



### Series TDA

#### Construction

Double flanged casing is produced in mild steel or galvanised steel, available in short and long cased. The impeller having manually adjustable pitch blades is made of PPG, PAG or pressure-casted Aluminium.

#### Finish

Painting or galvanised after manufacture are normal finishes on all parts.


Operating Temperature -20°C to +55°C

#### Motors

Totally enclosed Class 'F' motor, to a min. IP54 protection are fitted as standard. Standard motor up to 2.2kW are usually supplied on DOL starting, motor 3.0kW and above are star/ delta starting.


#### **Airflow Direction**


Air flowing from impeller to motor (B) are fitted as standard. Air flowing from motor to impeller (A) can be supplied on request.




Ltd o

Motor no. of pole – 4 or 6 Motor Power kW Airflow direction – A or B Blade angle - 8°, 10°, 12°, 14°, 16°, 18° 20°, 22°, 24°, 26°, 28°, 30° Type of casing construction – L or S





LEA900/1.E1 January 2018 Edition 2 Printed on January 2018

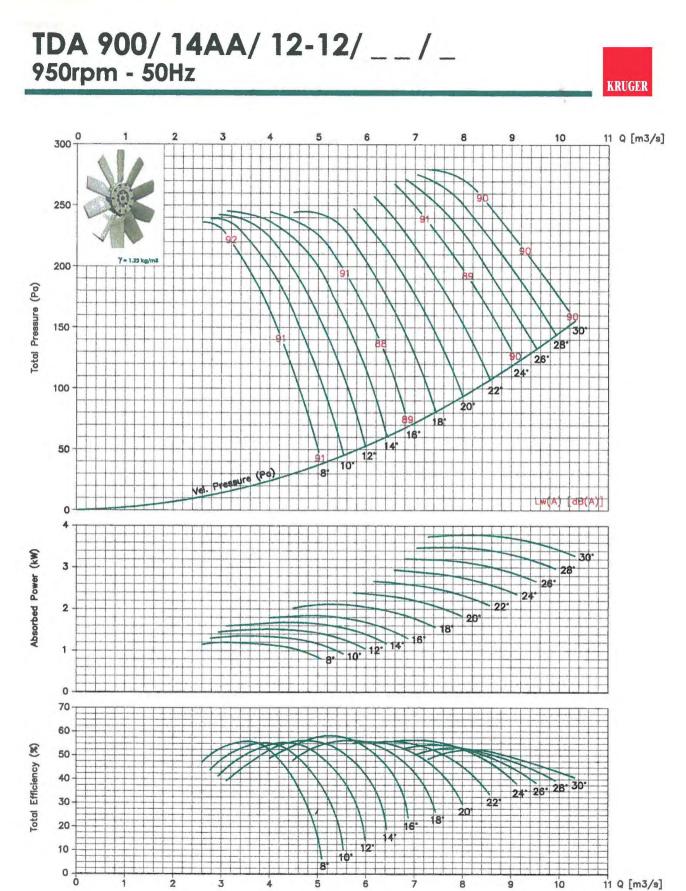

0 5000 10000 15000 20000 25000 30000 35000 Q [m3/h] 5 10 15 V [m/s]

Performance shown is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances in the airstream.
The A-weighted sound ratings shown have been calculated per AMCA standard 301. Values shown are for inlet Lwi(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.





All

Kruger Ventilation Industries Asia Co., Ltd certifies that the TDA 900 shown herein is licensed to bear the AMCA Seal, the ratings shown are based on tests and procedures performed in accordance with AMCA publication 211 and AMCA publication 311 and comply the requirements of the AMCA Certified Ratings Promram.

### Series TDA

#### Construction

Double flanged casing is produced in mild steel or galvanised steel, available in short and long cased. The impeller having manually adjustable pitch blades is made of PPG, PAG or pressure-casted Aluminium.

#### Finish

Painting or galvanised after manufacture are normal finishes on all parts.


Operating Temperature -20°C to +55°C


#### Motors


Totally enclosed Class 'F' motor, to a min. IP54 protection are fitted as standard. Standard motor up to 2.2kW are usually supplied on DOL starting, motor 3.0kW and above are star/ delta starting.

#### **Airflow Direction**


Air flowing from impeller to motor (B) are fitted as standard. Air flowing from motor to impeller (A) can be supplied on request.








LEA900/2.E1 January 2018 Edition 2 Printed on January 2018

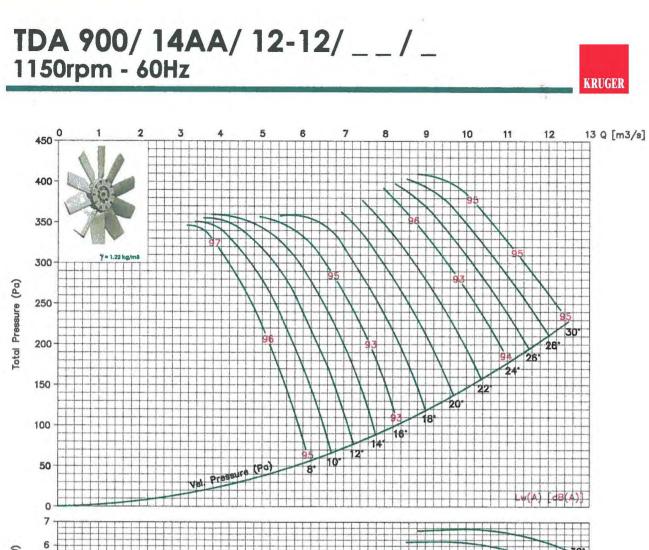

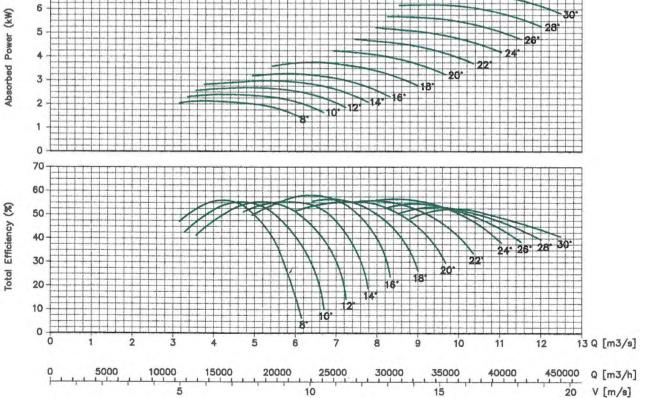

Performance shown is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances in the airstream.
The A-weighted sound ratings shown have been calculated per AMCA standard 301. Values shown are for inlet Lwi(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.





Kruger Ventilation Industries Asia Co., Ltd certifies that the TDA 900 shown herein is licensed to bear the AMCA Seal, the ratings shown are based on tests and procedures performed in accordance with AMCA publication 211 and AMCA publication 311 and comply the requirements of the AMCA Certified Ratings

### Series TDA

#### Construction

Double flanged casing is produced in mild steel or galvanised steel, available in short and long cased. The impeller having manually adjustable pitch blades is made of PPG, PAG or pressure-casted Aluminium.

#### Finish

Painting or galvanised after manufacture are normal finishes on all parts.

#### **Operating Temperature** -20°C to +55°C


-20-0 10 +5:


#### Motors


Totally enclosed Class 'F' motor, to a min. IP54 protection are fitted as standard. Standard motor up to 2.2kW are usually supplied on DOL starting, motor 3.0kW and above are star/ delta starting.

#### **Airflow Direction**

Air flowing from impeller to motor (B) are fitted as standard. Air flowing from motor to impeller (A) can be supplied on request.








LEA900/3.E1 January 2018 Edition 2 Printed on January 2018



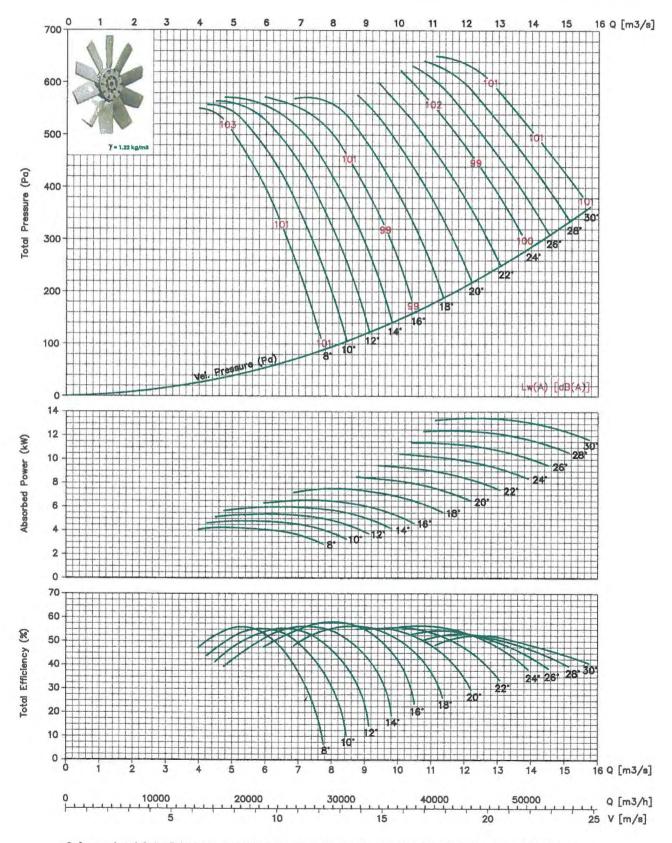

Performance shown is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances in the airstream.
The A-weighted sound ratings shown have been calculated per AMCA standard 301. Values shown are for inlet Lwi(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.





### Series TDA

#### Construction

Double flanged casing is produced in mild steel or galvanised steel, available in short and long cased. The impeller having manually adjustable pitch blades is made of PPG, PAG or pressure-casted Aluminium.

#### Finish

Painting or galvanised after manufacture are normal finishes on all parts.

Operating Temperature -20°C to +55°C

#### Motors

Totally enclosed Class 'F' motor, to a min. IP54 protection are fitted as standard. Standard motor up to 2.2kW are usually supplied on DOL starting, motor 3.0kW and above are star/ delta starting.


#### **Airflow Direction**


Air flowing from impeller to motor (B) are fitted as standard. Air flowing from motor to i mpeller (A) can be supplied on request.

# 


Kruger Ventilation Industries Asia Co., Ltd certifies that the TDA 900 shown herein is licensed to bear the AMCA Seal, the ratings shown are based on tests and procedures performed in accordance with AMCA publication 211 and AMCA publication 311 and comply the requirements of the AMCA Certified Ratings

> Motor no. of pole – 4 or 6 Motor Power kW Airflow direction – A or B Biade angle - 8°, 10°, 12°, 14°, 16°, 18° 20°, 22°, 24°, 26°, 28°, 30° Type of casing construction – L or S





LEA900/4.E1 January 2018 Edition 2 Printed on January 2018

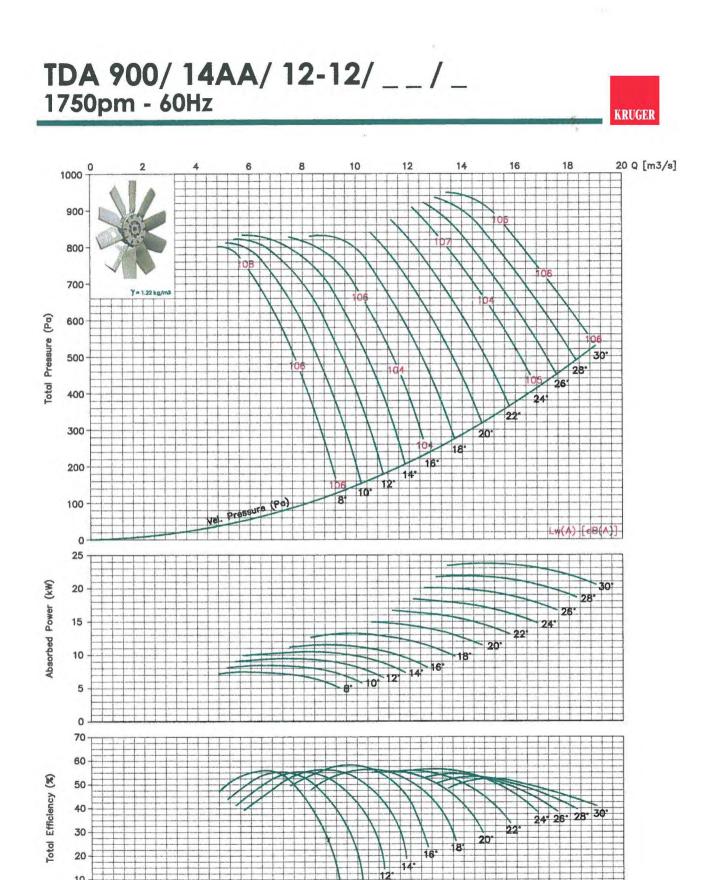

20 Q [m3/s]

Q [m3/h]

V [m/s]

0+0

Performance shown is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances in the airstream.
The A-weighted sound ratings shown have been calculated per AMCA standard 301. Values shown are for inlet Lwi(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.