




DRAINABLE LOUVER

Visible Mullion Louver Type	K6776
Material	Extruded Aluminum (Alloy 6063-T5)
Stationary Blade	0.081 in. (2.06 mm)
Frame	0.081 in. (2.06 mm)
Louver Depth	6 in. (152.4 mm)
Blade Angle	35°
Free Area – 4 ft. x 4 ft. Unit	8.56 sq. ft. (0.80 sq m)
Percent Free Area	53.5%
Free Area Velocity at Beginning Point of Water Penetration – 0.01 oz H₂O/sq. ft. Free Area	above 1,250 fpm (6.35 m/s)
Air Volume Flow Rate at Beginning Point of Water Penetration – 4 ft. x 4 ft. Unit	10,700 cfm (5.06 m ³ /s)
Pressure Drop at Beginning Point of Water Penetration	0.18 in. H ₂ O (0.045 kPa)

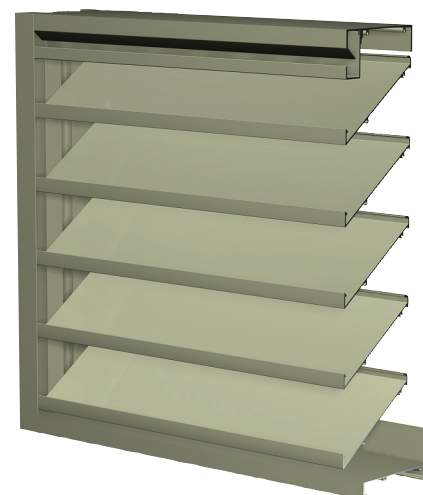

RECOMMENDED SPECIFICATION

GENERAL

Furnish and install where indicated on plans or described in schedules drainable Louver Type K6776 as designed and manufactured by The Airolite Company LLC, Schofield, Wisconsin. Louvers shall be furnished with bird screen, insect screen, supports, installation hardware and finishes as specified and as required for a complete installation.

PRODUCTS

Louvers shall be drainable Louver Type K6776 with visible vertical mullions (or Louver Type CB6776 with concealed vertical mullions). Louvers shall be 6-inches (152.4 mm) deep and assembled entirely from extruded aluminum components. Blades and frames shall be 0.081-inch (2.0 mm) thick extruded aluminum, alloy 6063-T5. Blades shall be stationary, incorporate drainable gutters, and be spaced 4-1/2-inches (114.3 mm) on center. Jamb frames shall incorporate drainable gutters to ensure resistance to water penetration.

OPTIONAL WELDED ASSEMBLY

Join stationary blade, head, sill and jamb frames with fillet welds concealed from view, unless the size of the louver makes screwed connections between louver sections necessary. Louver blades shall be joined to each jamb frame with fillet welds produced with the Pulsed Gas Metal Arc Welding (GMAW/Mig) process.

STRUCTURAL DESIGN CRITERIA

Maximum single section size for model K6776 is 72 in. W x 144 in. H or 144 in. W x 72 in. H. Larger openings require field assembly of multiple louver sections to make up the overall opening size. Individual louver sections are designed to withstand a 25 PSF wind load (please consult Airolite if the louvers must withstand higher wind-loads). Structural reinforcing members may be required to adequately support and install multiple louver sections within a large opening. Structural reinforcing members along with any associated installation hardware is not provided by Airolite unless indicated otherwise by Airolite. Options and accessories including, but not limited to, screens, filter racks, louver doors, and blank off panels are not subject to structural analysis unless indicated otherwise by Airolite. Additional information on louver installation may be found in AMCA Publication #501, Louver Application Manual.

PERFORMANCE RATINGS

FREE AREA:	8.56 Square Feet (0.80 m ²)
MINIMUM FREE AREA VELOCITY	
at Beginning Point of Water Penetration:	1,250 fpm (6.35 m/s)
MINIMUM AIR VOLUME FLOW RATE	
at Beginning Point of Water Penetration:	10,700 cfm (5.06 m ³ /s)
MAXIMUM STATIC PRESSURE	
at Beginning Point of Water Penetration:	0.18 in. H ₂ O (0.045 kPa)


See page 4 for complete finish options

LOUVER TYPE K6776 PRODUCT DESCRIPTION & DETAILS

AIROLITE LOUVER TYPE K6776 is a 6-inch (152.4 mm) deep drainable louver designed to achieve high volume air flow and superior resistance to water penetration. Drainable louvers are characterized by gutters incorporated at the front edge of each blade to prevent water droplets from cascading from blade-to-blade and becoming entrained in the intake air flow. Vertical gutters located in the jamb frames carry the water to the sill frame where it exits from the louver assembly between the sill frame and bottom blade. Drainable louvers generally outperform conventional architectural blade louvers and provide enhanced resistance to water penetration. Airlite Louver Type K6776 is a highly efficient louver with AMCA Licensed air performance and water penetration ratings that enable designers to select and specify this product with confidence. Please contact your local Airlite representative or the factory for assistance with the layout and design of support systems when required.

VERTICAL SECTION DETAIL

PLAN SECTION DETAIL

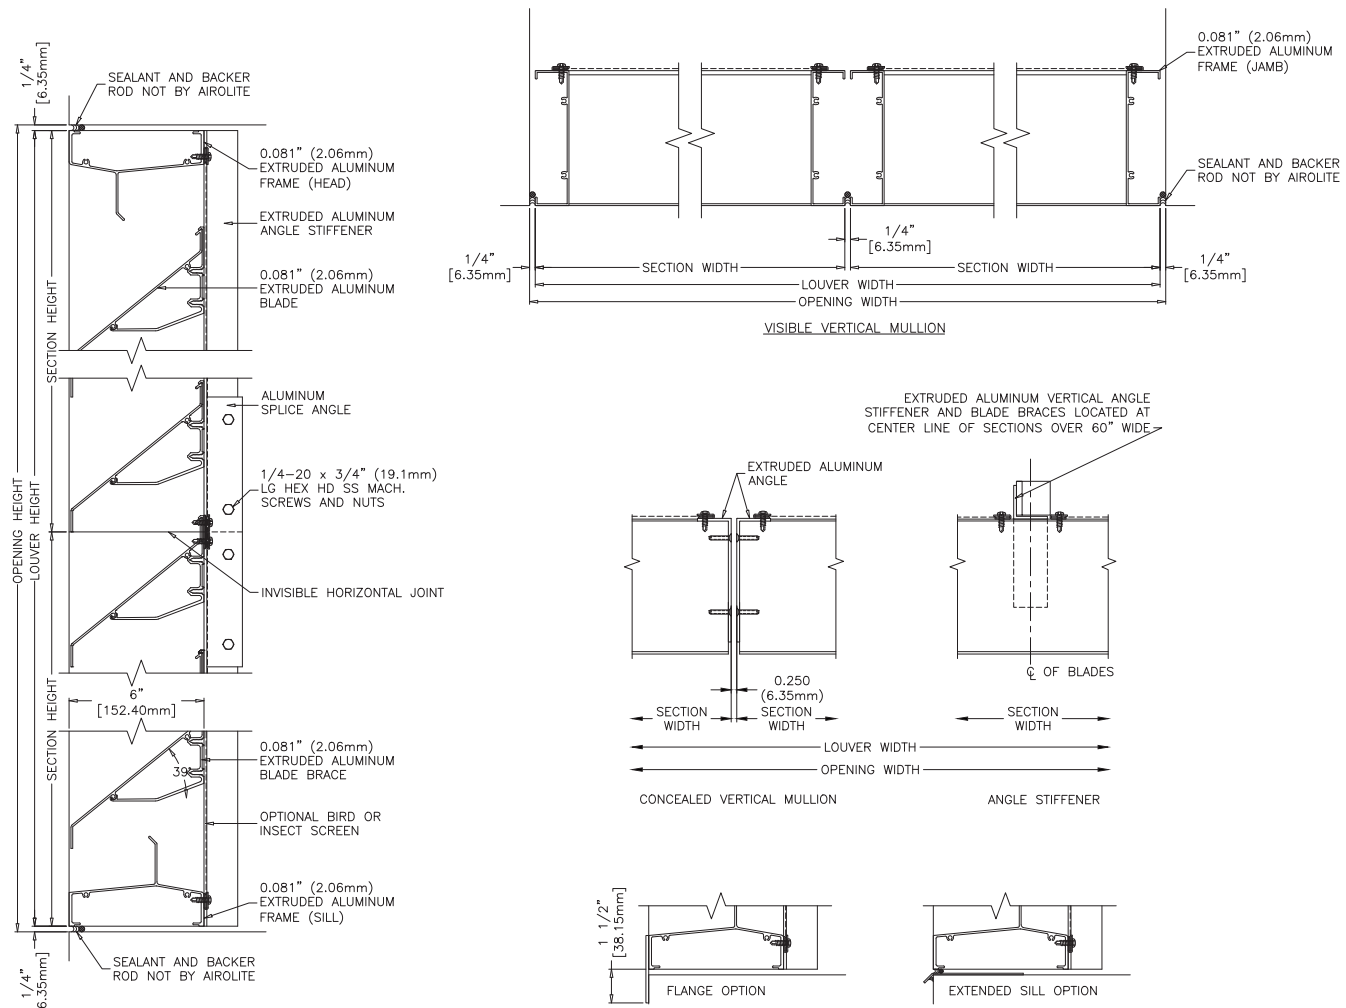

Minimum Section Size:

12 in. (30 cm) W x 12 in. (30 cm) H

Maximum Section Size:

144 in. (366 cm) W x 144 in. (366 cm) H

*one dimension cannot exceed 72 in.

LOUVER TYPE K6776 PERFORMANCE RATINGS

FREE AREA CHART - in square feet


Louver Height Inches	Louver Width in Inches											
	12	24	36	48	60	72	84	96	108	120	132	144
12	0.21	0.49	0.77	1.05	1.34	1.58	1.87	2.15	2.43	2.71	2.96	3.24
24	0.76	1.79	2.83	3.87	4.91	5.81	6.85	7.89	8.93	9.96	10.87	11.91
36	1.22	2.89	4.56	6.22	7.89	9.35	11.02	12.69	14.36	16.03	17.49	19.16
48	1.67	3.97	6.26	8.56	10.86	12.86	15.16	17.45	19.75	22.05	24.05	26.35
60	2.22	5.27	8.32	11.37	14.43	17.09	20.14	23.19	26.24	29.29	31.96	35.01
72	2.68	6.37	10.05	13.73	17.41	20.64	24.32	28.00	31.68	35.36	38.59	42.27
84	3.14	7.45	11.76	16.07	20.37	24.14						
96	3.69	8.75	13.82	18.88	23.94	28.37						
108	4.15	9.85	15.54	21.24	26.93	31.92						
120	4.61	10.93	17.25	23.57	29.89	35.42						
132	5.16	12.24	19.31	26.39	33.46	39.65						
144	5.62	13.33	21.04	28.74	36.45	43.20						



The Airlite Company, LLC certifies that Louver Type K6776 shown herein is licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies only to Air Performance and Water Penetration ratings.

AIRFLOW RESISTANCE


(Standard Air - .075 lb./ft.³)

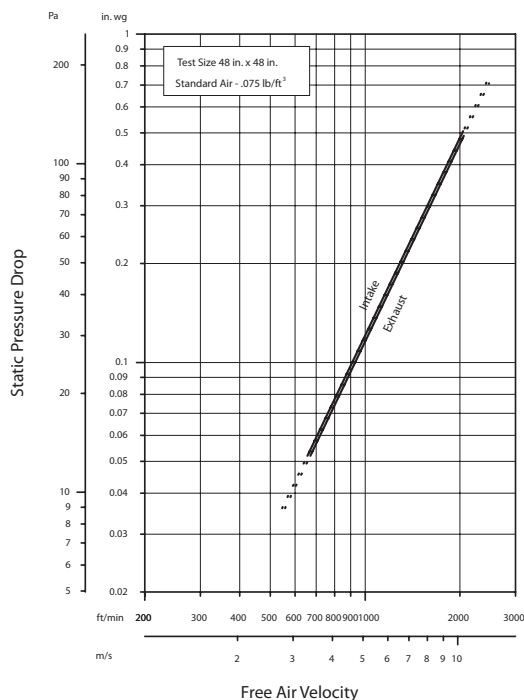

Louver Type K6776 resistance to airflow is shown with louver blades fully open. Resistance (pressure drop) varies depending on louver application (air intake or air exhaust). Free area velocities (shown) are higher than average velocity through the overall louver size. (Tested to Figure 5.5-6.5)

WATER PENETRATION


(Standard Air - .075 lb./ft.³)

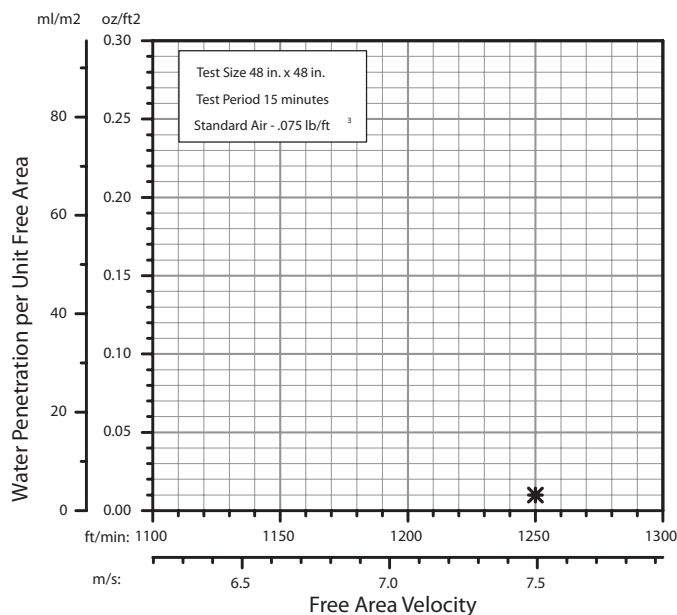

The AMCA Water Penetration Test provides a method for comparing various louver models and designs as to their efficiency in resisting the penetration of rainfall under specific laboratory test conditions. The point of zero water penetration is defined as that velocity where the water penetration curve projects through .01 oz. of water (penetration) per sq. ft. of louver free area. ***The beginning point of water penetration for Louver Type K6776 is above 1250 fpm free area velocity.** These performance ratings do not guarantee a louver to be weatherproof or stormproof and should be used in combination with other factors including good engineering judgement in selecting louvers.

LOUVER TYPE K6776

METHOD OF INSTALLATION & ACCESSORY OPTIONS

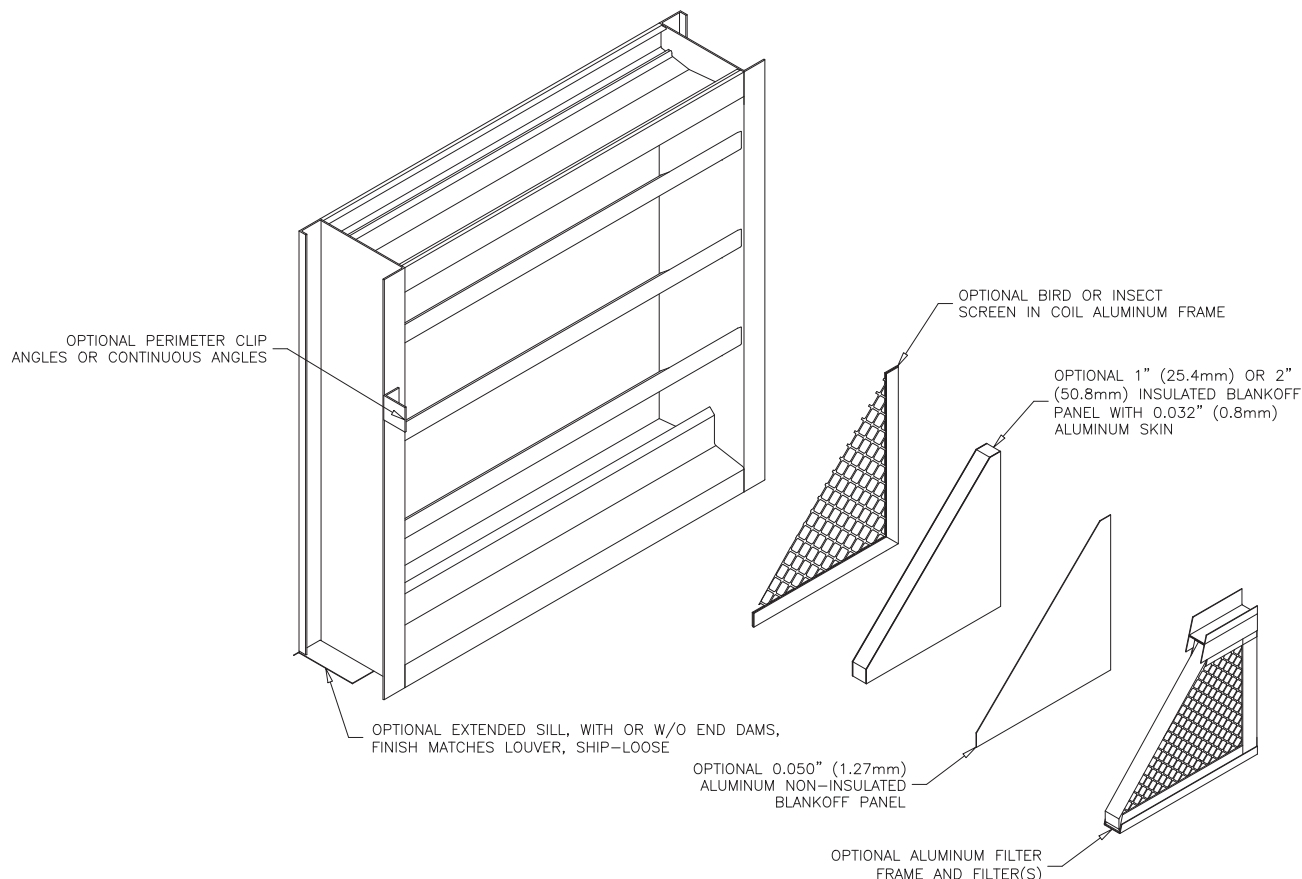

FINISHES

Finish Type	Description/Application	Color Selection	Standard Warranty (Aluminum)
AAMA 2605 100% Fluoropolymer (FEVE) 2-Coat 70% Kynar® (PVDF) 3-Coat 70% Kynar® (PVDF) 4-Coat 70% Kynar® (PVDF)	"Best." The premier finish for extruded aluminum. Tough, long-lasting coating has superior color retention and abrasive properties. Resists chalking, fading, chemical abrasion and weathering.	Standard Colors: Any of the 27 standard colors shown can be furnished in 70% or 50% Kynar®, 100% Fluoropolymer or Baked Enamel. Mica Colors: Airlite offers 6 standard Mica colors for 70% Kynar® or 100% Fluoropolymer. Custom Colors: Custom color matching is available. Consult your Airlite representative for cost and/or lead-time implications if a custom color is required.	10 Years (20 Years Optional)
AAMA 2603 Baked Enamel	"Good." Provides good adhesion and resistance to weathering, corrosion and chemical stain.		1 Year
AA-M10C22A42 Integral Color Anodize	"Two-step" anodizing is produced by following the normal anodizing step with a second, colorfast process.	Light, Medium, Dark or Extra Dark Bronze; Champagne; Black	5 years
AA-M10C22A41 Clear Anodize 215 R-1	Clear, colorless and hard oxide aluminum coating that resists weathering and chemical attack.	Clear	5 years
AA-M10C22A31 Clear Anodize 204	Clear, colorless and hard oxide aluminum coating that resists weathering and chemical attack.	Clear	1 Year
Prime Coat	Louvers or architectural products shall be cleaned, pre-treated and receive a prime coat finish suitable for field painting. Airlite does not recommend prime coat or field painting of materials.		n/a
Mill	Materials may be supplied in natural aluminum or galvanized steel finish when normal weathering is acceptable and there is no concern for color or color change.		n/a

Finishes meet or exceed AAMA 2605, AAMA 2604, and AAMA 2603 requirements. Please consult www.airlite.com for complete information on standard and extended paint warranties. Paint finish warranties are not applicable to steel products.



P.O. Box 410, 525 Western Road, Schofield, WI 54476-0410 USA
715.841.8757 • fax 715.841.8773 • www.airlite.com

Submittal K6776 August 2021
Copyright ©2021 The Airlite Company, LLC

The Airlite Company, LLC reserves the right to make product changes.