



Belt Drive Propeller Fans

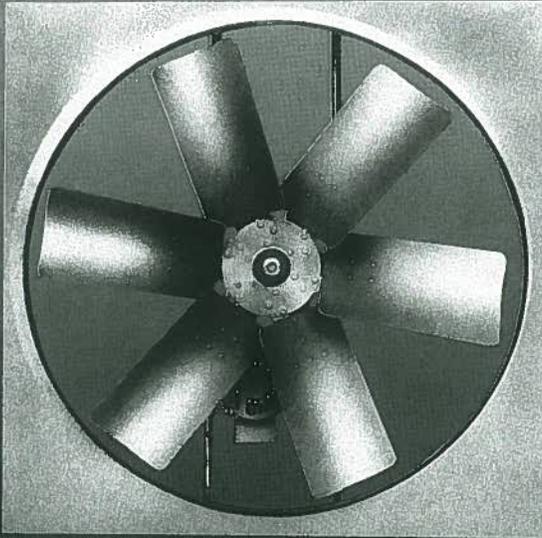


GS Series

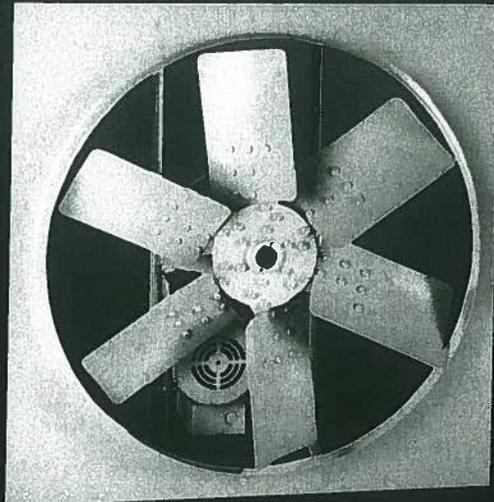


HC Series

Quietaire

Quietaire GS Series Fans

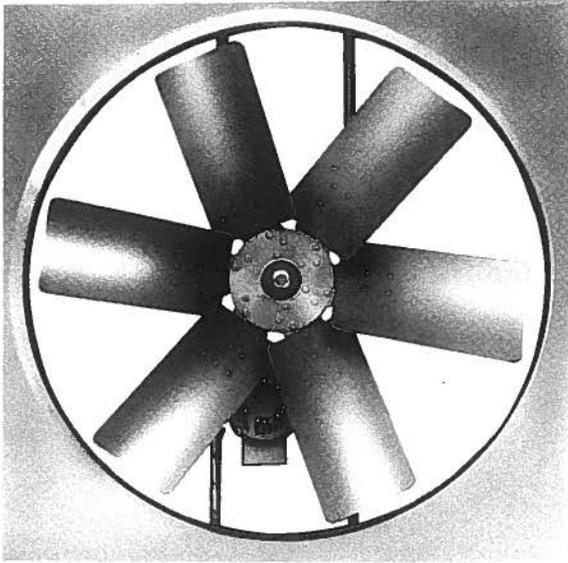

GS SERIES

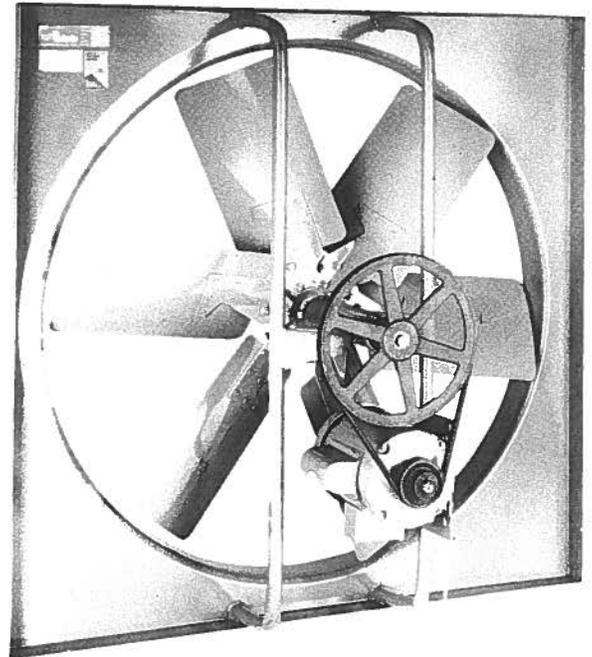

FEATURES

• QUALITY CONSTRUCTION

GS Series fans have rugged, unitized construction with deep spun orifice and tubular motor support arms welded into a single rigid unit. This type of quality construction gives maximum dimensional stability and better overall performance due to the streamlined contours of the fan. The square panel means easy installation for any type service. Bolted bracket-to-hub construction gives maximum strength at this critical stress location. Two-inch oversize blade design means larger air volumes at lower RPMs for any application.

• EFFICIENT PERFORMANCE

GS Series fans are engineered for maximum air delivery at lowest possible sound levels. Balanced flow design propellers and tubular motor supports give smoother air flow to enhance air delivery and reduce noise. These fans are designed for use in all types of applications where quiet efficient performance is demanded.


• MOTORS AND DRIVES

Motors are high efficiency and mounted to a slotted motor base to permit belt tensioning. V-belt drives are rated at 1.5 time the motor horsepower. The drive shaft is mounted in two wide spaced, self aligning prelubricated ball bearings, mounted in die formed housing. Totally enclosed, explosion proof, and two speed motors are available.

• ACCESSORIES

- Wall Sleeves
- Motor side guard
- Blade side guard
- Single phase, three phase, explosion proof or two speed motors
- Supply or exhaust duty
- Wall shutters
- Epoxy coating

FAN DIMENSIONS — GS SERIES

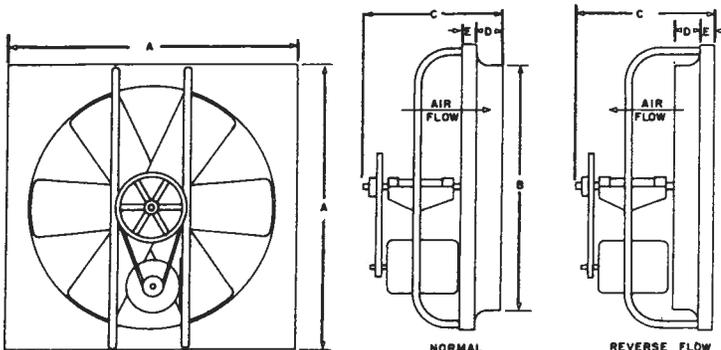

| Catalog No. | A | B | C | D | E | Gauges | |
|-------------|----|----|----|-----|---|---------|--------|
| | | | | | | Orifice | Blades |
| GS 26 | 32 | 27 | 19 | 1.8 | 2 | 16 | 16 |
| GS 32 | 38 | 33 | 19 | 2.2 | 2 | 16 | 16 |
| GS 38 | 44 | 39 | 19 | 2.7 | 2 | 16 | 16 |
| GS 44 | 50 | 45 | 19 | 2.7 | 2 | 14 | 14 |
| GS 50 | 56 | 51 | 19 | 3.2 | 2 | 14 | 14 |
| GS 56 | 62 | 57 | 19 | 3.2 | 2 | 14 | 14 |

FAN PERFORMANCE—SERIES GS

| Catalog No. | Blade Size | Motor HP | Fan RPM | Tip Speed | Capacity C.F.M. | | | | | Maximum BHP |
|-------------|------------|----------|---------|-----------|-----------------|----------|---------|---------|---------|-------------|
| | | | | | 0° SP | 1/10° SP | 1/8° SP | 1/4° SP | 3/8° SP | |
| GS 2625 | 26" | 1/4 | 650 | 4426 | 5353 | 4735 | 4525 | | | .41 |
| GS 2633 | | 1/3 | 718 | 4889 | 5973 | 5371 | 5181 | | | .48 |
| GS 2650 | | 1/2 | 795 | 5113 | 6548 | 6155 | 6002 | 5067 | | .61 |
| GS 2675 | | 3/4 | 920 | 6265 | 7653 | 7224 | 7091 | 6407 | 5422 | .94 |
| GS 26100 | | 1 | 1025 | 6980 | 8442 | 8201 | 8101 | 7537 | 6812 | 1.29 |
| GS 26150 | | 1 1/2 | 1175 | 8001 | 9774 | 9441 | 9358 | 8863 | 8288 | 1.87 |
| GS 3233 | 32" | 1/3 | 460 | 3860 | 8410 | 6900 | 6250 | | | .42 |
| GS 3250 | | 1/2 | 525 | 4400 | 9600 | 8400 | 7950 | | | .62 |
| GS 3275 | | 3/4 | 600 | 5030 | 10970 | 10000 | 9700 | 7250 | | .93 |
| GS 32100 | | 1 | 662 | 5550 | 12100 | 11280 | 11000 | 9130 | | 1.24 |
| GS 32150 | | 1 1/2 | 760 | 6370 | 13890 | 13280 | 13050 | 11630 | 9740 | 1.93 |
| GS 32200 | | 2 | 834 | 6990 | 15250 | 14720 | 14560 | 13350 | 11780 | 2.38 |
| GS 3833 | 38" | 1/3 | 360 | 3505 | 10820 | 8750 | 7650 | | | .44 |
| GS 3350 | | 1/2 | 414 | 4125 | 12440 | 10850 | 10250 | | | .66 |
| GS 3875 | | 3/4 | 475 | 4740 | 14270 | 12980 | 12550 | 6300 | | 1.00 |
| GS 38100 | | 1 | 521 | 5200 | 15650 | 14500 | 14150 | 11500 | | 1.32 |
| GS 38150 | | 1 1/2 | 600 | 5980 | 18035 | 17090 | 16800 | 15070 | 10000 | 2.00 |
| GS 38200 | | 2 | 658 | 6560 | 19770 | 18900 | 18670 | 17270 | 15120 | 2.65 |
| GS 4433 | 44" | 1/3 | 287 | 3310 | 12750 | 9650 | 7500 | | | .43 |
| GS 4450 | | 1/2 | 328 | 3780 | 14600 | 12300 | 11300 | | | .64 |
| GS 4475 | | 3/4 | 375 | 4325 | 16800 | 14950 | 14300 | 7150 | | .96 |
| GS 44100 | | 1 | 415 | 4780 | 18480 | 17100 | 16550 | 11850 | | 1.29 |
| GS 44150 | | 1 1/2 | 475 | 5475 | 21160 | 20050 | 19550 | 16750 | | 1.93 |
| GS 44200 | | 2 | 523 | 6030 | 23300 | 22350 | 22050 | 19800 | 15950 | 2.57 |
| GS 44300 | 3 | 600 | 6910 | 26730 | 26100 | 25850 | 24200 | 21700 | 3.86 | |
| GS 5050 | 50" | 1/2 | 269 | 3525 | 17750 | 13850 | 10300 | | | .62 |
| GS 5075 | | 3/4 | 308 | 4040 | 20350 | 17500 | 16200 | | | .96 |
| GS 50100 | | 1 | 340 | 4450 | 22410 | 20150 | 19250 | 9700 | | 1.29 |
| GS 50150 | | 1 1/2 | 390 | 5100 | 25720 | 24000 | 23400 | 16750 | | 1.90 |
| GS 50200 | | 2 | 428 | 5610 | 28250 | 26900 | 26350 | 21500 | 12850 | 2.53 |
| GS 50300 | | 3 | 490 | 6420 | 32300 | 31200 | 30850 | 28050 | 22700 | 3.79 |
| GS 5675 | 56" | 3/4 | 221 | 3240 | 24900 | 17700 | 10630 | | | .77 |
| GS 56100 | | 1 | 243 | 3565 | 27380 | 21400 | 18900 | | | 1.04 |
| GS 56150 | | 1 1/2 | 278 | 4080 | 31300 | 26500 | 25000 | 8400 | | 1.55 |
| GS 56200 | | 2 | 306 | 4490 | 34500 | 30300 | 29200 | 13700 | | 2.09 |
| GS 56300 | | 3 | 350 | 5130 | 39440 | 35800 | 34900 | 28000 | | 3.09 |

- NOTE: 1) Power rating (BHP) does not include drive losses.
 2) Performance shown is for GS series installation type A free inlet, free outlet.
 3) Performance rating does not include the effects of appurtenances in the air stream.






• SPECIAL APPLICATIONS

Special service fans can be furnished with protective coatings or made from stainless steel or aluminum per customer's specifications. Prices on request. For hazardous locations, fans can be furnished with explosion-proof motors.

Quietair Corporation certifies that the GS Series shown hereon is licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Rating program.

Quietaire HC Series Fans

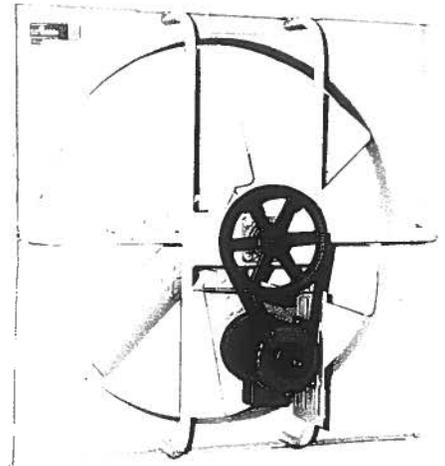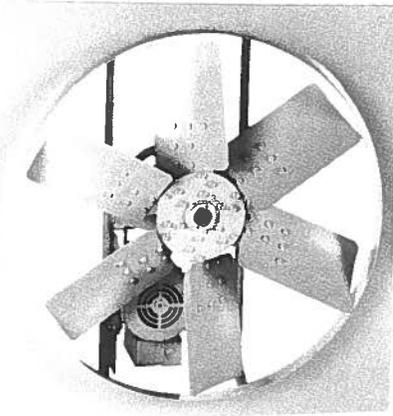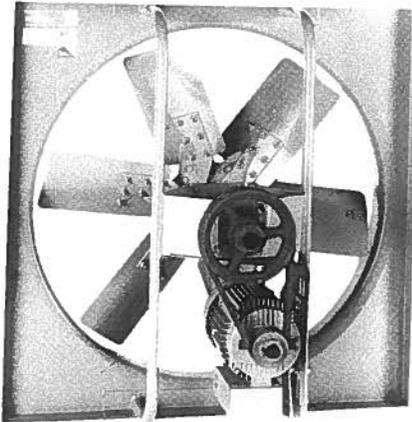

FEATURES

• QUALITY CONSTRUCTION

HC Series fans have rugged, unitized construction with deep spun orifice and tubular motor support arms welded into a single rigid unit. This type of quality construction gives maximum dimensional stability and better overall performance due to the streamlined contours of the fan. The square panel means easy installation for any type service. Bolted bracket to hub and blade to bracket construction gives maximum strength at this critical stress location. Two inch oversize blade design means larger air volumes at lower RPMs for any application.

• EFFICIENT PERFORMANCE

HC Series fans are engineered for maximum air delivery at lowest possible sound levels. Balanced flow design propellers and tubular motor supports give smoother air flow to enhance air delivery and reduce noise. These fans are designed for use in all types of applications where quiet efficient performance is demanded.


• MOTORS AND DRIVES

Motors are high efficiency and mounted to a slotted motor base to permit belt tensioning. V-belt drives are rated at 1.5 times the motor horsepower. The drive shaft is mounted in two wide spaced, self aligning prelubricated ball bearings, mounted in die formed housing. Totally enclosed, explosion proof, and two speed motors are available.

• ACCESSORIES

- Wall Sleeves
- Motor side guard
- Blade side guard
- Single phase, three phase, explosion proof or, two speed motors
- Supply or exhaust duty
- Wall shutters
- Epoxy coating

FAN DIMENSIONS — HC SERIES

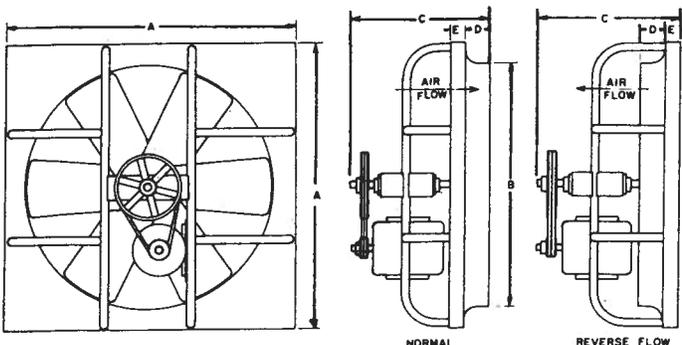

| Catalog No. | A | B | C | D | E | Gauges | |
|-------------|----|------|----|-----|---|---------|--------|
| | | | | | | Orifice | Blades |
| HC 26 | 32 | 26.6 | 22 | 1.8 | 2 | 16 | 16 |
| HC 32 | 38 | 32.6 | 23 | 2.2 | 2 | 16 | 16 |
| HC 38 | 44 | 38.6 | 24 | 2.7 | 2 | 16 | 16 |
| HC 44 | 50 | 44.6 | 24 | 2.7 | 2 | 14 | 14 |
| HC 50 | 56 | 50.6 | 24 | 3 | 2 | 14 | 14 |
| HC 56 | 62 | 56.6 | 27 | 3.2 | 2 | 14 | 14 |
| HC 62 | 68 | 63.0 | 28 | 3.2 | 3 | 10 | 14 |
| HC 74 | 80 | 75.0 | 30 | 6 | 3 | 10 | 12 |
| HC 86 | 92 | 87.0 | 30 | 6 | 3 | 10 | 12 |

FAN PERFORMANCE—SERIES HC

| Catalog No. | Nominal Size | Blade Size | Motor H.P. | Fan RPM | Tip Speed | Capacity CFM | | | | | Maximum BHP |
|-------------|--------------|------------|------------|---------|-----------|--------------|----------|---------|---------|---------|-------------|
| | | | | | | 0" SP | 1/10" SP | 1/8" SP | 1/4" SP | 3/8" SP | |
| HC 26100 | 24" | 26" | 1 | 1025 | 6980 | 8442 | 8201 | 8101 | 7537 | 6812 | 1.29 |
| HC 26150 | | | 1½ | 1175 | 8001 | 9774 | 9441 | 9358 | 8863 | 8288 | 1.87 |
| HC 26200 | | | 2 | 1275 | 8682 | 10606 | 10299 | 10222 | 9789 | 9285 | 2.49 |
| HC 32100 | 30" | 32" | 1 | 662 | 5550 | 12100 | 11280 | 11000 | 9130 | | 1.24 |
| HC 32150 | | | 1½ | 760 | 6370 | 13890 | 13280 | 13050 | 11630 | 9740 | 1.93 |
| HC 32200 | | | 2 | 834 | 6990 | 15250 | 14720 | 14560 | 13350 | 11780 | 2.38 |
| HC 32300 | | | 3 | 954 | 8000 | 17340 | 17030 | 16900 | 16000 | 14800 | 3.66 |
| HC 38100 | 36" | 38" | 1 | 521 | 5200 | 15650 | 14500 | 14150 | 11500 | | 1.32 |
| HC 38150 | | | 1½ | 600 | 5980 | 18035 | 17090 | 16800 | 15070 | 10000 | 2.00 |
| HC 38200 | | | 2 | 658 | 6560 | 19770 | 18900 | 18670 | 17270 | 15120 | 2.65 |
| HC 38300 | | | 3 | 752 | 7500 | 22600 | 21830 | 21630 | 20490 | 19140 | 3.93 |
| HC 38500 | | | 5 | 890 | 8870 | 26750 | 26030 | 25880 | 25020 | 24060 | 6.50 |
| HC 44100 | 42" | 44" | 1 | 415 | 4780 | 18480 | 17100 | 16550 | 11850 | | 1.29 |
| HC 44150 | | | 1½ | 475 | 5475 | 21160 | 20050 | 19550 | 16750 | | 1.93 |
| HC 44200 | | | 2 | 523 | 6030 | 23300 | 22350 | 22050 | 19800 | 15950 | 2.57 |
| HC 44300 | | | 3 | 600 | 6910 | 26730 | 26100 | 25850 | 24200 | 21700 | 3.86 |
| HC 44500 | | | 5 | 710 | 8180 | 31600 | 31280 | 31100 | 30000 | 28300 | 6.40 |
| HC 50100 | 48" | 50" | 1 | 340 | 4450 | 22410 | 20150 | 19250 | 9700 | | 1.29 |
| HC 50150 | | | 1½ | 390 | 5100 | 25720 | 24000 | 23400 | 16750 | | 1.93 |
| HC 50200 | | | 2 | 428 | 5610 | 28250 | 26900 | 26350 | 21500 | 12850 | 2.53 |
| HC 50300 | | | 3 | 490 | 6420 | 32300 | 31200 | 30850 | 28050 | 22700 | 3.79 |
| HC 50500 | | | 5 | 580 | 7600 | 38270 | 37740 | 37450 | 35600 | 32500 | 6.32 |
| HC 56100 | 54" | 56" | 1 | 243 | 3565 | 27380 | 21400 | 18900 | | | 1.04 |
| HC 56150 | | | 1½ | 278 | 4080 | 31300 | 26500 | 25000 | | | 1.55 |
| HC 56200 | | | 2 | 306 | 4490 | 34500 | 30300 | 29200 | 13700 | | 2.09 |
| HC 56300 | | | 3 | 350 | 5130 | 39440 | 35800 | 34900 | 28000 | | 3.09 |
| HC 56500 | | | 5 | 415 | 6090 | 46750 | 43700 | 43100 | 38600 | 31000 | 5.17 |
| HC 62100 | 60" | 62" | 1 | 214 | 3480 | 29950 | 22700 | 18600 | | | 1.05 |
| HC 62150 | | | 1½ | 245 | 3980 | 34350 | 28900 | 26700 | | | 1.59 |
| HC 62200 | | | 2 | 270 | 4380 | 37800 | 33300 | 31700 | | | 2.11 |
| HC 62300 | | | 3 | 309 | 5025 | 43300 | 39700 | 38400 | 28500 | | 3.18 |
| HC 62500 | | | 5 | 366 | 5950 | 51350 | 48700 | 47700 | 41700 | 31100 | 5.18 |
| HC 62750 | | | 7½ | 419 | 6800 | 58700 | 56500 | 55800 | 51000 | 45100 | 7.75 |
| HC 74100 | 72" | 74" | 1 | 162 | 3140 | 38600 | 24800 | | | | 1.11 |
| HC 74150 | | | 1½ | 185 | 3580 | 44100 | 34400 | 29500 | | | 1.65 |
| HC 74200 | | | 2 | 204 | 3950 | 48600 | 40600 | 37300 | | | 2.38 |
| HC 74300 | | | 3 | 233 | 4520 | 55500 | 49200 | 46900 | | | 3.27 |
| HC 74500 | | | 5 | 277 | 5370 | 66000 | 61400 | 59800 | 48600 | | 5.50 |
| HC 74750 | | | 7½ | 315 | 6100 | 75000 | 71300 | 70000 | 62200 | 48500 | 7.93 |
| HC 741000 | | | 10 | 347 | 6725 | 82800 | 79700 | 78600 | 72000 | 62900 | 10.60 |
| HC 86100 | 84" | 86" | 1 | 126 | 2840 | 47100 | | | | | 1.09 |
| HC 86150 | | | 1½ | 144 | 3240 | 53800 | 36900 | | | | 1.64 |
| HC 86200 | | | 2 | 158 | 3560 | 59100 | 45800 | 39100 | | | 2.16 |
| HC 86300 | | | 3 | 182 | 4100 | 68000 | 58000 | 54100 | | | 3.36 |
| HC 86500 | | | 5 | 215 | 4845 | 80400 | 73000 | 70400 | 47800 | | 5.47 |
| HC 86750 | | | 7½ | 245 | 5520 | 91600 | 85600 | 83600 | 69800 | | 7.86 |
| HC 861000 | | | 10 | 270 | 6070 | 101000 | 96000 | 94300 | 83800 | 65000 | 10.90 |

NOTE: 1) Power rating (BHP) does not include drive losses.

2) Performance shown is for GS series installation type A free inlet, free outlet.

3) Performance rating does not include the effects of appurtenances in the air stream.



• SPECIAL APPLICATIONS


Special service fans can be furnished with protective coatings or made from stainless steel or aluminum per customer's specifications. Prices on request. For hazardous locations, fans can be furnished with explosion-proof motors.

Quietair Corporation certifies that the HC Series shown hereon is licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Rating program.

Accessories

WALL SHUTTERS FOR SERIES HC FANS


Wall shutters always open fully because of rigid counter-balanced construction. Tie rods and bearings are placed inside — protected from the elements. All aluminum construction and nylon bearings prevent corrosion. Available in choice of air operated gravity closing, motor operated or hand operated types. High velocity shutters with additional tie rods are required for use with air velocities above 2,000 feet per minute, unless motor or hand operated.

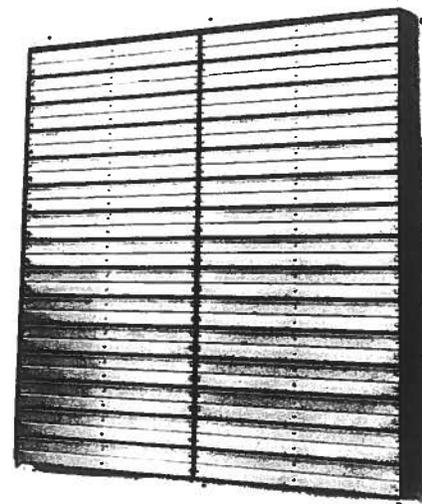

AUTOMATIC SHUTTER

| Fan Catalog No. | Wall Shutter Catalog No. | | | | Dimensions | | | |
|-----------------|--------------------------|----------------|---------------|---------------|------------|-----|---|----|
| | Automatic | Motor Operated | Hand Operated | High Velocity | A | B | C | D |
| HC 26 | HD 33 | HDE 33 | HDM 33 | XHD 33 | 32 | 36¼ | 6 | 7 |
| HC 32 | HD 39 | HDE 39 | HDM 39 | XHD 39 | 38 | 42¼ | 6 | 8 |
| HC 38 | HD 45 | HDE 45 | HDM 45 | XHD 45 | 44 | 48¼ | 6 | 10 |
| HC 44 | HD 51 | HDE 51 | HDM 51 | XHD 51 | 50 | 54¼ | 6 | 11 |
| HC 50 | HD 57 | HDE 57 | HDM 57 | XHD 57 | 56 | 60¼ | 6 | 13 |
| HC 56 | HD 63 | HDE 63 | HDM 63 | XHD 63 | 62 | 66¼ | 6 | 14 |
| HC 62 | HD 69 | HDE 69 | HDM 69 | XHD 69 | 68 | 72¼ | 6 | 16 |
| HC 74 | HD 81 | HDE 81 | HDM 81 | XHD 81 | 80 | 84¼ | 6 | 19 |
| HC 86 | HD 93 | HDE 93 | HDM 93 | XHD 93 | 92 | 96¼ | 6 | 22 |

1. Construction is all aluminum double panel with T-Bar center support. Bearings are nylon.
2. Extra heavy duty high velocity shutters must be used on fans with 7½ H.P. and larger motors.
3. Dimension C-6" Clearance for motor on HDE motor operated shutters.
4. Dimension D indicates minimum recommended distance between fan panel and shutter.

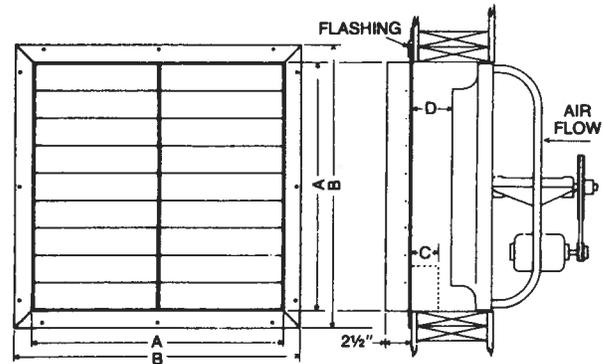


PROTECTIVE GUARDS FOR SERIES HC FANS

Drive side guards are fabricated of 1½" mesh industrial expanded metal, welded to angle frames to meet all normal safety requirements, and painted to match the fans. Front guards are constructed of heavy gauge cadmium plated wire.



GUARD DIMENSIONS

| Fan Catalog No. | Drive Side Guard | | | | | | Front Guard Diameter |
|-----------------|------------------|----|----|----|----|----|----------------------|
| | A | B | C | D | E | F | |
| HC 26 | 32 | 20 | 10 | 10 | 10 | 12 | 29 |
| HC 32 | 38 | 20 | 10 | 10 | 10 | 18 | 35 |
| HC 38 | 44 | 20 | 10 | 10 | 10 | 24 | 41 |
| HC 44 | 50 | 24 | 14 | 10 | 14 | 22 | 47 |
| HC 50 | 56 | 24 | 14 | 10 | 14 | 28 | 53 |
| HC 56 | 62 | 24 | 14 | 10 | 14 | 34 | 59 |
| HC 62 | 68 | 24 | 14 | 10 | 14 | 40 | 65 |
| HC 74 | 80 | 30 | 20 | 10 | 20 | 40 | 77 |
| HC 86 | 92 | 30 | 20 | 10 | 20 | 52 | 89 |

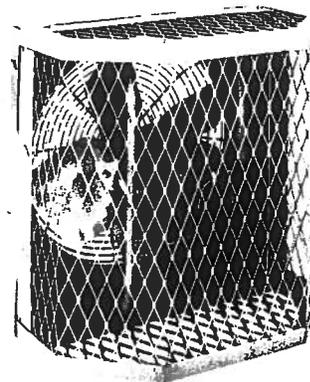

FRONT GUARD


DRIVE SIDE GUARD

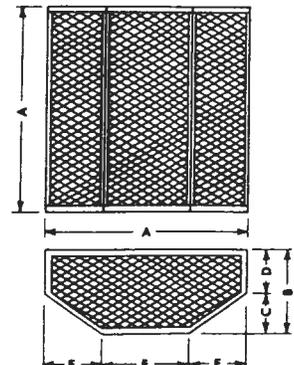

Accessories

WALL SHUTTERS FOR SERIES GS FANS


Wall shutters always open fully because of rigid counter-balanced construction. Tie rods and bearings are placed inside — protected from the elements. All aluminum construction and nylon bearings prevent corrosion. Available in choice of air operated gravity closing, motor operated or hand operated types. High velocity shutters with additional tie rods are required for use with air velocities above 2,000 feet per minute, unless motor or hand operated.

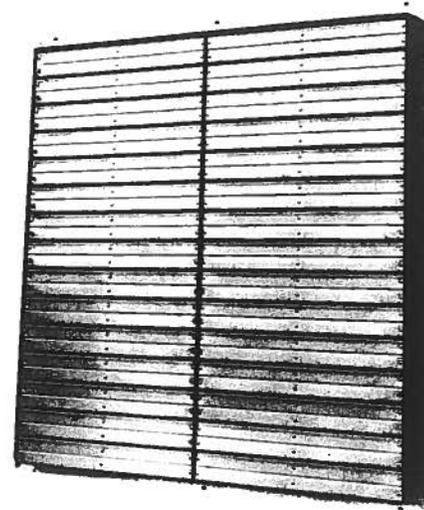

AUTOMATIC SHUTTER

| Fan Catalog No. | Wall Shutter Catalog No. | | | | Dimensions | | | |
|-----------------|--------------------------|----------------|---------------|---------------|------------|-----|---|----|
| | Automatic | Motor Operated | Hand Operated | High Velocity | A | B | C | D |
| GS 26 | HD 33 | HDE 33 | HDM 33 | XHD 33 | 32 | 36¼ | 6 | 7 |
| GS 32 | HD 39 | HDE 39 | HDM 39 | XHD 39 | 38 | 42¼ | 6 | 8 |
| GS 38 | HD 45 | HDE 45 | HDM 45 | XHD 45 | 44 | 48¼ | 6 | 10 |
| GS 44 | HD 51 | HDE 51 | HDM 51 | XHD 51 | 50 | 54¼ | 6 | 11 |
| GS 50 | HD 57 | HDE 57 | HDM 57 | XHD 57 | 56 | 60¼ | 6 | 13 |
| GS 56 | HD 63 | HDE 63 | HDM 63 | XHD 63 | 62 | 66¼ | 6 | 14 |

1. Dimensions C-6" Clearance for motor on HDE motor operated shutters.
2. Dimension D indicates minimum recommended distance between fan panel and shutter.

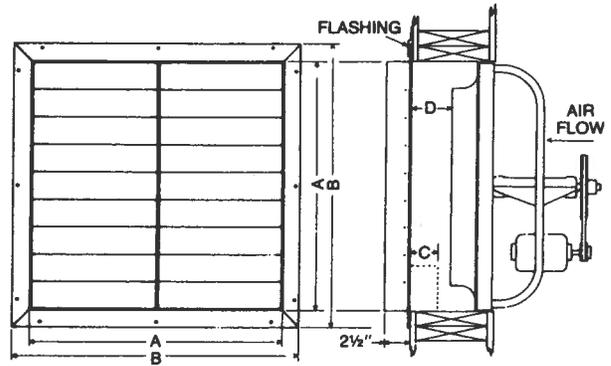


PROTECTIVE GUARDS FOR SERIES GS FANS

Drive side guards are fabricated of 1½" mesh industrial expanded metal, welded to angle frames to meet all normal safety requirements, and painted to match the fans. Front guards are constructed of heavy gauge cadmium plated wire.



GUARD DIMENSIONS

| Fan Catalog No. | Drive Side Guard | | | | | | Front Guard Diameter |
|-----------------|------------------|----|----|----|----|----|----------------------|
| | A | B | C | D | E | F | |
| GS 26 | 32 | 20 | 10 | 10 | 10 | 12 | 28 |
| GS 32 | 38 | 20 | 10 | 10 | 10 | 18 | 34 |
| GS 38 | 44 | 20 | 10 | 10 | 10 | 24 | 40 |
| GS 44 | 50 | 20 | 10 | 10 | 10 | 30 | 46 |
| GS 50 | 56 | 20 | 10 | 10 | 10 | 36 | 52 |
| GS 56 | 62 | 20 | 10 | 10 | 10 | 42 | 58 |

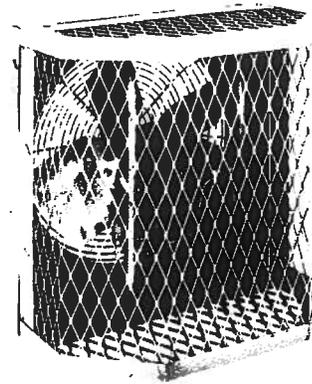




FRONT GUARD

DRIVE SIDE GUARD

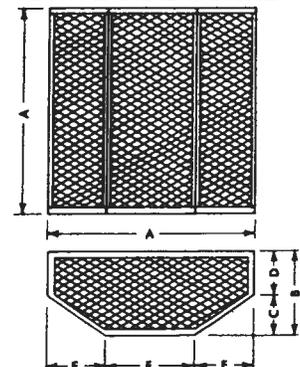

Wall Boxes For GS-HC Series

WB series wall boxes are formed from heavy gauge galvanized steel. Mounting flanges are an integral part of the wall box. The fan, guard and wall box are assembled at the factory for easy installation at the job site.

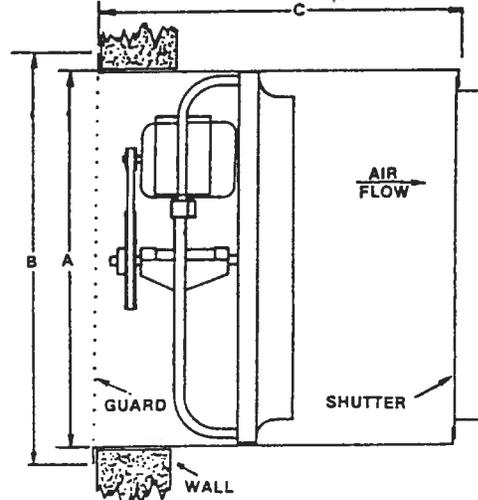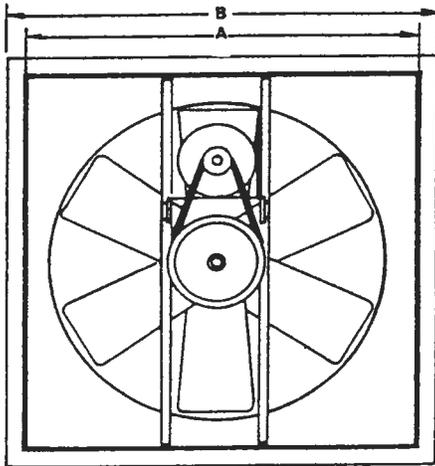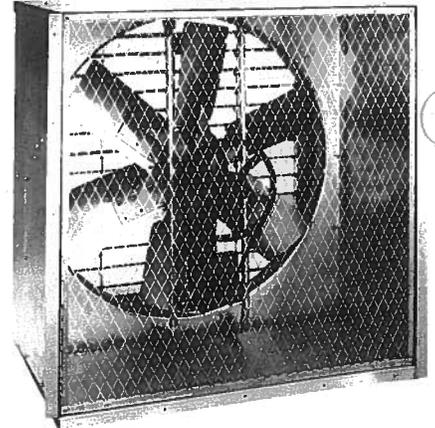

| MODEL NO. | DIMENSIONS | | | GAUGES | | FOR USE WITH FAN MODEL NO. | SHUTTER REQUIRED | | GUARD MODEL NO. |
|-----------|------------|----|----|--------|-------|-------------------------------|------------------|---------|--------------------|
| | A | B | C | GALV. | ALUM. | | MODEL NO. | SIZE | |
| WB-26 | 33 | 36 | 32 | 16 | .050 | GS26, HC26 | HD-27 | 27 x 27 | GHG-26 |
| WB-32 | 39 | 42 | 32 | 16 | .050 | GS32, HC32 | HD-33 | 33 x 33 | GHG-32 |
| WB-38 | 45 | 48 | 32 | 16 | .050 | GS38, HC38 | HD-39 | 39 x 39 | GHG-38 |
| WB-44 | 51 | 54 | 32 | 16 | .050 | GS44, HC44 | HD-45 | 45 x 45 | GHG-44 |
| WB-50 | 59 | 60 | 32 | 16 | .050 | GS50, HC50 | HG-51 | 51 x 51 | GHG-50 |
| WB-56 | 63 | 66 | 38 | 16 | .080 | GS56, HC56 | HD-57 | 57 x 57 | GHG-56 |
| WB-62 | 70 | 74 | 43 | 16 | .080 | HC62 | XHD-63 | 63 x 63 | GHG-62 |
| WB-74 | 82 | 86 | 43 | 14 | .125 | HC-74 | XHD-75 | 75 x 75 | GHG-74 |
| WB-86 | 94 | 96 | 49 | 14 | .125 | HC-86 | XHD-87 | 87 x 87 | GHG-86 |

Warranty

Warranty and Disclaimer: Quietaire Corporation extends this limited warranty to the original buyer and warrants that products manufactured by Quietaire shall be free from original defects in workmanship and materials for one year from date of shipment, provided same have been properly stored, installed service, maintained and operated. This warranty shall not apply to products which have been altered or repaired in any way so as to effect its performance, without Quietaire's express authorization, or altered or reliability, nor which have been improperly installed or subjected to misuse, negligence, or accident, or incorrectly used in combination with other substances. The Buyer assumes all risks and liability for results of; use of the products. Warranties on purchased parts, such as electric motor and controls are limited to the terms of warranty extended by our supplier.

Limitation Of Remedy And Damages: All claims under this warranty must be made in writing and delivered to Quietaire Corporation 505 North Hutcheson, Houston, Texas 77003 within 15 days after discovery of the defect and prior to the expiration of one year from the date of shipment by Quietaire of the product claimed defective, and Buyer shall be barred from any remedy if Buyer fails to make such claim within such period.

Within 30 days after receipt of a timely claim, Quietaire shall have the option either to inspect the product while in Buyer's possession or to request Buyer to return the product to Quietaire at Buyer's expense for inspection by Quietaire. Quietaire shall replace, or at its option repair, free of charge, any product it determines to be defective, and it shall ship the repaired or replacement product to Buyer F.O.B. point of shipment; provided, however, if circumstances are such as Quietaire judgment to prohibit repair or replacement to remedy the warranted defects, the buyer's sole... exclusive remedy shall be a refund to the buyer of any part of the invoice price, paid to Quietaire for the defective product or part.

Quietaire is not responsible for the cost of removal of the defective product or part, damages due to removal, or any expenses incurred in shipping the product or part to or from Quietaire plant, or the installation of the repaired or replaced product or part.

Implied warranties, when applicable, shall commence upon the same date as the express warranty provided above, and shall except for warranties of title, extend only for the duration of the express warranty provided above. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. The only remedy provided to you under an applicable implied warranty and the express warranty shall be the remedy provided under the express warranty, subject to the terms and conditions contained therein. Quietaire shall not be liable for incidental and consequential losses and damages under the express warranty, any applicable implied warranty, or claims for negligence, except to the extent that his limitation is found to be unenforceable under applicable state law. Some states do not allow exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. The warranty gives you specific legal rights, and you may also have other rights which vary from state to state.

No employee, agent, dealer, or other person is authorized to give any warranties on behalf of Quietaire or to assume for Quietaire any other liability in connection with any of its products except in writing and signed by an officer of Quietaire.

Technical Advice And Recommendation, Disclaimer: Notwithstanding any past practice or dealings or any custom of the trade, sales shall not include the furnishing of technical advice or assistance or system design. Any such assistance shall be at Quietaire sole option and may be subject to additional charge.

Quietaire assumes no obligation or liability on account of any recommendations, opinions, or advice as to the choice, installation or use of products. Any such recommendations, opinions or advice are given and shall be accepted at your own risk and shall not constitute any warranty or guarantee of such products or their performance.



WEB SITE: <http://www.quietaire.com> E-MAIL: info@quietaire.com

505 North Hutcheson • Houston, Texas 77003 • 713/228-9421 • FAX 713/228-9425