

2DDWRG

Wind-Driven Rain Resistant Stationary Louver

Extruded Aluminum



APPLICATION

The 2DDWRG is a stationary wind driven rain louver with a 2" deep frame and sightproof blades. This model is ideal for glazing applications and is cost effective with high performance.

STANDARD CONSTRUCTION



Frame	2" (51) deep, 6063T6 extruded aluminum with .070" (1.8) nominal wall thickness.
Blades	6063T6 extruded aluminum .040" (1.02) nominal wall thickness. Double drainable blades are sight-proof.
Screen	5/8" x .040" (16 x 1) expanded flattened aluminum bird screen in removable frame. Screen adds approximately 1/2" (13) to louver depth.
Finish	Mill.
Minimum Size	6"w x 6"h (152 x 152)
Approximate Shipping Weight	4 lbs. per sq. ft. (19.4 kg/m ²)
Maximum Factory Assembly Size	Single sections shall not exceed 120"w x 90"h (3048 x 2286) or 90"w x 120"h (2286 x 3048). Louvers larger than the maximum single section size will require field assembly of smaller sections.
Supports	Louvers may be provided with rear mounted blade supports that increase overall louver depth depending on louver size, assembly configuration or windload.

Consult Reliable for additional information.

FEATURES

- Closely spaced horizontal blades minimize the penetration of wind-driven rain, reducing damage and additional operating expenses
- Tested in the AMCA 500-L Wind-Driven Rain Penetration Test
- Published performance ratings based on testing in accordance with AMCA Publication 511
- 43% Free Area
- Excellent pressure drop performance
- Aluminum construction for low maintenance and high resistance to corrosion
- Triangular and round shapes available

FRAME CONSTRUCTION

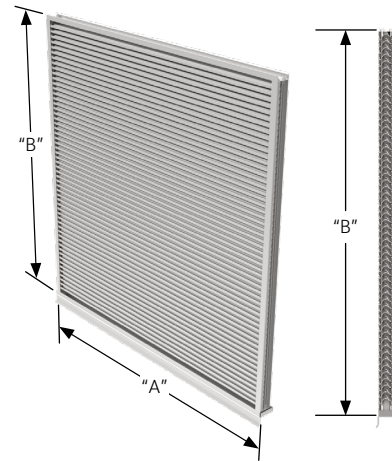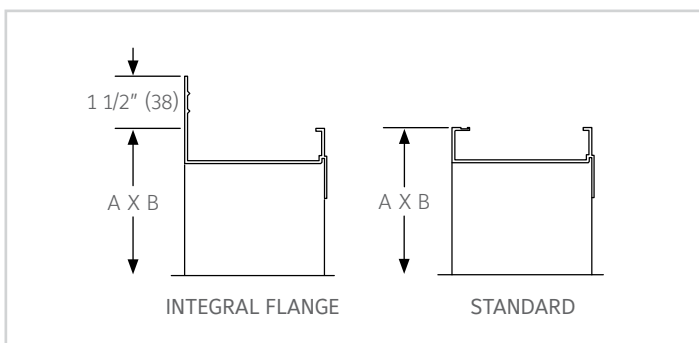

VARIATIONS

- Extended sill
- Hinged frame
- Front or rear security bars
- Filter racks
- Installation angles
- A variety of bird and insect screens
- Selection of finishes: prime coat, pearledize, 50% PVDF (modified fluoropolymer), epoxy, 70% PVDF, clear and color anodize. (Some variation in anodize color consistency is possible.)

Consult Reliable for other special requirements.

NOTES:

- Dimensions in inches, parenthesis () indicate millimeters.
- Units can be furnished actual size or with size deducts.


FREE AREA GUIDE

Free Area Guide shows free area in ft² and m² for various sizes of 2DDWRG.

		Width – Inches and Meters																			
		12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120	
Height – Inches and Meters	12	0.30	0.45	0.60	0.75	0.90	1.05	1.20	1.35	1.50	1.65	1.80	1.95	2.10	2.25	2.40	2.55	2.70	2.85	3.00	
	12	0.30	0.30	0.48	0.66	0.84	1.01	1.19	1.37	1.55	1.73	1.91	2.09	2.27	2.45	2.63	2.80	2.98	3.16	3.34	3.52
	18	0.45	0.52	0.82	1.13	1.44	1.75	2.06	2.37	2.68	2.99	3.30	3.61	3.92	4.22	4.53	4.84	5.15	5.46	5.77	6.08
	24	0.60	0.71	1.13	1.55	1.97	2.40	2.82	3.24	3.67	4.09	4.51	4.94	5.36	5.78	6.20	6.63	7.05	7.47	7.90	8.32
	30	0.75	0.89	1.43	1.97	2.51	3.04	3.58	4.12	4.65	5.19	5.73	6.26	6.80	7.34	7.88	8.41	8.95	9.49	10.02	10.56
	36	0.90	1.11	1.78	2.45	3.11	3.78	4.45	5.11	5.78	6.45	7.12	7.78	8.45	9.12	9.78	10.45	11.12	11.79	12.45	13.12
	42	1.05	1.30	2.08	2.86	3.64	4.43	5.21	5.99	6.77	7.55	8.33	9.11	9.89	10.67	11.45	12.24	13.02	13.80	14.58	15.36
	48	1.20	1.49	2.39	3.28	4.18	5.07	5.97	6.86	7.76	8.65	9.55	10.44	11.34	12.23	13.13	14.02	14.91	15.81	16.70	17.60
	54	1.35	1.71	2.73	3.76	4.78	5.81	6.83	7.86	8.88	9.91	10.93	11.96	12.98	14.01	15.03	16.06	17.08	18.11	19.13	20.16
	60	1.50	1.90	3.04	4.18	5.32	6.45	7.59	8.73	9.87	11.01	12.15	13.29	14.43	15.57	16.70	17.84	18.98	20.12	21.26	22.40
	66	1.65	2.12	3.38	4.65	5.92	7.19	8.46	9.73	11.00	12.27	13.54	14.81	16.08	17.34	18.61	19.88	21.15	22.42	23.69	24.96
	72	1.80	2.31	3.69	5.07	6.45	7.84	9.22	10.60	11.99	13.37	14.75	16.14	17.52	18.90	20.28	21.67	23.05	24.43	25.82	27.20
	78	1.95	2.49	3.99	5.49	6.99	8.48	9.98	11.48	12.97	14.47	15.97	17.46	18.96	20.46	21.95	23.45	24.95	26.45	27.94	29.44
	84	2.10	2.71	4.34	5.97	7.59	9.22	10.85	12.47	14.10	15.73	17.36	18.98	20.61	22.24	23.86	25.49	27.12	28.75	30.37	32.00
	90	2.25	2.90	4.64	6.38	8.12	9.87	11.61	13.35	15.09	16.83	18.57	20.31	22.05	23.79	25.53	27.28	29.02	30.76	32.50	34.24
	96	2.40	3.09	4.95	6.80	8.66	10.51	12.37	14.22	16.08	17.93	19.79	21.64	23.50	25.35	27.20					
102	2.55	3.31	5.29	7.28	9.26	11.25	13.23	15.22	17.20	19.19	21.17	23.16	25.14	27.13	29.11						
108	2.70	3.50	5.60	7.70	9.80	11.89	13.99	16.09	18.19	20.29	22.39	24.49	26.59	28.69	30.78						
114	2.85	3.72	5.94	8.17	10.40	12.63	14.86	17.09	19.32	21.55	23.78	26.01	28.24	30.46	32.69						
120	3.00	3.91	6.25	8.59	10.93	13.28	15.62	17.96	20.31	22.65	24.99	27.34	29.68	32.02	34.36						


PRESSURE DROP

Air Performance (Pressure Drop) per AMCA 511 - Test Size 48" x 48" (1,220 mm x 1,220 mm). Tested per AMCA 500L (Test figures 6.5 & 5.5) without any screens or sill pan options. Results corrected to standard air density 0.075 lbs./ft.³ (1.2 kg/m³)

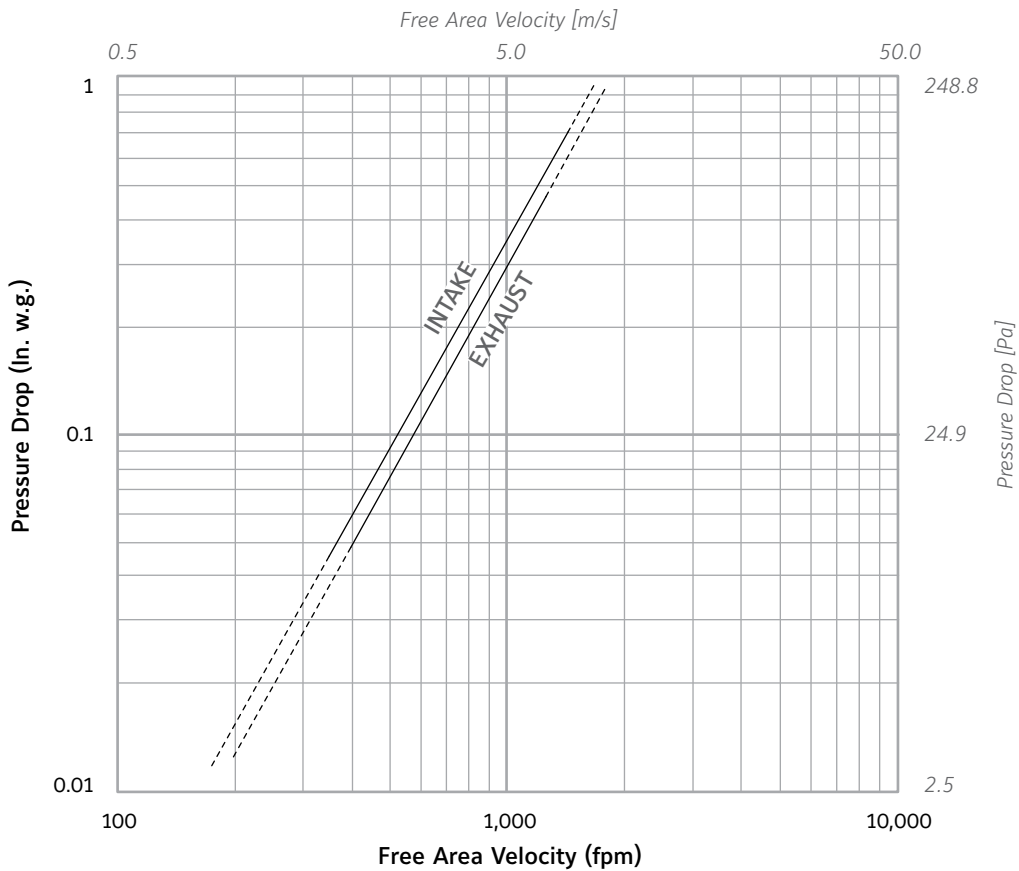

WATER PENETRATION GRAPH

Test size 48" wide x 48" high (1219 X 1219) Beginning point of water penetration at .01 oz. /sq. ft. is 752 fpm (266229 m/min).

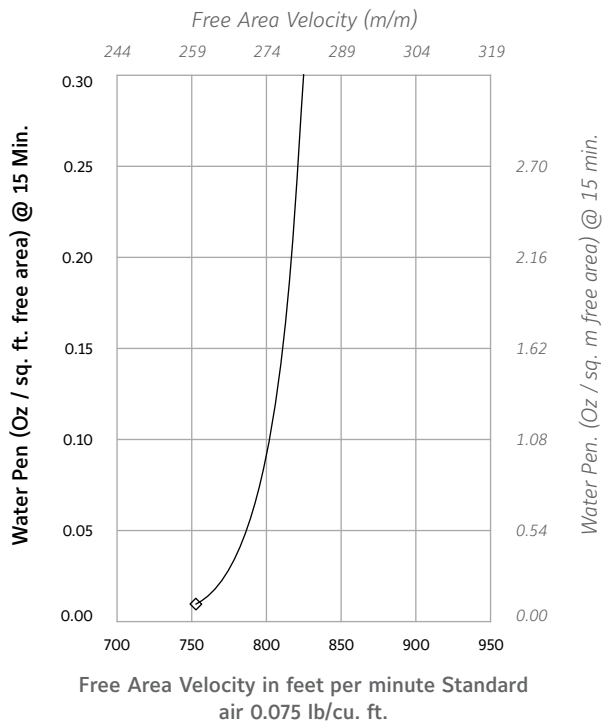

Reliable Products certifies that the louver shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings, water penetration ratings and wind driven rain ratings only. Ratings include the effect of a drain pan.

WIND-DRIVEN RAIN PERFORMANCE

Test size is 1m x 1m (39" x 39") core area, 1.04m x 1.12m (41" x 44") nominal. Free Area of test louver is 4.20 ft² (.39m²).

29 mph (75 mm/h) wind & 3" (76) per hour rain conditions				
Core Velocity ₁ fpm (m/s)	Airflow cfm (m ³ /min)	Free Area Velocity ₂ fpm (m/sec.)	Effectiveness Ratio	Class ₃
984 (5.0)	10007 (283)	1866 (9.48)	100	A

50 mph (202 mm/h) wind & 8" (203) per hour rain conditions				
Core Velocity ₁ fpm (m/s)	Airflow cfm (m ³ /min)	Free Area Velocity ₂ fpm (m/sec.)	Effectiveness Ratio	Class ₃
482 (2.4)	4315 (122)	804 (4.0)	99.5	A
588 (2.99)	5642 (160)	1052 (5.3)	99.3	A
691 (3.5)	6862 (194)	1280 (6.5)	99.1	A

NOTE:

- Core area is the open area of the louver face (face area less louver frames). Core Velocity is the airflow velocity through the Core Area of the louver (1m x 1m).
- Free Area of test size is calculated per AMCA standard 500-L.
- Wind Driven Rain Penetration Classes:

Class	Effectiveness
A	1 to .99
B	0.989 to 0.95
C	0.949 to 0.80
D	Below 0.8
- Intake Discharge Loss Class 2
Discharge Loss Coefficient is calculated by dividing a louvers' actual airflow rate vs. a theoretical airflow for the opening. It provides an indication of the louvers' airflow characteristics.


Discharge Loss Classes:

Class	Discharge Loss Coefficient
1	0.4 and above
2	0.3 to 0.399
3	0.2 to 0.299
4	0.199 and below

(The higher the coefficient, the less resistance to airflow.)

- The AMCA Wind Driven Rain Test is performed in a laboratory environment and incorporates controlled wind, water and system airflow effects. In actual field installations, storms may create conditions not considered by the AMCA test. Penthouse and similar applications where wind can pass through multiple louvers in an enclosure is another condition that is not simulated by AMCA tests. These applications can create elevated water penetration rates through any louver. Because of these uncontrolled situations, it is recommended that provisions to manage water penetration through louvers be included in the building design. Ratings include the effect of a drain pain.

TYPICAL INSTALLATION DETAILS

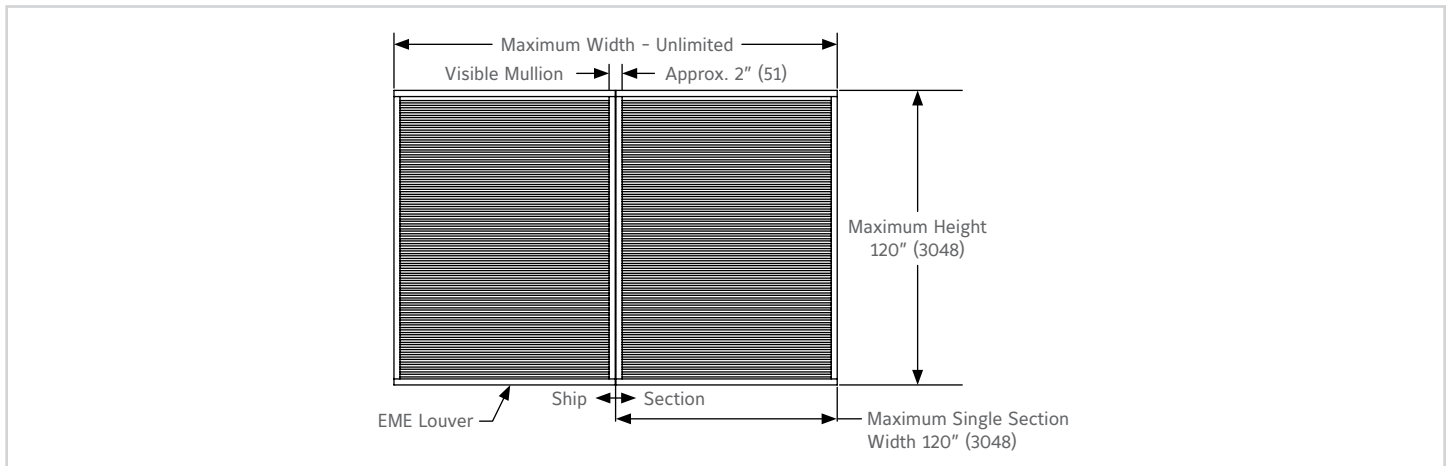

- Reference separate Installation Instruction sheets for installation details. It is the responsibility of the installing contractor to properly install the louvers per the appropriate detail.
- Louvers wider than the maximum single section width will be shipped in multiple sections and will require field assembly. Field assembly is not by Reliable.

LINKS TO IMPORTANT DOCUMENTS

Document Title

Finishes and Color Guide

Limited Warranty Document



1300 Enterprise Road, P.O. Box
580, Geneva, Alabama 36340
Tel: 334-684-3621
Tel: 800-624-3914
Fax: 800-508-1469