

### EDD-637

(standard)

\*Louver dimensions furnished approximately 1/2" (13) undersize.

The EDD-637 dual-drainable blade louver is designed to prevent water penetration in non-wind-driven rain applications by collecting water in frame and blade gutters and channeling it into downspouts and away from airflow paths. The EDD-637 is available in a wide array of anodized and painted finishes including custom color matching.

## Standard Construction

**Material:** Mill finish 6063-T5 extruded aluminum

**Frame:** 6" deep × 0.081" thick (152 × 2) channel

**Blades:** 37-1/2° × 0.081" (2) thick dual-drainable style

**Screen:** 1/2" × 0.063" (12.7 × 1.6) expanded and flattened aluminum

**Mullion:** Visible

**Minimum Size:** 4.5" × 8" (114 × 203)

**Maximum Size:**

Single section: 60" × 120" (1524 × 3048)  
120" × 60" (3048 × 1524)

Multiple section: Unlimited

## Ratings

**Free Area:** [48" × 48" (1219 × 1219) unit]: 9.2 ft<sup>2</sup> (0.85 m<sup>2</sup>)  
57.7%

**Performance @ Beginning Point of Water Penetration**

**Free Area Velocity:** 1,113 fpm (5.65 m/s)

**Air Volume Delivered:** 10,242 cfm (4.83 m<sup>3</sup>/s)

**Pressure Loss:** 0.15 in.wg. (37 Pa)

**Velocity @ 0.15 in.wg. Pressure Loss:** 1,106 fpm (5.62 m/s)

**Std. Design Load:** 25 psf

## Options

### ■ Factory finish:

- High Performance Fluoropolymer
- Baked Enamel
- Clear Anodize
- Prime Coat
- Integral Color Anodize

### ■ Frame options:

- 1-1/2" (38) flange frame
- Stucco flange
- Custom size flange
- Glazing frame

### ■ Installation hardware

- Clip angles
- Continuous angles

### ■ Hidden vertical mullion

### ■ Alternate bird or insect screens

### ■ Insulated or non-insulated blank-off panels

### ■ Filter racks

### ■ Hinged frame

### ■ Subframe

### ■ Head and/or sill flashing

### ■ Burglar bars

### ■ Frame closure

### ■ Net OD (actual size)

**5** year  
warranty



### Certified Ratings:

Pottorff certifies that the model EDD-637 shown herein is licensed to bear the AMCA seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings seal applies to air performance and water penetration ratings.

**NOTE:** Dimensions in parentheses ( ) are millimeters.  
Information is subject to change without notice or obligation.

# PERFORMANCE

## EDD-637

Extruded Aluminum Louver  
6" deep • 37-1/2° Dual-Drainable Blade

### Free Area (ft<sup>2</sup>)

Width (Inches)

Height (Inches)	Width (Inches)																			
	4.5	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96	102	108	114	120
7	0.0	0.1	0.2	0.2	0.3	0.3	0.4	0.4	0.5	0.6	0.6	0.7	0.7	0.8	0.8	0.9	1.0	1.0	1.1	1.1
12	0.1	0.3	0.5	0.6	0.8	1.0	1.1	1.3	1.5	1.7	1.8	2.0	2.2	2.3	2.5	2.7	2.9	3.0	3.2	3.4
18	0.1	0.6	0.9	1.3	1.6	1.9	2.3	2.6	3.0	3.3	3.7	4.0	4.3	4.7	5.0	5.4	5.7	6.1	6.4	6.7
24	0.2	0.9	1.4	1.9	2.4	2.9	3.4	3.9	4.5	5.0	5.5	6.0	6.5	7.0	7.5	8.1	8.6	9.1	9.6	10.1
30	0.3	1.1	1.8	2.5	3.2	3.9	4.6	5.3	5.9	6.6	7.3	8.0	8.7	9.4	10.1	10.7	11.4	12.1	12.8	13.5
36	0.4	1.4	2.3	3.1	4.0	4.9	5.7	6.6	7.4	8.3	9.1	10.0	10.9	11.7	12.6	13.4	14.3	15.1	16.0	16.9
42	0.4	1.7	2.7	3.8	4.8	5.8	6.9	7.9	8.9	9.9	11.0	12.0	13.0	14.1	15.1	16.1	17.2	18.2	19.2	20.2
48	0.5	2.0	3.2	4.4	5.6	6.8	8.0	9.2	10.4	11.6	12.8	14.0	15.2	16.4	17.6	18.8	20.0	21.2	22.4	23.6
54	0.6	2.3	3.7	5.0	6.4	7.8	9.1	10.5	11.9	13.3	14.6	16.0	17.4	18.8	20.1	21.5	22.9	24.2	25.6	27.0
60	0.6	2.6	4.1	5.7	7.2	8.7	10.3	11.8	13.4	14.9	16.5	18.0	19.6	21.1	22.6	24.2	25.7	27.3	28.8	30.4
66	0.7	2.9	4.6	6.3	8.0	9.7	11.4	13.1	14.9	16.6										
72	0.8	3.1	5.0	6.9	8.8	10.7	12.6	14.5	16.3	18.2										
78	0.9	3.4	5.5	7.5	9.6	11.7	13.7	15.8	17.8	19.9										
84	0.9	3.7	5.9	8.2	10.4	12.6	14.9	17.1	19.3	21.6										
90	1.0	4.0	6.4	8.8	11.2	13.6	16.0	18.4	20.8	23.2										
96	1.1	4.3	6.9	9.4	12.0	14.6	17.1	19.7	22.3	24.9										
102	1.1	4.6	7.3	10.1	12.8	15.5	18.3	21.0	23.8	26.5										
108	1.2	4.9	7.8	10.7	13.6	16.5	19.4	22.4	25.3	28.2										
114	1.3	5.1	8.2	11.3	14.4	17.5	20.6	23.7	26.8	29.8										
120	1.4	5.4	8.7	11.9	15.2	18.5	21.7	25.0	28.2	31.5										



#### Certified Ratings:

Pottorff certifies that the model EDD-637 shown herein is licensed to bear the AMCA seal. The ratings shown are based on test and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings seal applies to air performance and water penetration ratings.




**amca** INTERNATIONAL  
www.amca.org

### Water Penetration


AMCA defines the beginning point of water penetration as the free area velocity at the intersection of a simple linear regression of test data and the line of 0.01 ounces of water per square foot of free area measured through a 48" x 48" louver during a 15 minute period. The AMCA water penetration test provides a method for comparing louver models and designs as to their efficiency in resisting the penetration of rainfall under specific lab conditions. We recommend that intake louvers are selected with a reasonable margin of safety below the beginning point of water penetration in order to avoid unwanted penetration during severe storm conditions.

**Beginning Point of Water Penetration = 1,113 fpm**

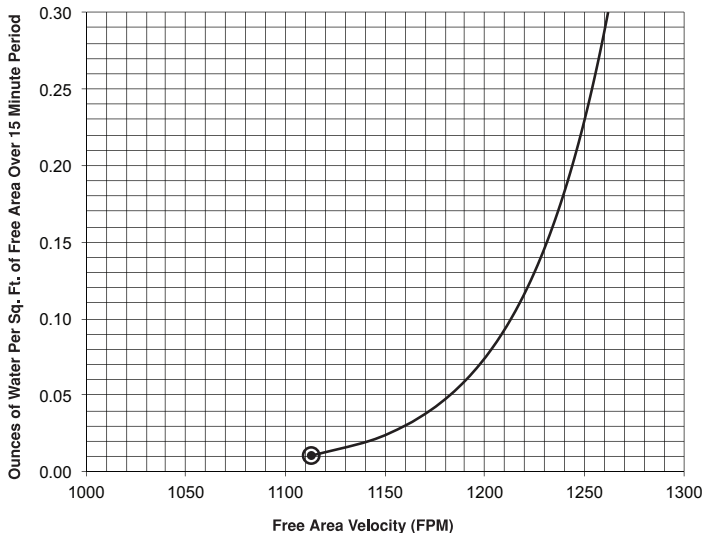


### Pressure Loss

(Data corrected to standard air density.)

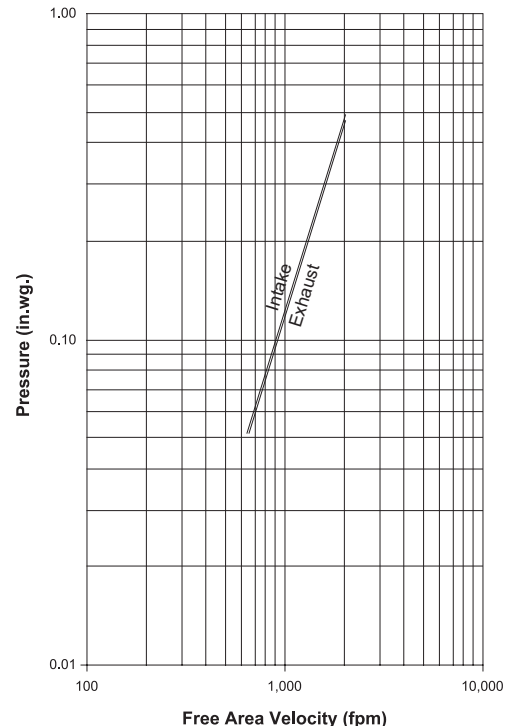

Louver Test Size = 48" x 48" (1219 x 1219)  
Pressure loss tested in accordance with  
Figure 5.5 of AMCA Standard 500-L.

## Attributes

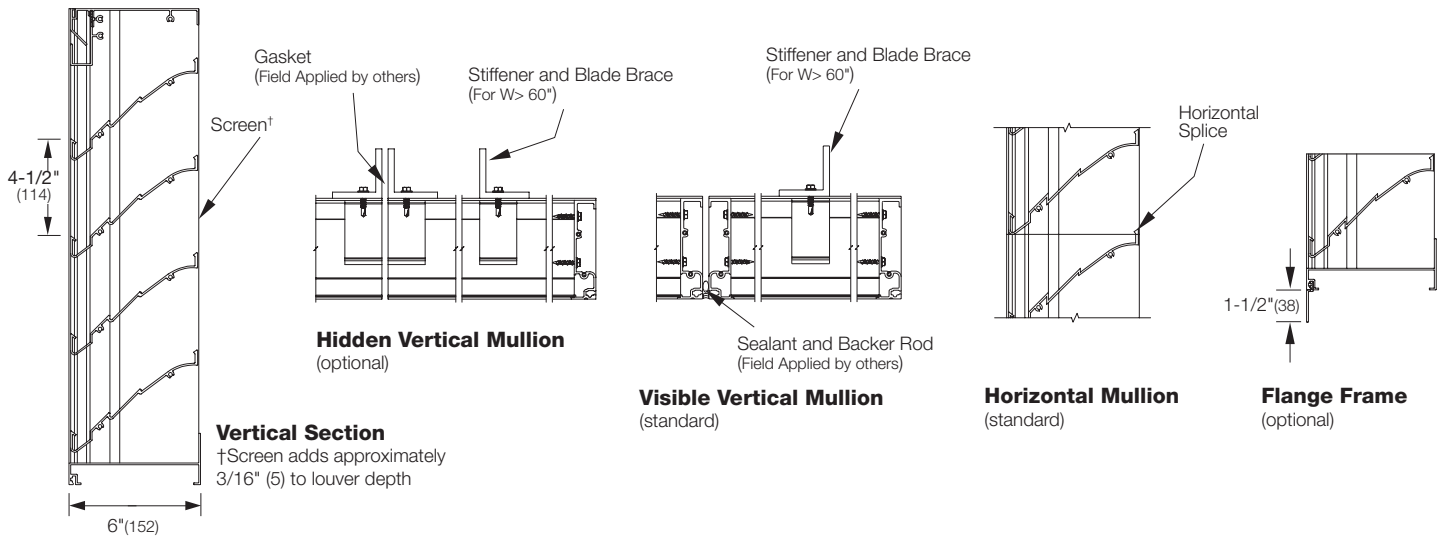

## Supplemental Options

