



VANE AXIAL FAN

DIRECT DRIVEN

VANE AXIAL FAN DIRECT DRIVEN

Series TDA-V

Features

For commercial and industrial applications where large volumes of air are required at moderate to high pressure, special designed integral straightening vanes, reduced turbulence, provide high performance and low sound level.

Construction

Double flanged casing is produced in mild steel or galvanised Steel, the impeller having manually adjustable pitch aerofoil blades is made of PPG, PAG or Aluminium.

Finish

Available in standard finishes of galvanisation or painting.

Operating Temperature

-20°C to +55°C

Motors

Totally enclosed Class 'F' motor, to a min. IP54 protection are fitted as standard. Standard motor up to 2.2kW are usually supplied on DOL starting, motor 3.0kW and above are star/delta starting.


Airflow Direction

Air flowing from impeller to motor is fitted as standard.





Kruger Ventilation Industries (India) Pvt Ltd. certifies that the TDA 315 -V shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with the AMCA publication 211 and comply with there quirements of the AMCA Certified Ratings Program.


MODEL: TDA 315-V / 12AA / 5-5 / _ / _

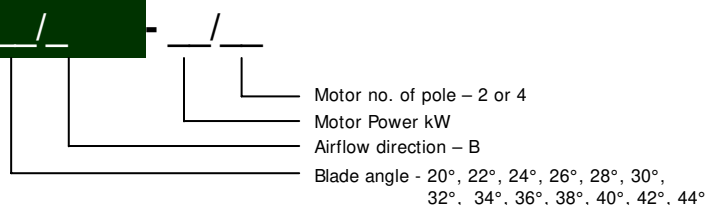

* All Dimension in mm

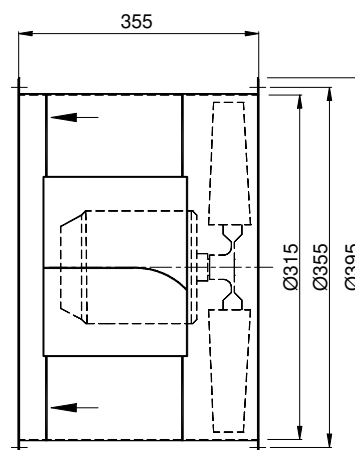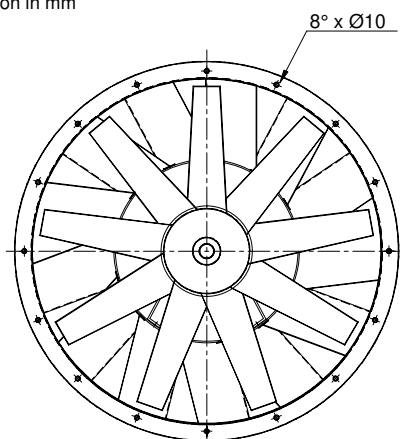

TDA 315-V / 12AA/ 5-5/ _ _ / _ 1450rpm - 50Hz

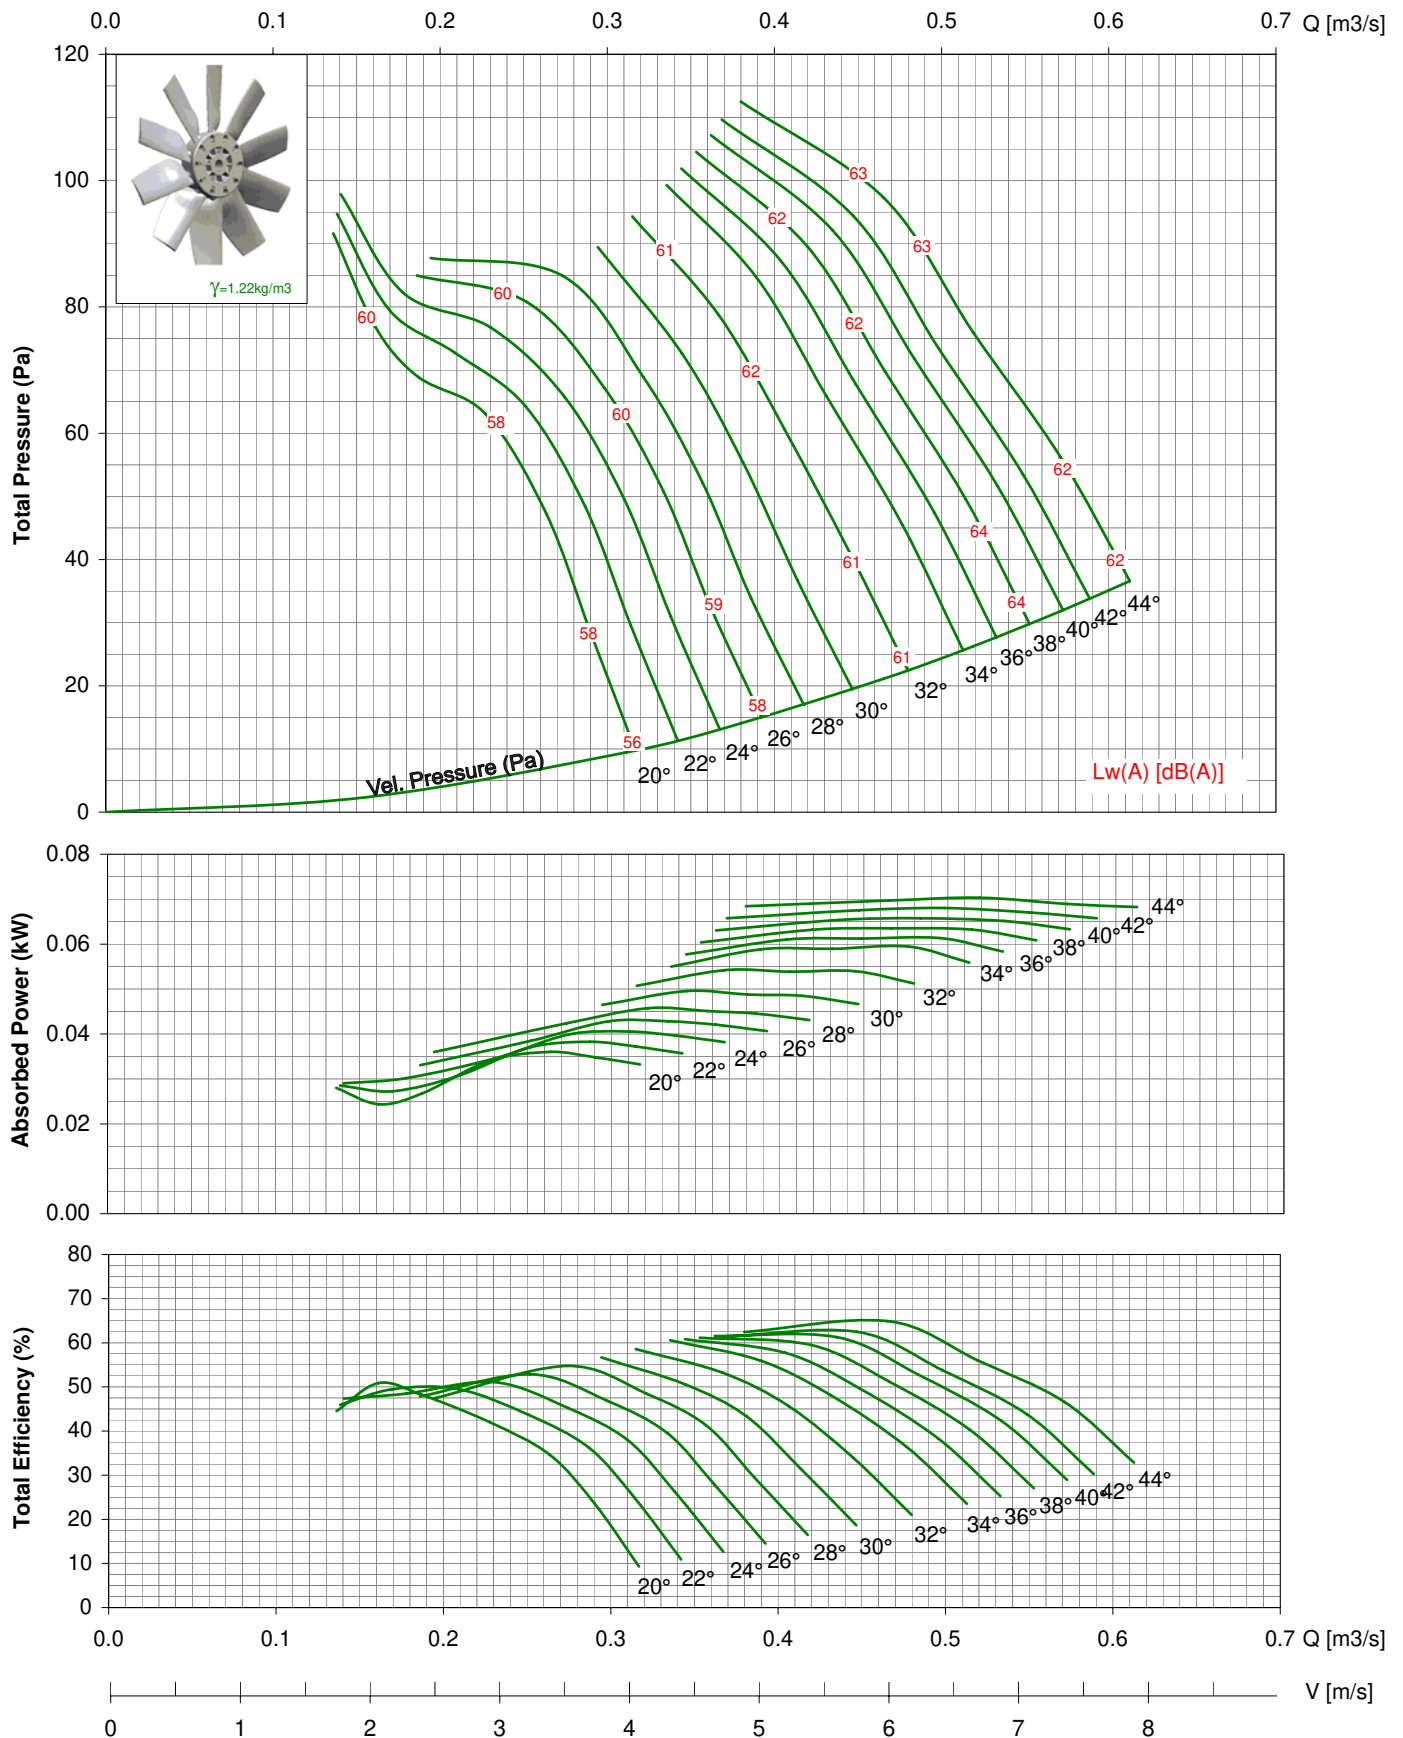


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- Power ratings (kW) does not include transmission losses.

- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.

- The AMCA Certified Ratings applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 315-V / 12AA/ 5-5/ _ _ / _ 2850rpm - 50Hz

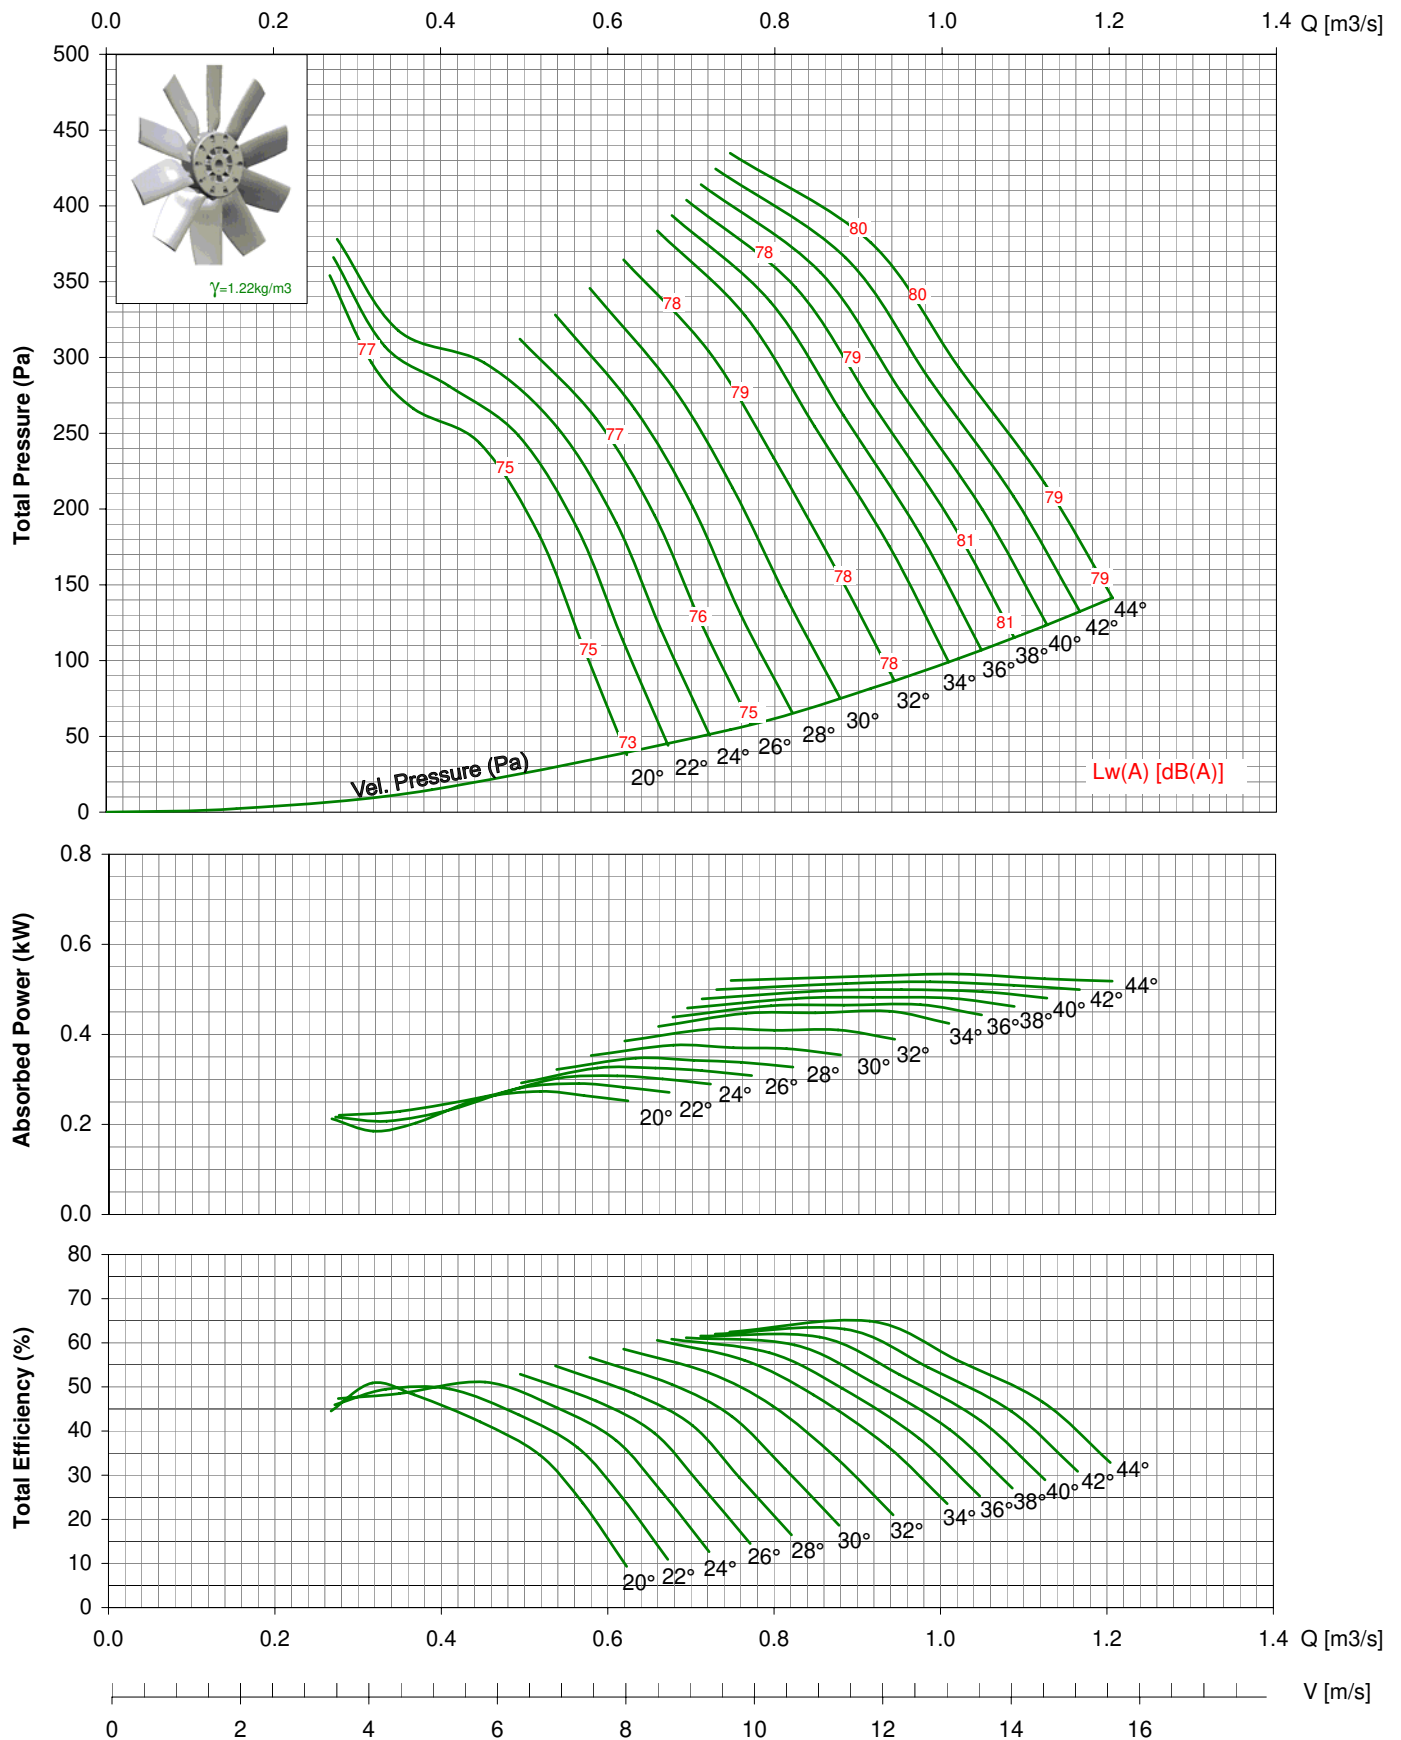

- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).


- Power ratings (kW) does not include transmission losses.

- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.

- The AMCA Certified Ratings applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 315-V / 12AA/ 5-5/ _ _ / _

1750rpm - 60Hz

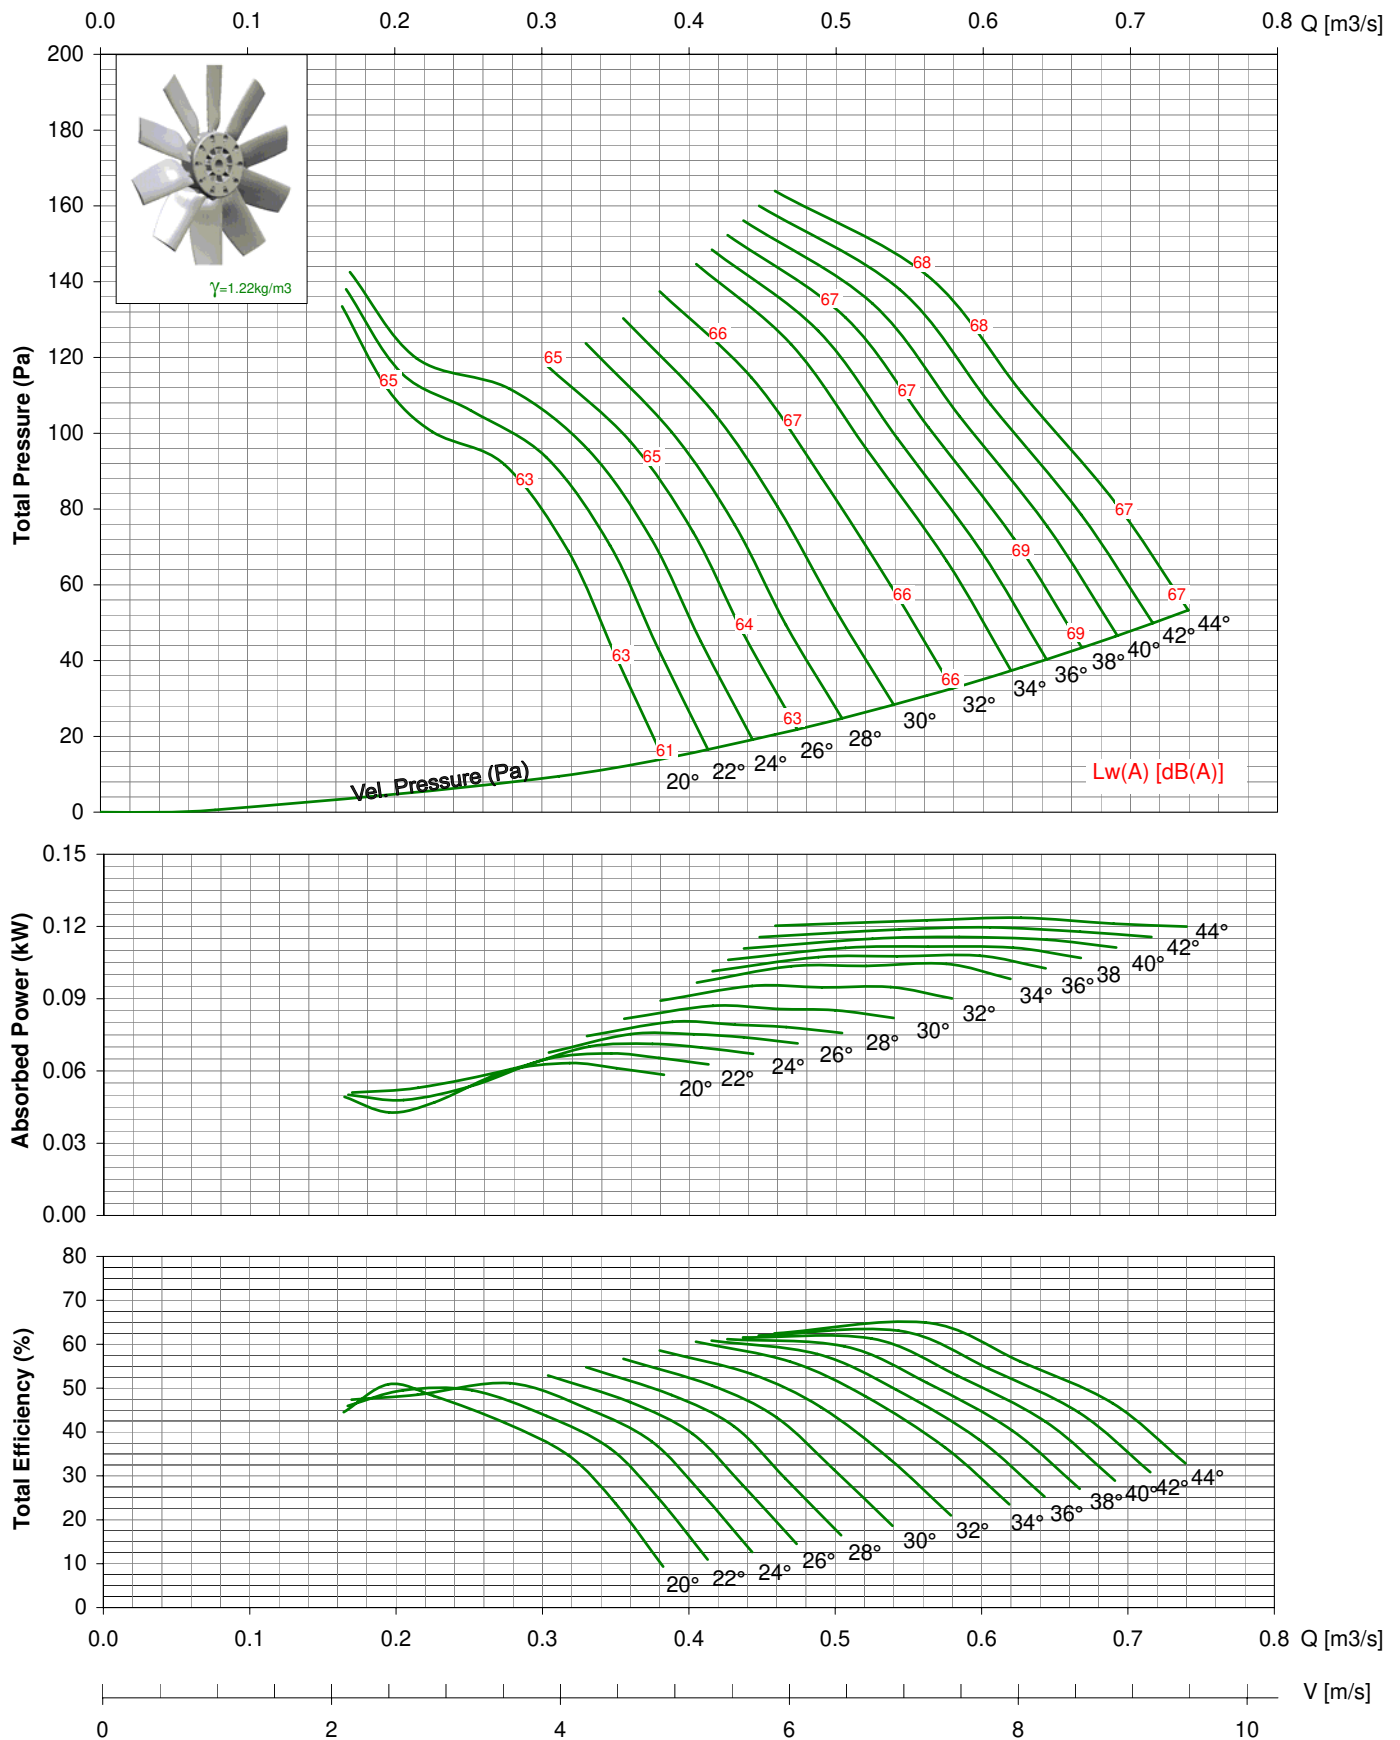


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- Power ratings (kW) does not include transmission losses.

- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lwi(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.

- The AMCA Certified Ratings applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 315-V / 12AA/ 5-5/ _ _ / _ 3450rpm - 60Hz

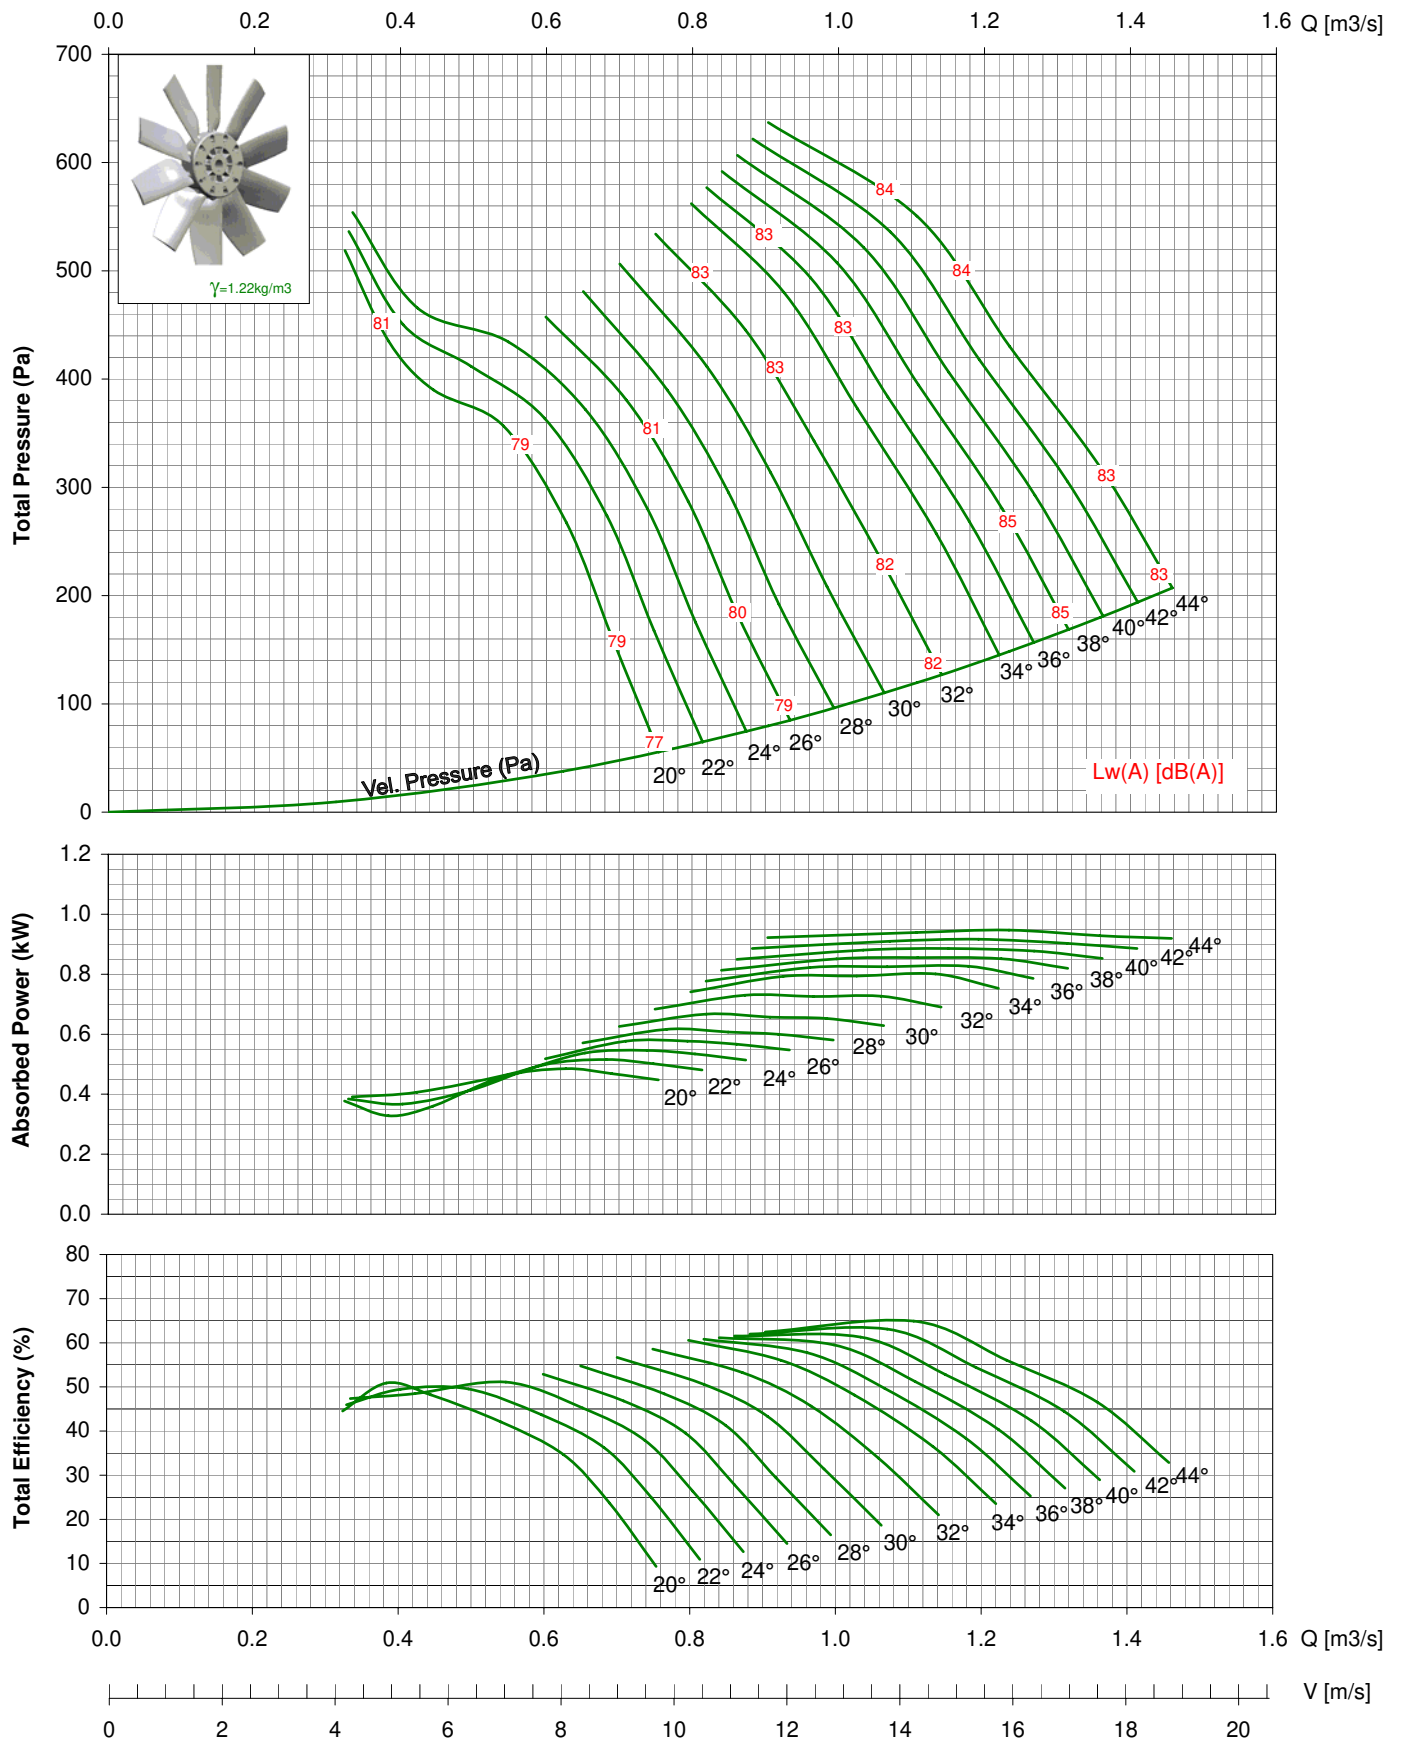

- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- Power ratings (kW) does not include transmission losses.

- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.

- The AMCA Certified Ratings applies to air performance only. dBA levels are not licensed by AMCA international.

VANE AXIAL FAN DIRECT DRIVEN

Series TDA-V

Features

For commercial and industrial applications where large volumes of air are required at moderate to high pressure, special designed integral straightening vanes, reduced turbulence, provide high performance and low sound level.

Construction

Double flanged casing is produced in mild steel or galvanised Steel, the impeller having manually adjustable pitch aerofoil blades is made of PPG, PAG or Aluminium.

Finish

Available in standard finishes of galvanisation or painting.

Operating Temperature

-20°C to +55°C

Motors

Totally enclosed Class 'F' motor, to a min. IP54 protection are fitted as standard. Standard motor up to 2.2kW are usually supplied on DOL starting, motor 3.0kW and above are star/delta starting.


Airflow Direction

Air flowing from impeller to motor is fitted as standard.





Kruger Ventilation Industries (India) Pvt Ltd. certifies that the TDA 355 -V shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with the AMCA publication 211 and comply with there quirements of the AMCA Certified Ratings Program.


MODEL: TDA 355-V / 12AA / 5-5 / _/_ / _/_

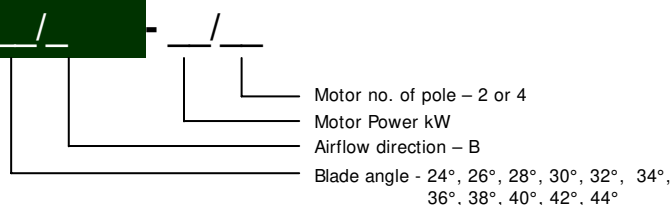

* All Dimension in mm

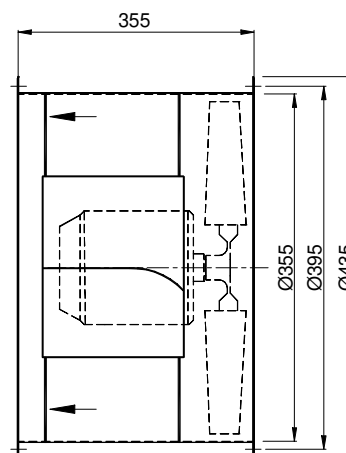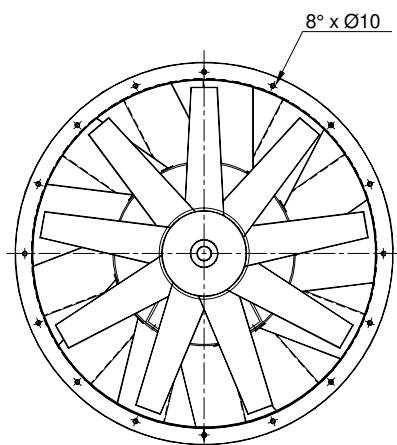


TDA 355-V / 12AA/ 5-5/ _ _ / _ 1450rpm - 50Hz

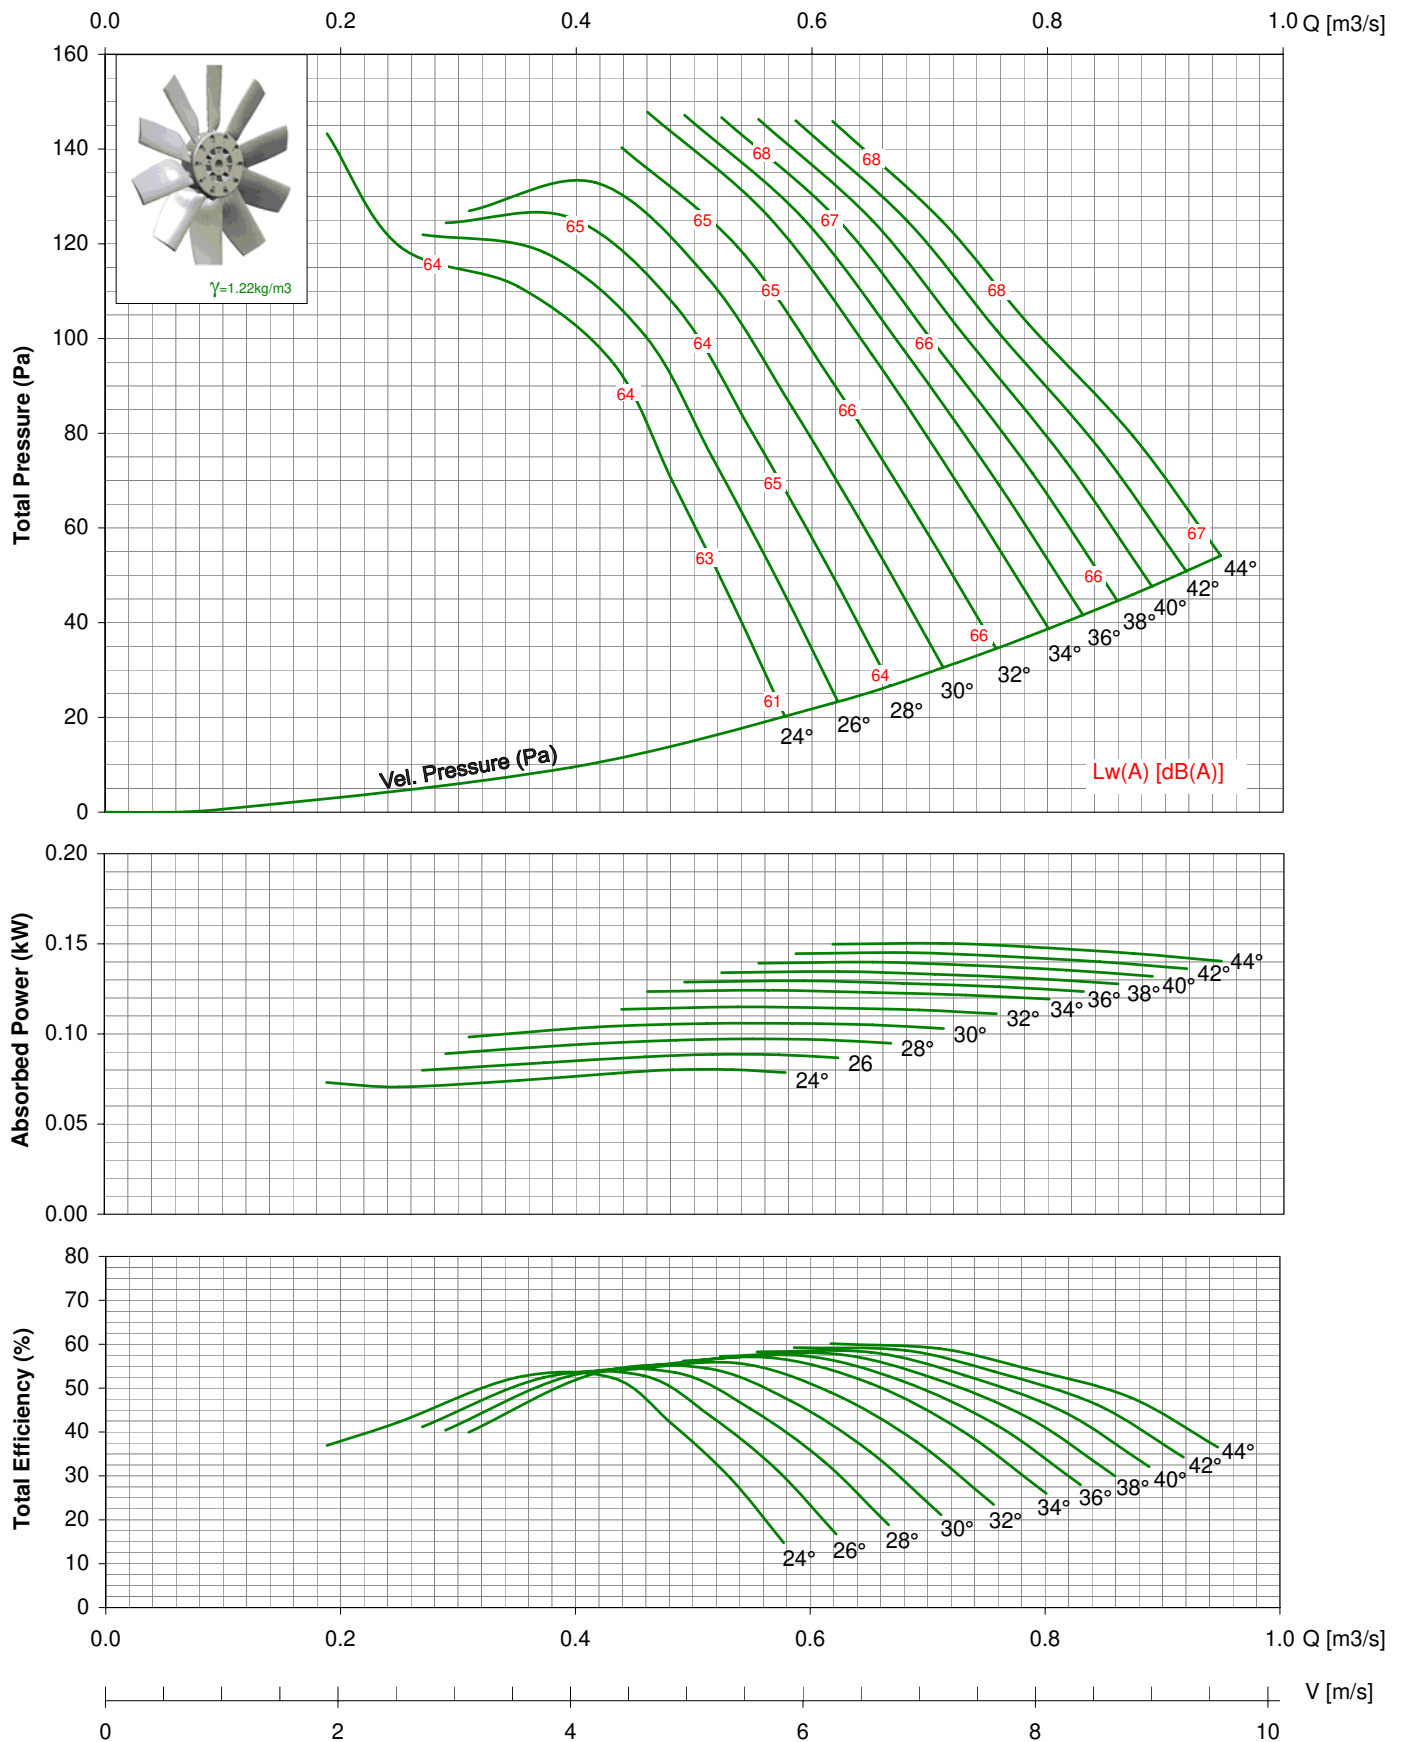

- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lwi(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.


TDA 355-V / 12AA/ 5-5/ _ _ / _ 2850rpm - 50Hz

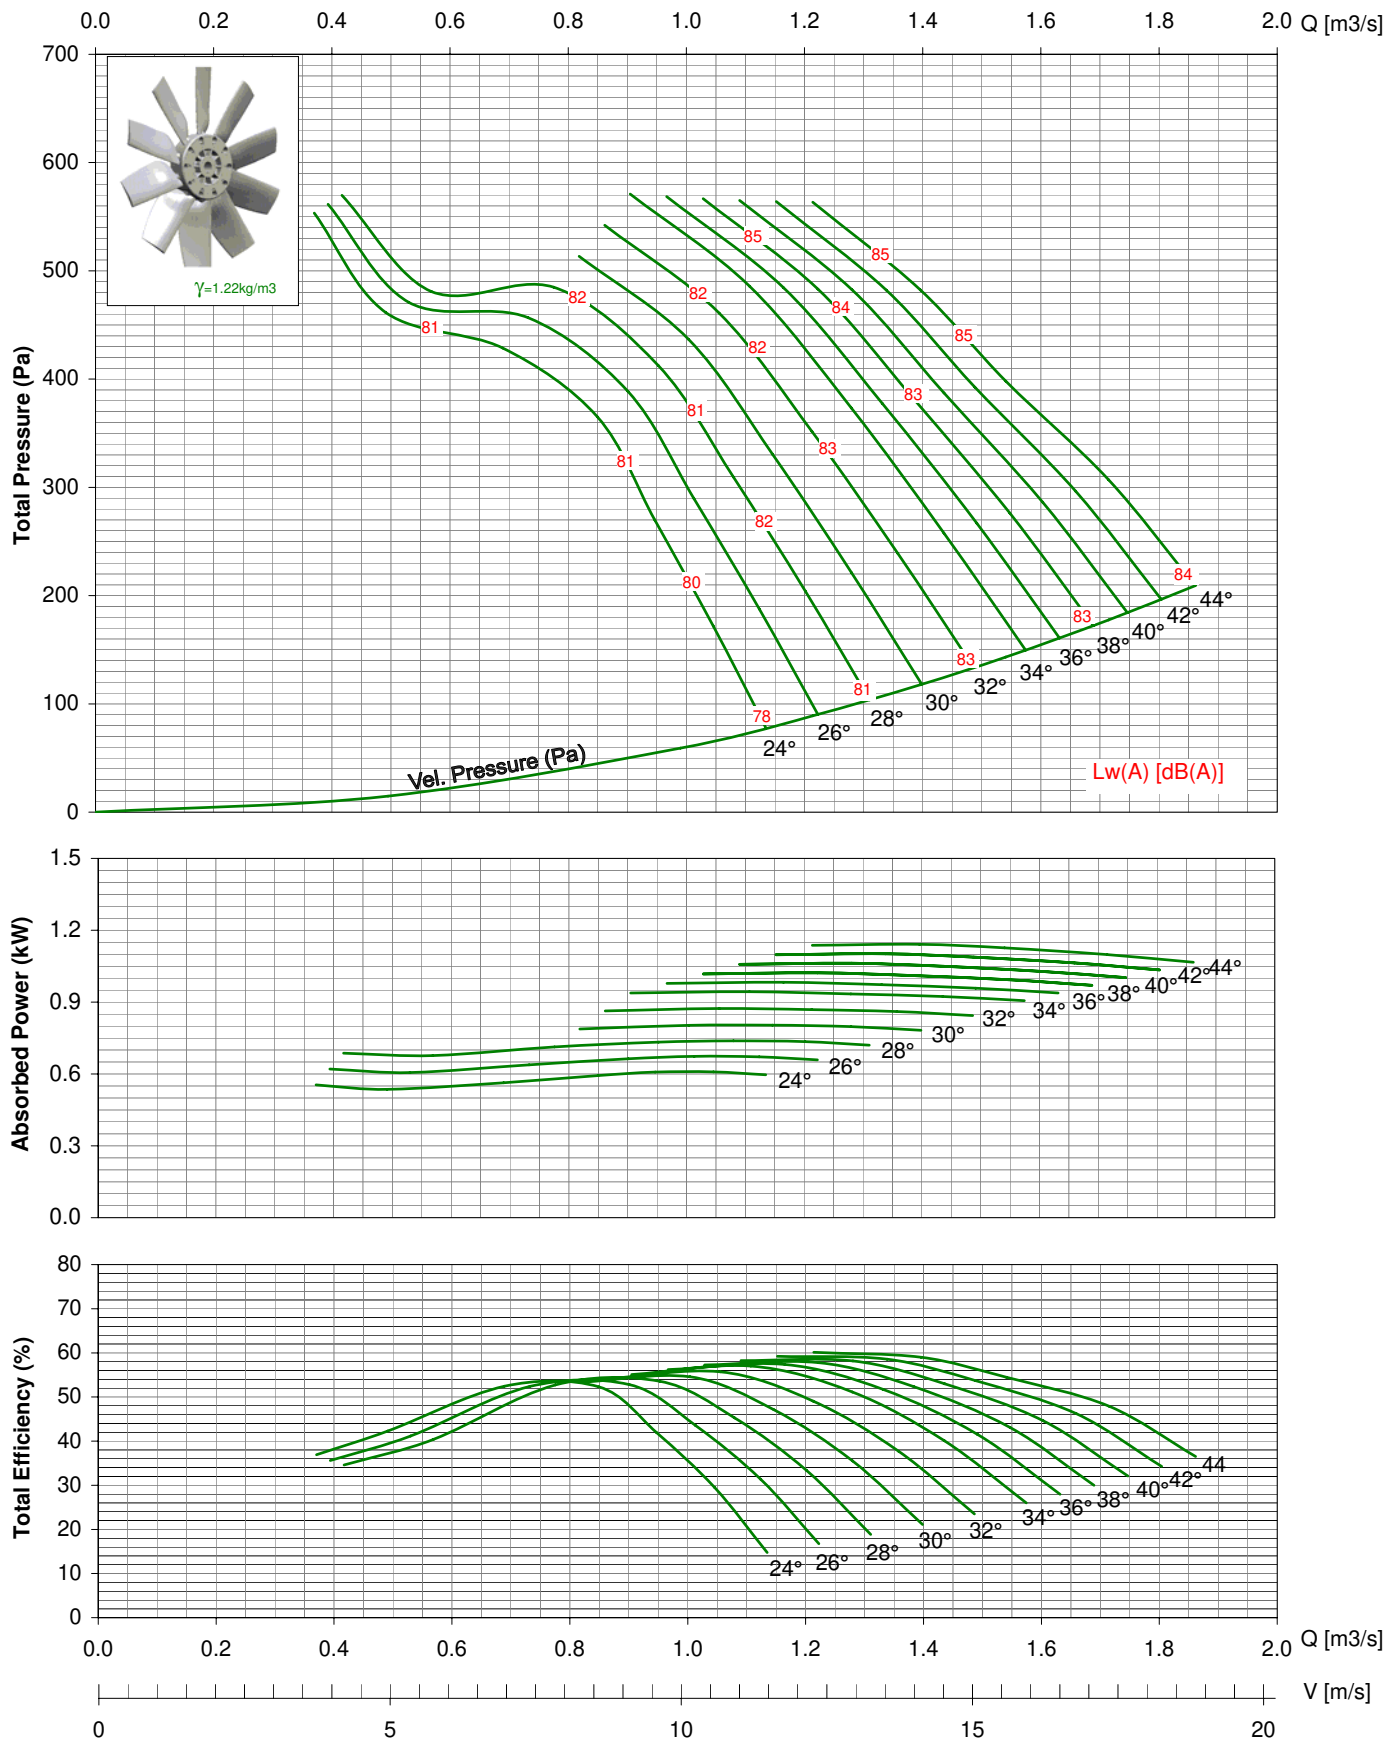

- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lwi(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.


TDA 355-V / 12AA/ 5-5/ _ _ / _

1750rpm - 60Hz

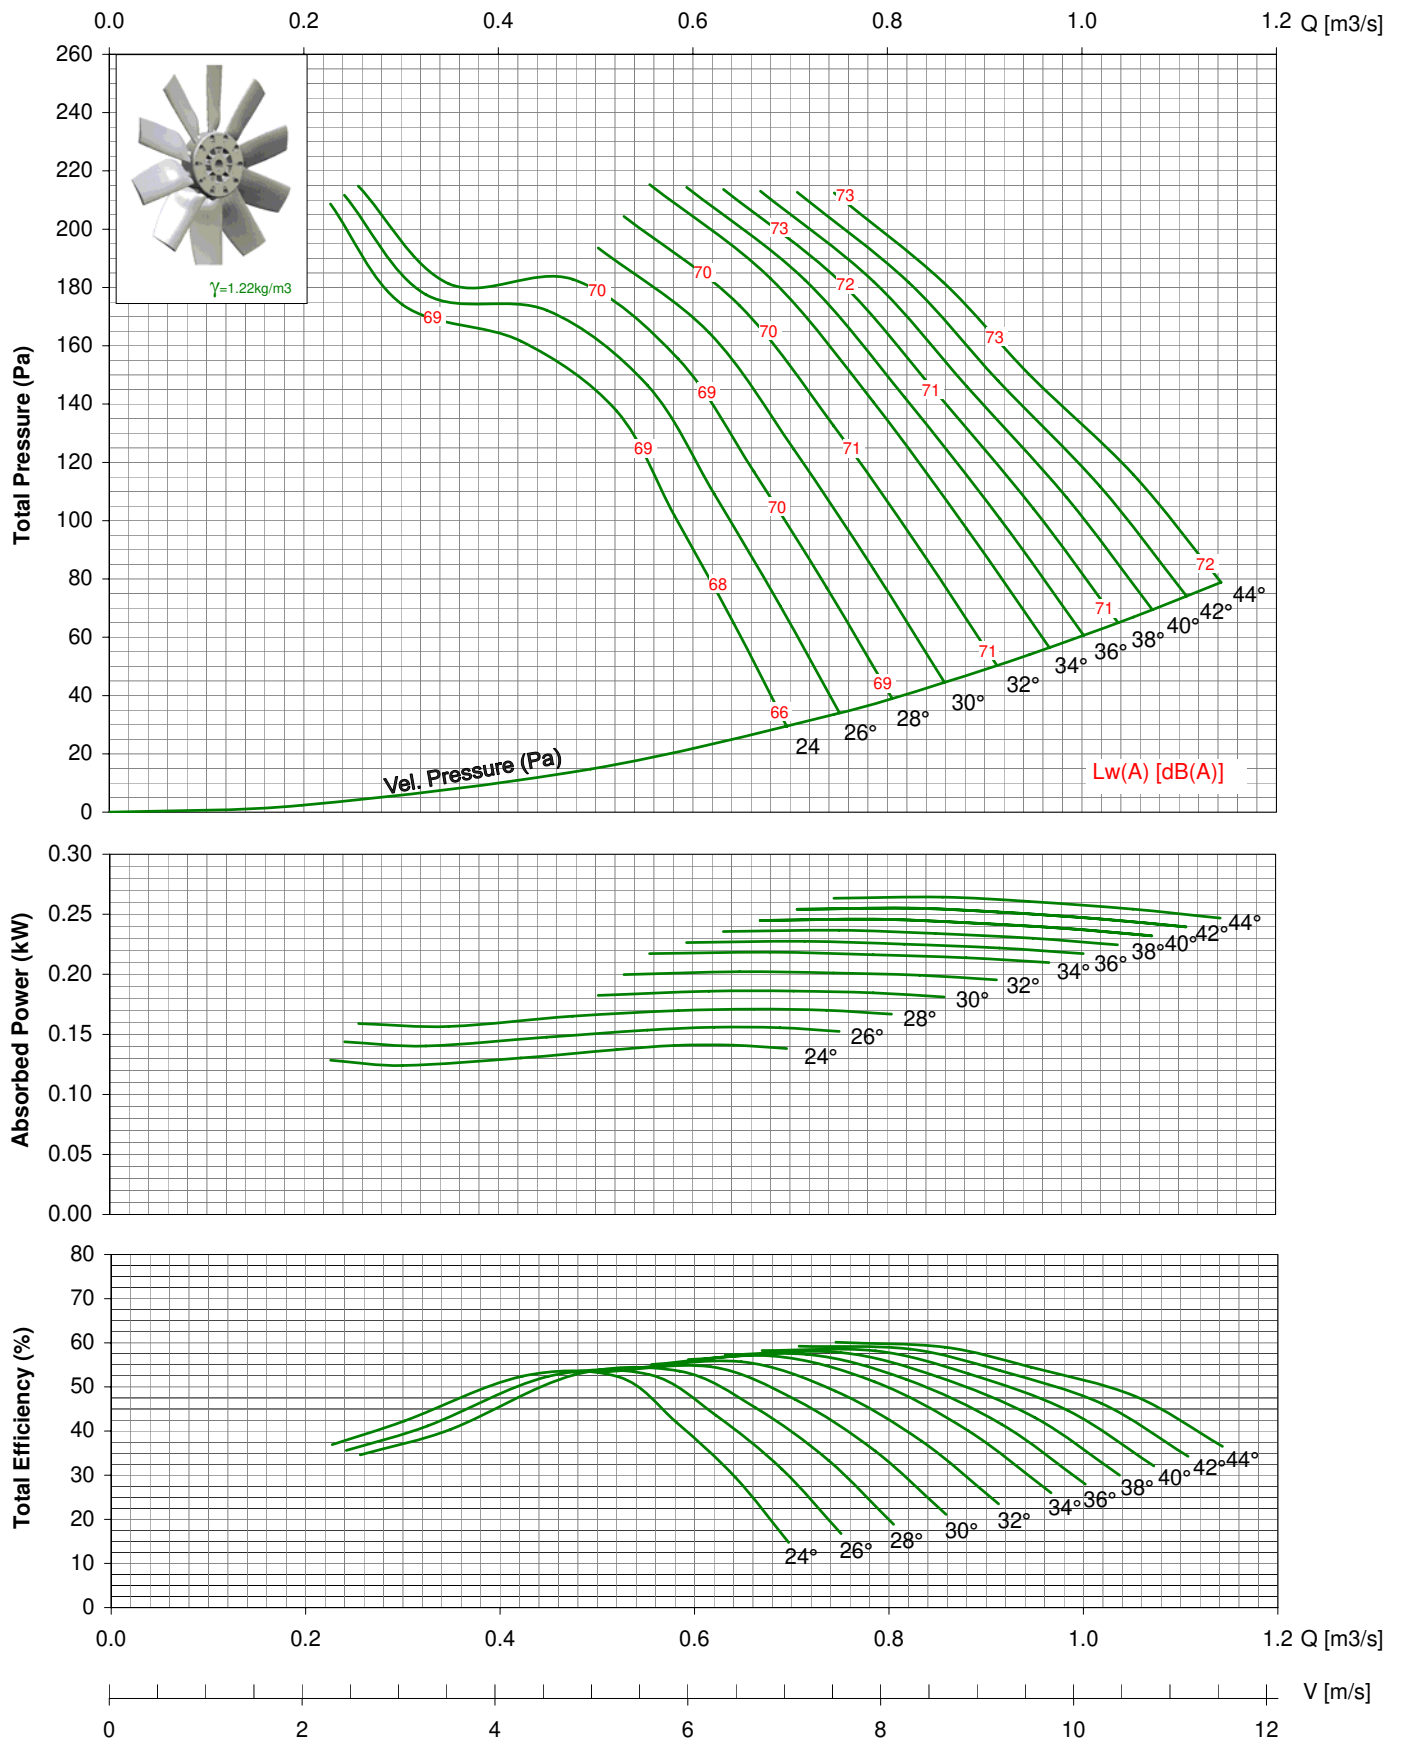

- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lw(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 355-V / 12AA/ 5-5/ _ _ / _ 3450rpm - 60Hz

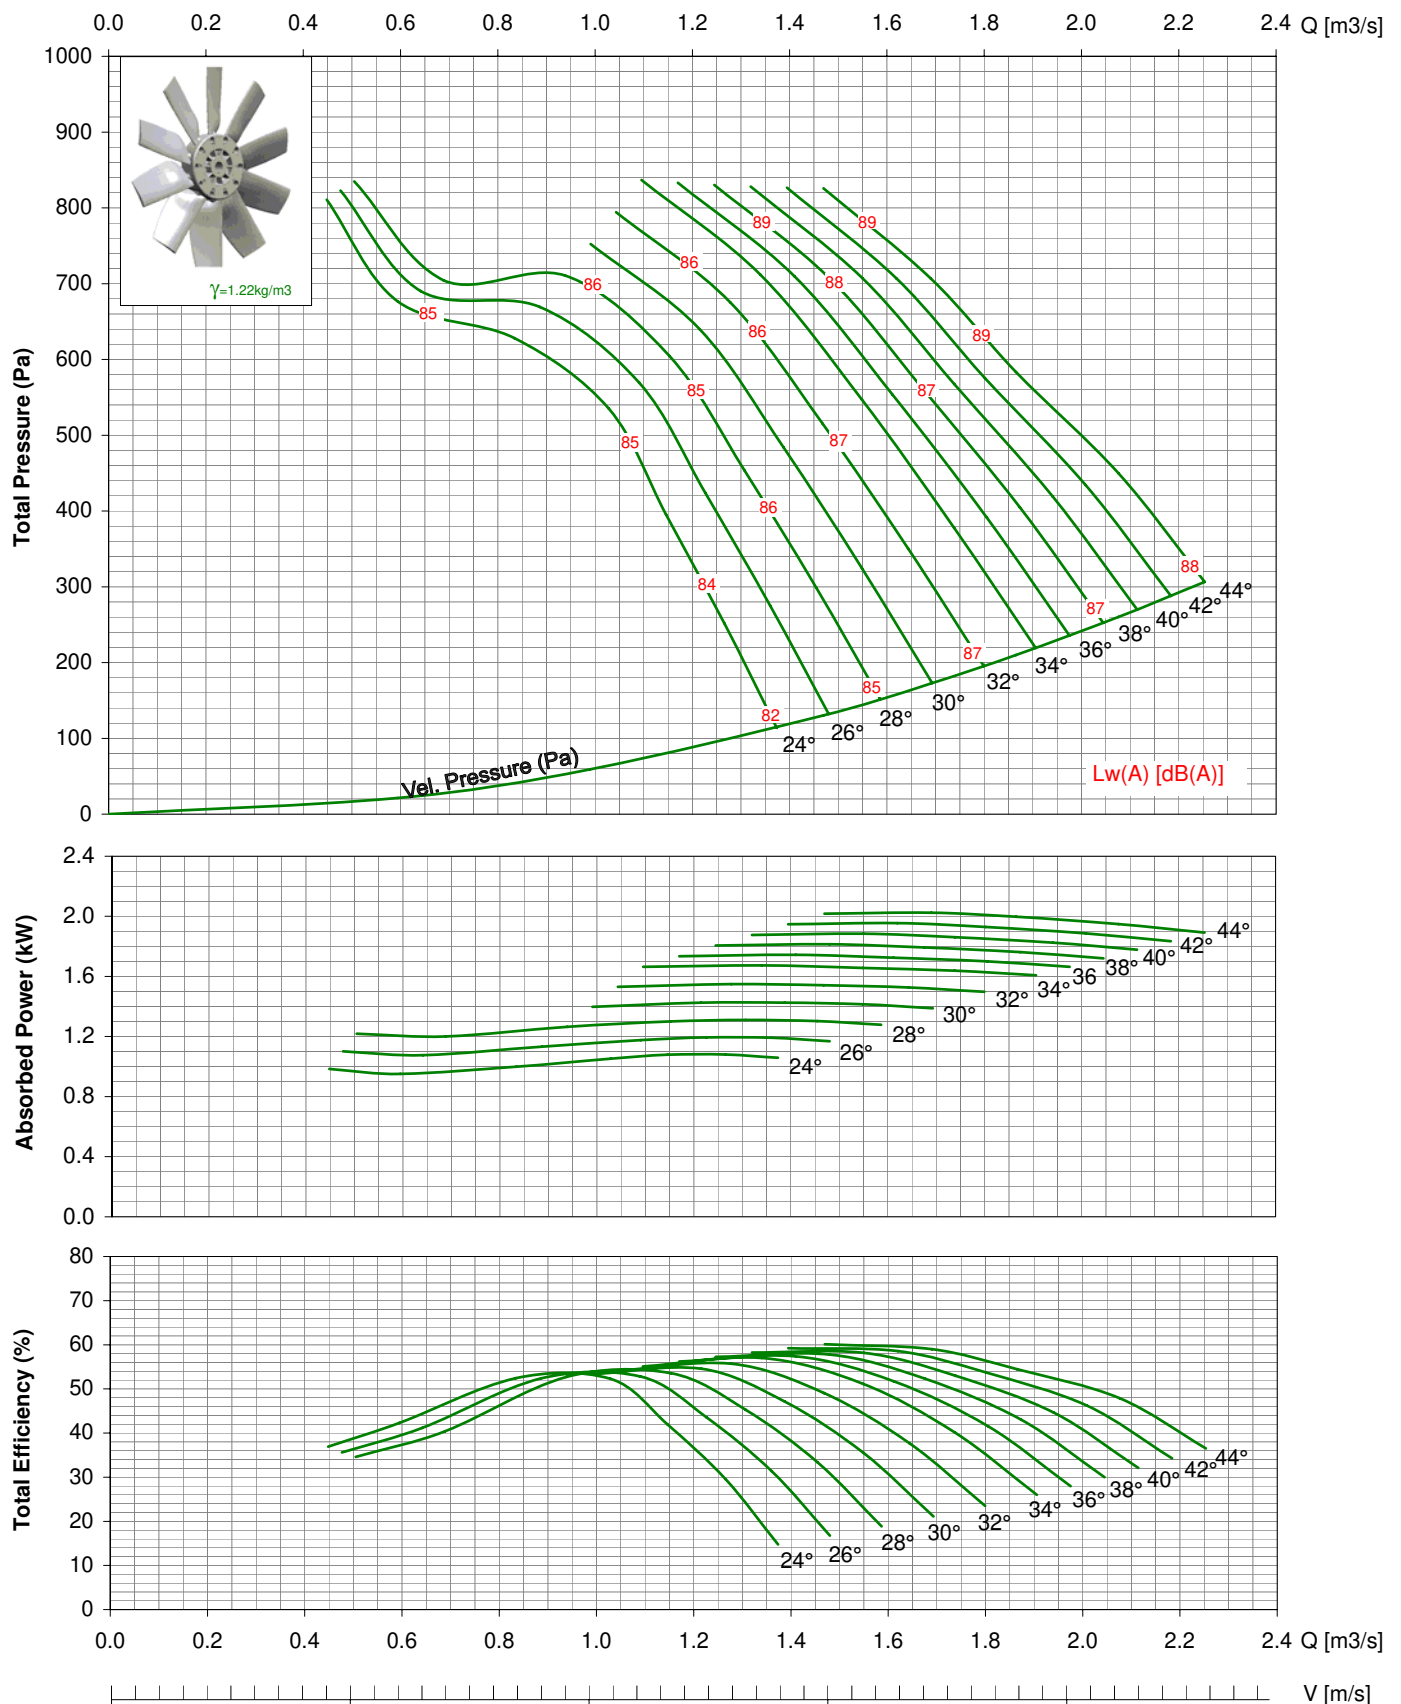

- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- Power ratings (kW) does not include transmission losses.

- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lwi(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.

- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

VANE AXIAL FAN DIRECT DRIVEN

Series TDA-V

Features

For commercial and industrial applications where large volumes of air are required at moderate to high pressure, special designed integral straightening vanes, reduced turbulence, provide high performance and low sound level.

Construction

Double flanged casing is produced in mild steel or galvanised Steel, the impeller having manually adjustable pitch aerofoil blades is made of PPG, PAG or pressure-casted Aluminium.

Finish

Available in standard finishes of galvanisation or painting.

Operating Temperature

-20°C to +55°C

Motors

Totally enclosed Class 'F' motor, to a min. IP54 protection are fitted as standard. Standard motor up to 2.2kW are usually supplied on DOL starting, motor 3.0kW and above are star/delta starting.


Airflow Direction

Air flowing from impeller to motor is fitted as standard.





Kruger Ventilation Industries (India) Pvt Ltd. certifies that the TDA 400 -V shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with the AMCA publication 211 and comply with there quirements of the AMCA Certified Ratings Program.


MODEL: TDA 400-V / 12AA / 5-5 / _ / _

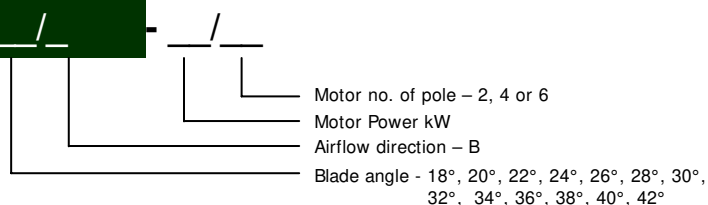

* All Dimension in mm

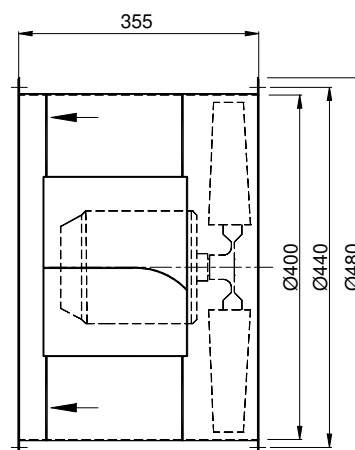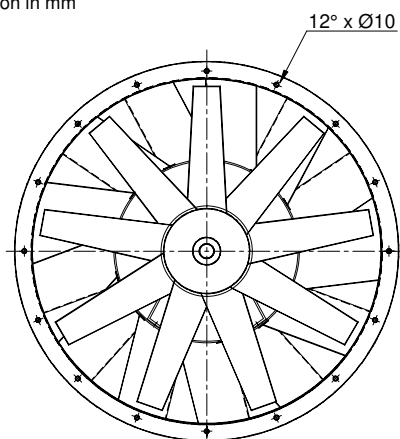


TDA 400-V / 12AA/ 5-5/ _ _ / _ 950rpm - 50Hz

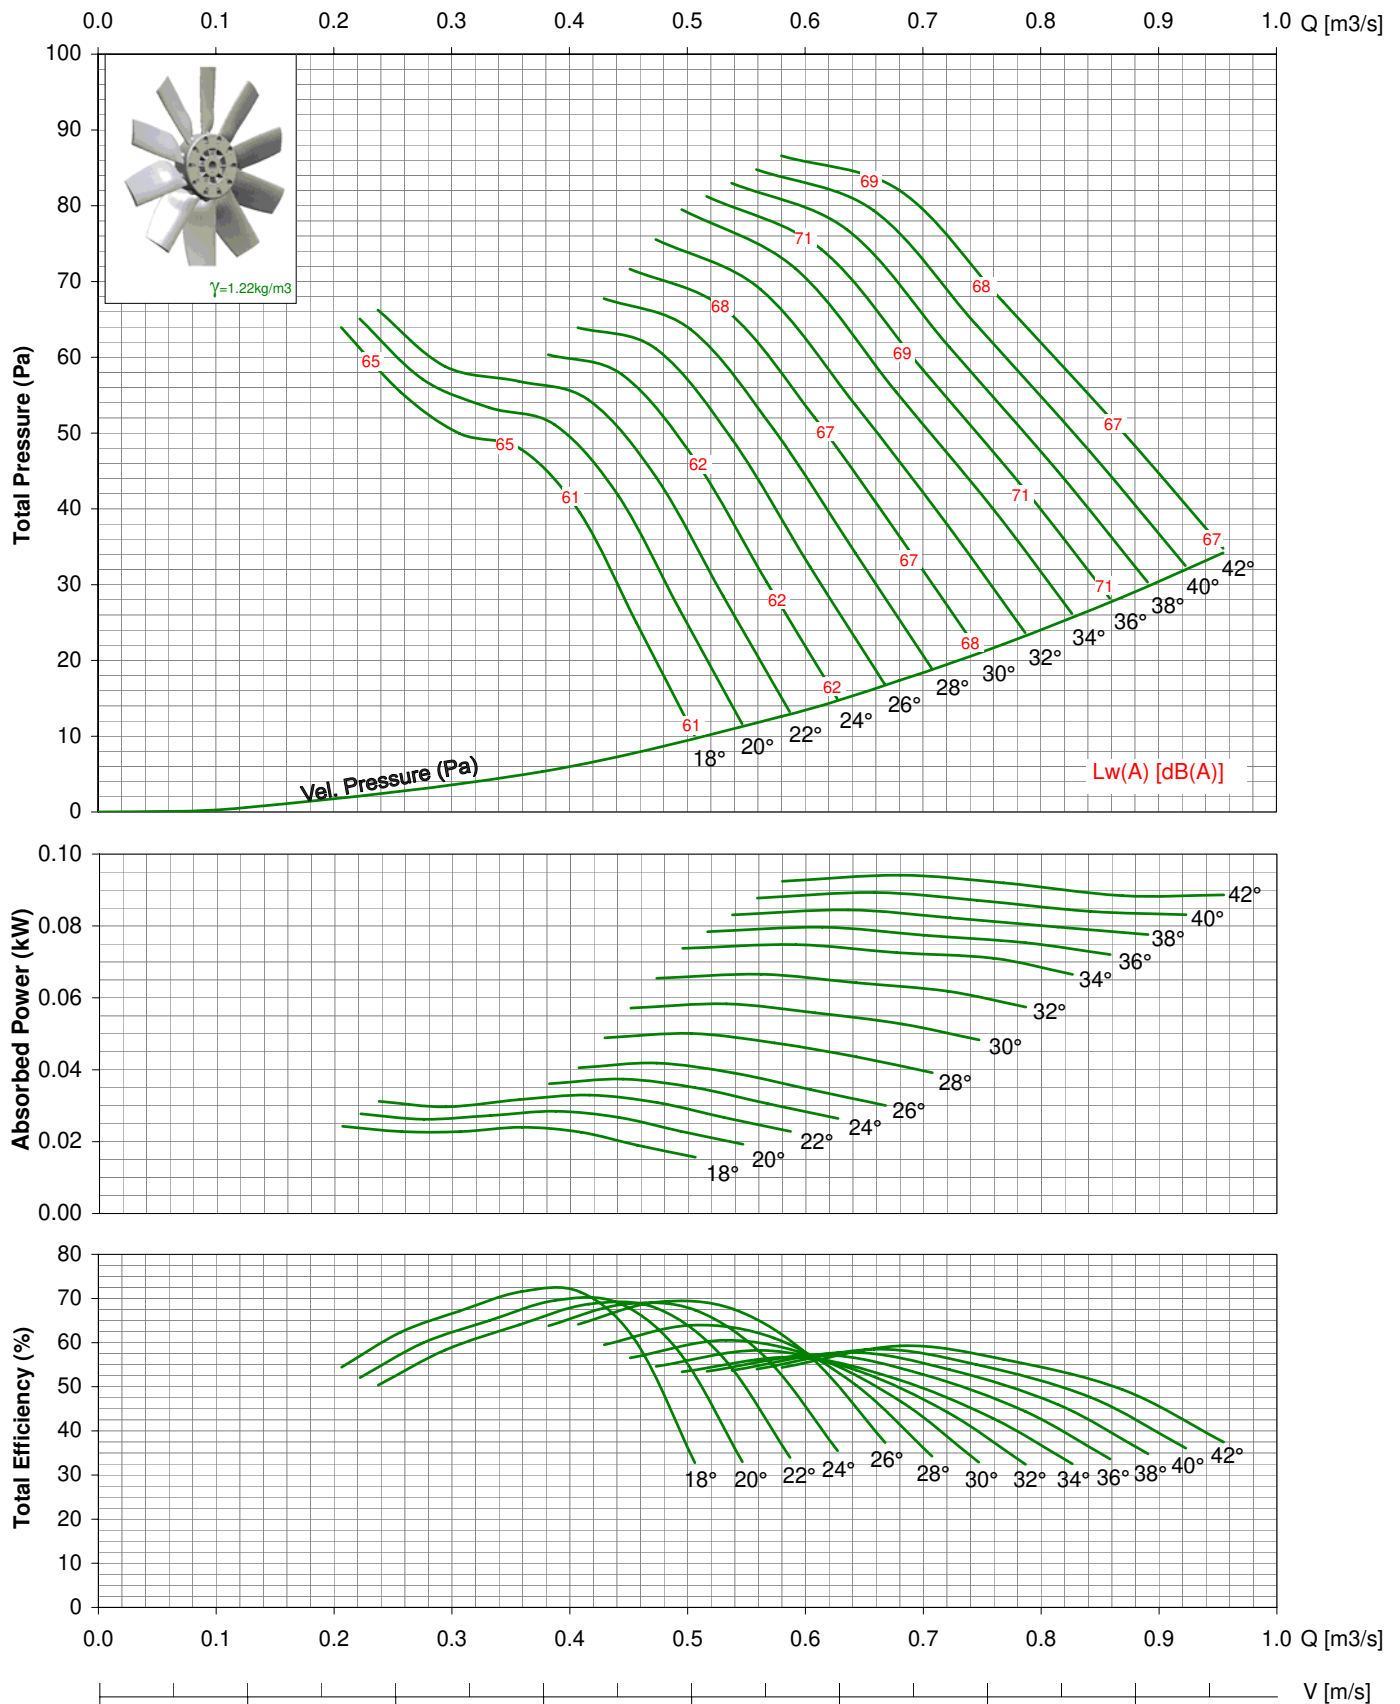

- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (KW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.


TDA 400-V / 12AA/ 5-5/ _ _ / _

1450rpm - 50Hz

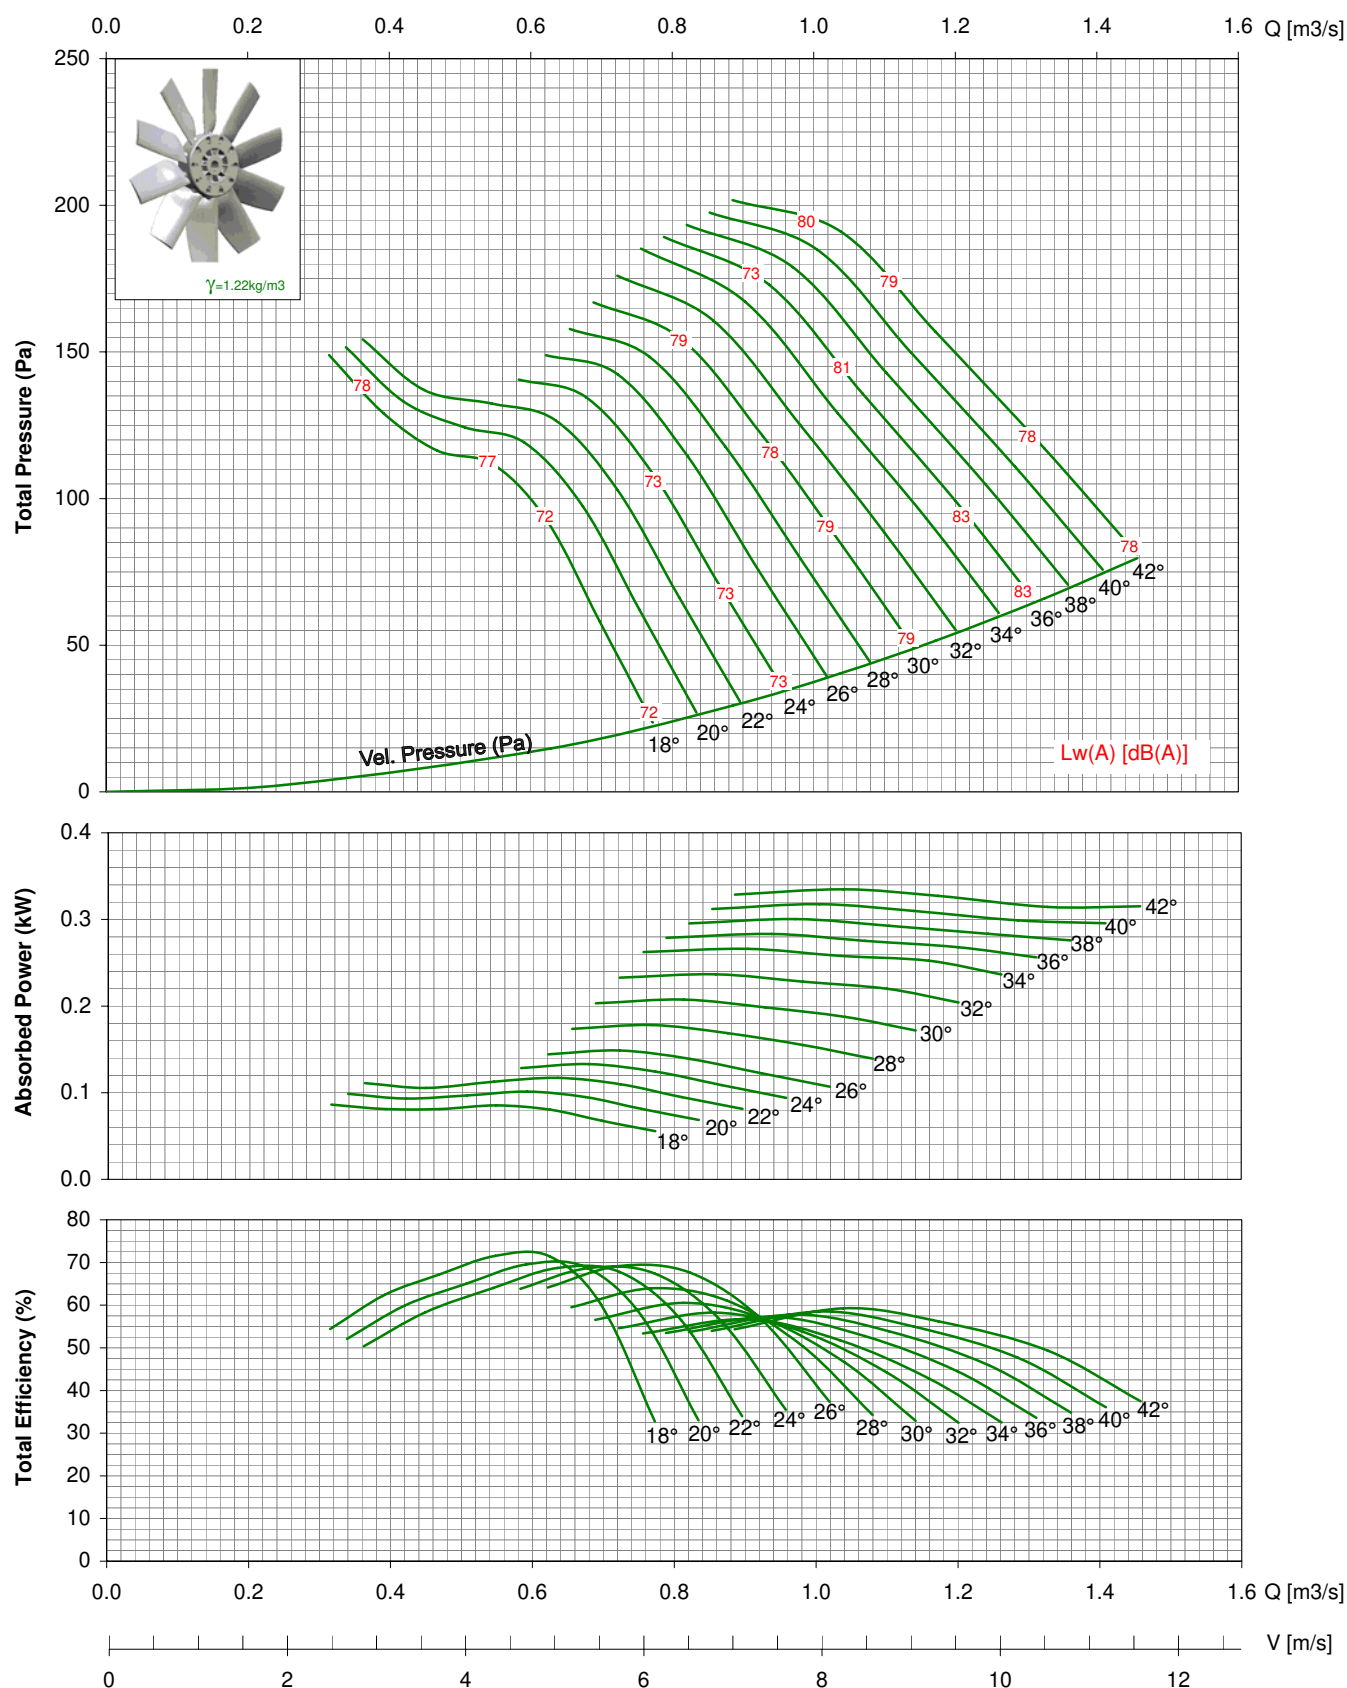


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (KW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 400-V / 12AA/ 5-5/ _ _ / _ 2850rpm - 50Hz

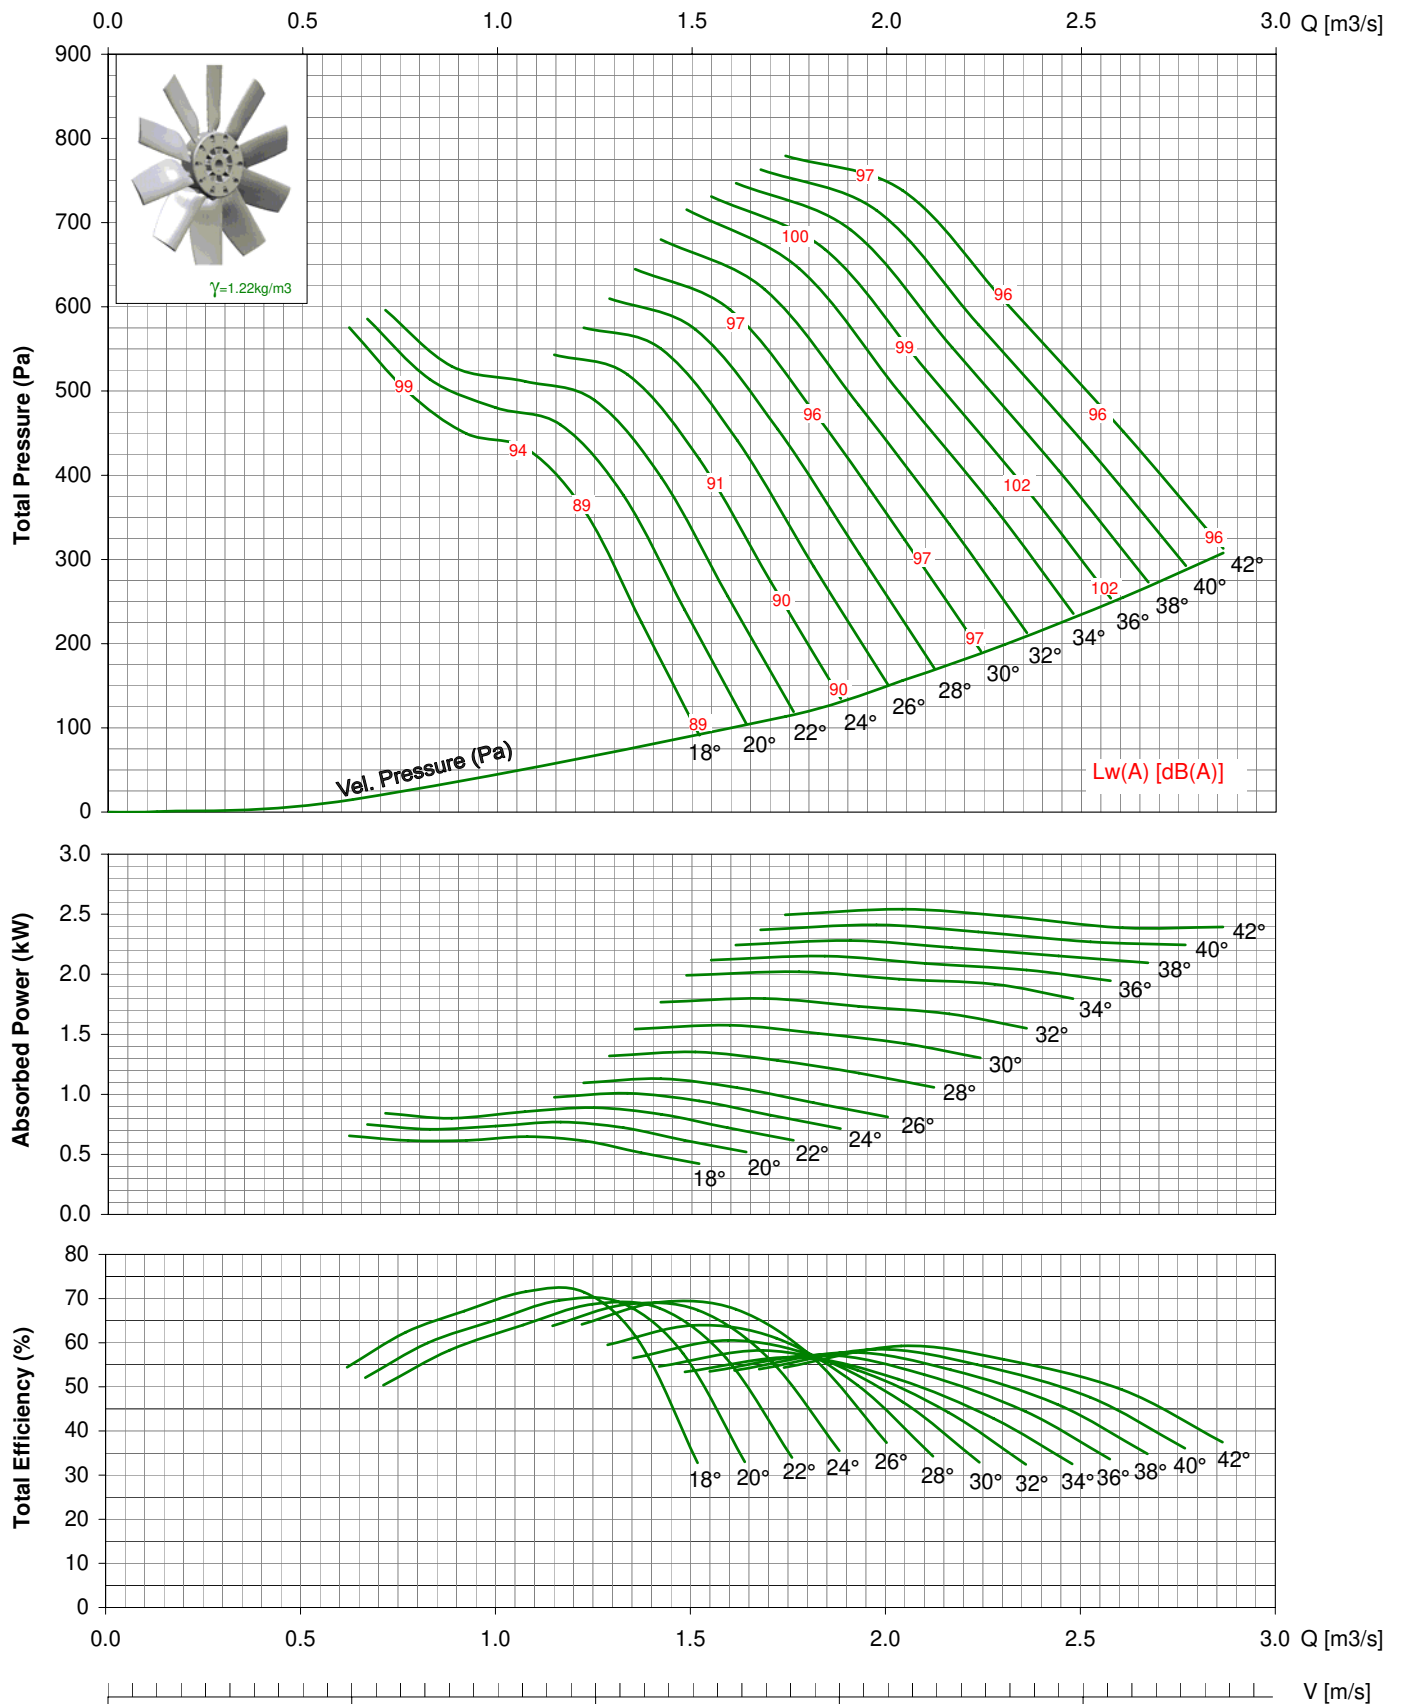


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (KW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 400-V / 12AA/ 5-5/ _ _ / _ 1150rpm - 60Hz

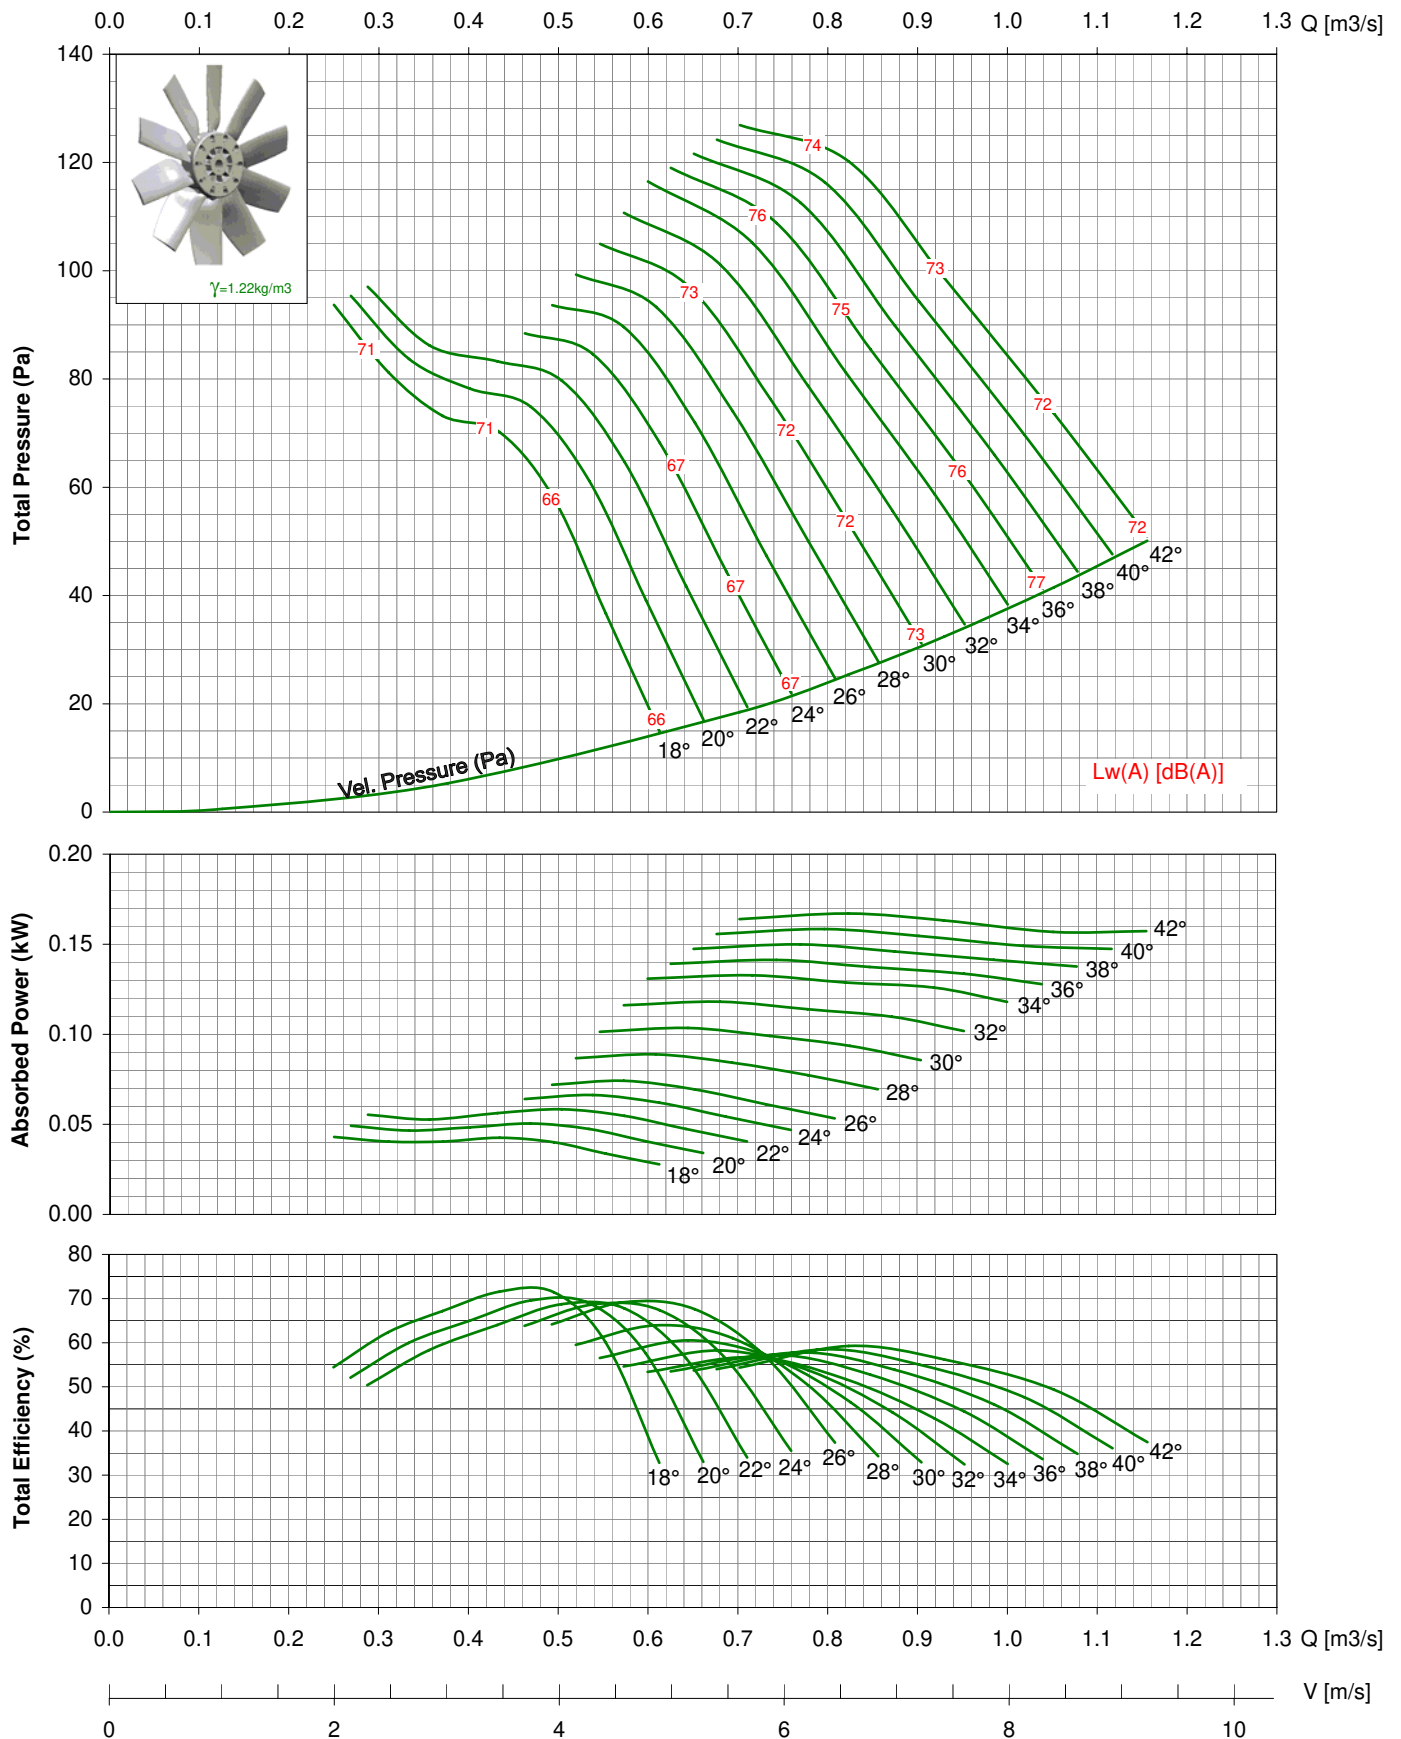


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (KW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 400-V / 12AA/ 5-5/ _ _ / _ 1750rpm - 60Hz

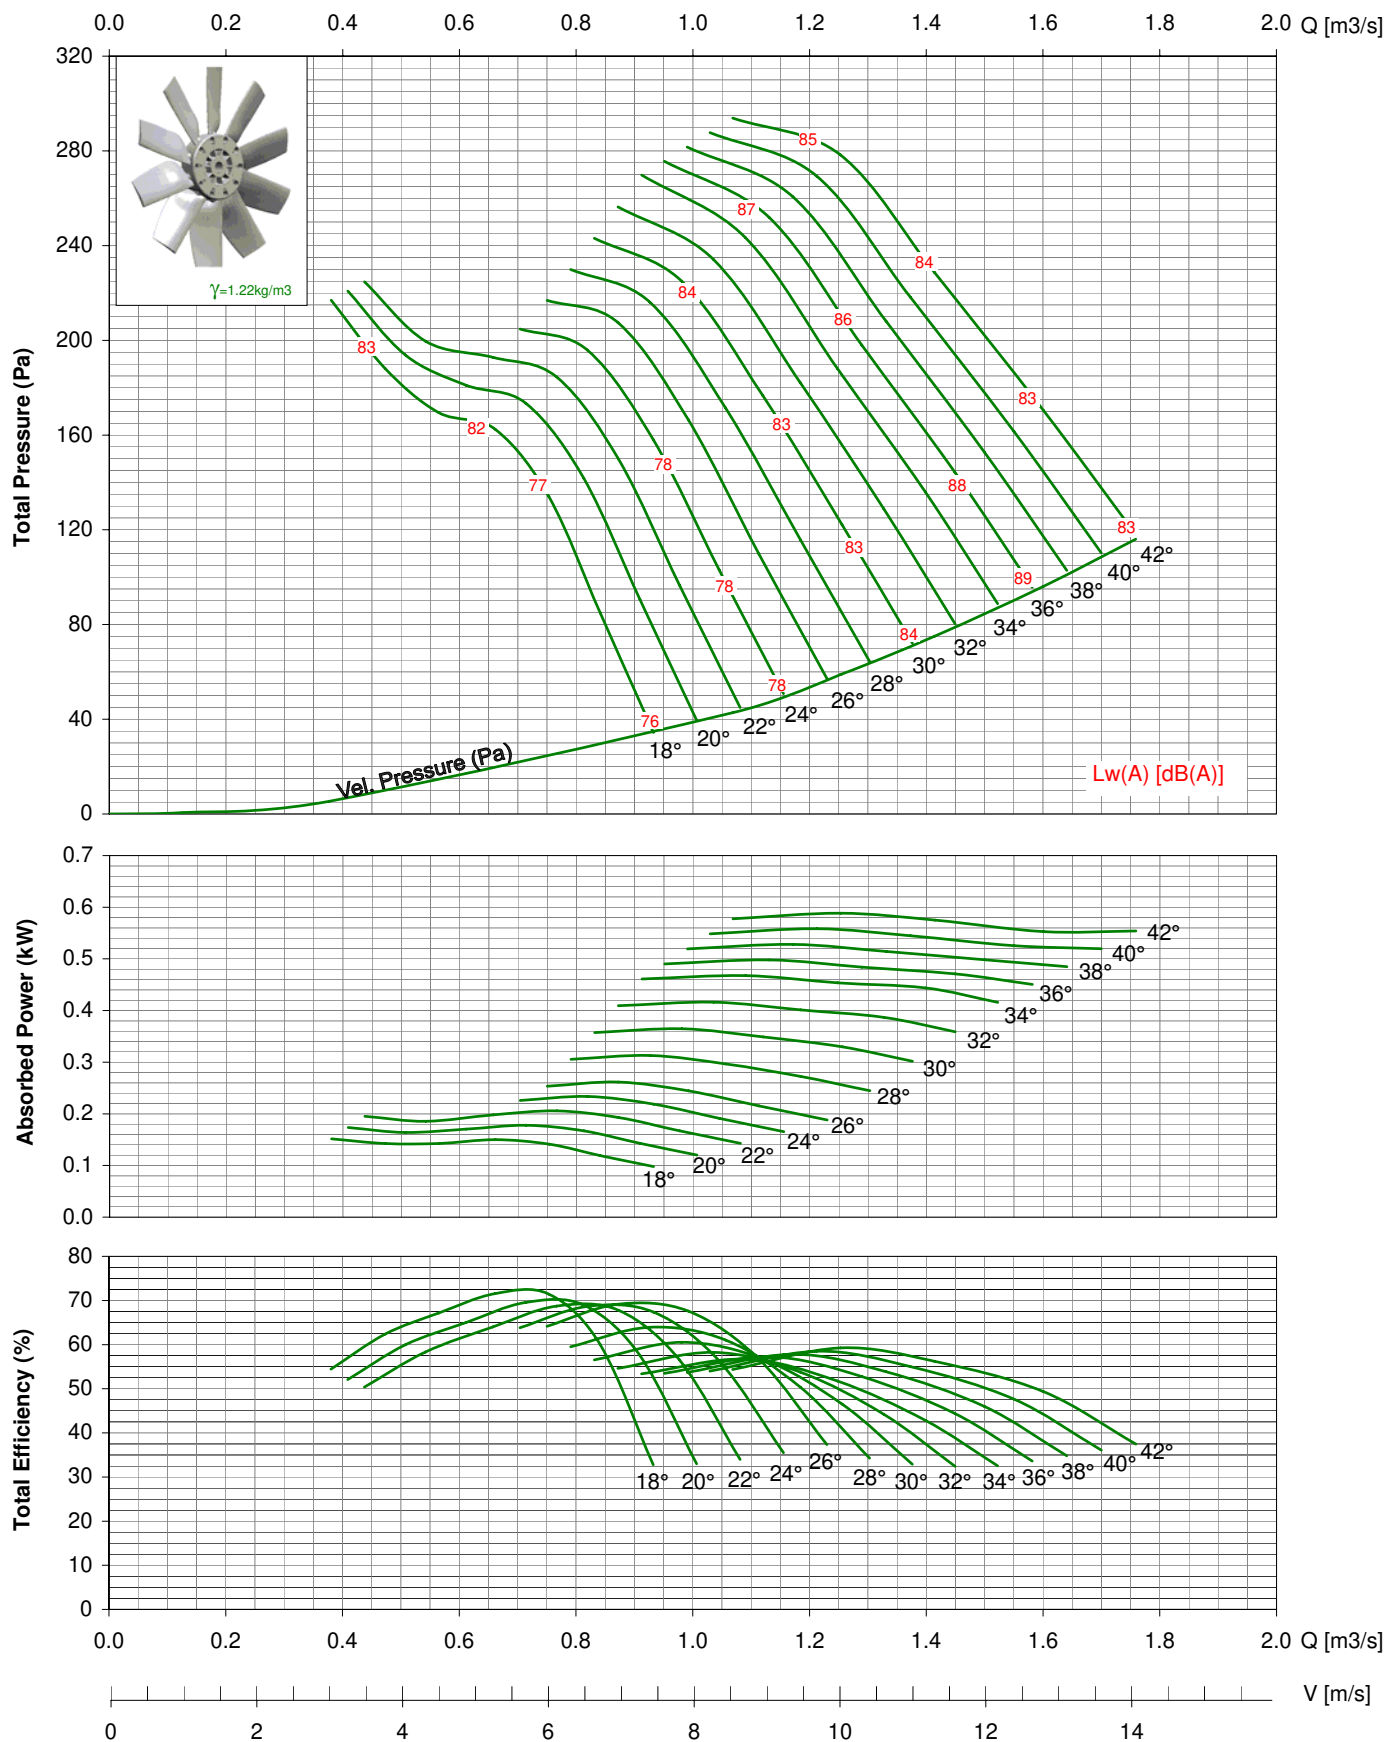

- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (KW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 400-V / 12AA/ 5-5/ _ _ / _ 3450rpm - 60Hz

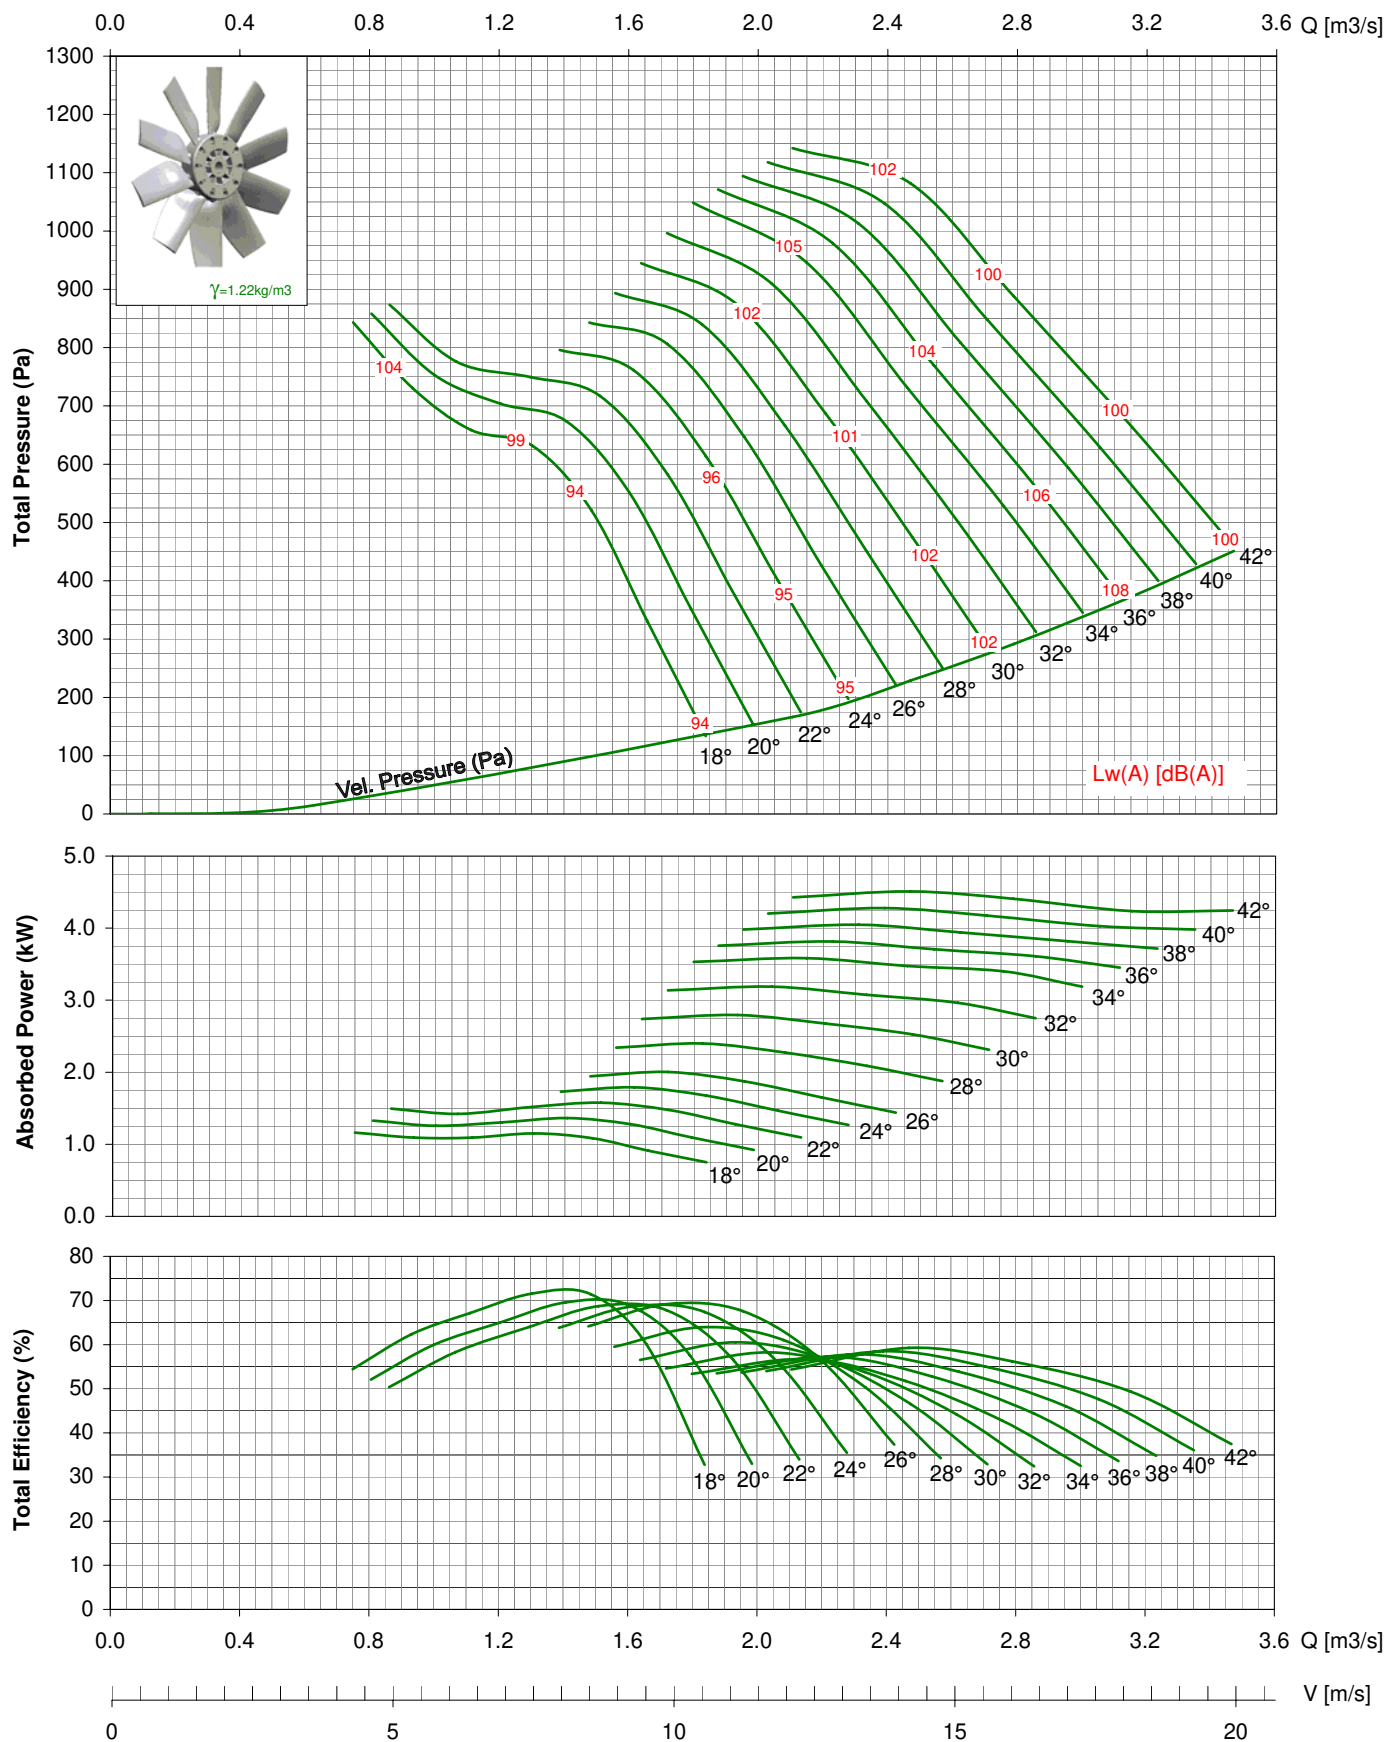

- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (KW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

VANE AXIAL FAN DIRECT DRIVEN

Series TDA-V

Features

For commercial and industrial applications where large volumes of air are required at moderate to high pressure, special designed integral straightening vanes, reduced turbulence, provide high performance and low sound level.

Construction

Double flanged casing is produced in mild steel or galvanised Steel, the impeller having manually adjustable pitch aerofoil blades is made of PPG, PAG or pressure-casted Aluminium.

Finish

Available in standard finishes of galvanisation or painting.

Operating Temperature

-20°C to +55°C

Motors

Totally enclosed Class 'F' motor, to a min. IP54 protection are fitted as standard. Standard motor up to 2.2kW are usually supplied on DOL starting, motor 3.0kW and above are star/delta starting.


Airflow Direction

Air flowing from impeller to motor is fitted as standard.





Kruger Ventilation Industries (India) Pvt Ltd. certifies that the TDA 450 -V shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with the AMCA publication 211 and comply with there quirements of the AMCA Certified Ratings Program.


MODEL: TDA 450-V / 12AA / 5-5 / _ / _

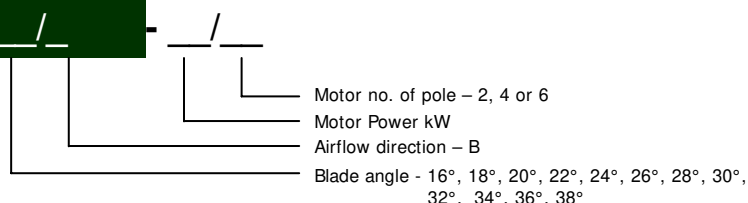

* All Dimension in mm

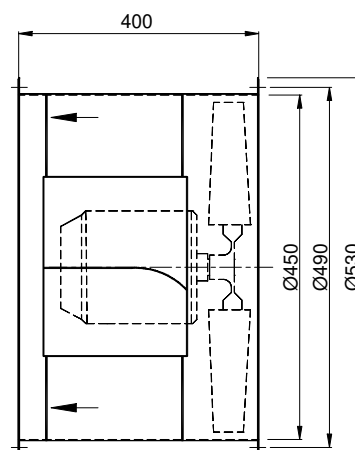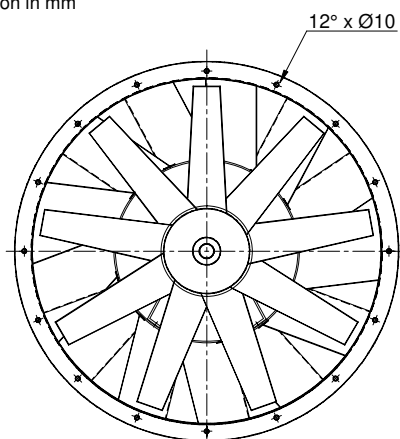


TDA 450-V / 12AA/ 5-5/ _ _ / _ 950rpm - 50Hz

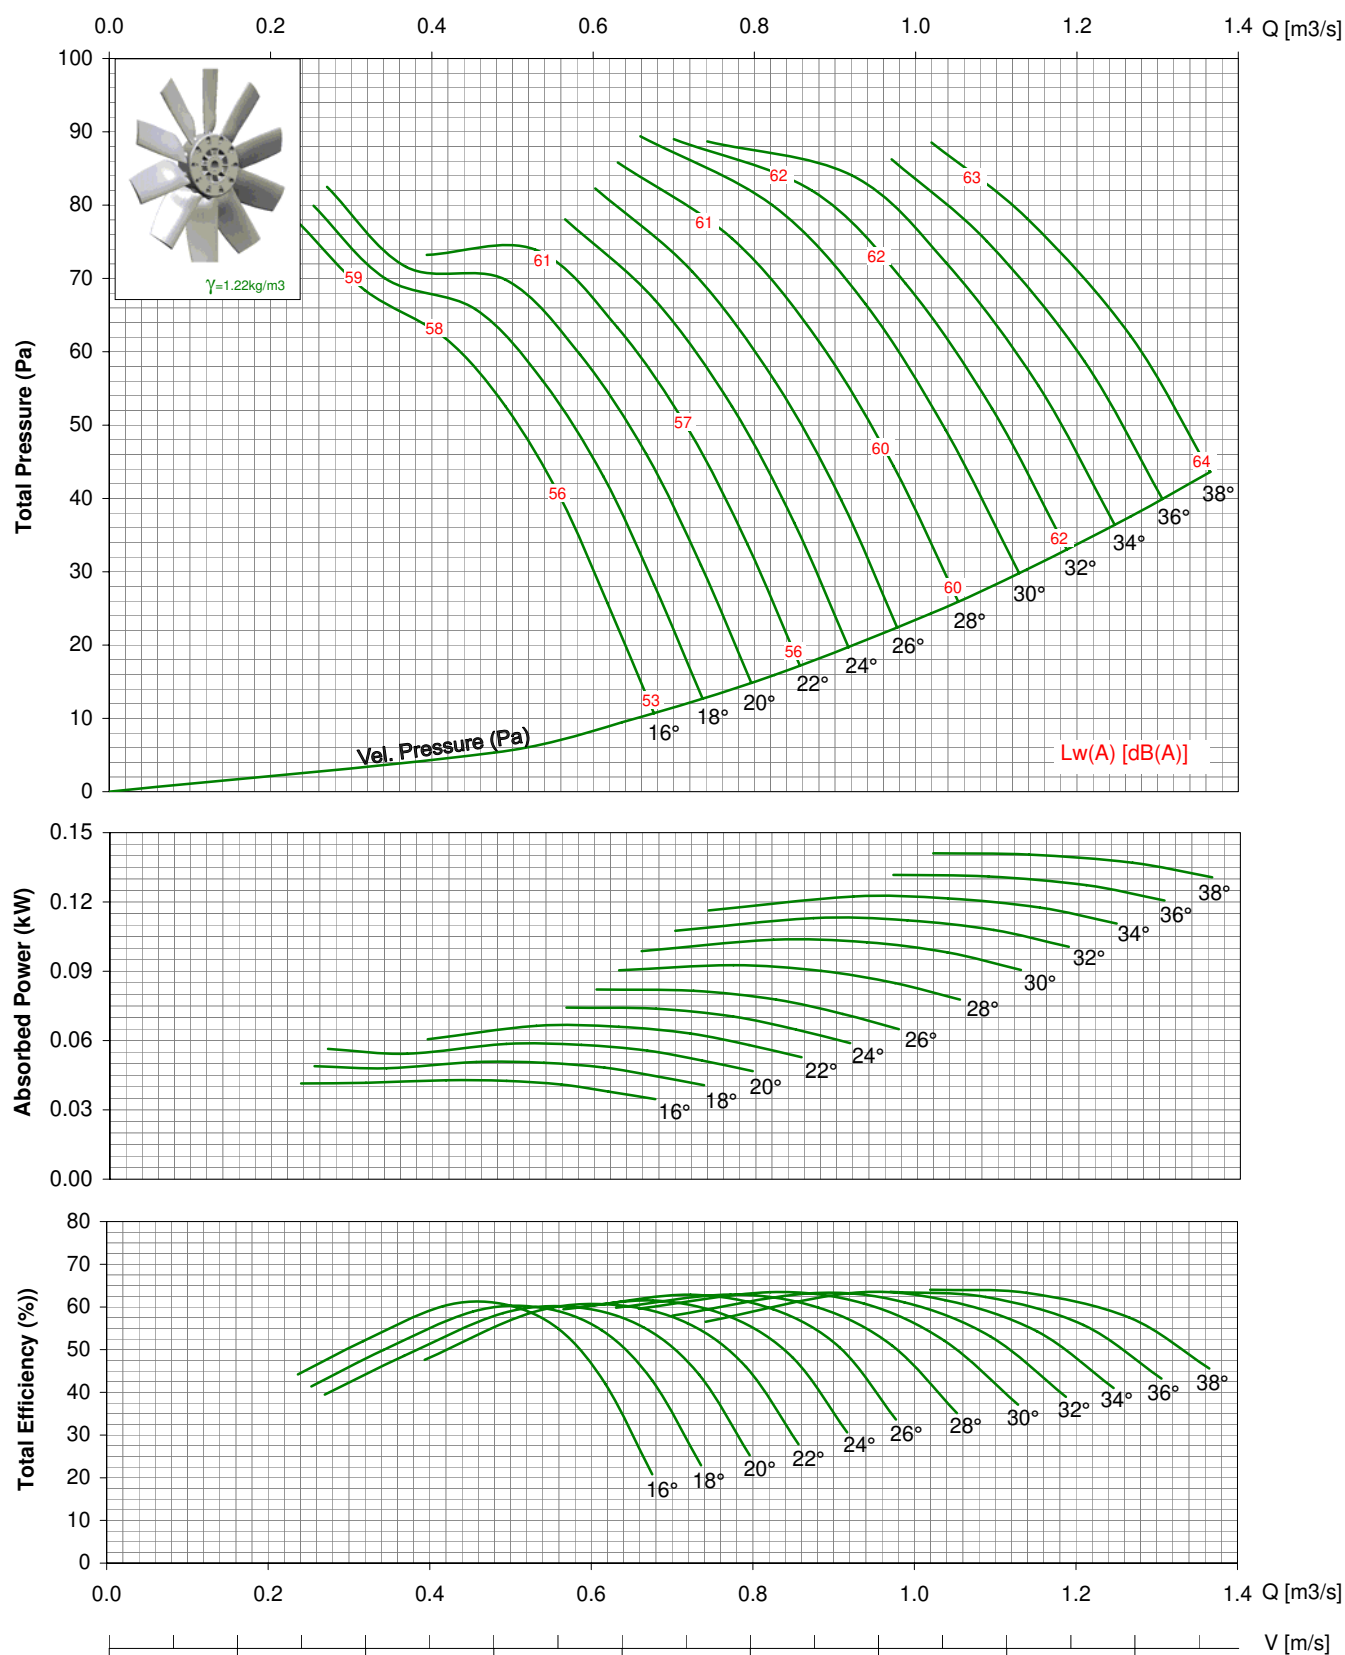


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lwi(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- dBA levels are not licensed by AMCA International. The AMCA Certified Ratings Seal applies to air performance only.

TDA 450-V / 12AA/ 5-5/ _ _ / _ 1450rpm - 50Hz

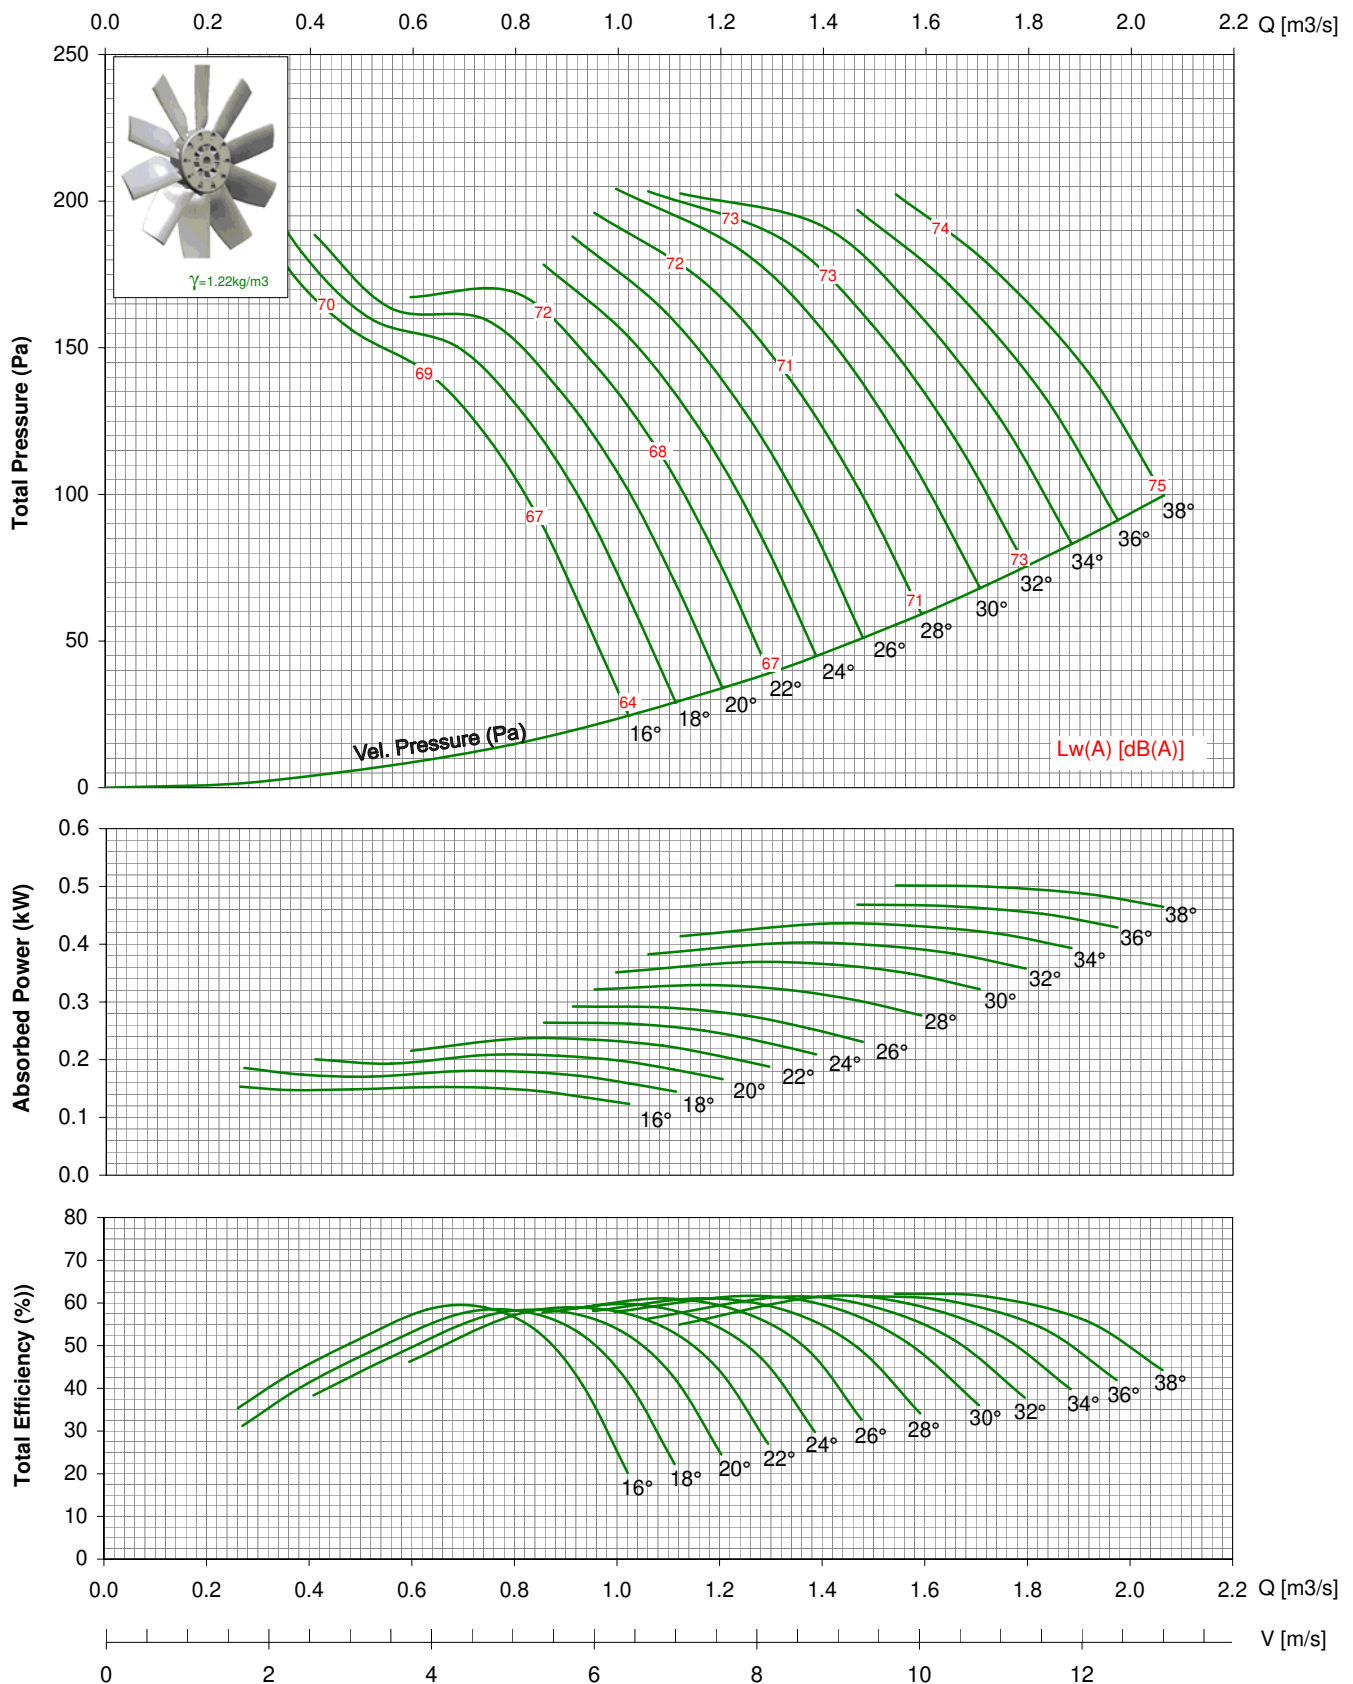


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA International.

TDA 450-V / 12AA/ 5-5/ _ _ / _ 2850rpm - 50Hz

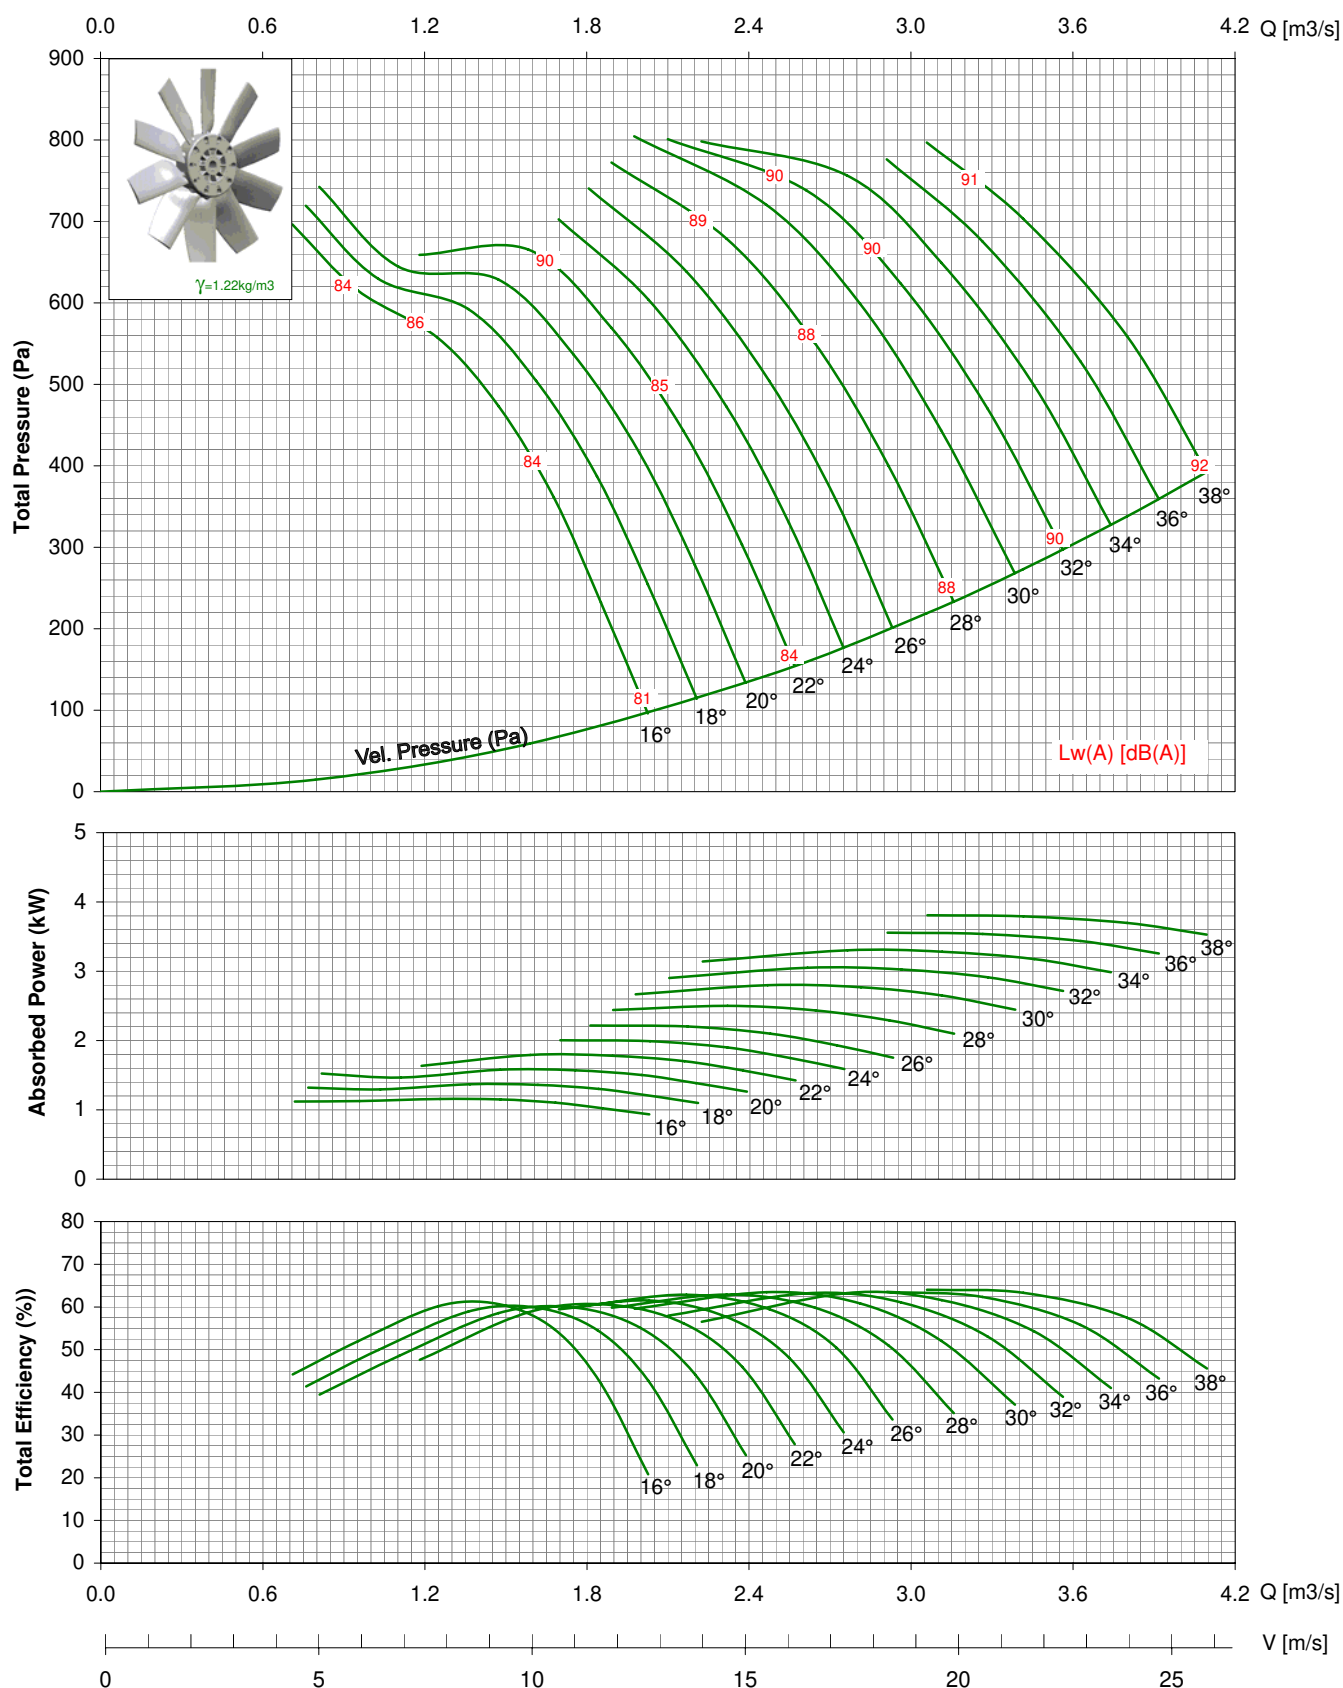


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA International.

TDA 450-V / 12AA/ 5-5/ _ _ / _ 1150rpm - 60Hz

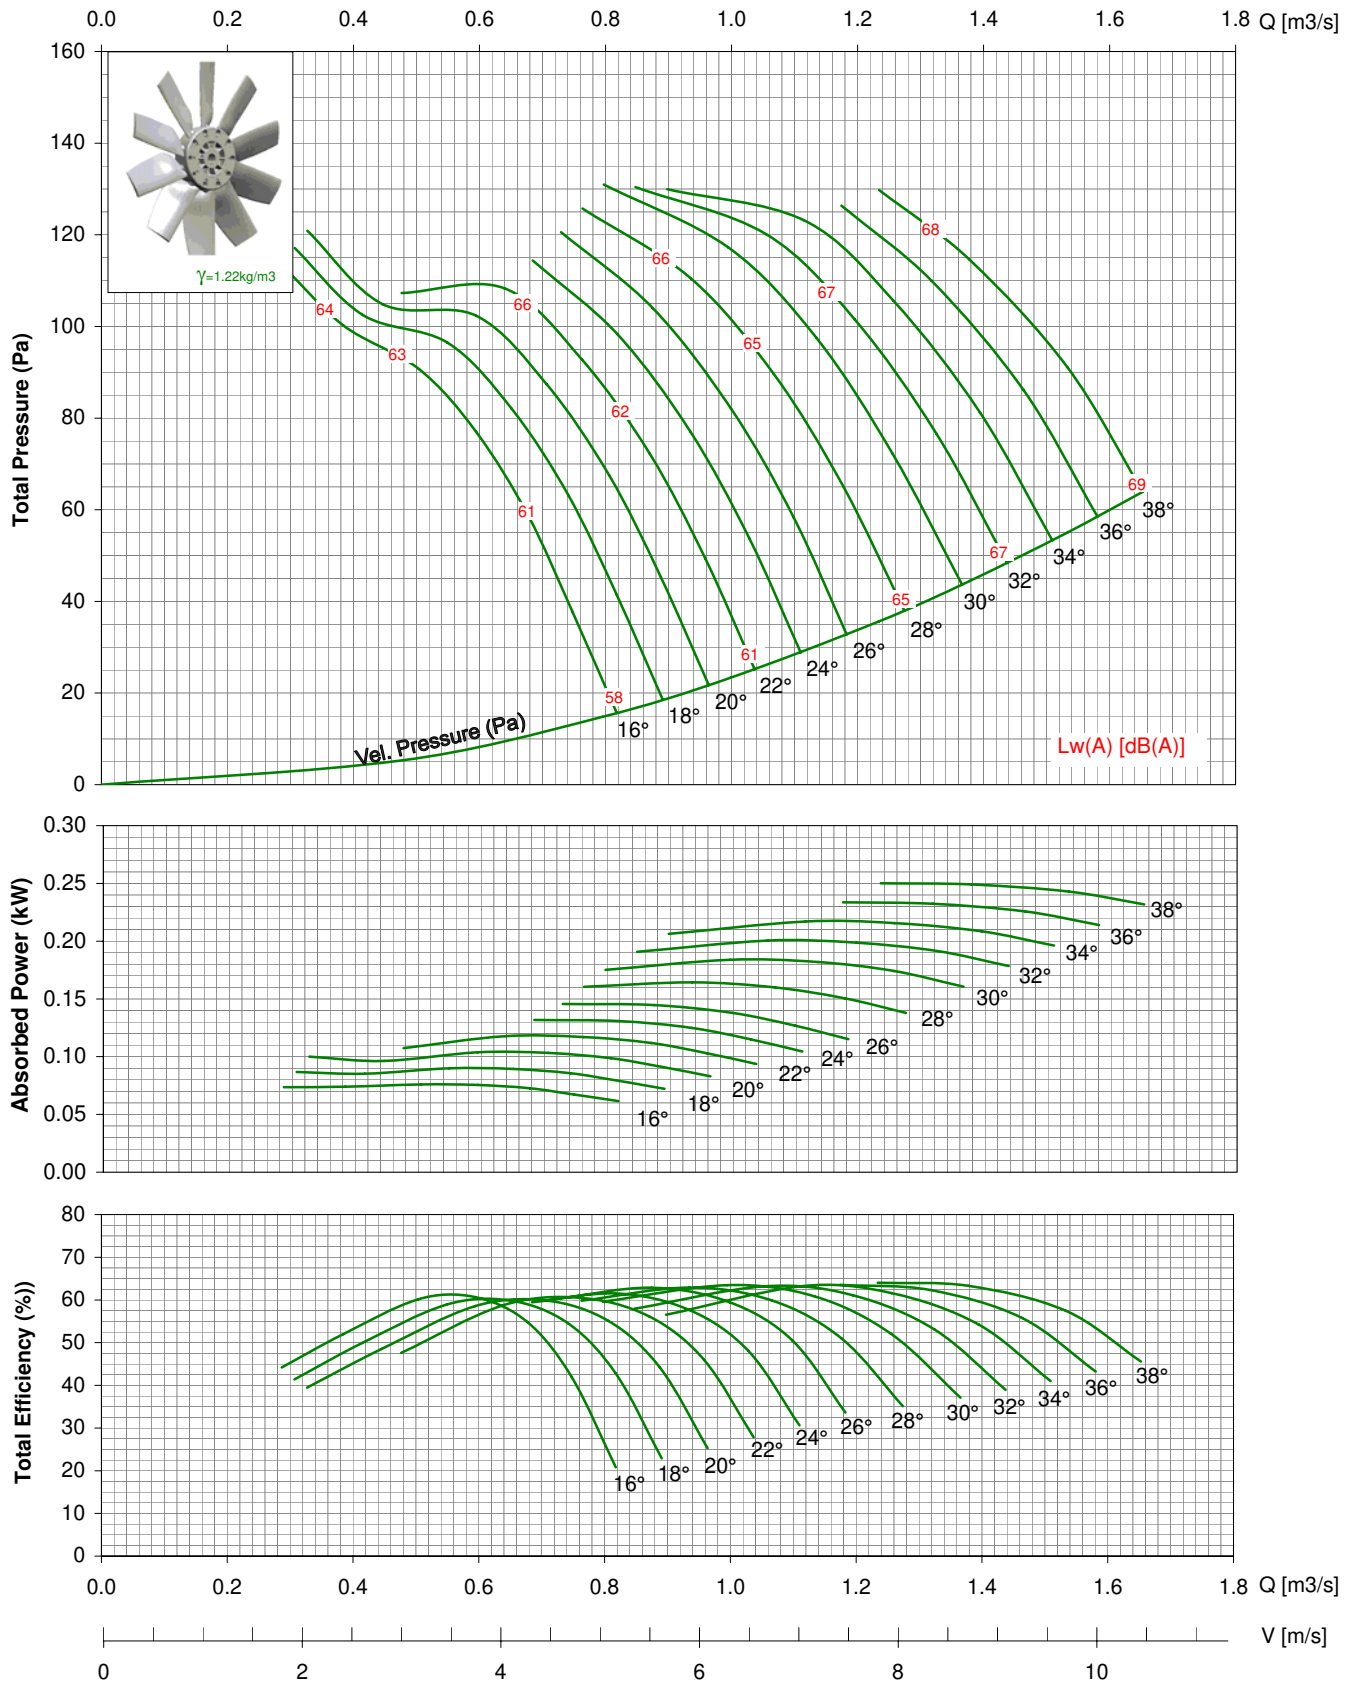


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA International.

TDA 450-V / 12AA/ 5-5/ _ _ / _ 1750rpm - 60Hz

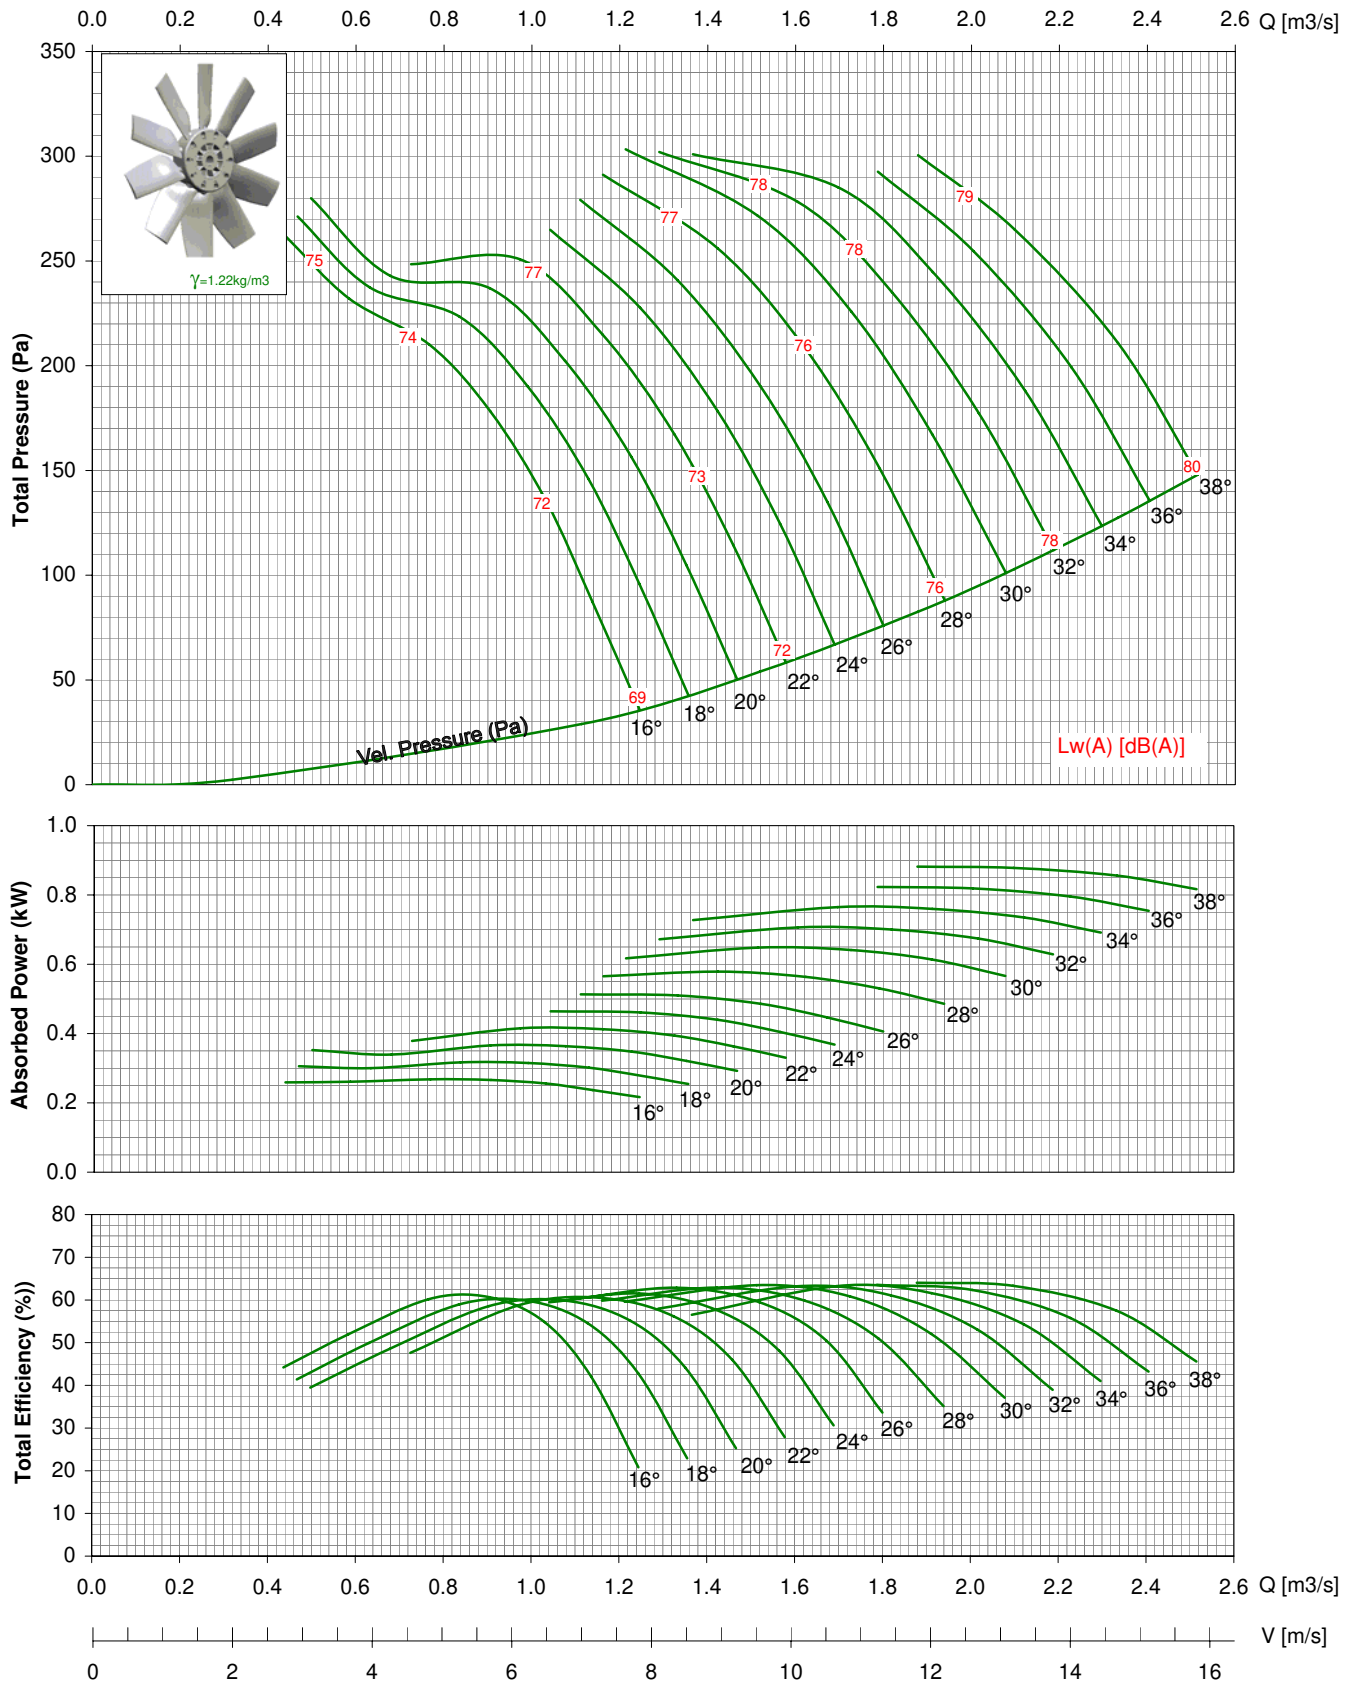

- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA International.

TDA 450-V / 12AA/ 5-5/ _ _ / _ 3450rpm - 60Hz

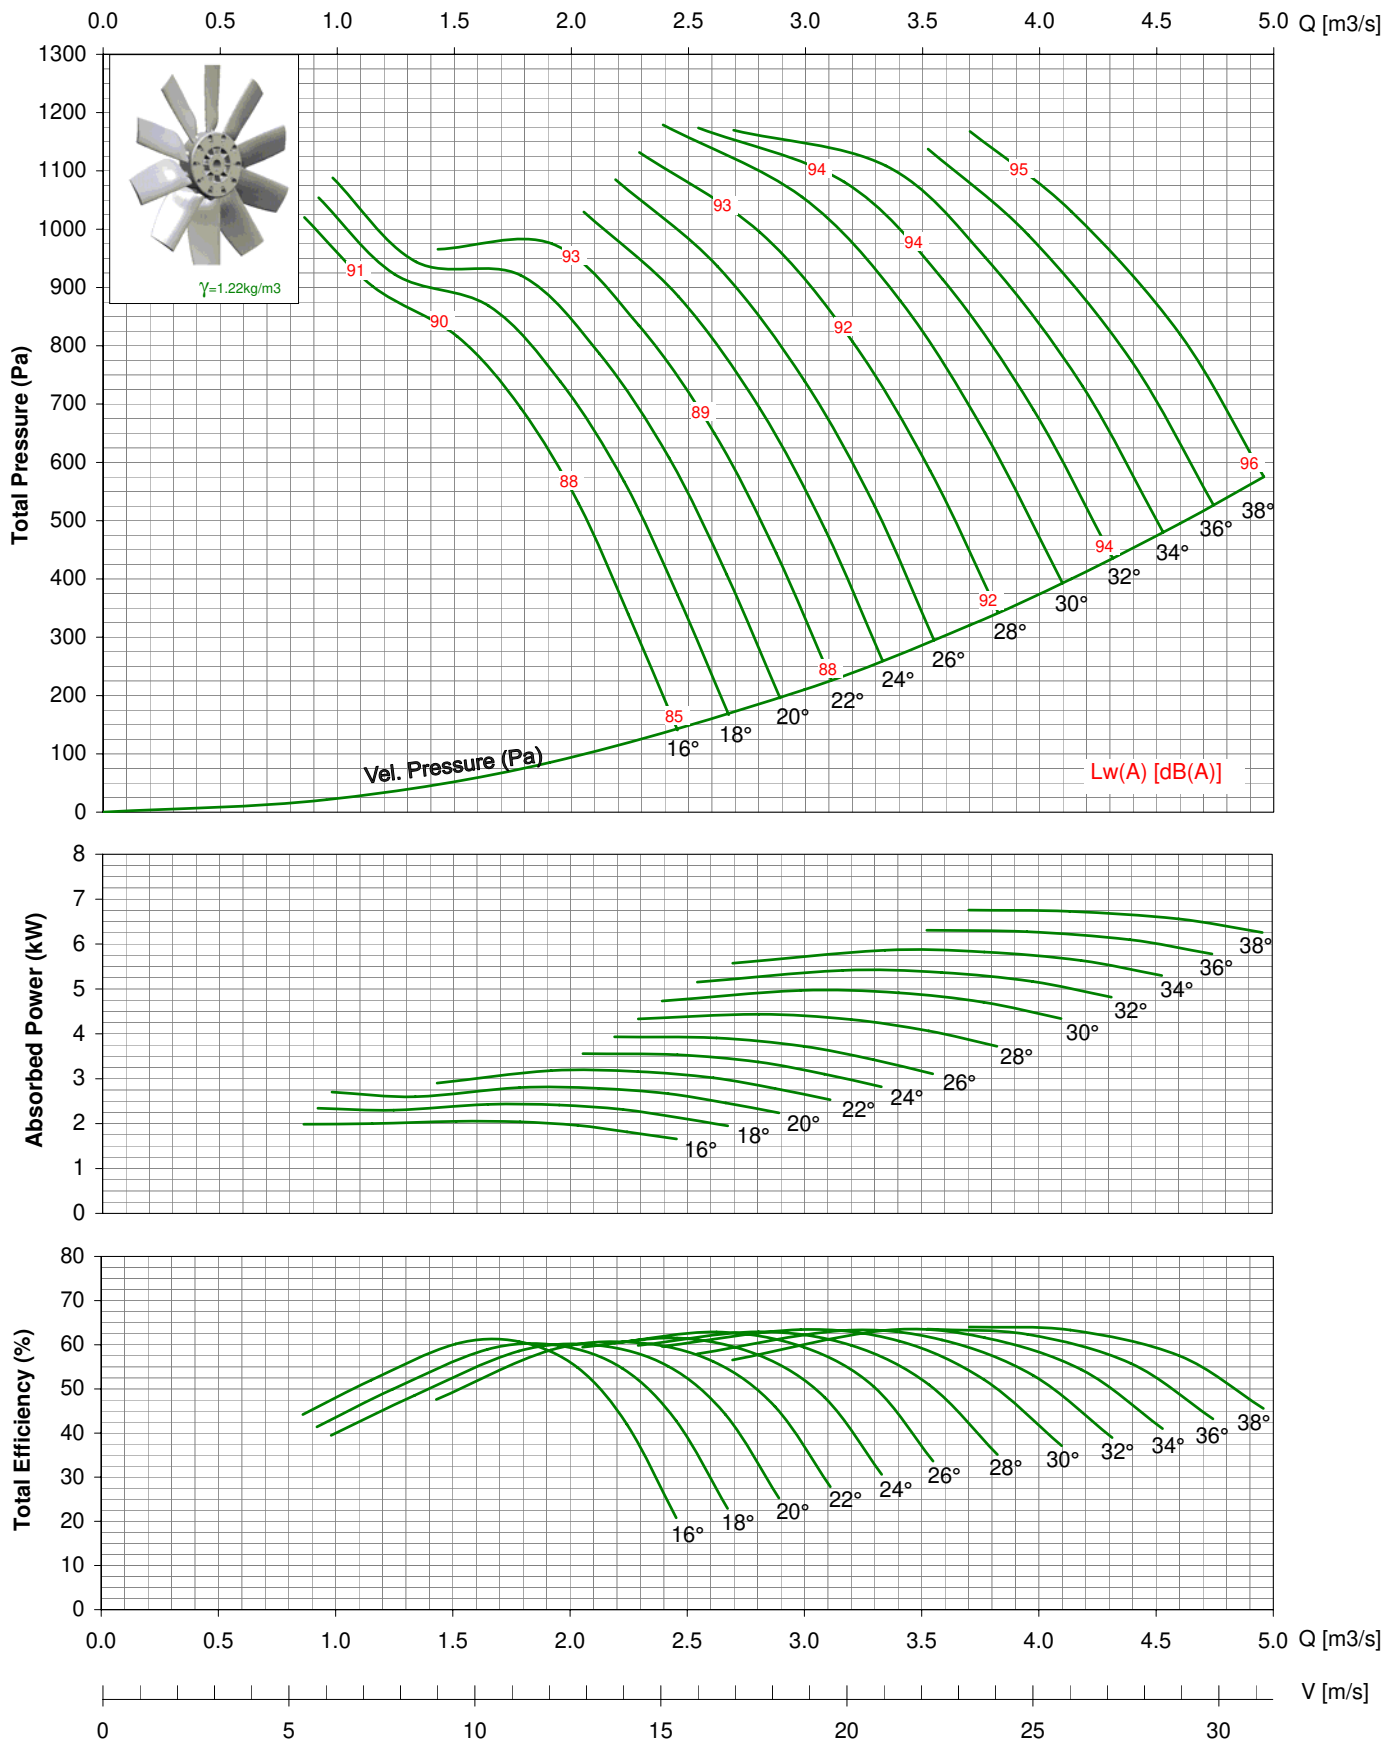

- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lwi(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA International.

VANE AXIAL FAN DIRECT DRIVEN

Series TDA-V

Features

For commercial and industrial applications where large volumes of air are required at moderate to high pressure, special designed integral straightening vanes, reduced turbulence, provide high performance and low sound level.

Construction

Double flanged casing is produced in mild steel or galvanised Steel, the impeller having manually adjustable pitch aerofoil blades is made of PPG, PAG or pressure-casted Aluminium.

Finish

Available in standard finishes of galvanisation or painting.

Operating Temperature

-20°C to +55°C

Motors

Totally enclosed Class 'F' motor, to a min. IP54 protection are fitted as standard. Standard motor up to 2.2kW are usually supplied on DOL starting, motor 3.0kW and above are star/delta starting.


Airflow Direction

Air flowing from impeller to motor is fitted as standard.





Kruger Ventilation Industries (India) Pvt Ltd. certifies that the TDA 500 -V shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with the AMCA publication 211 and comply with there quirements of the AMCA Certified Ratings Program.

MODEL: TDA 500-V / 12AA / 9-9 / _/_ / _/_

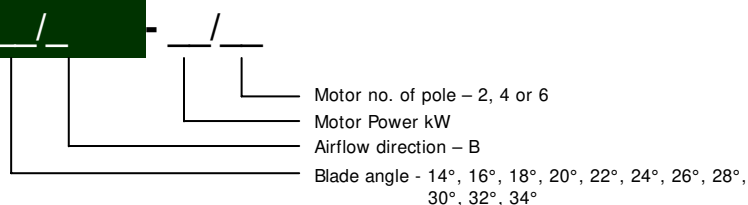


* All Dimension in mm

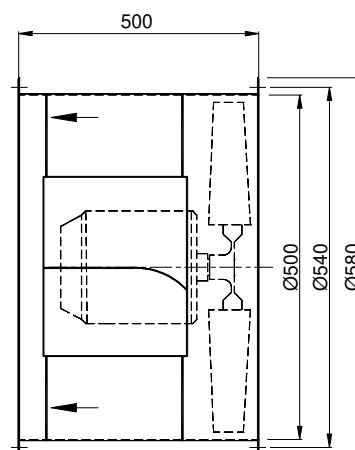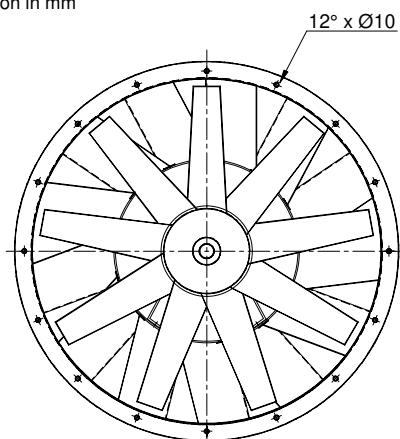


TDA 500-V / 12AA/ 9-9/ _ _ / _

950rpm - 50Hz

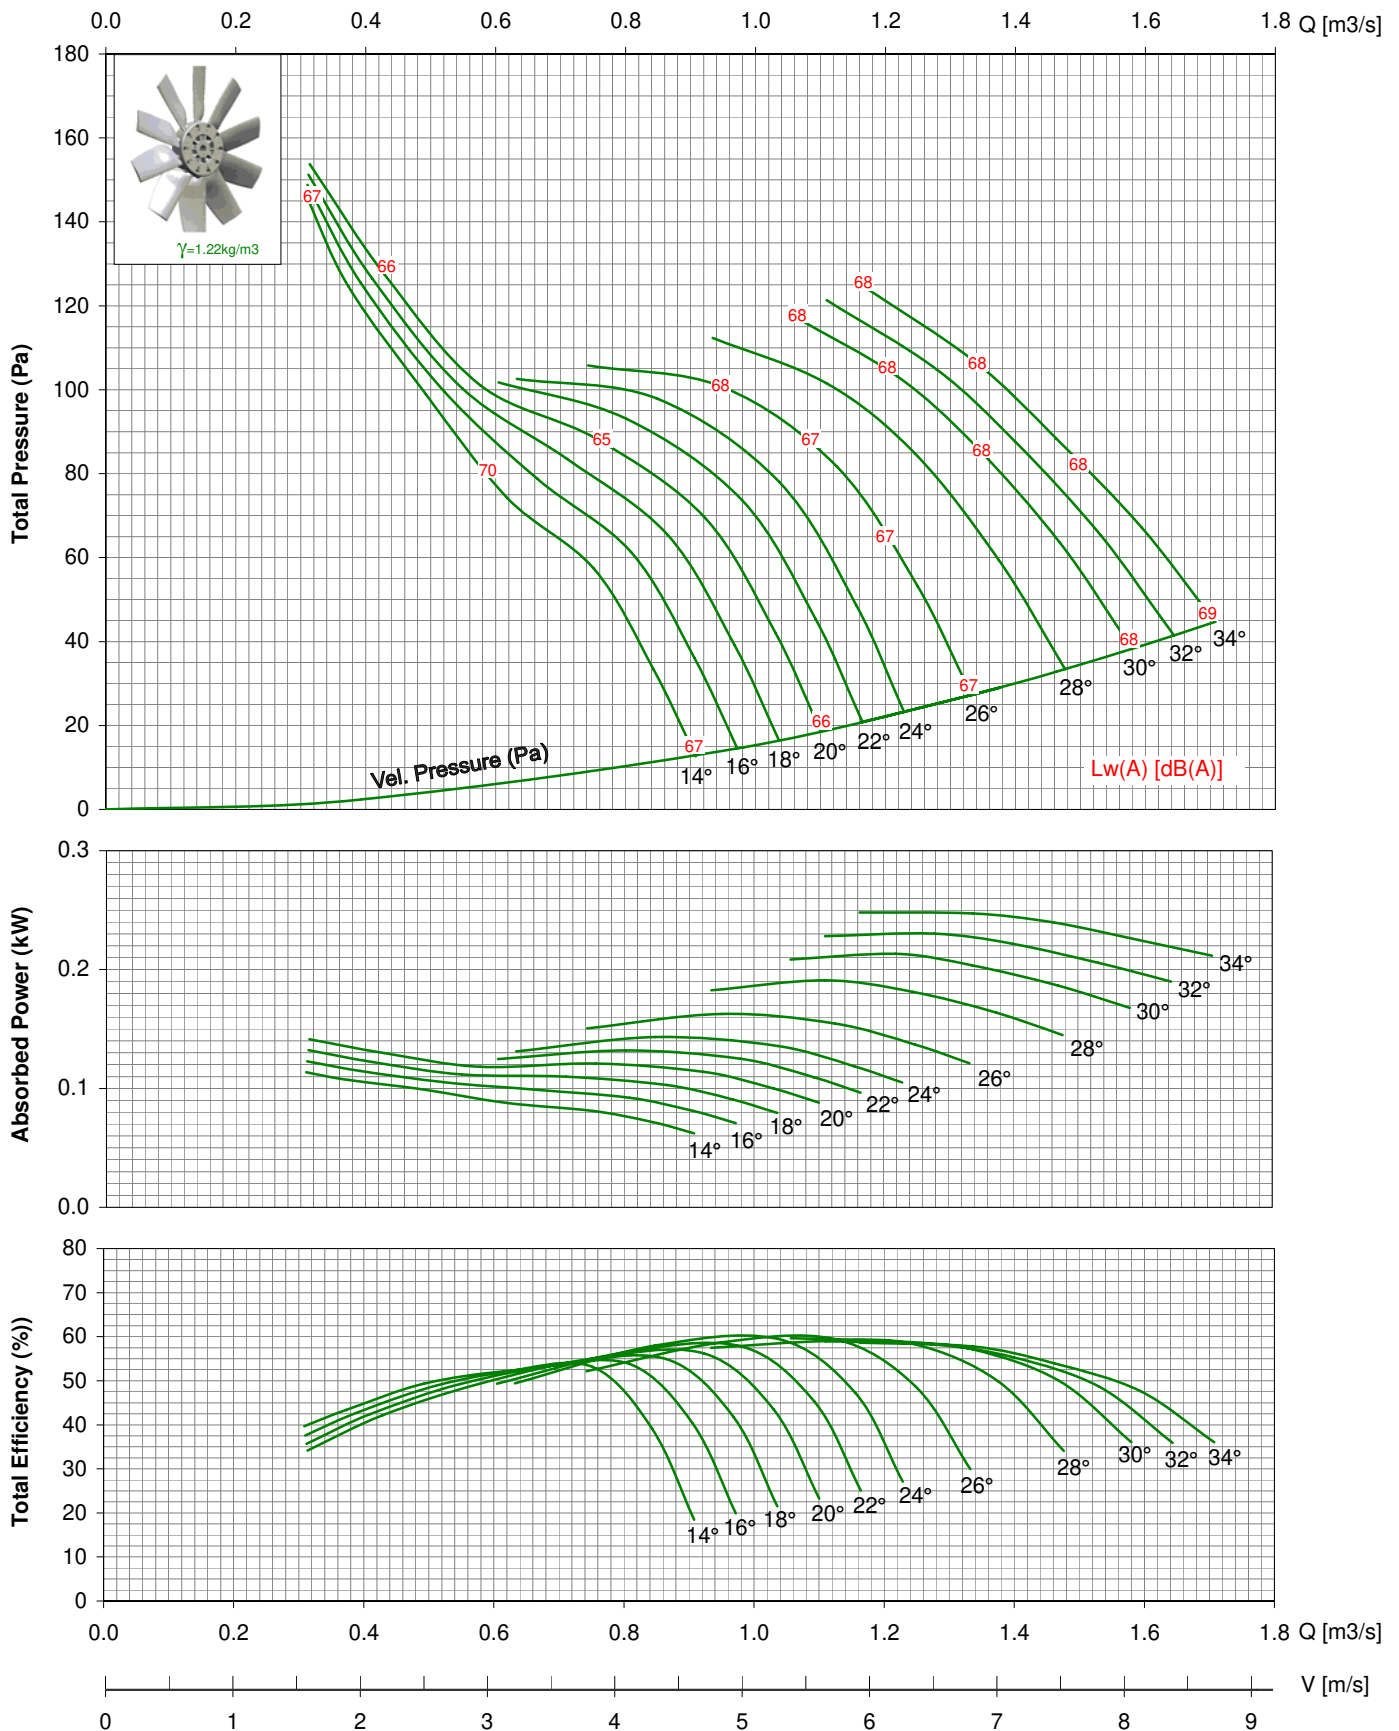


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lwi(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 500-V / 12AA/ 9-9/ _ _ / _ 1450rpm - 50Hz

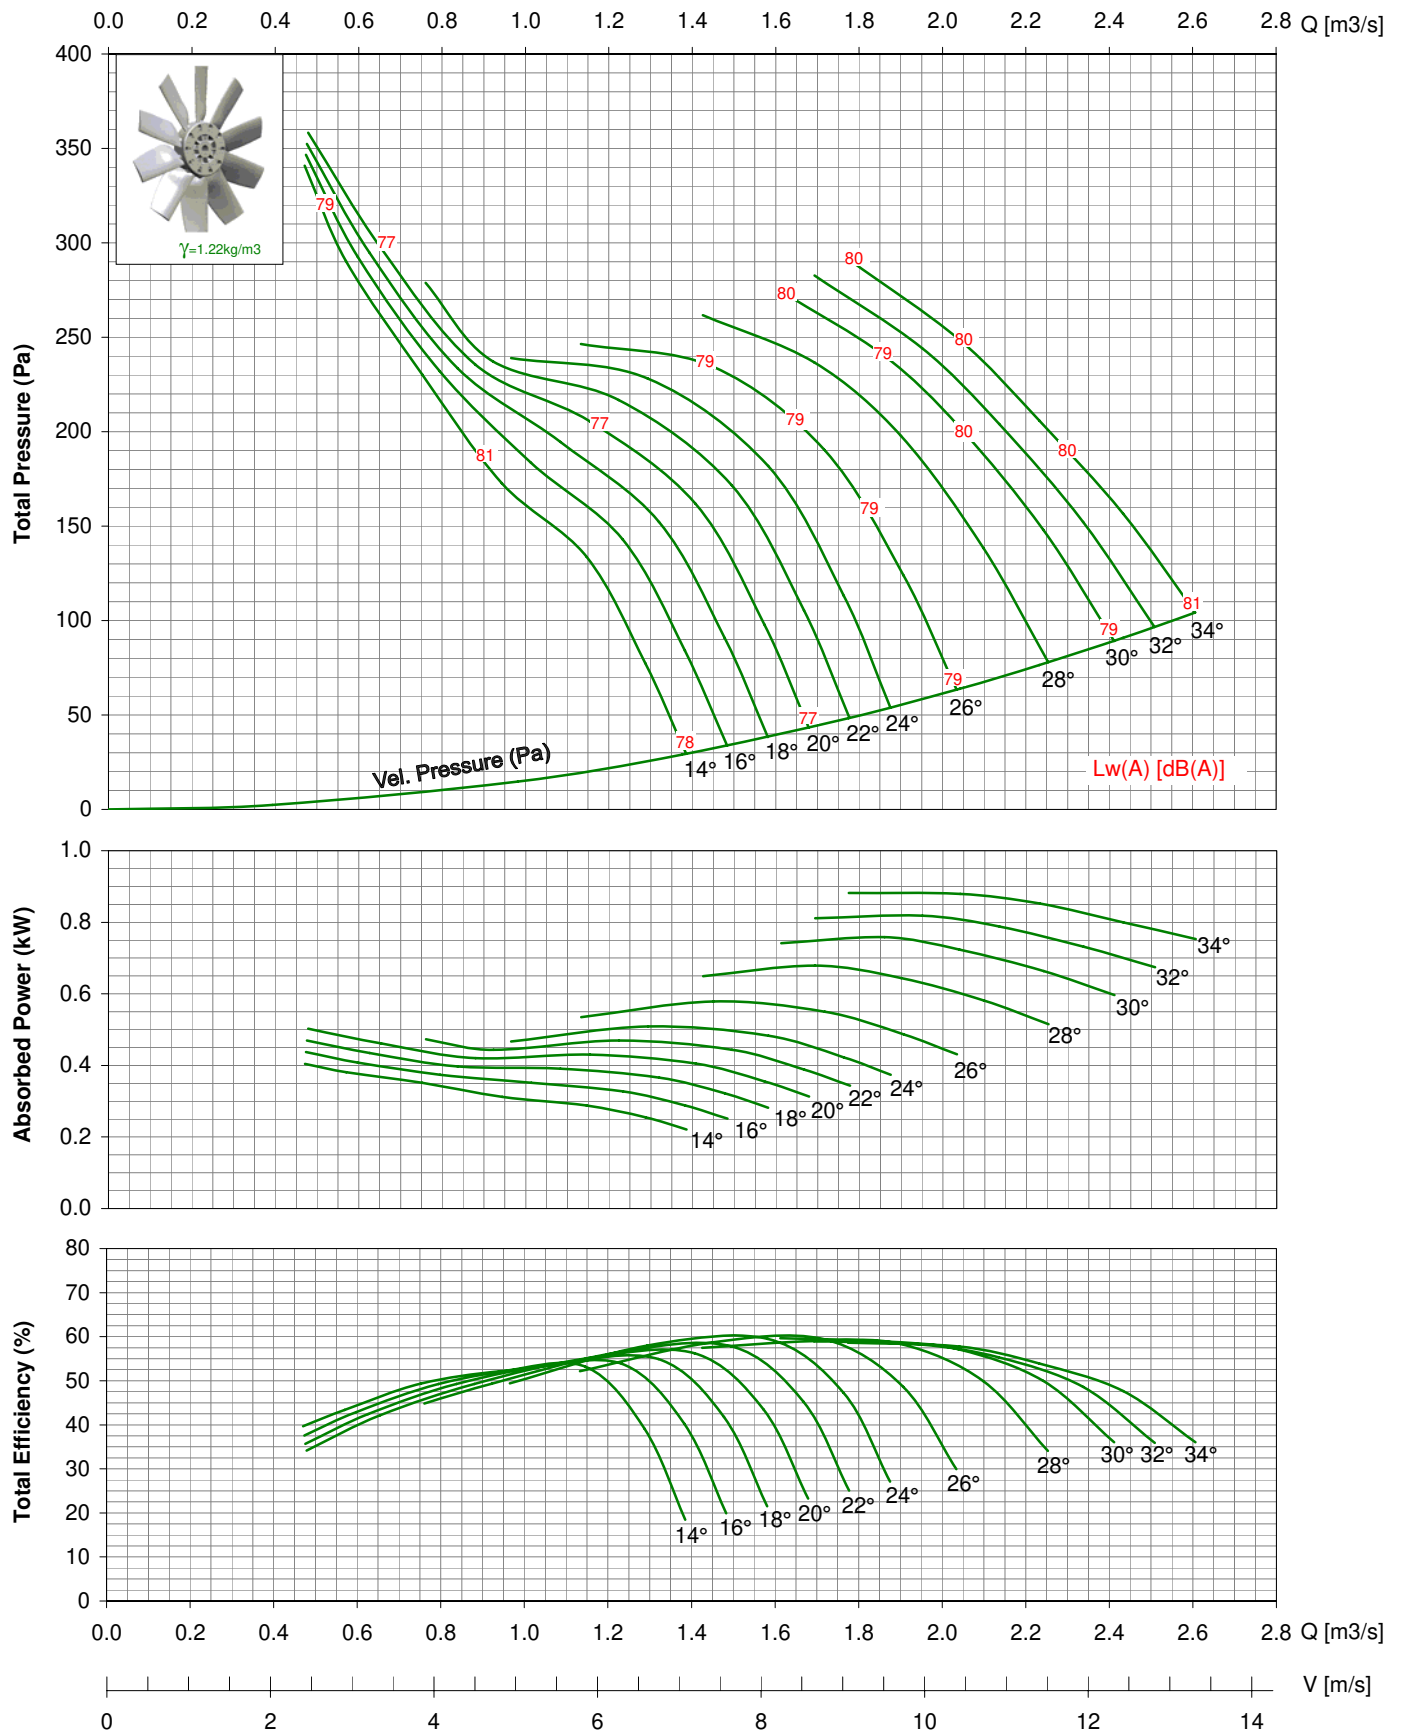

- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 500-V / 12AA/ 9-9/ _ _ / _ 2850rpm - 50Hz

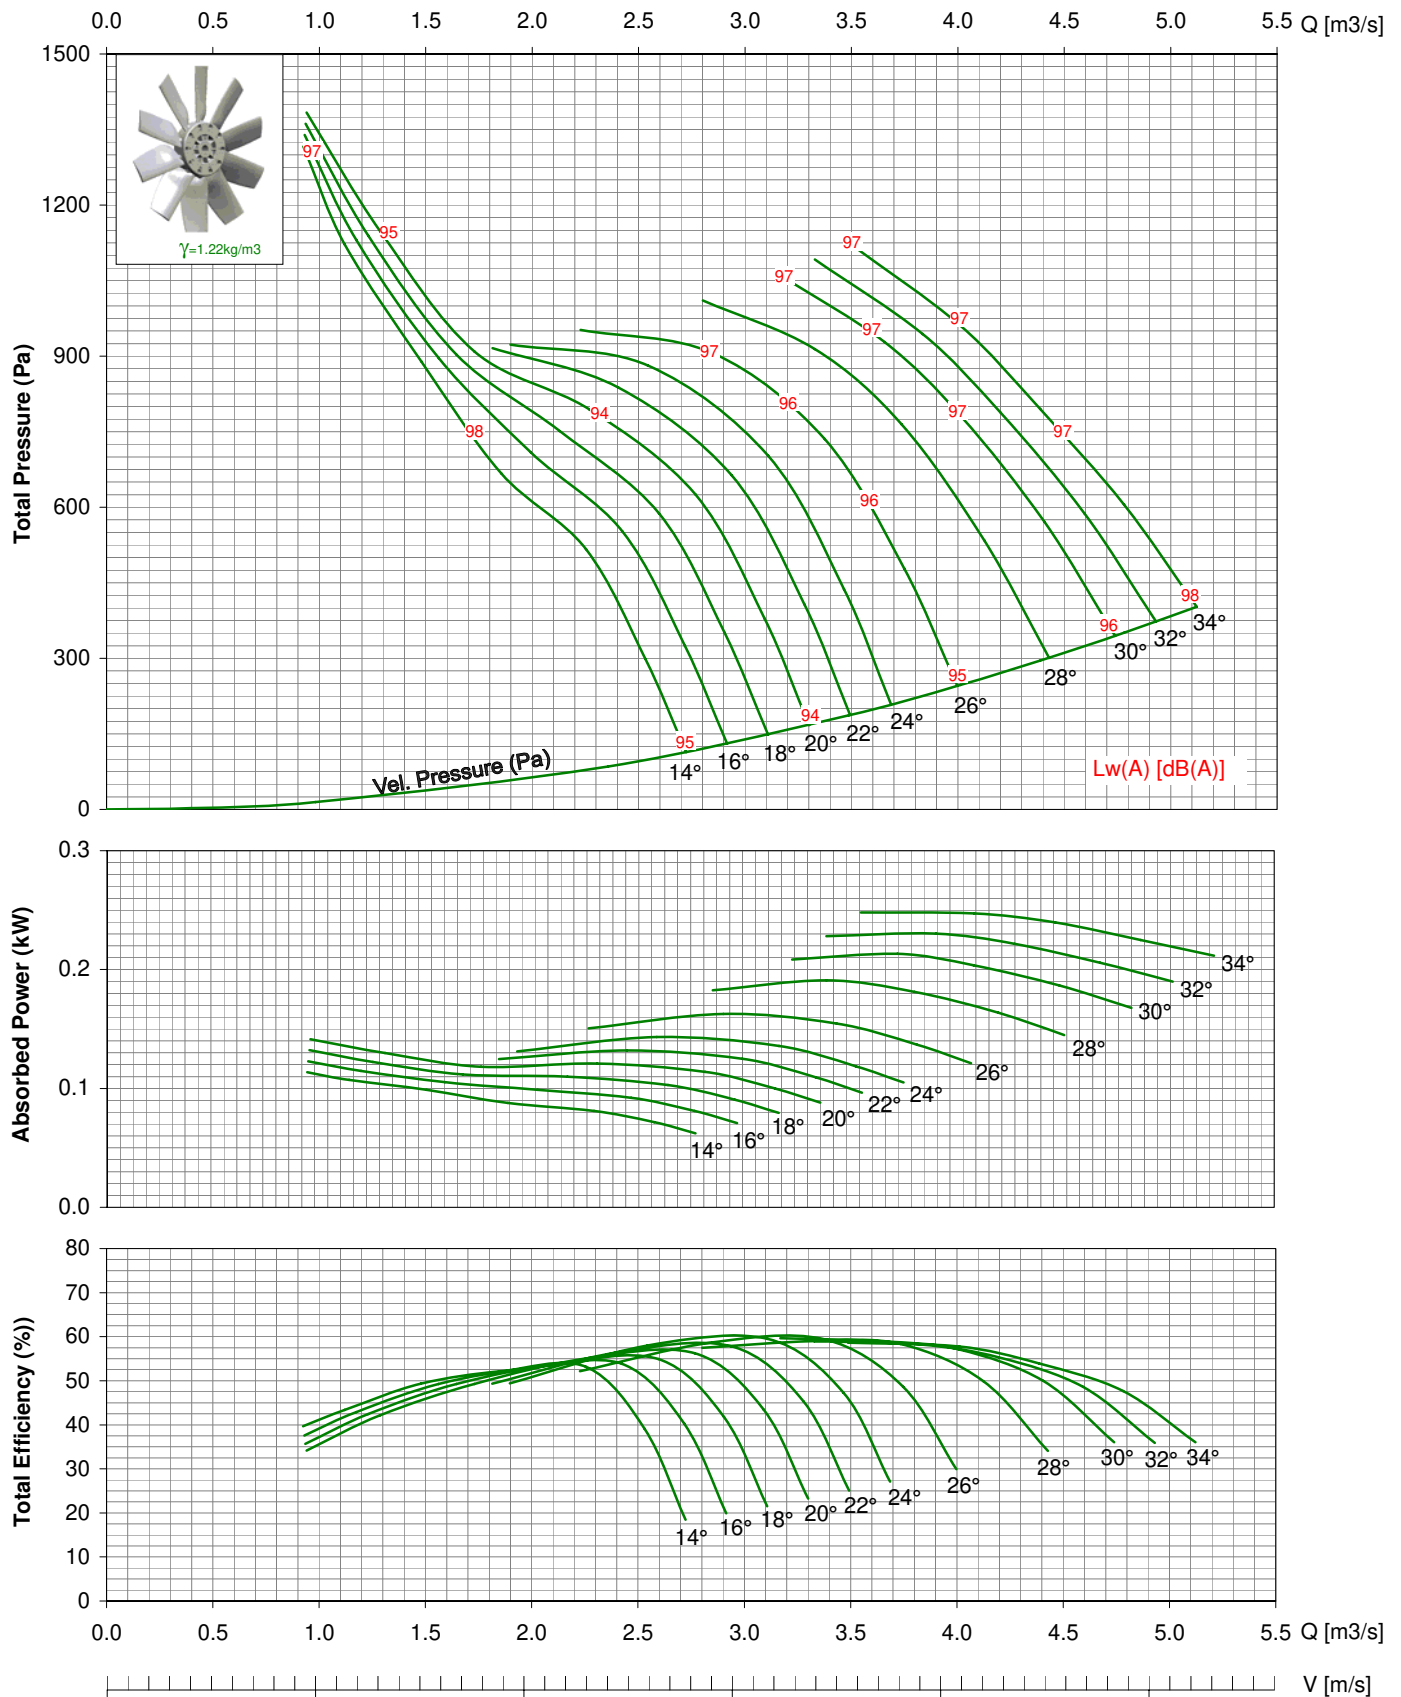


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- Power ratings (kW) does not include transmission losses.

- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.

- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 500-V / 12AA/ 9-9/ _ _ / _ 1150rpm - 60Hz

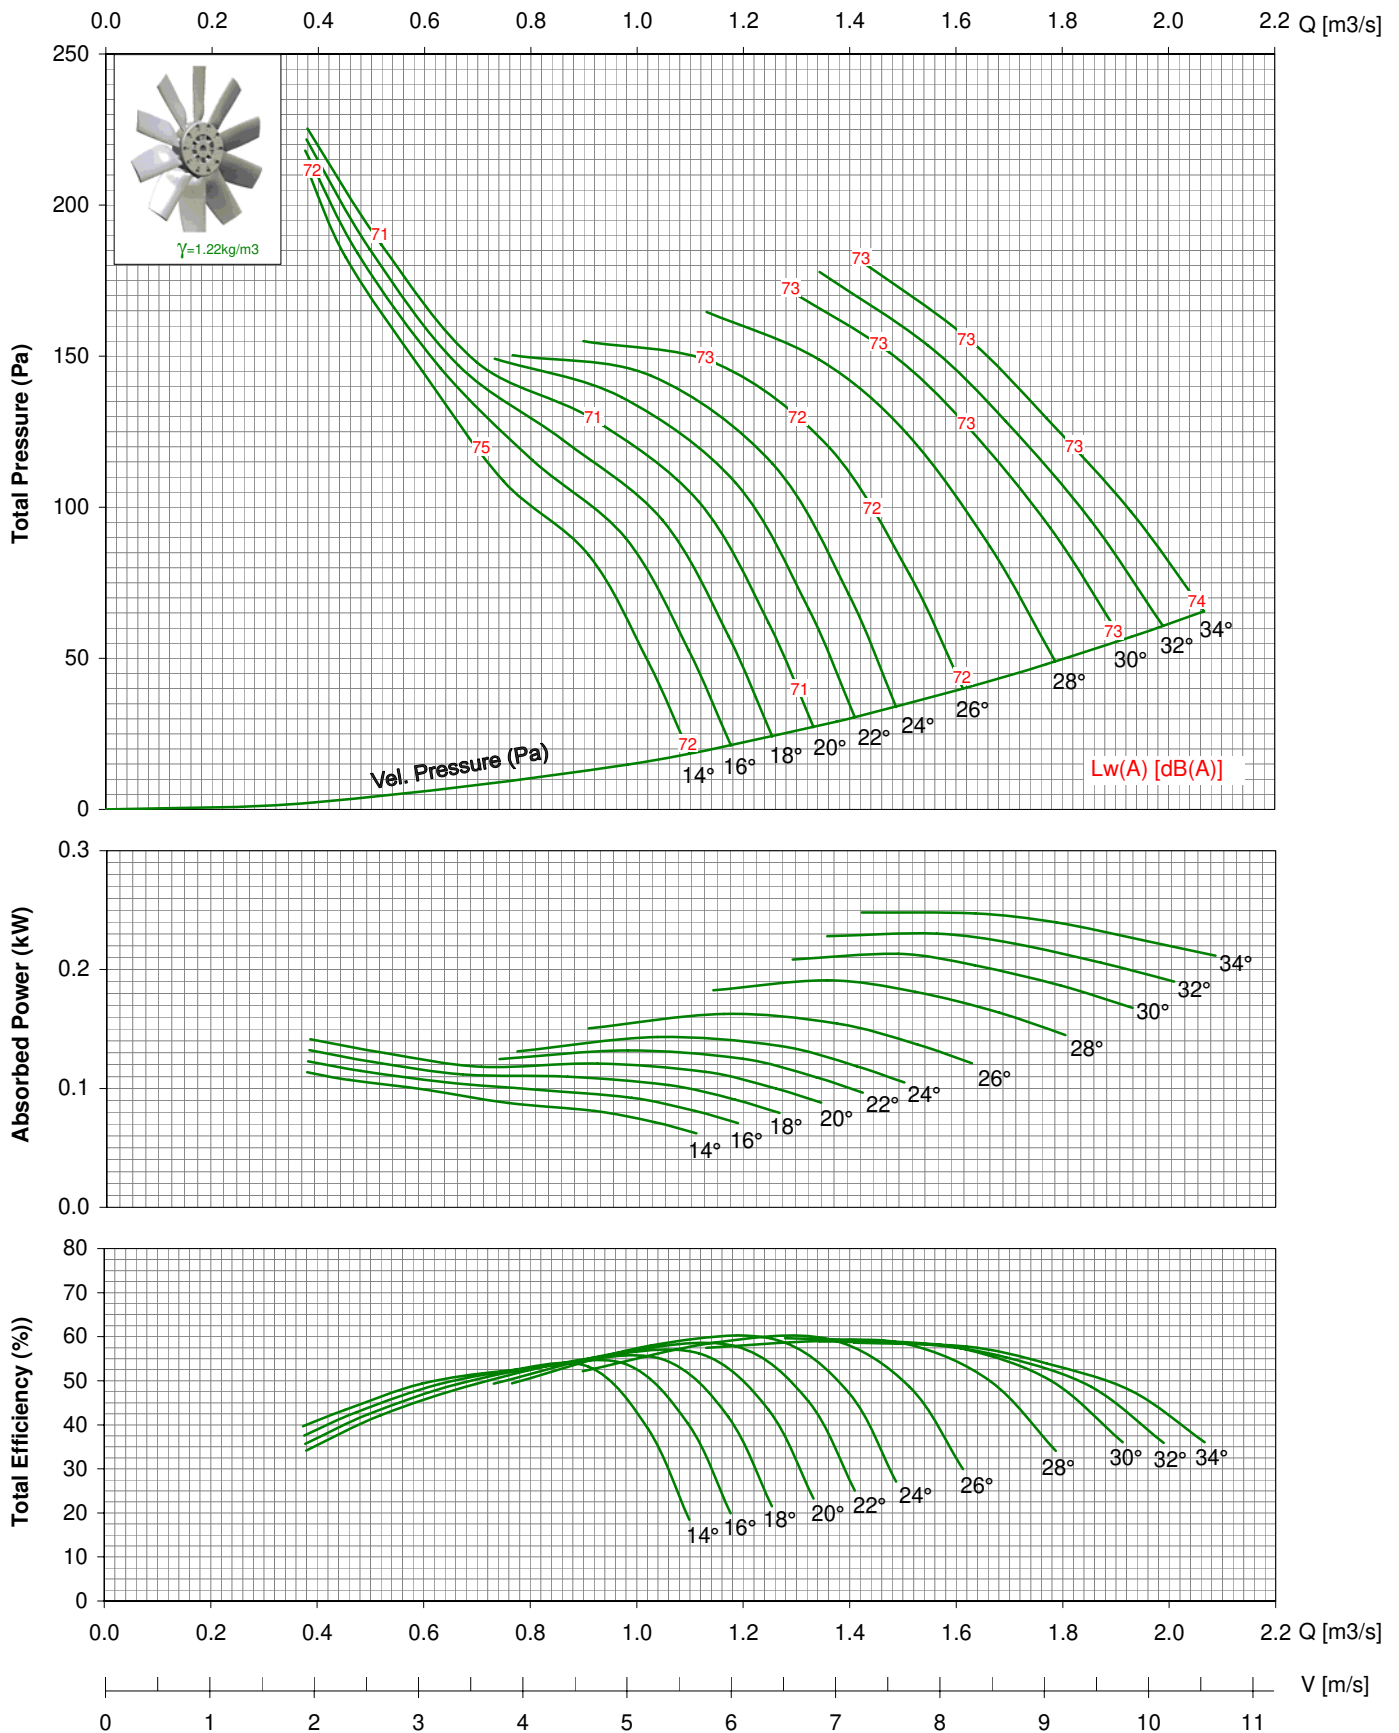


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- Power ratings (kW) does not include transmission losses.

- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.

- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 500-V / 12AA/ 9-9/ _ _ / _ 1750rpm - 60Hz

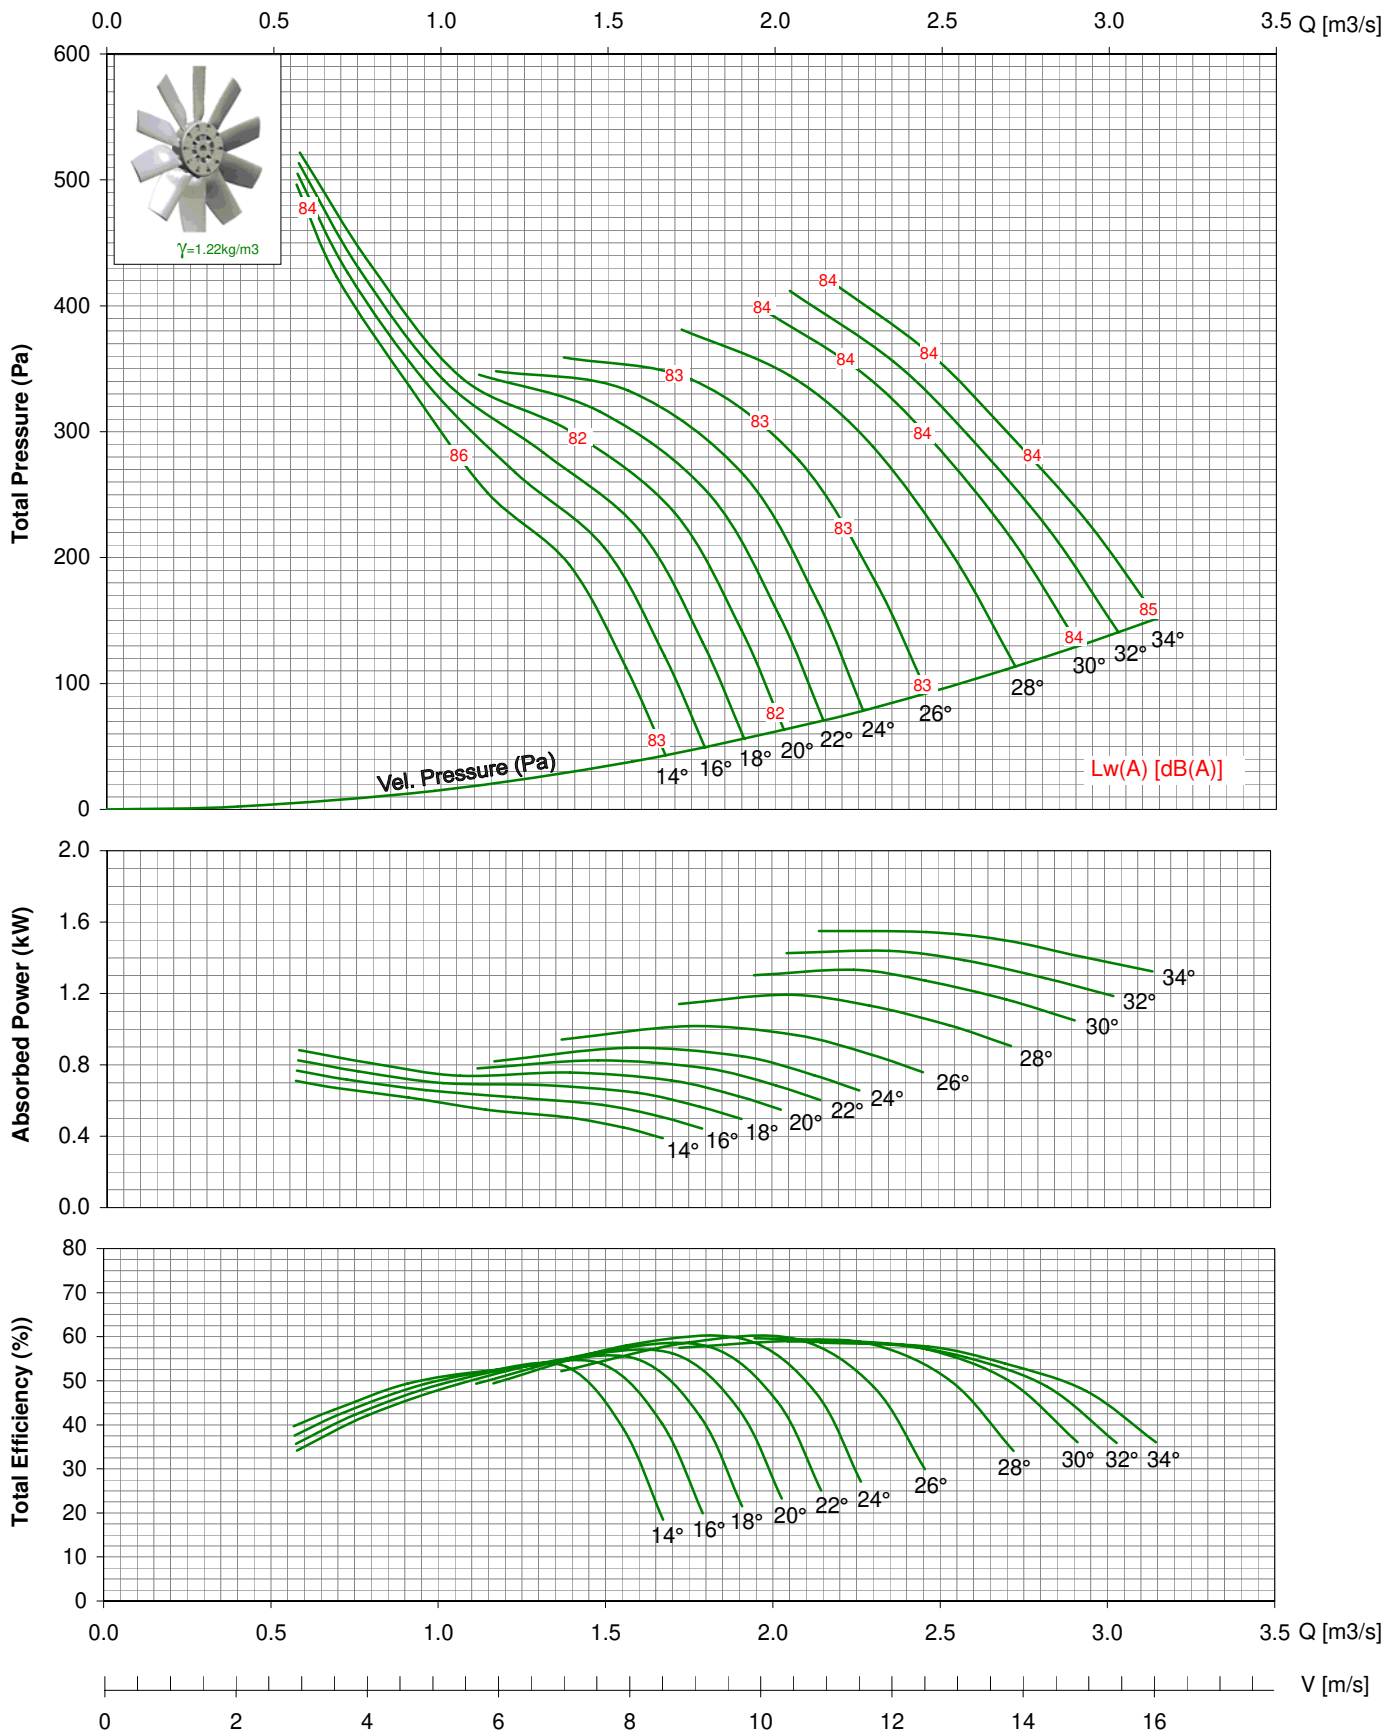

- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- Power ratings (KW) does not include transmission losses.

- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lwi(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.

- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

VANE AXIAL FAN DIRECT DRIVEN

Series TDA-V

Features

For commercial and industrial applications where large volumes of air are required at moderate to high pressure, special designed integral straightening vanes, reduced turbulence, provide high performance and low sound level.

Construction

Double flanged casing is produced in mild steel or galvanised Steel, the impeller having manually adjustable pitch aerofoil blades is made of PPG, PAG or pressure-casted Aluminium.

Finish

Available in standard finishes of galvanisation or painting.

Operating Temperature

-20°C to +55°C

Motors

Totally enclosed Class 'F' motor, to a min. IP54 protection are fitted as standard. Standard motor up to 2.2kW are usually supplied on DOL starting, motor 3.0kW and above are star/delta starting.


Airflow Direction

Air flowing from impeller to motor is fitted as standard.





Kruger Ventilation Industries (India) Pvt Ltd. certifies that the TDA 560 -V shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with the AMCA publication 211 and comply with there quirements of the AMCA Certified Ratings Program.


MODEL: TDA 560-V / 12AA / 9-9 / _/_ / _/_

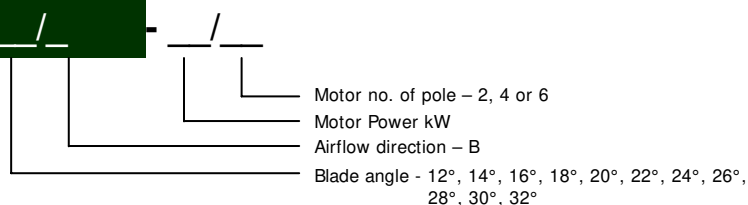

* All Dimension in mm

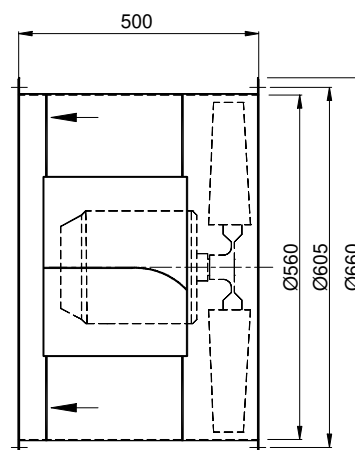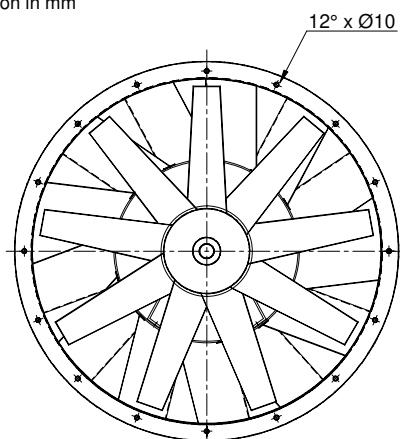


TDA 560-V / 12AA/ 9-9/ _ _ / _ 950rpm - 50Hz

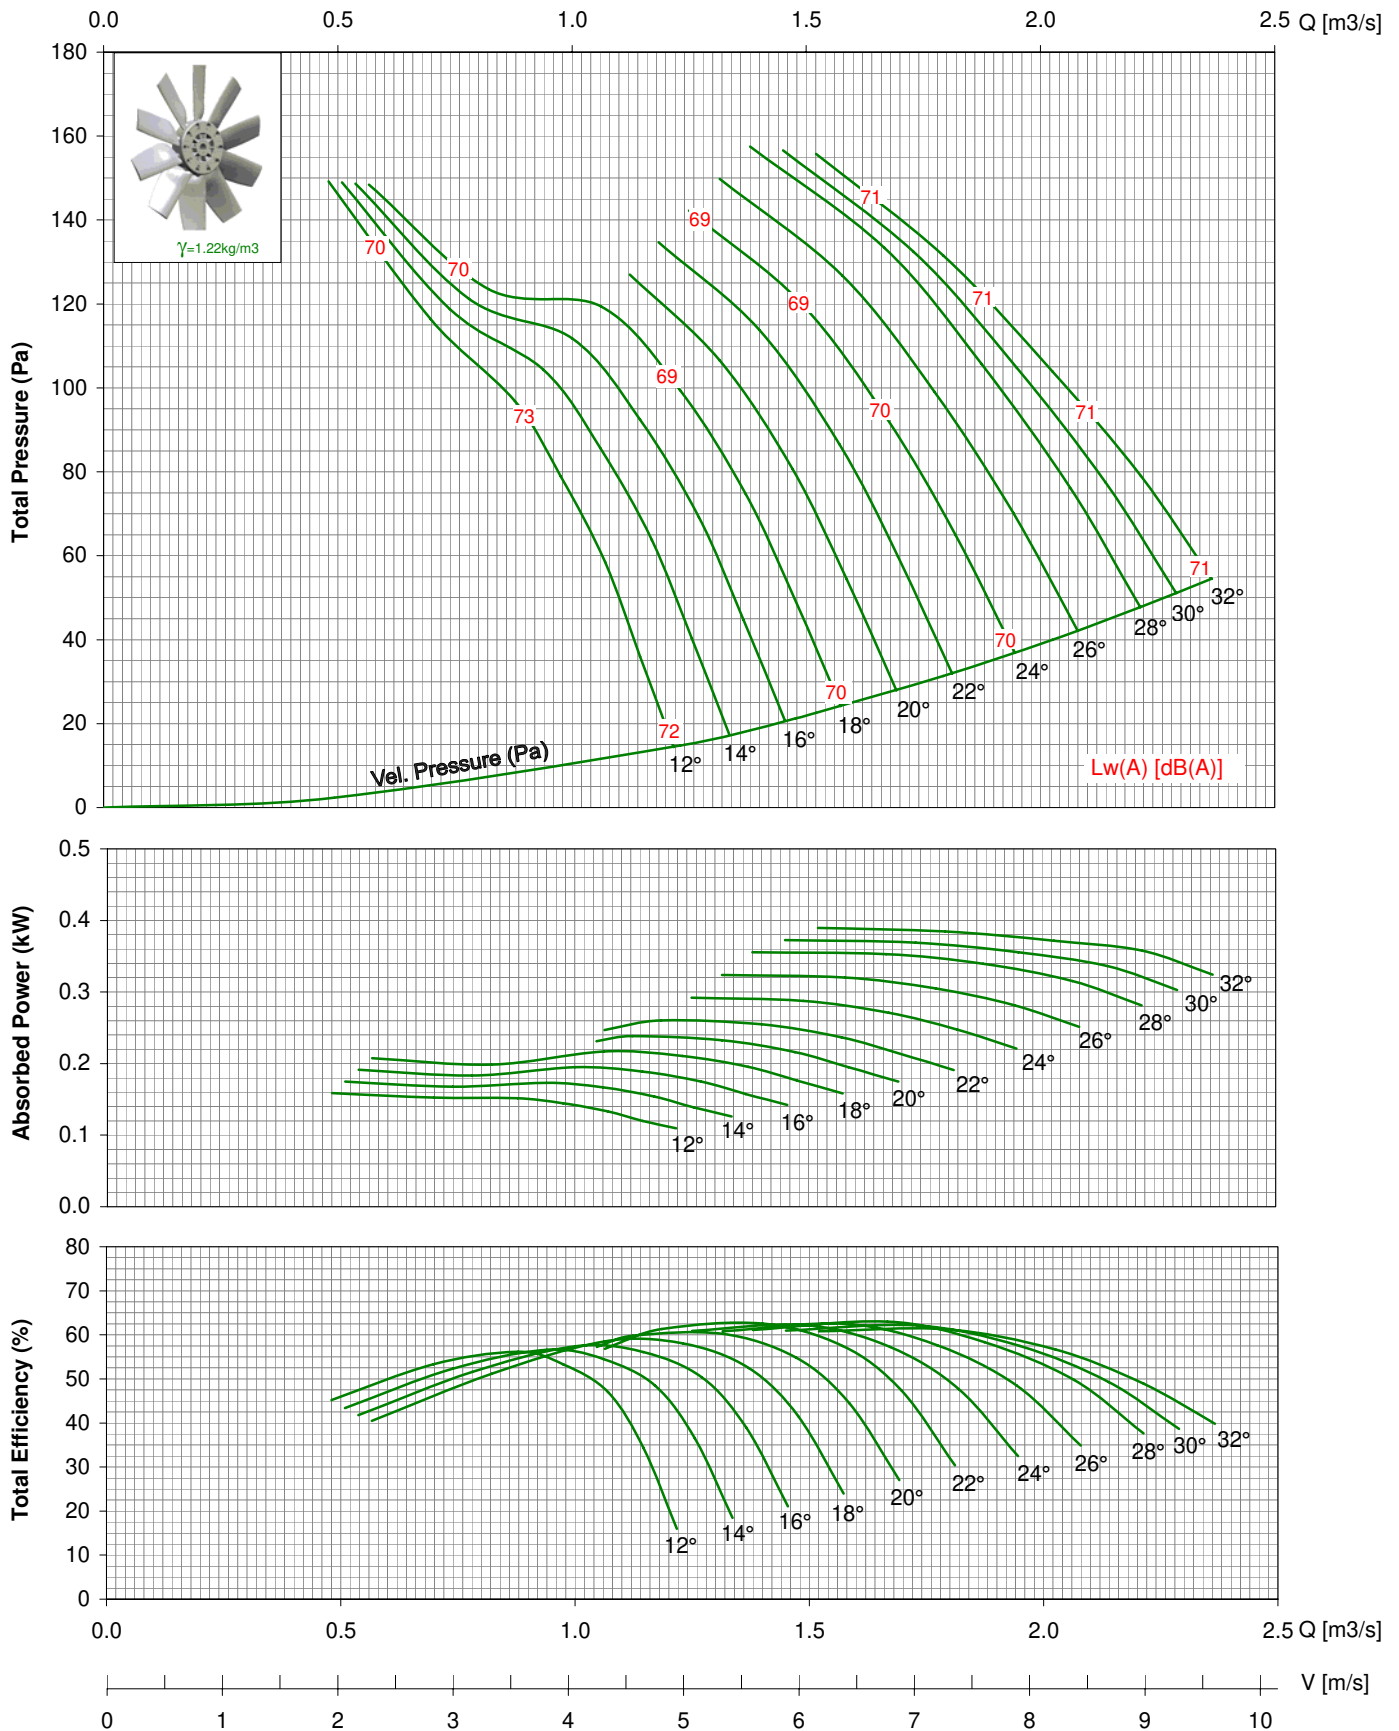

- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lw(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.


TDA 560-V / 12AA/ 9-9/ _ _ / _

1450rpm - 50Hz

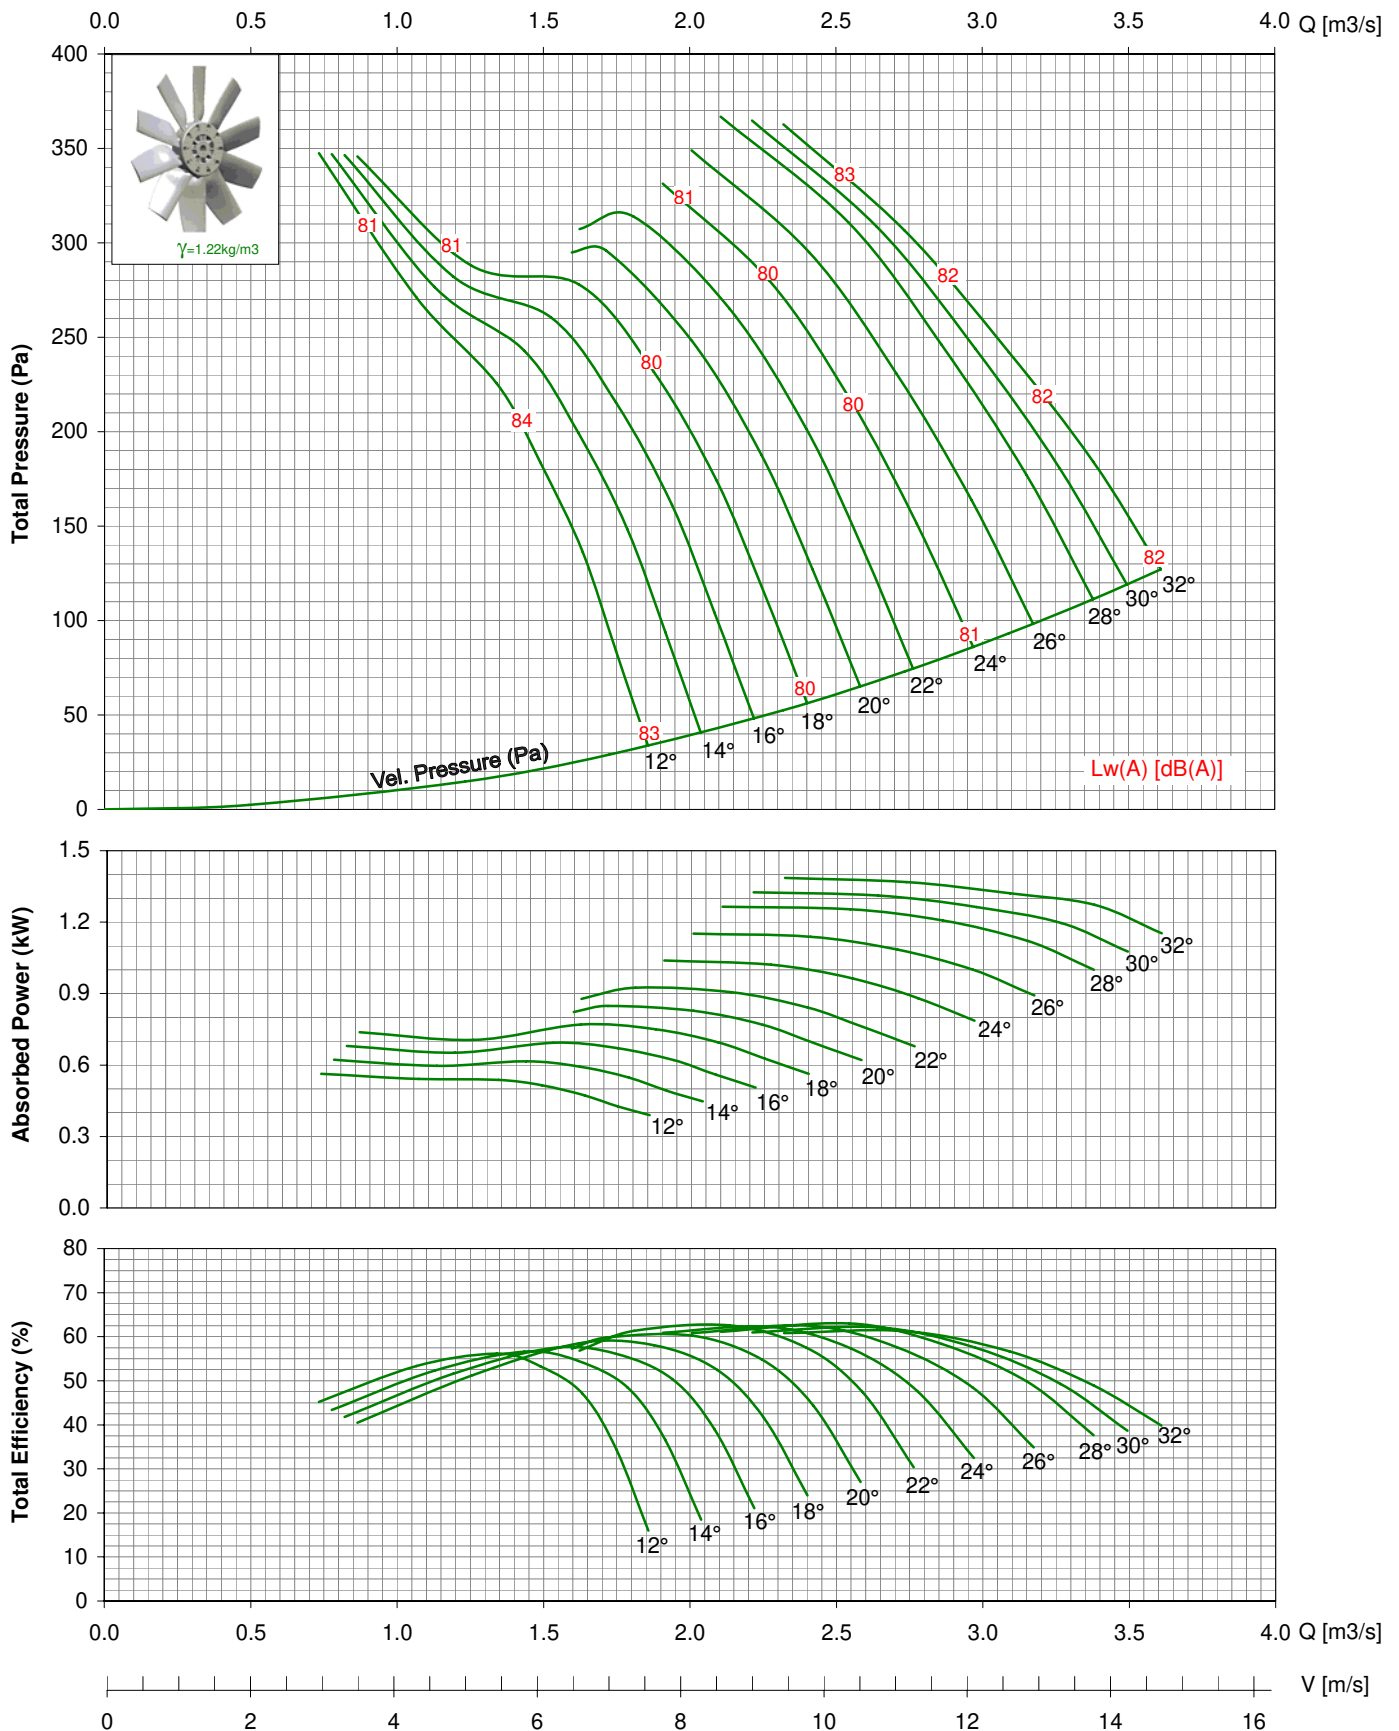


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lw(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 560-V / 12AA/ 9-9/ _ _ / _ 2850rpm - 50Hz

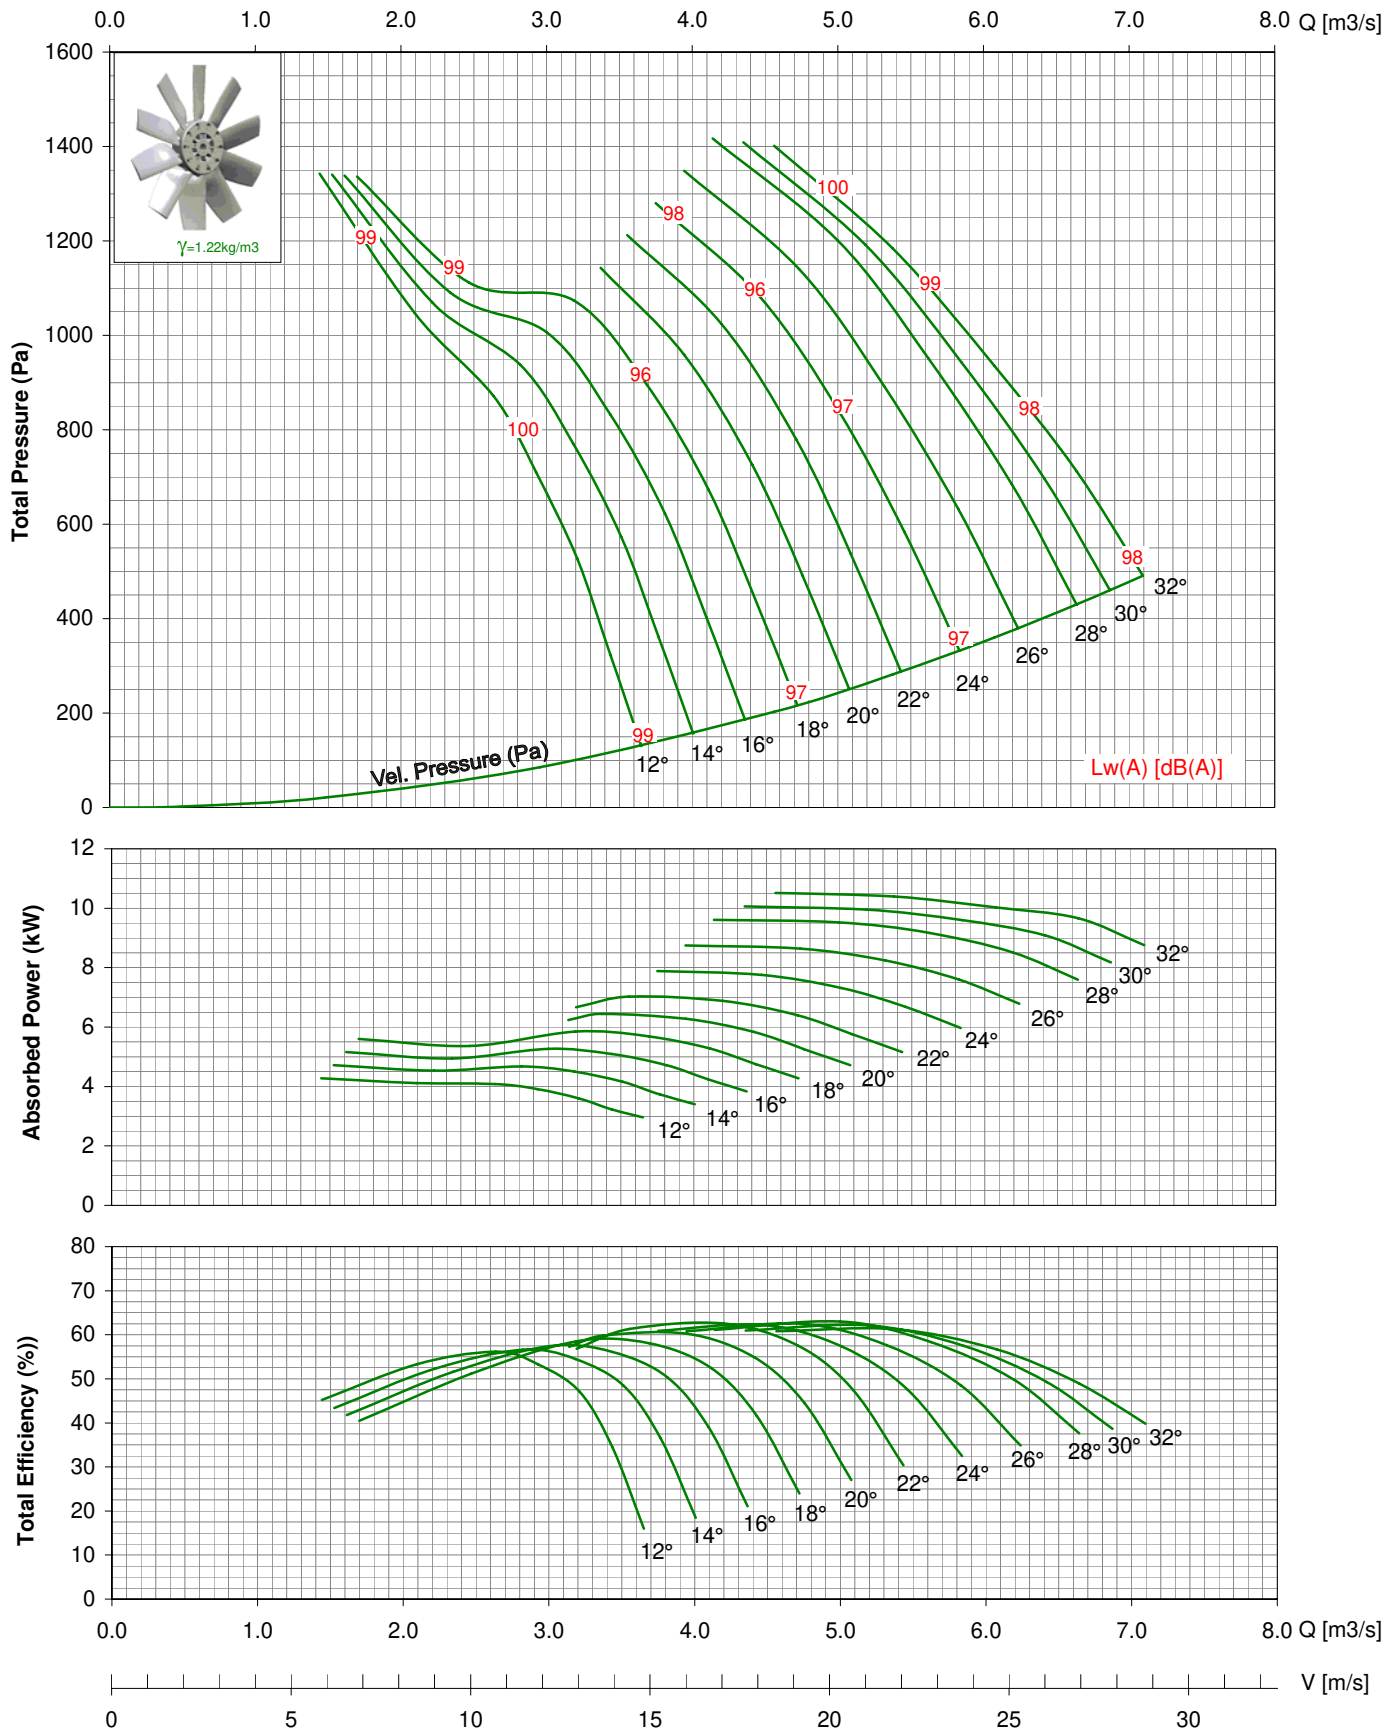


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{w(A)}$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 560-V / 12AA/ 9-9/ _ _ / _ 1150rpm - 60Hz

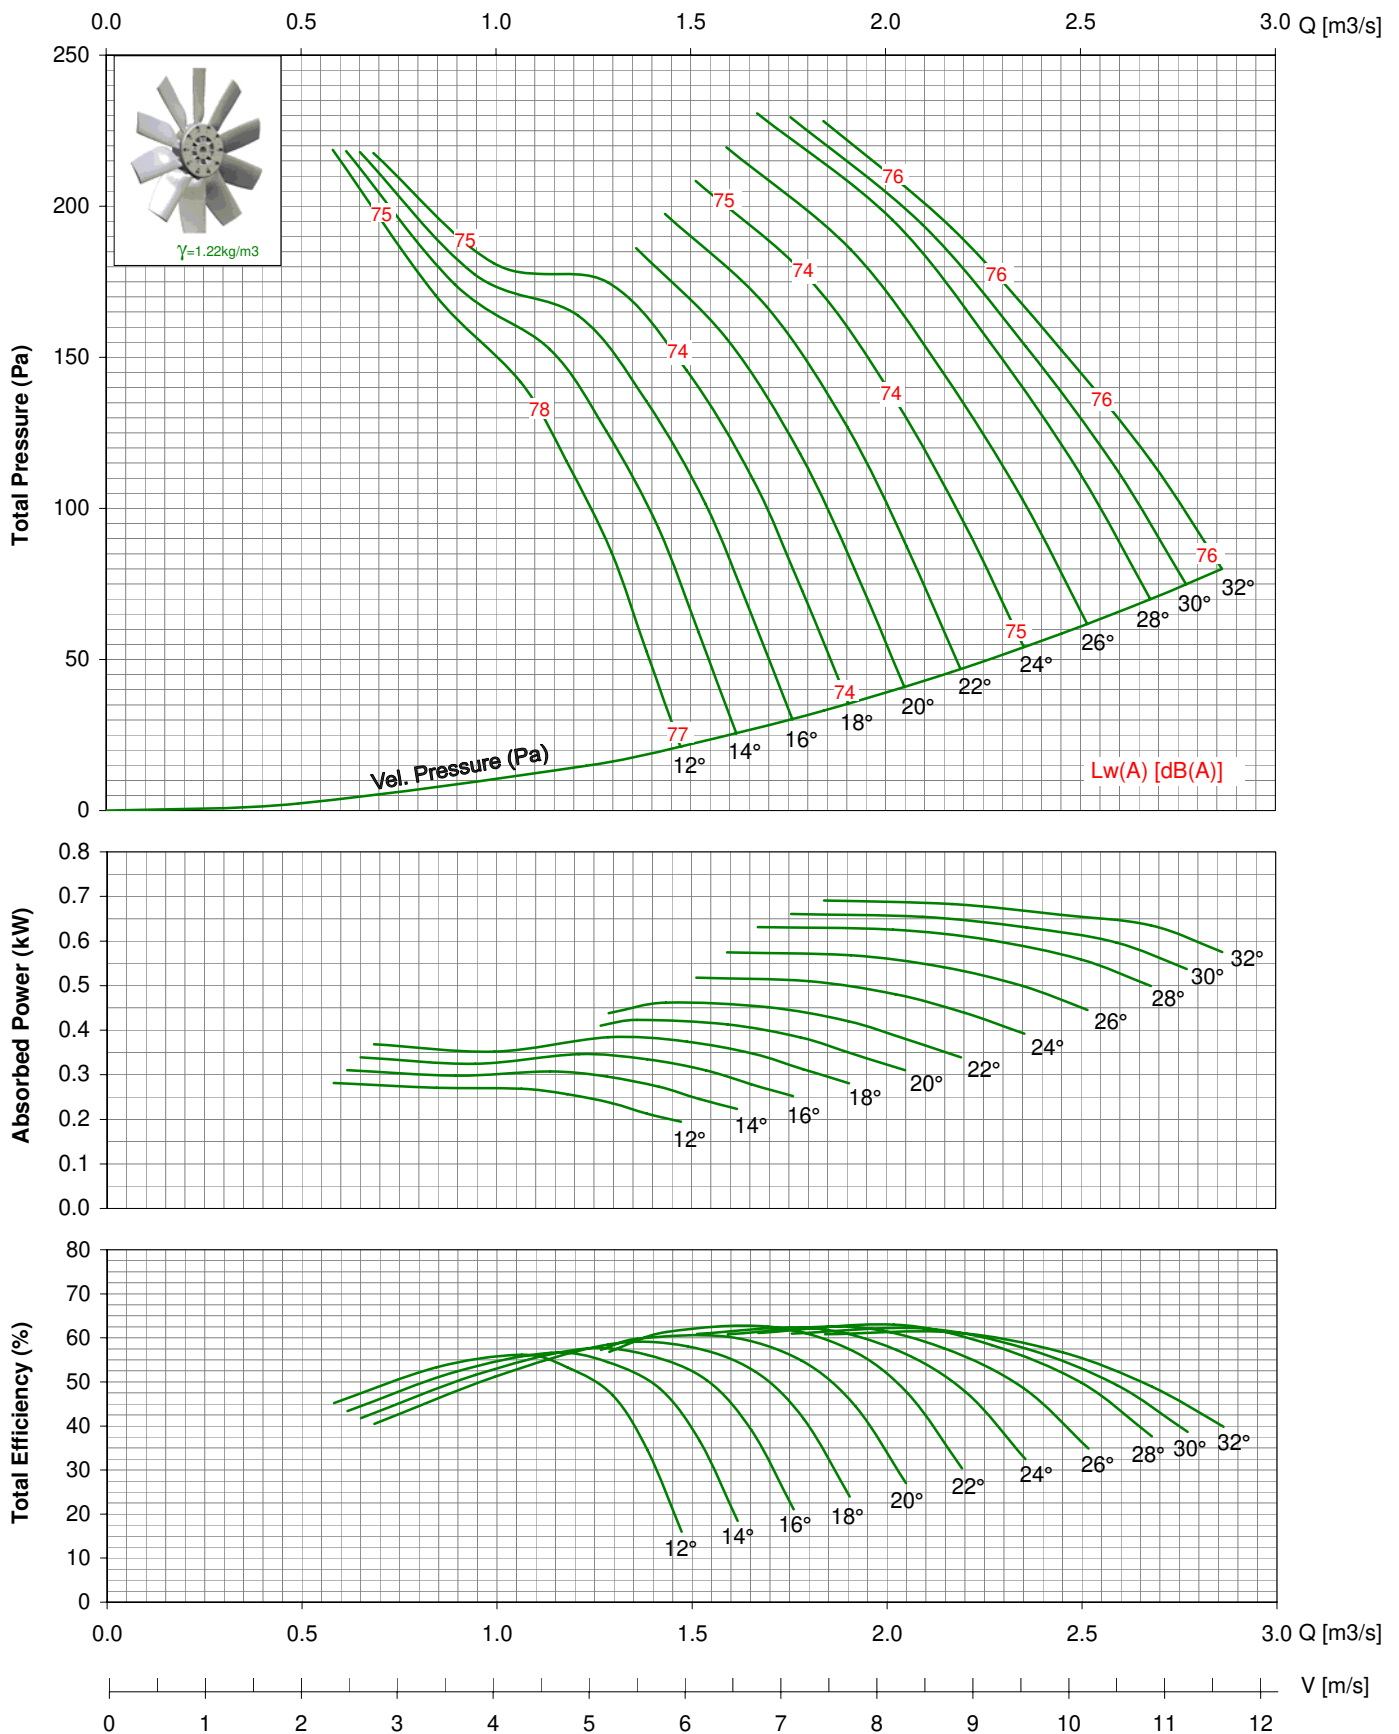

- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lw(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 560-V / 12AA/ 9-9/ _ _ / _ 1750rpm - 60Hz

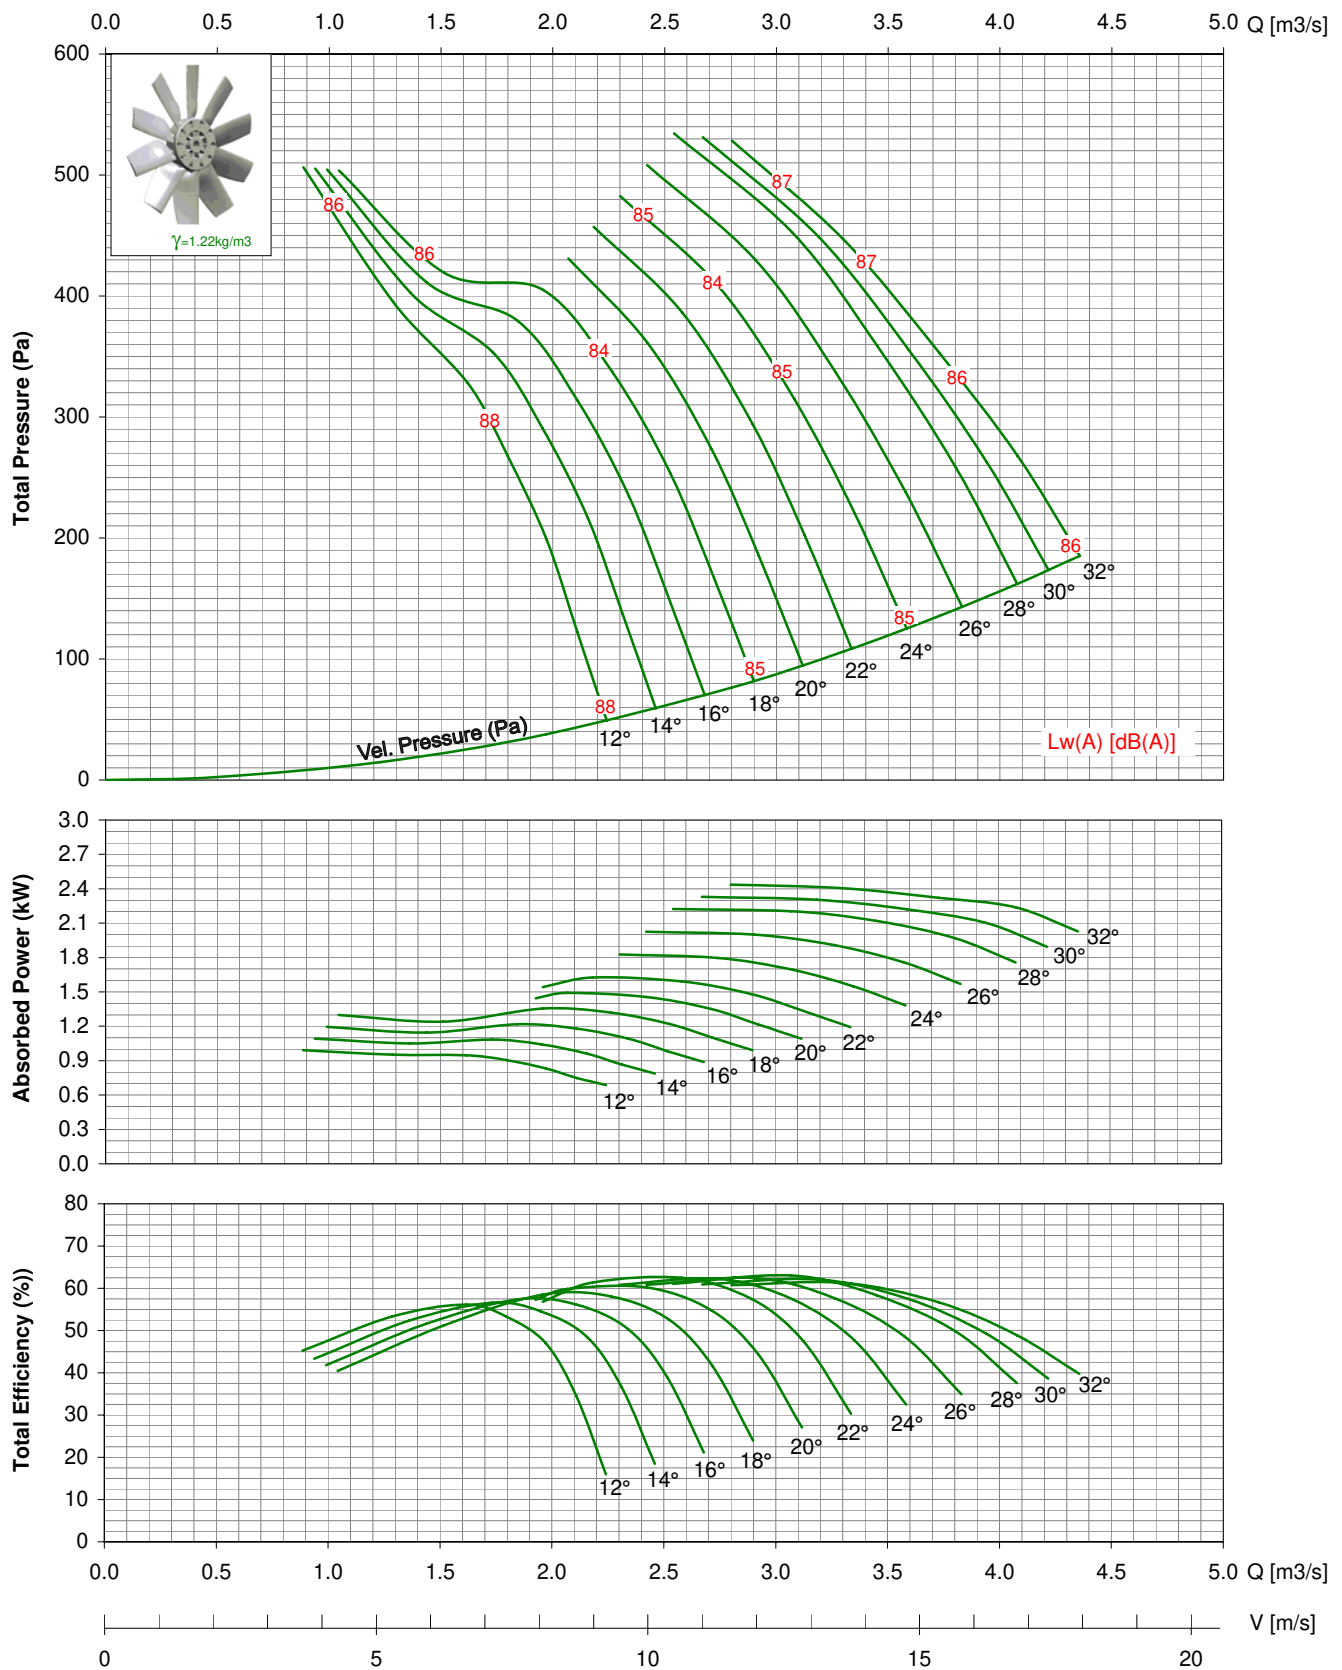

- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lw(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

VANE AXIAL FAN DIRECT DRIVEN

Series TDA-V

Features

For commercial and industrial applications where large volumes of air are required at moderate to high pressure, special designed integral straightening vanes, reduced turbulence, provide high performance and low sound level.

Construction

Double flanged casing is produced in mild steel or galvanised Steel, the impeller having manually adjustable pitch aerofoil blades is made of PPG, PAG or pressure-casted Aluminium.

Finish

Available in standard finishes of galvanisation or painting.

Operating Temperature

-20°C to +55°C

Motors

Totally enclosed Class 'F' motor, to a min. IP54 protection are fitted as standard. Standard motor up to 2.2kW are usually supplied on DOL starting, motor 3.0kW and above are star/delta starting.


Airflow Direction

Air flowing from impeller to motor is fitted as standard.





Kruger Ventilation Industries (India) Pvt Ltd. certifies that the TDA 630 -V shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with the AMCA publication 211 and comply with there quirements of the AMCA Certified Ratings Program.


MODEL: TDA 630-V / 12AA / 12-12 / _ / _

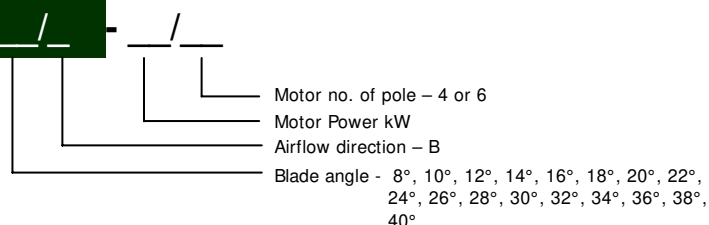

* All Dimension in mm

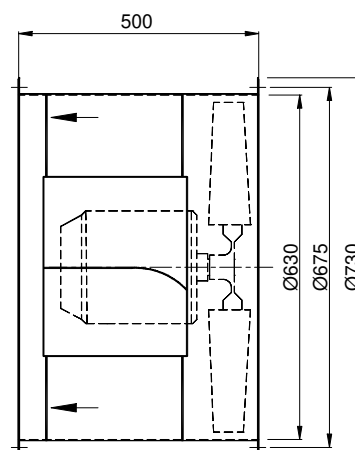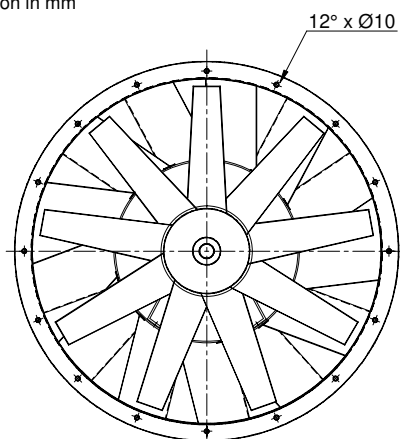


TDA 630-V / 12AA/ 12-12/ _ _ / _ 950rpm - 50Hz

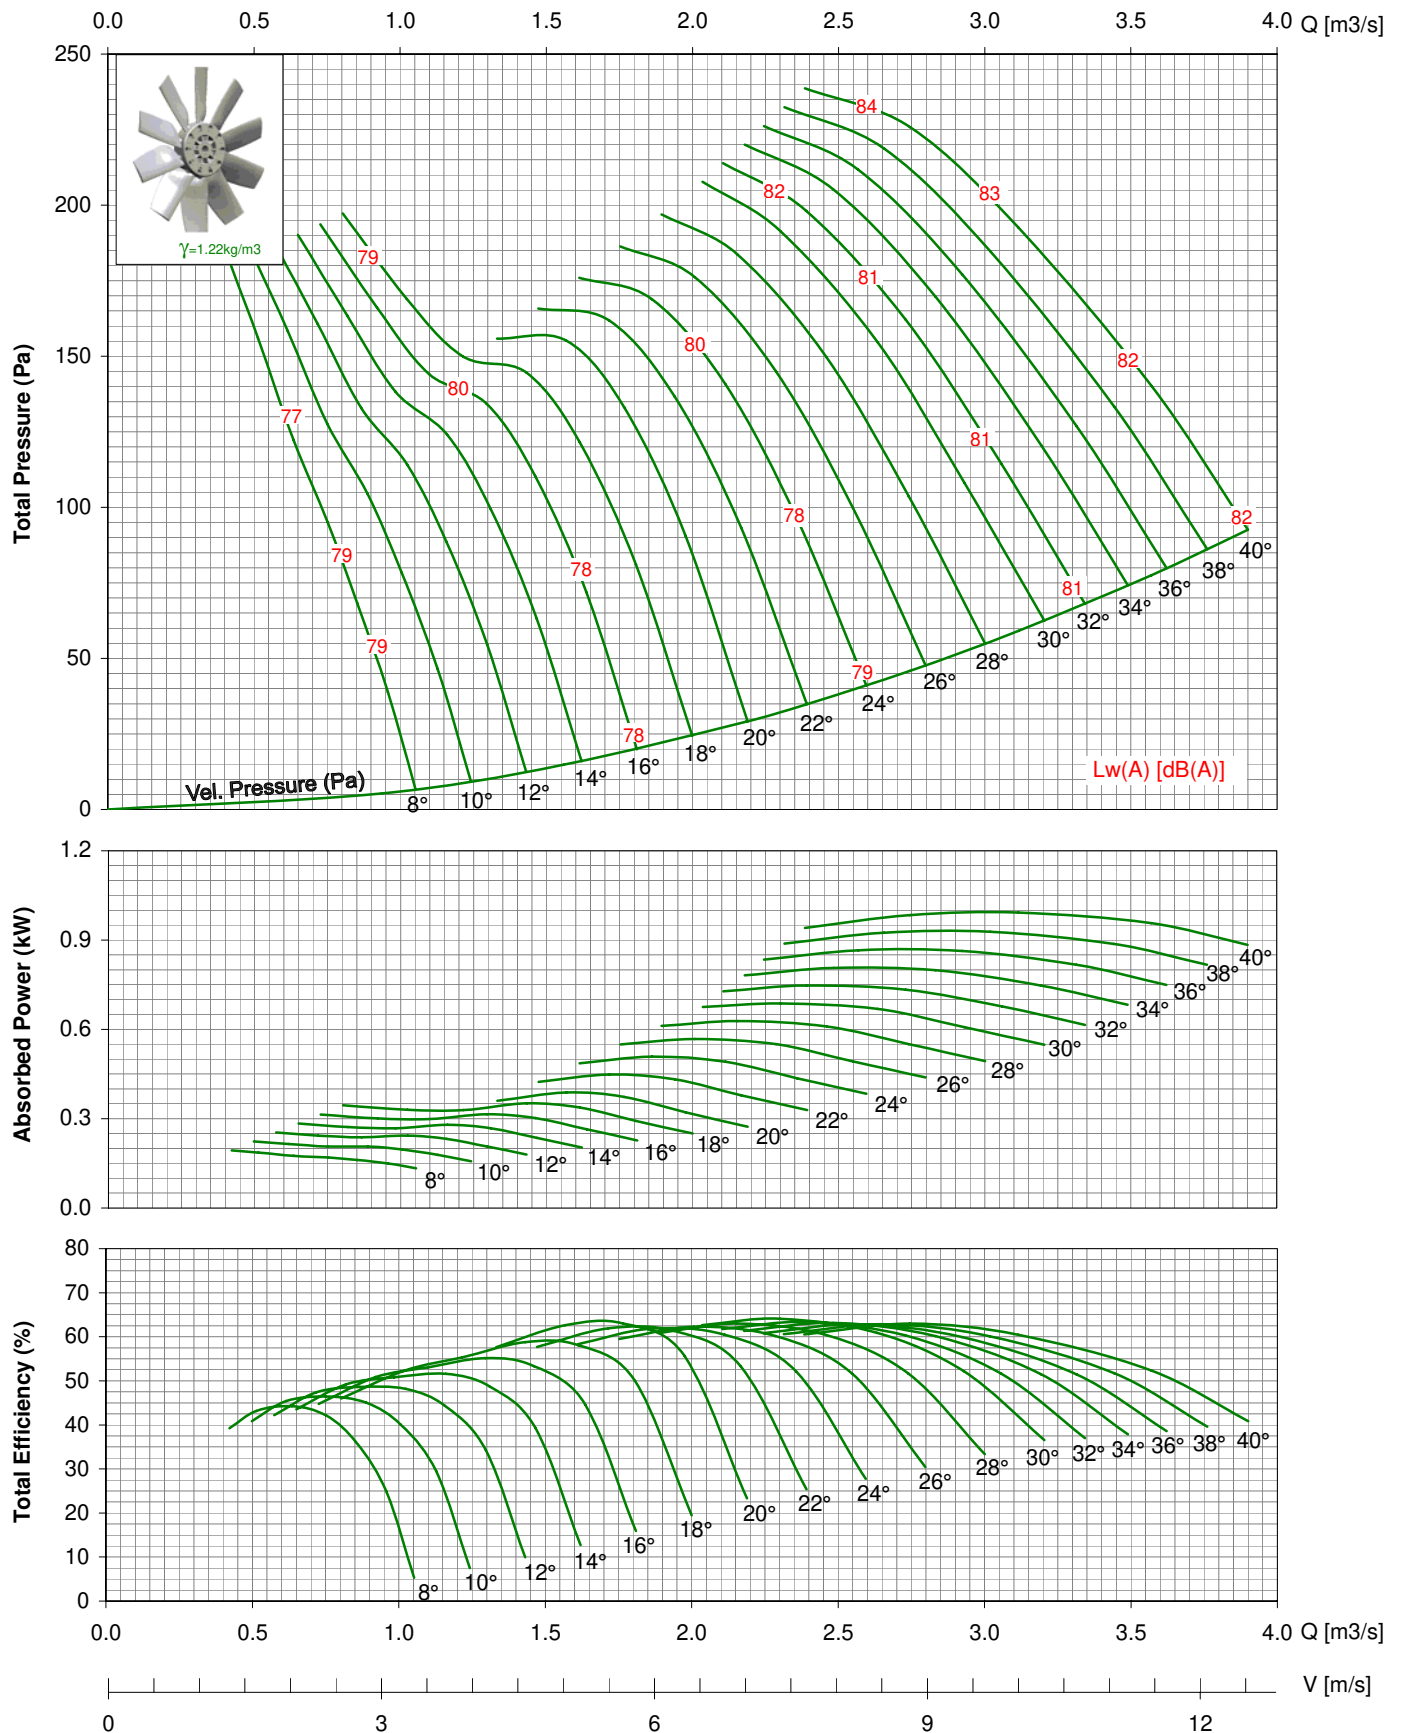


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 630-V / 12AA/ 12-12/ _ _ / _ 1450rpm - 50Hz

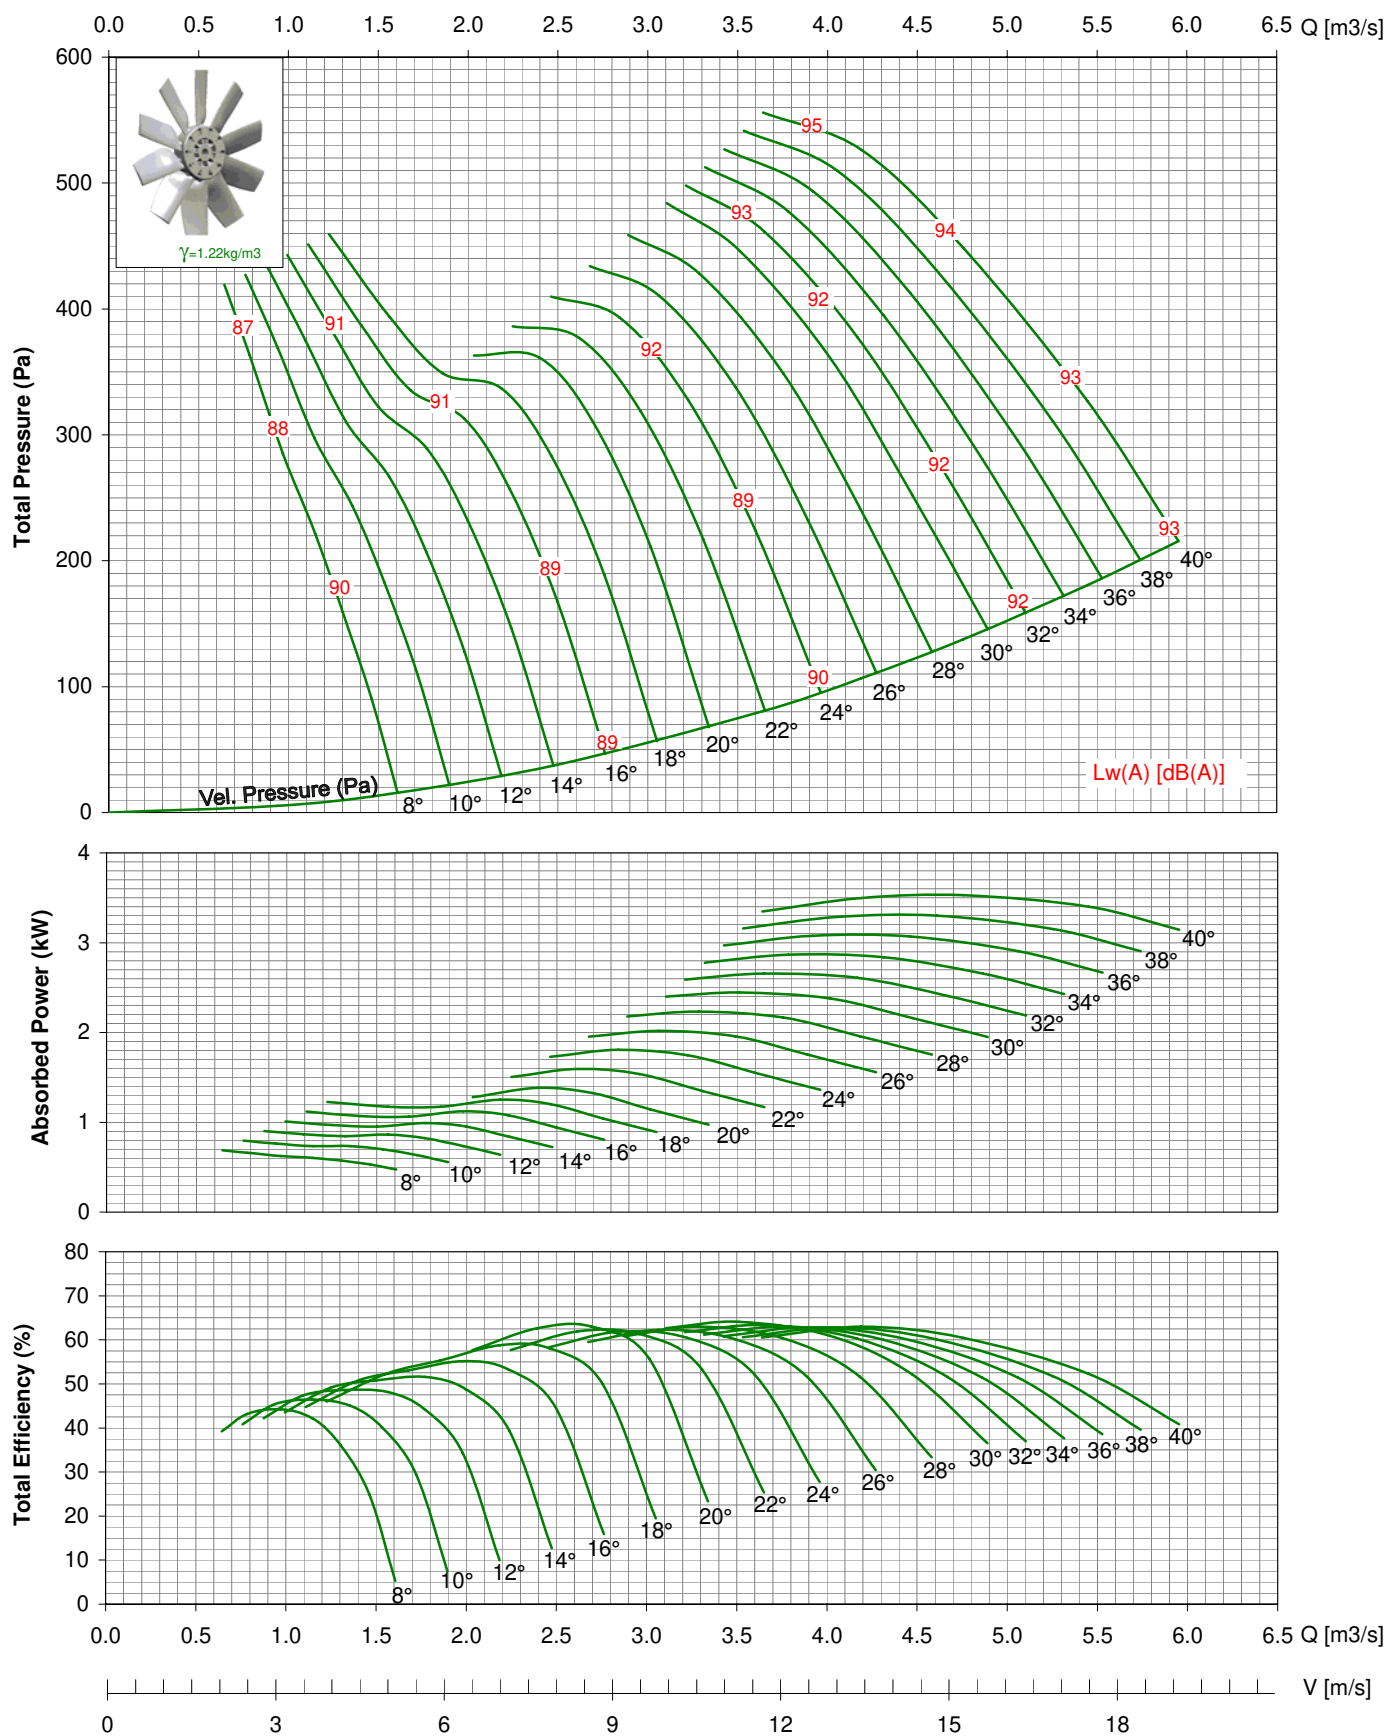


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 630-V / 12AA/ 12-12/ _ _ / _ 1150rpm - 60Hz

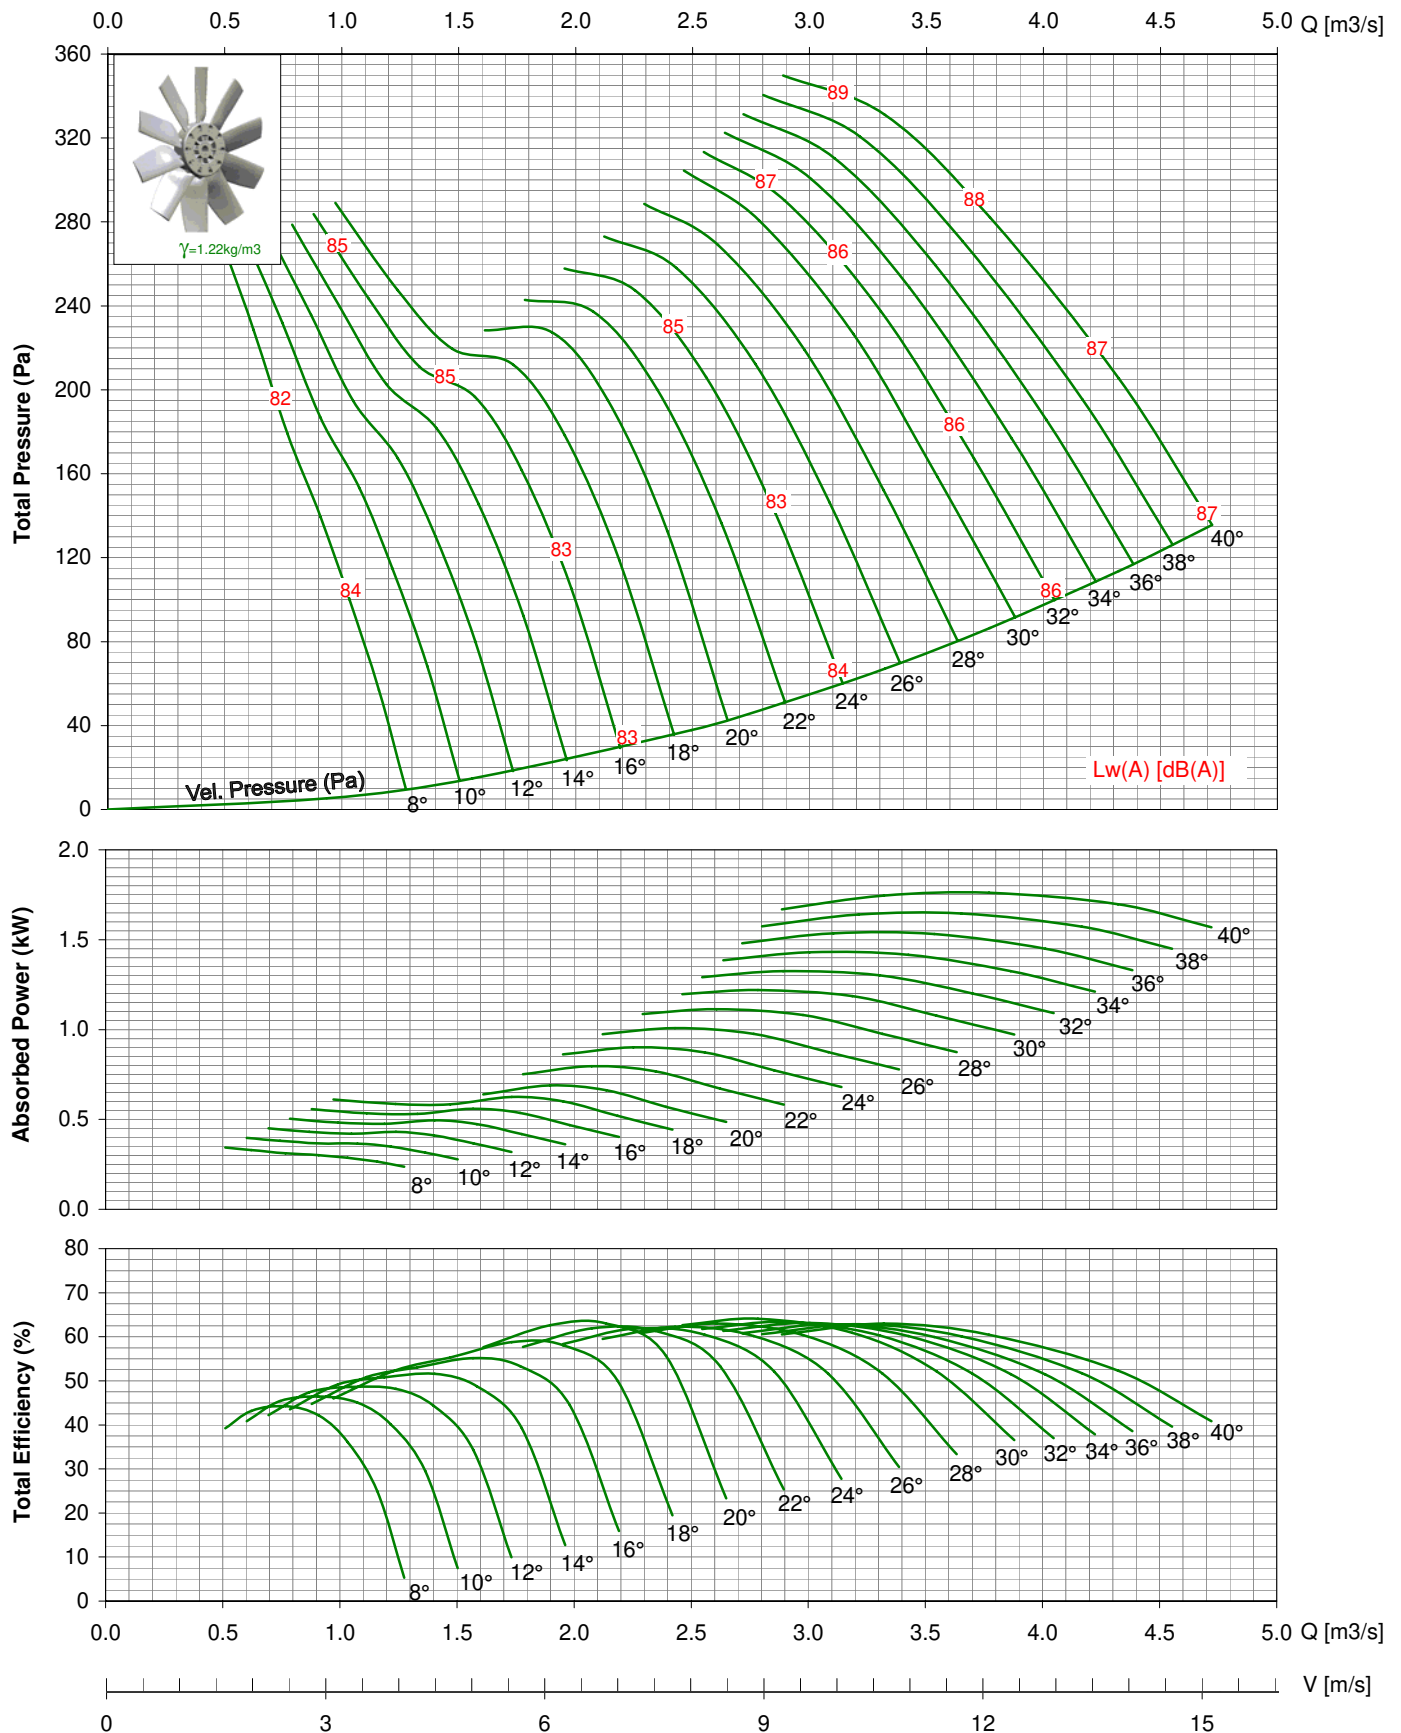

- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 630-V / 12AA/ 12-12/ _ _ / _ 1750rpm - 60Hz

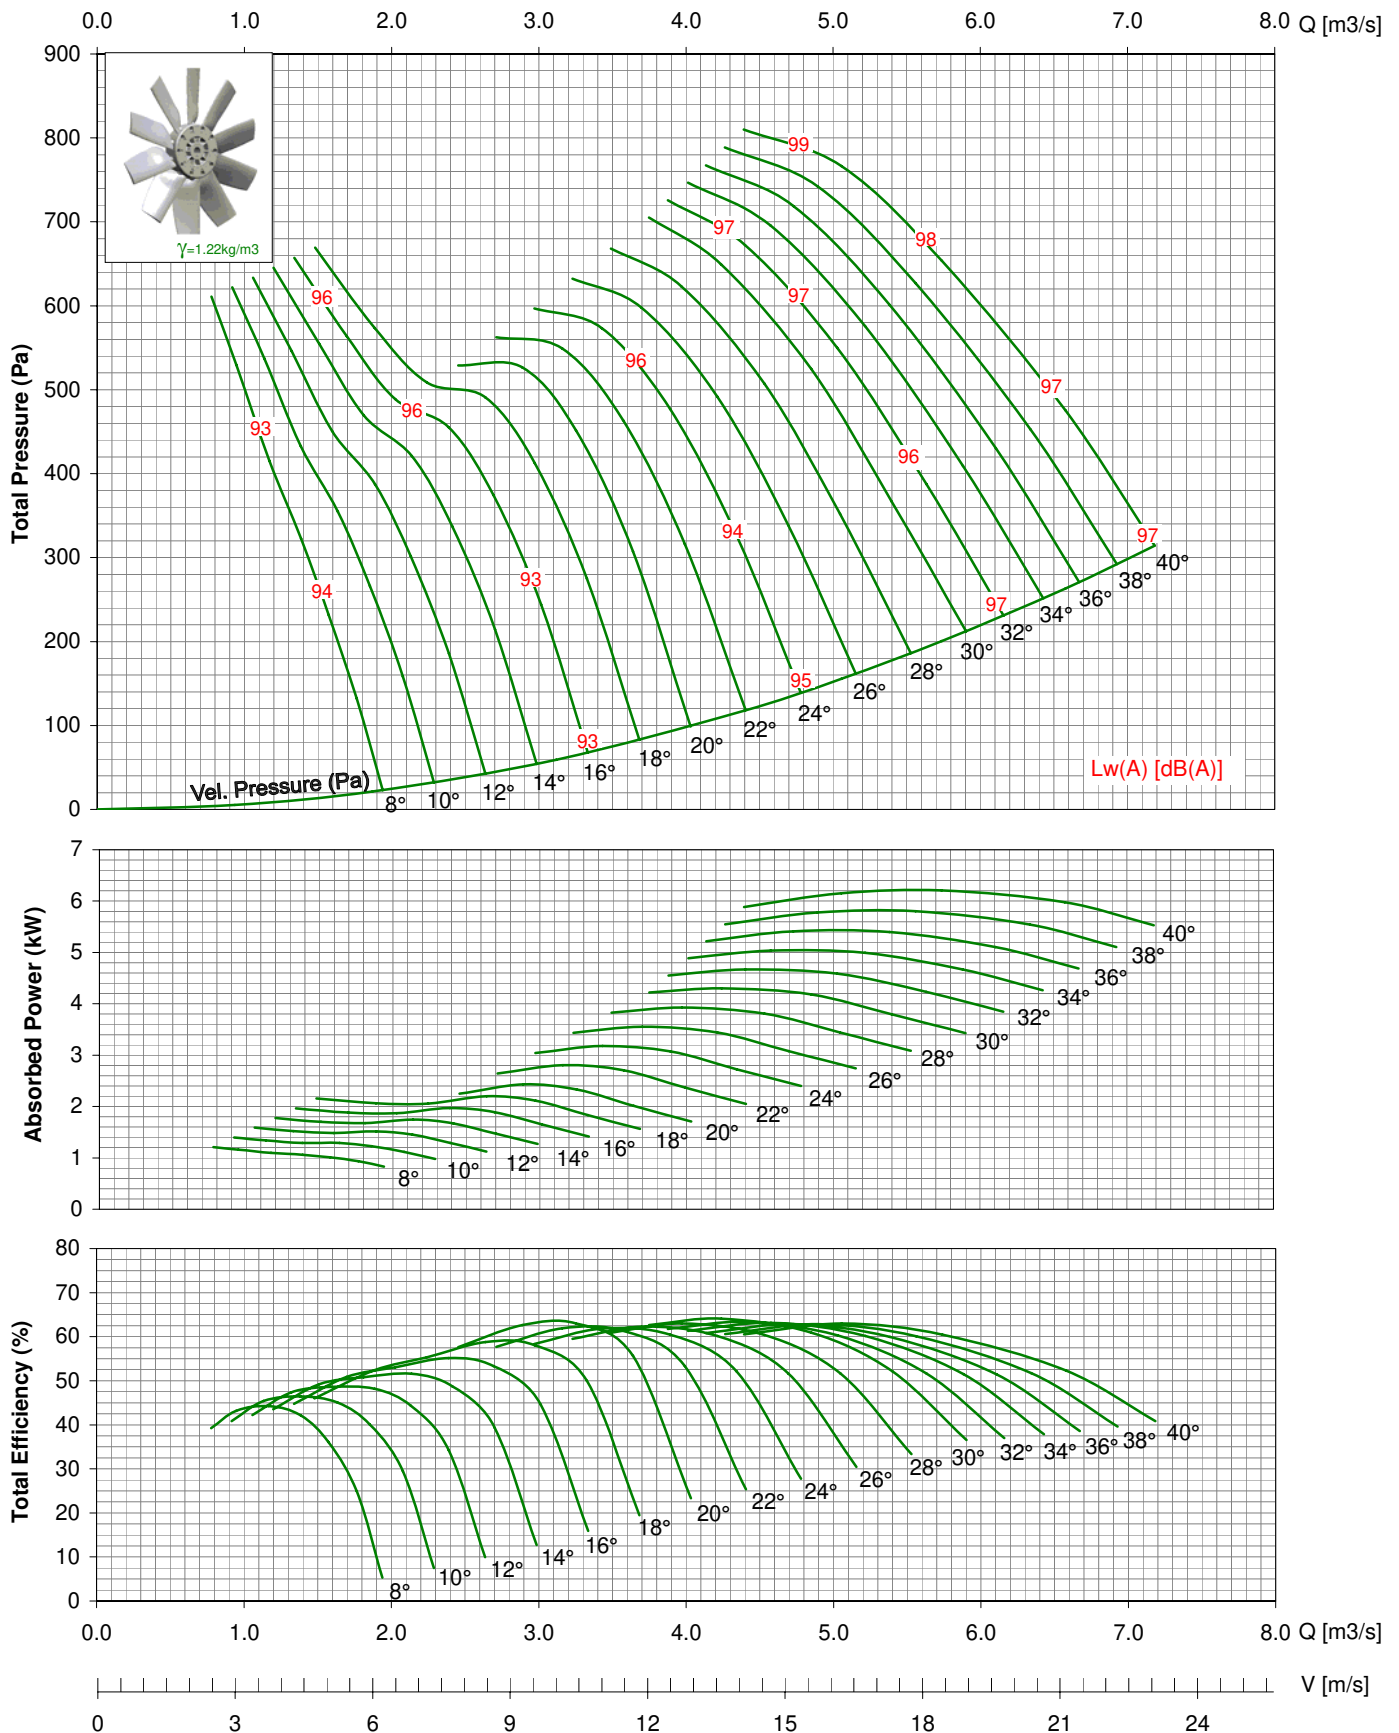

- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- Power ratings (kW) does not include transmission losses.

- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.

- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

VANE AXIAL FAN DIRECT DRIVEN

Series TDA-V

Features

For commercial and industrial applications where large volumes of air are required at moderate to high pressure, special designed integral straightening vanes, reduced turbulence, provide high performance and low sound level.

Construction

Double flanged casing is produced in mild steel or galvanised Steel, the impeller having manually adjustable pitch aerofoil blades is made of PPG, PAG or pressure-casted Aluminium.

Finish

Available in standard finishes of galvanisation or painting.

Operating Temperature

-20°C to +55°C

Motors

Totally enclosed Class 'F' motor, to a min. IP54 protection are fitted as standard. Standard motor up to 2.2kW are usually supplied on DOL starting, motor 3.0kW and above are star/delta starting.


Airflow Direction

Air flowing from impeller to motor is fitted as standard.





Kruger Ventilation Industries (India) Pvt Ltd. certifies that the TDA 710 -V shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with the AMCA publication 211 and comply with there quirements of the AMCA Certified Ratings Program.


MODEL: TDA 710-V / 14AA / 12-12 / _ / _

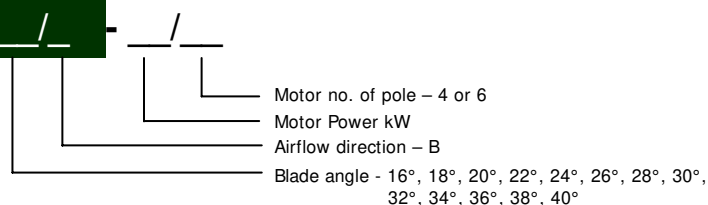

* All Dimension in mm

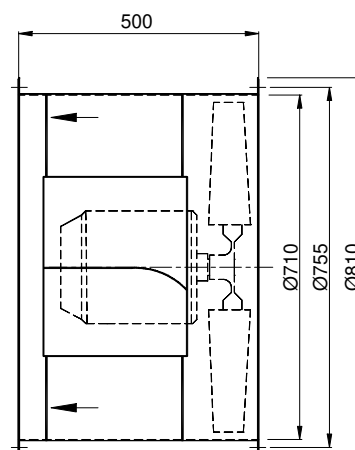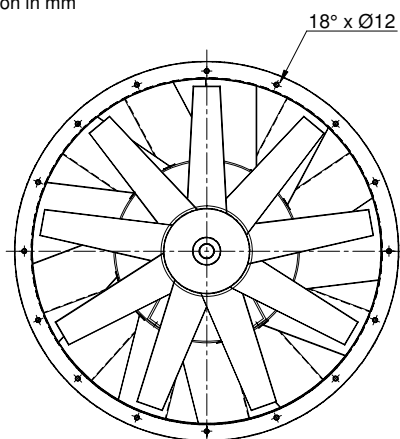


TDA 710-V / 14AA/ 12-12/ _ _ / _ 950rpm - 50Hz

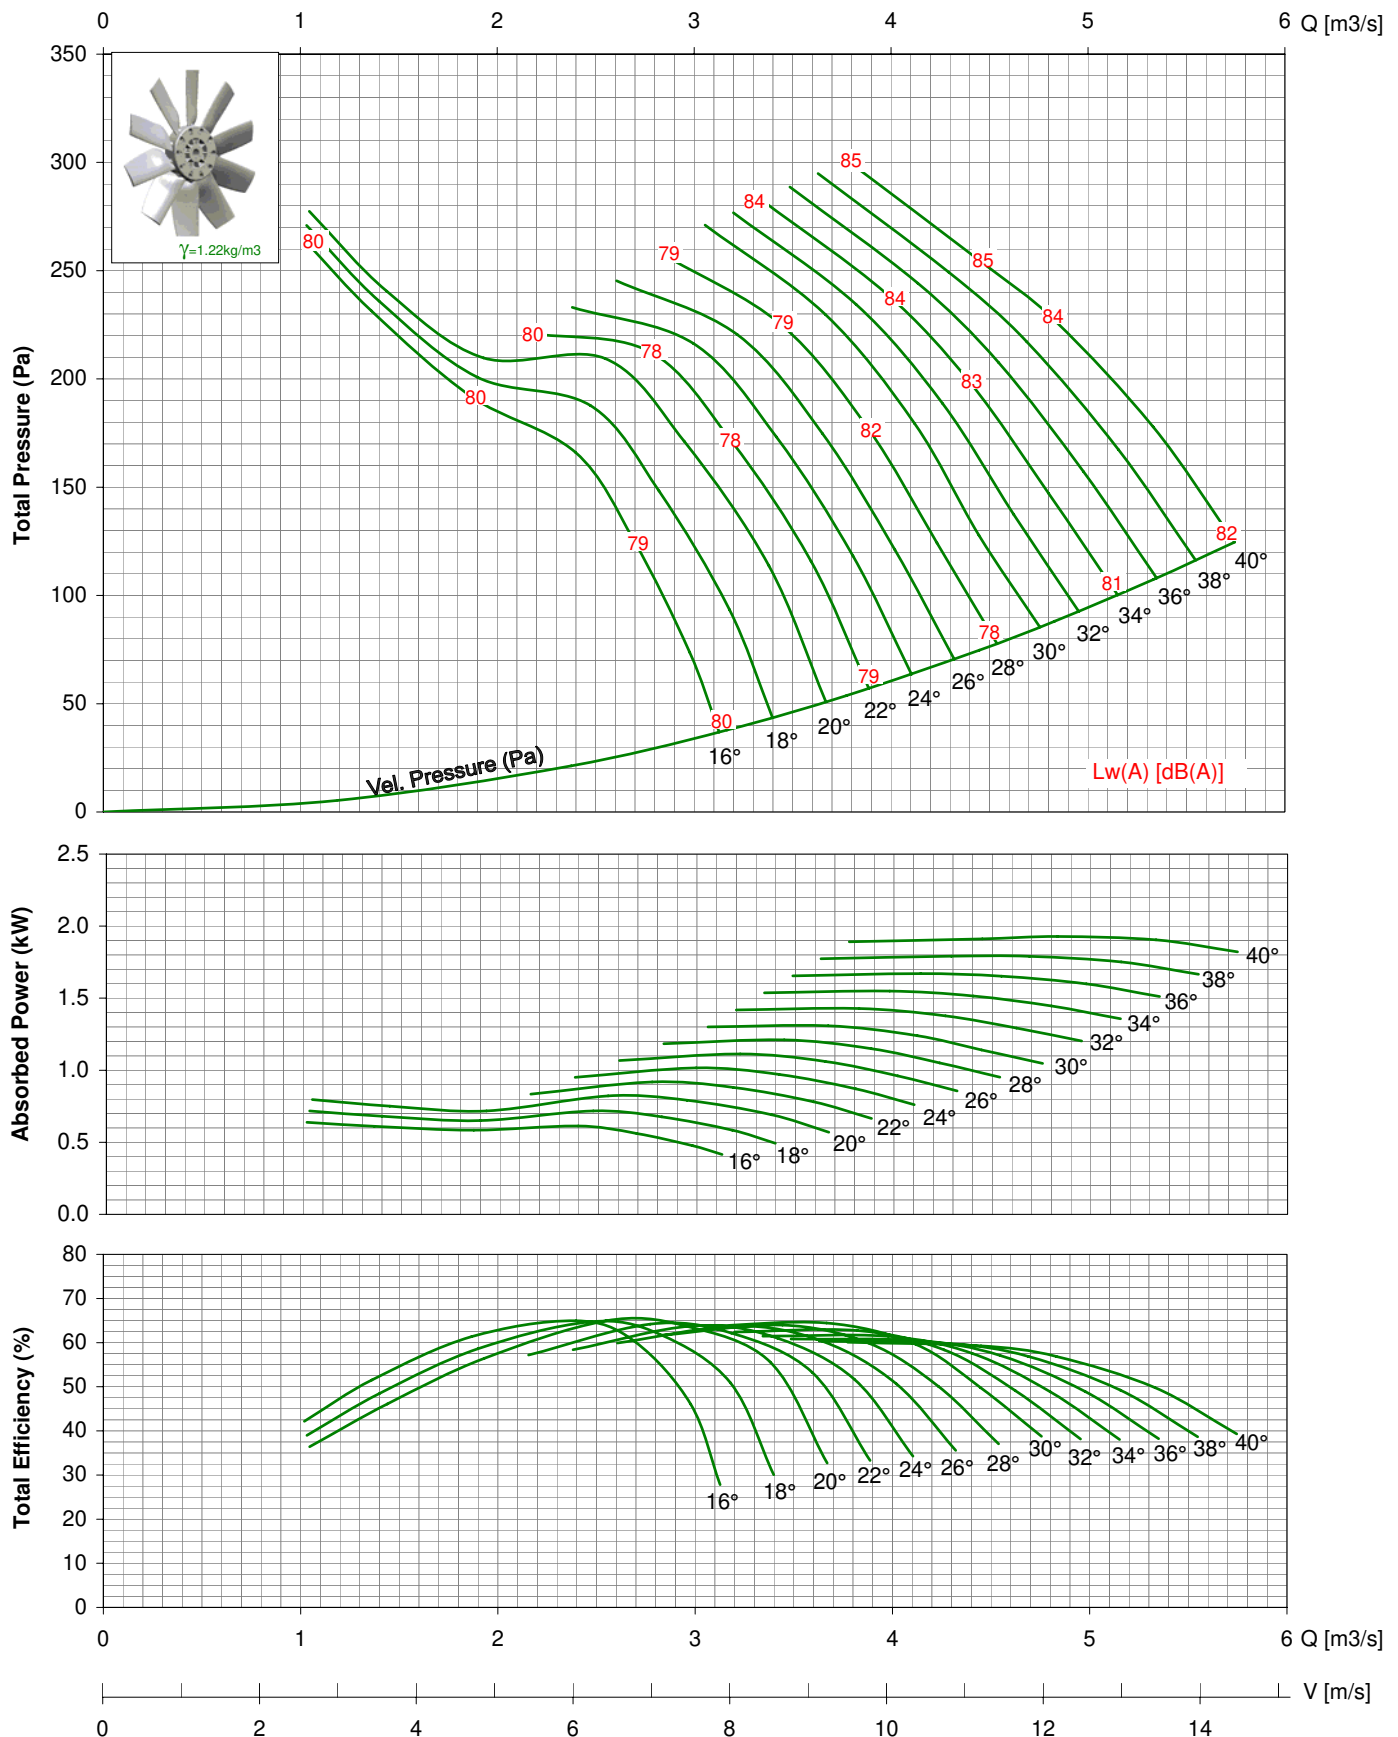


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 710-V / 14AA/ 12-12/ _ _ / _ 1450rpm - 50Hz

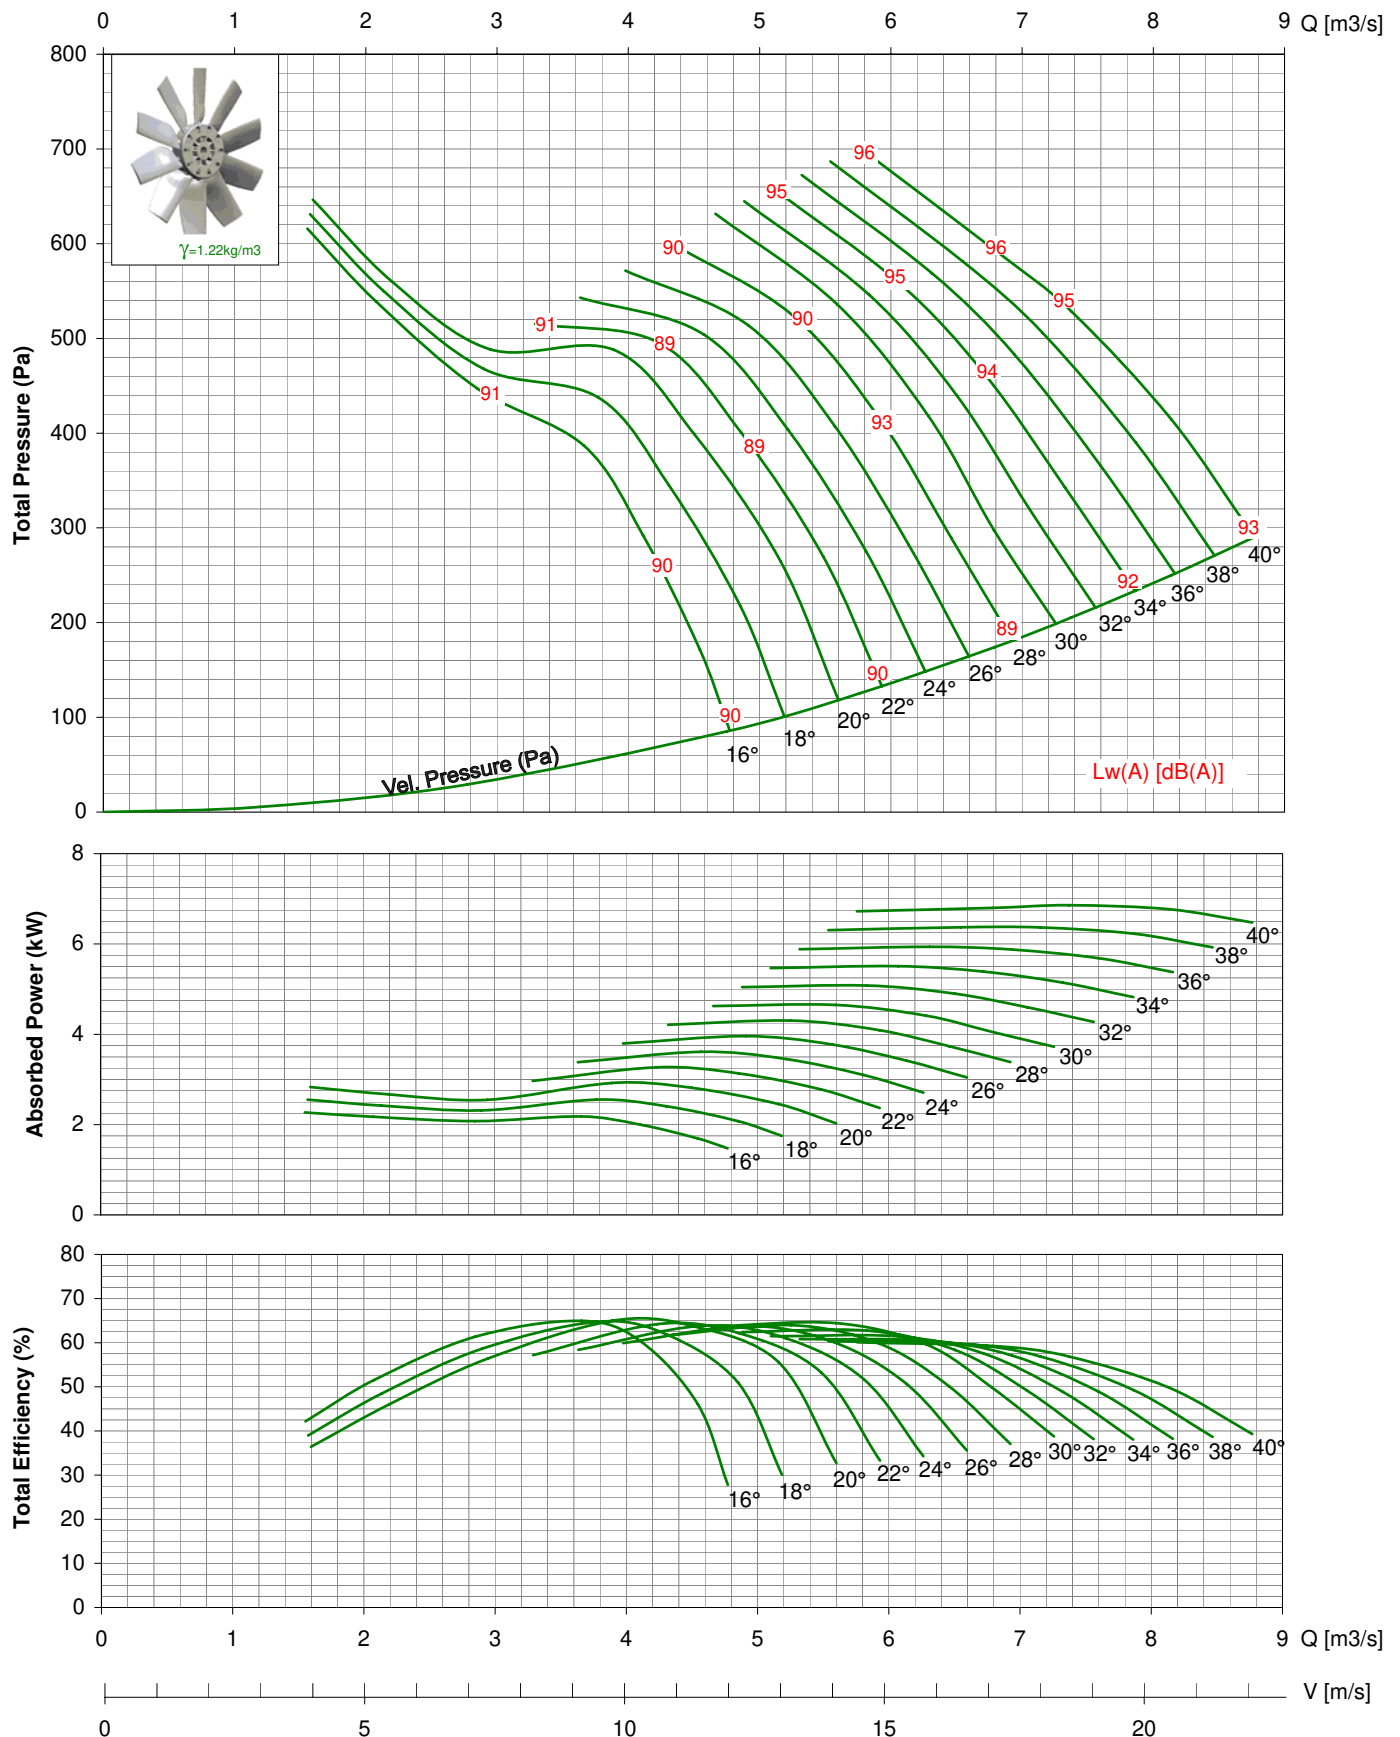


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 710-V / 14AA/ 12-12/ _ _ / _ 1150rpm - 60Hz

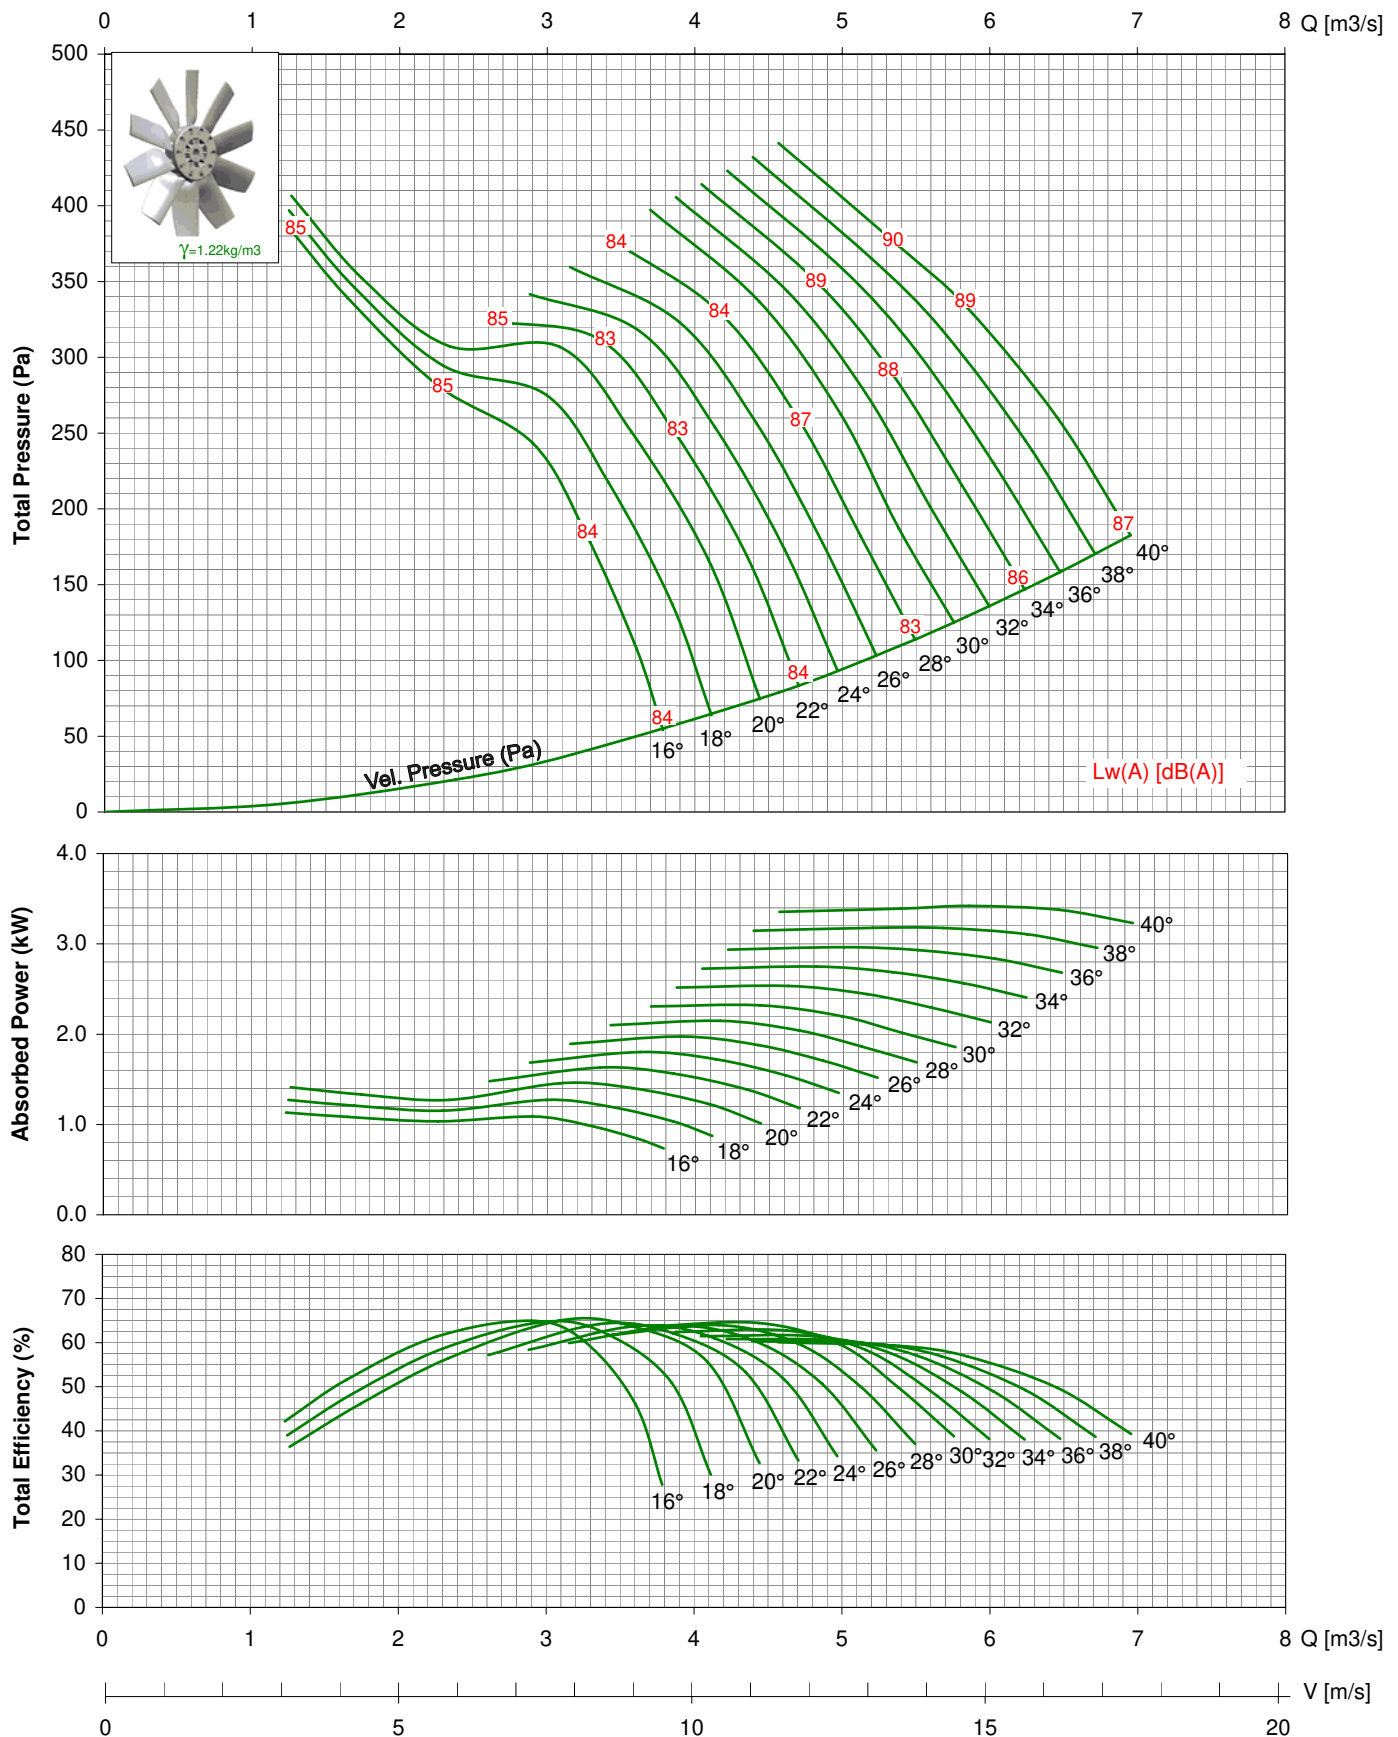

- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 710-V / 14AA/ 12-12/ _ _ / _ 1750rpm - 60Hz

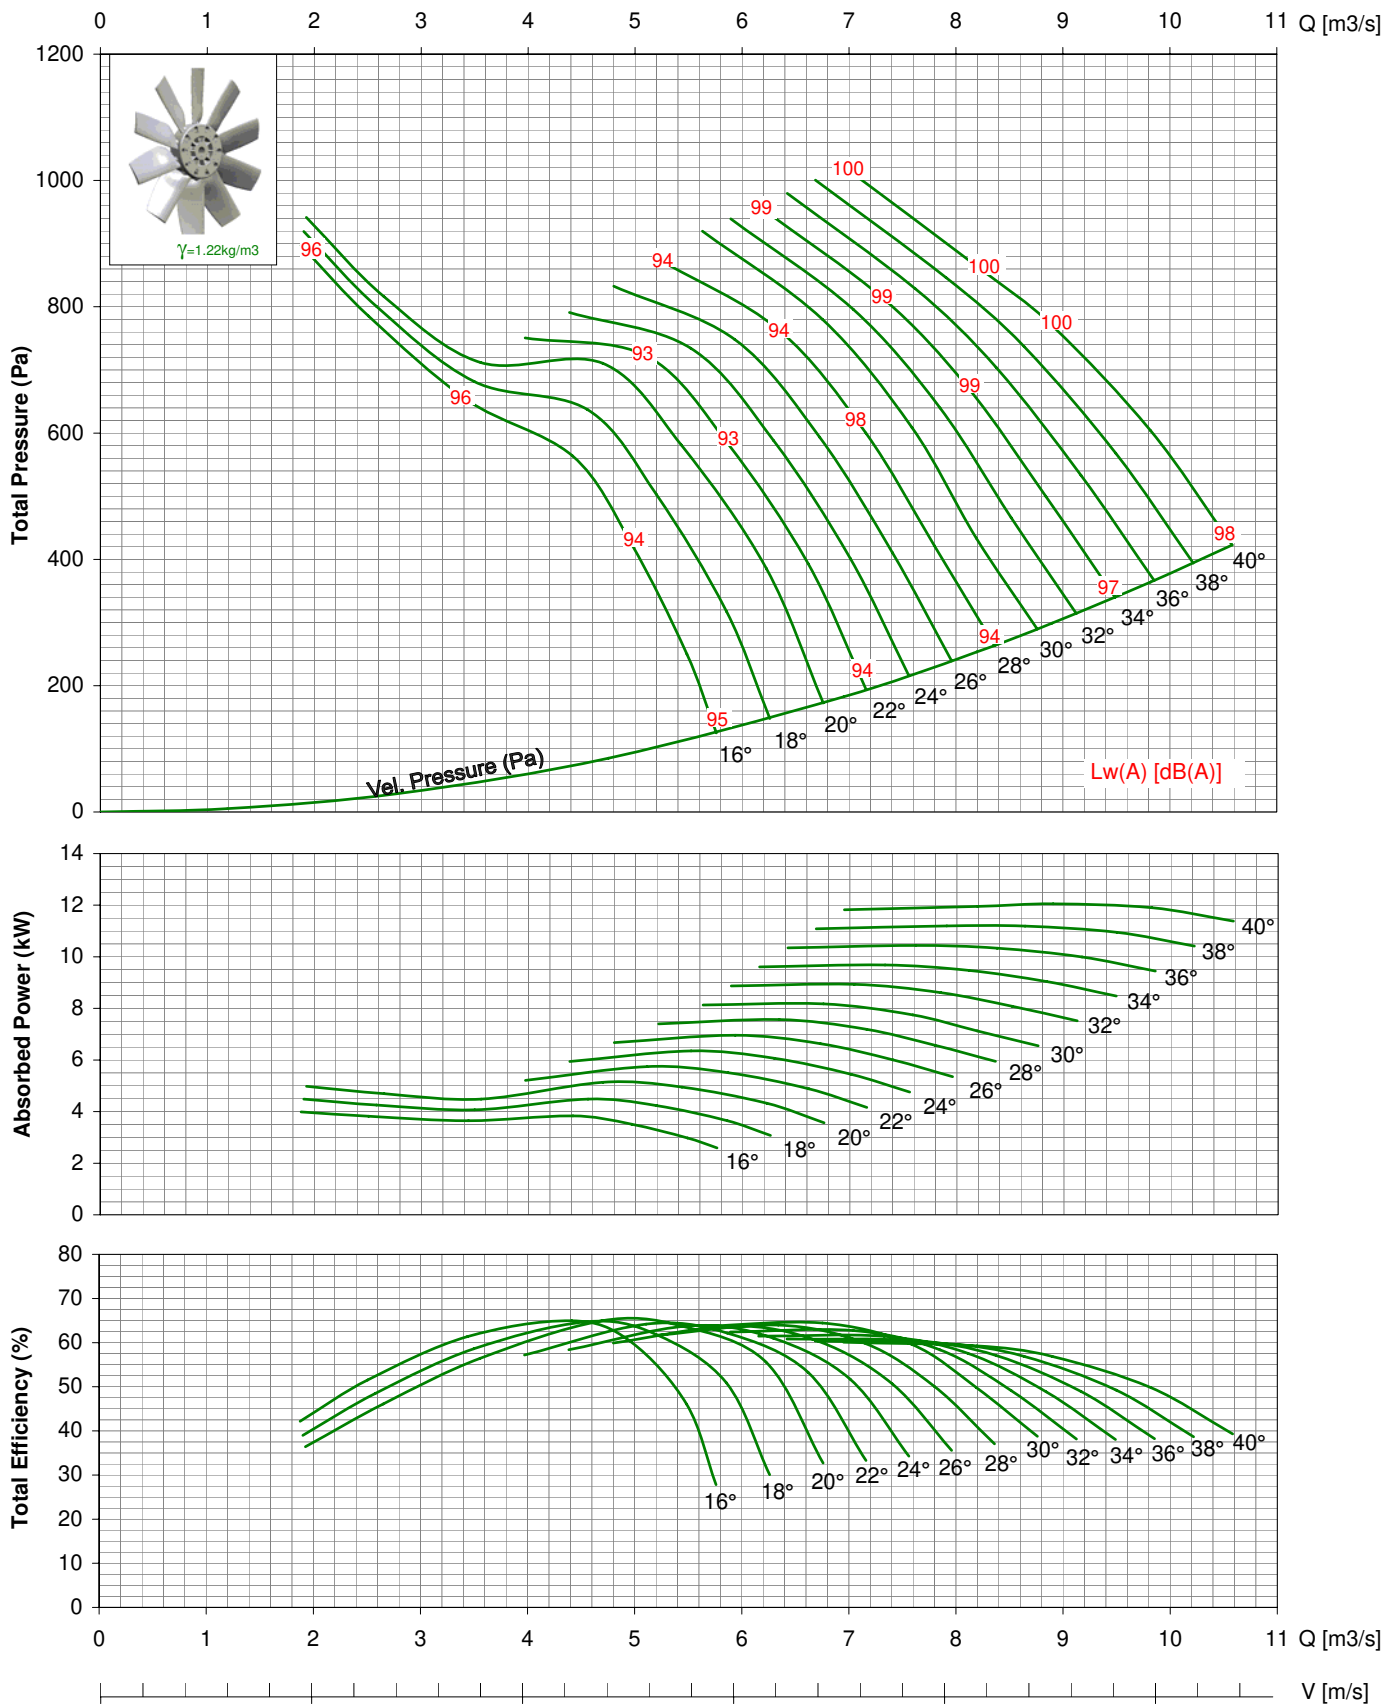

- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lwi(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

VANE AXIAL FAN DIRECT DRIVEN

Series TDA-V

Features

For commercial and industrial applications where large volumes of air are required at moderate to high pressure, special designed integral straightening vanes, reduced turbulence, provide high performance and low sound level.

Construction

Double flanged casing is produced in mild steel or galvanised Steel, the impeller having manually adjustable pitch aerofoil blades is made of PPG, PAG or pressure-casted Aluminium.

Finish

Available in standard finishes of galvanisation or painting.

Operating Temperature

-20°C to +55°C

Motors

Totally enclosed Class 'F' motor, to a min. IP54 protection are fitted as standard. Standard motor up to 2.2kW are usually supplied on DOL starting, motor 3.0kW and above are star/delta starting.


Airflow Direction

Air flowing from impeller to motor is fitted as standard.





Kruger Ventilation Industries (India) Pvt Ltd. certifies that the TDA 800 -V shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with the AMCA publication 211 and comply with there quirements of the AMCA Certified Ratings Program.


MODEL: TDA 800-V / 14AA / 12-12 / _ / _

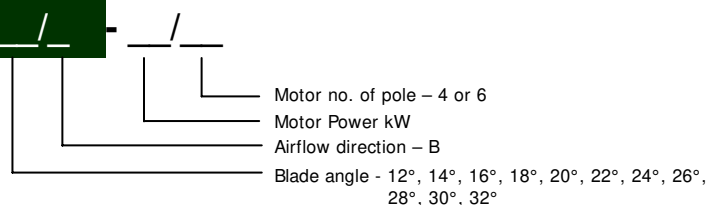

* All Dimension in mm

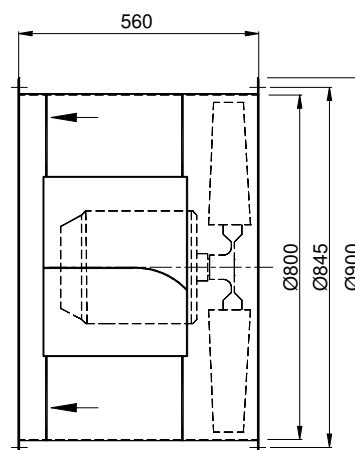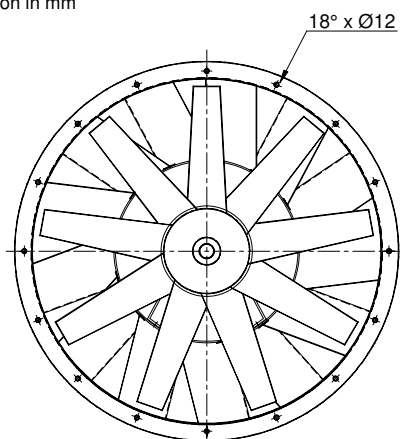

TDA 800-V / 14AA/ 12-12/ _ _ / _ 950rpm - 50Hz

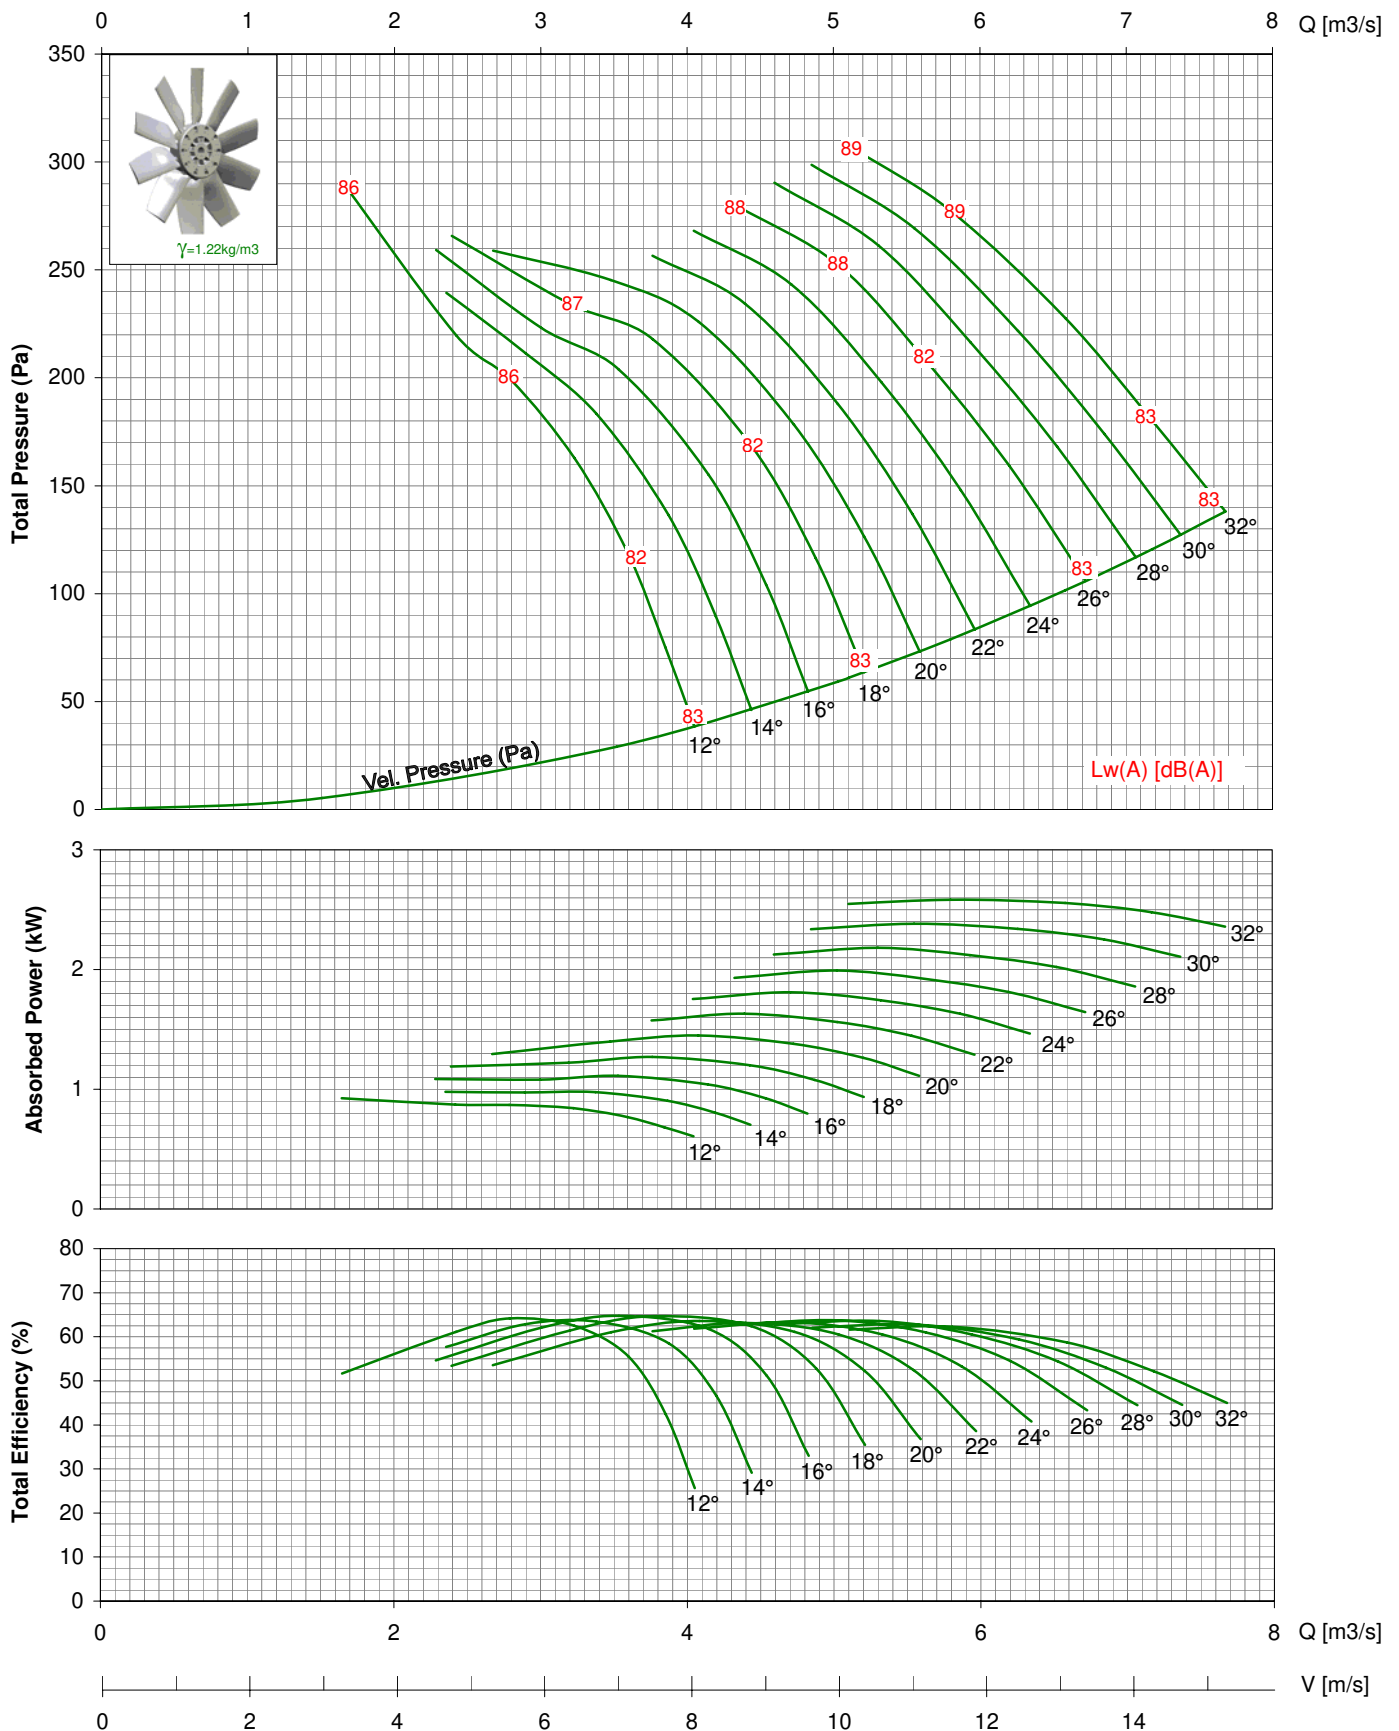


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- Power ratings (kW) does not include transmission losses.

- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lw(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.


- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 800-V / 14AA/ 12-12/ _ _ / _ 1450rpm - 50Hz

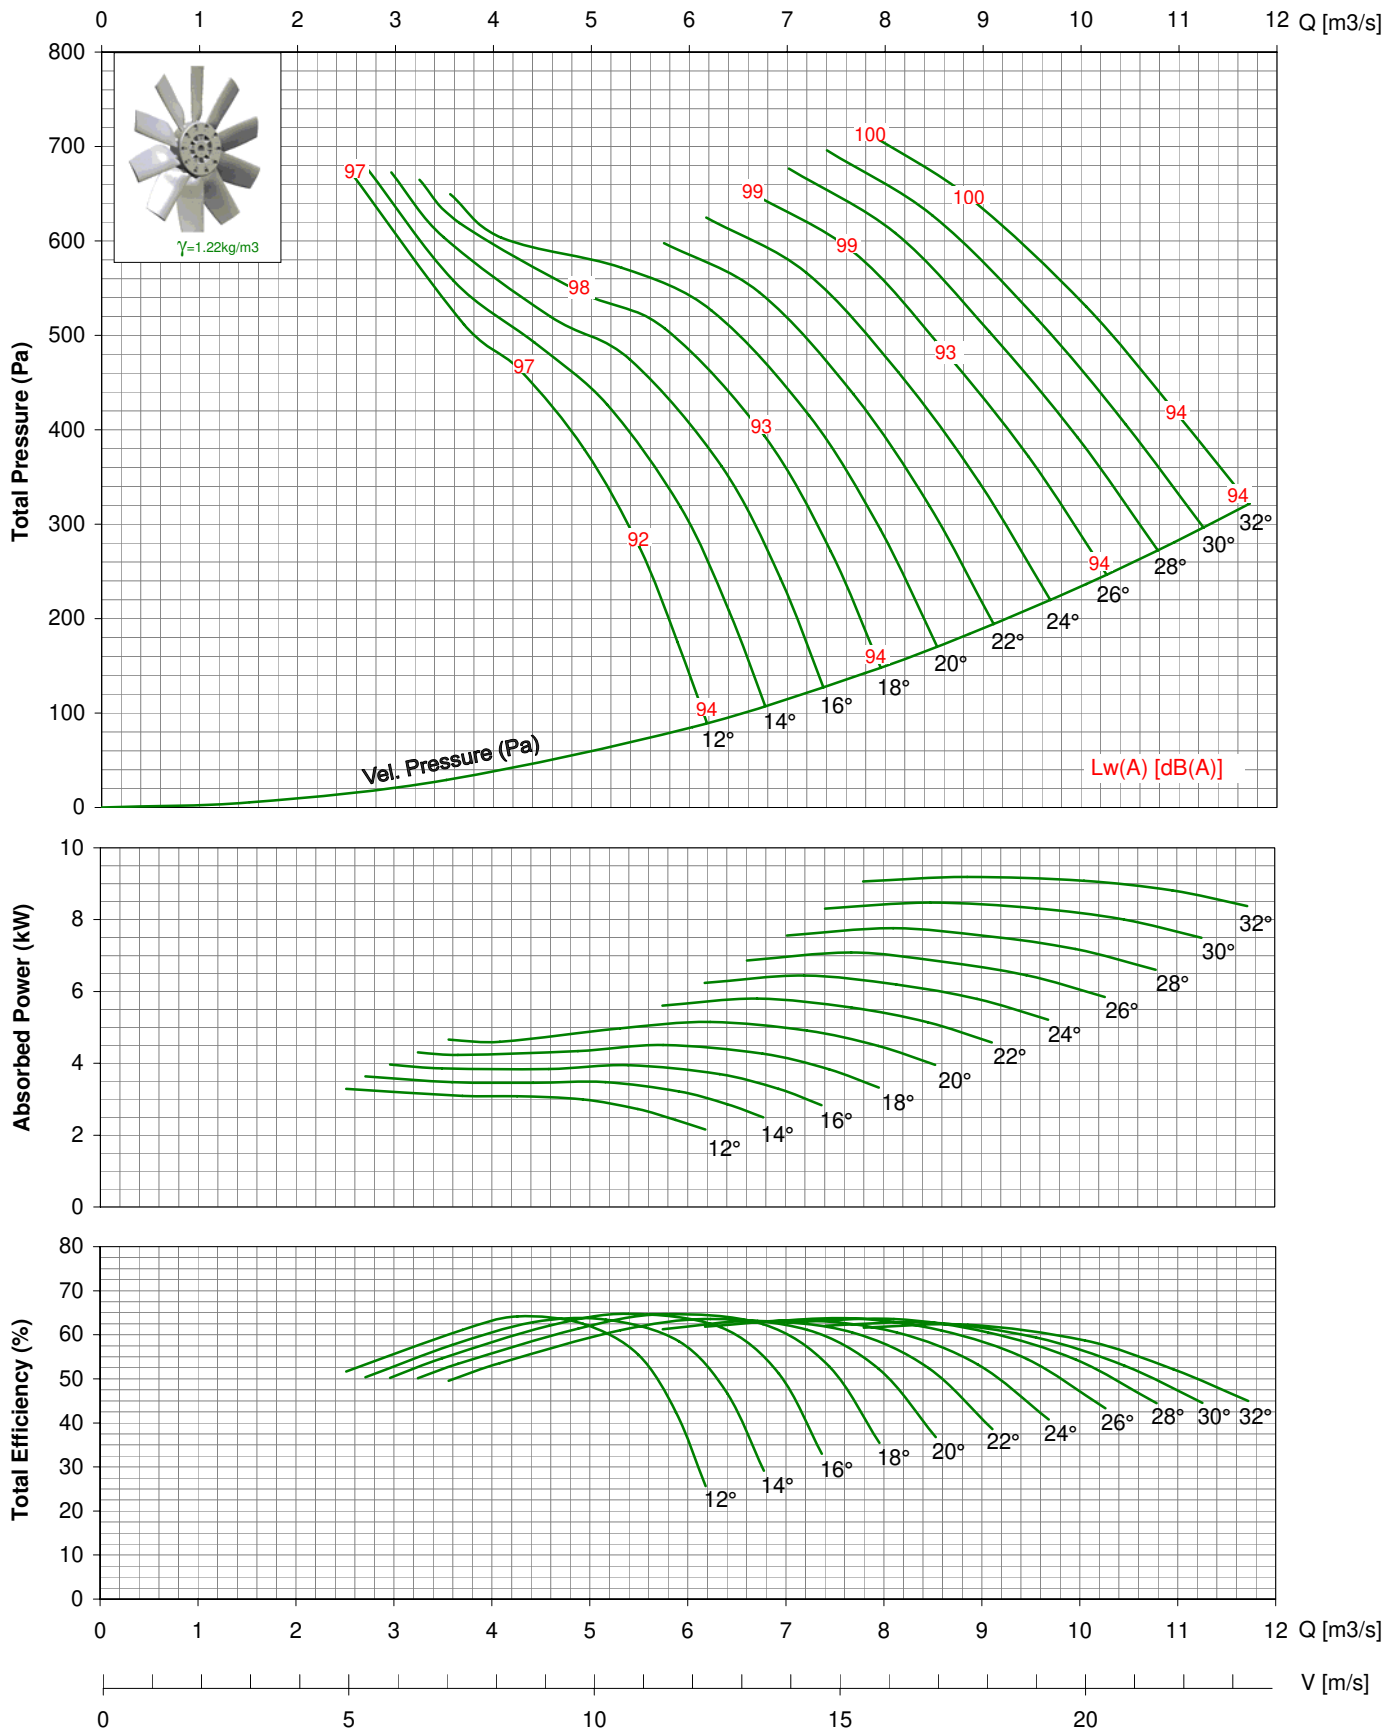


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lw(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 800-V / 14AA/ 12-12/ _ _ / _ 1150rpm - 60Hz

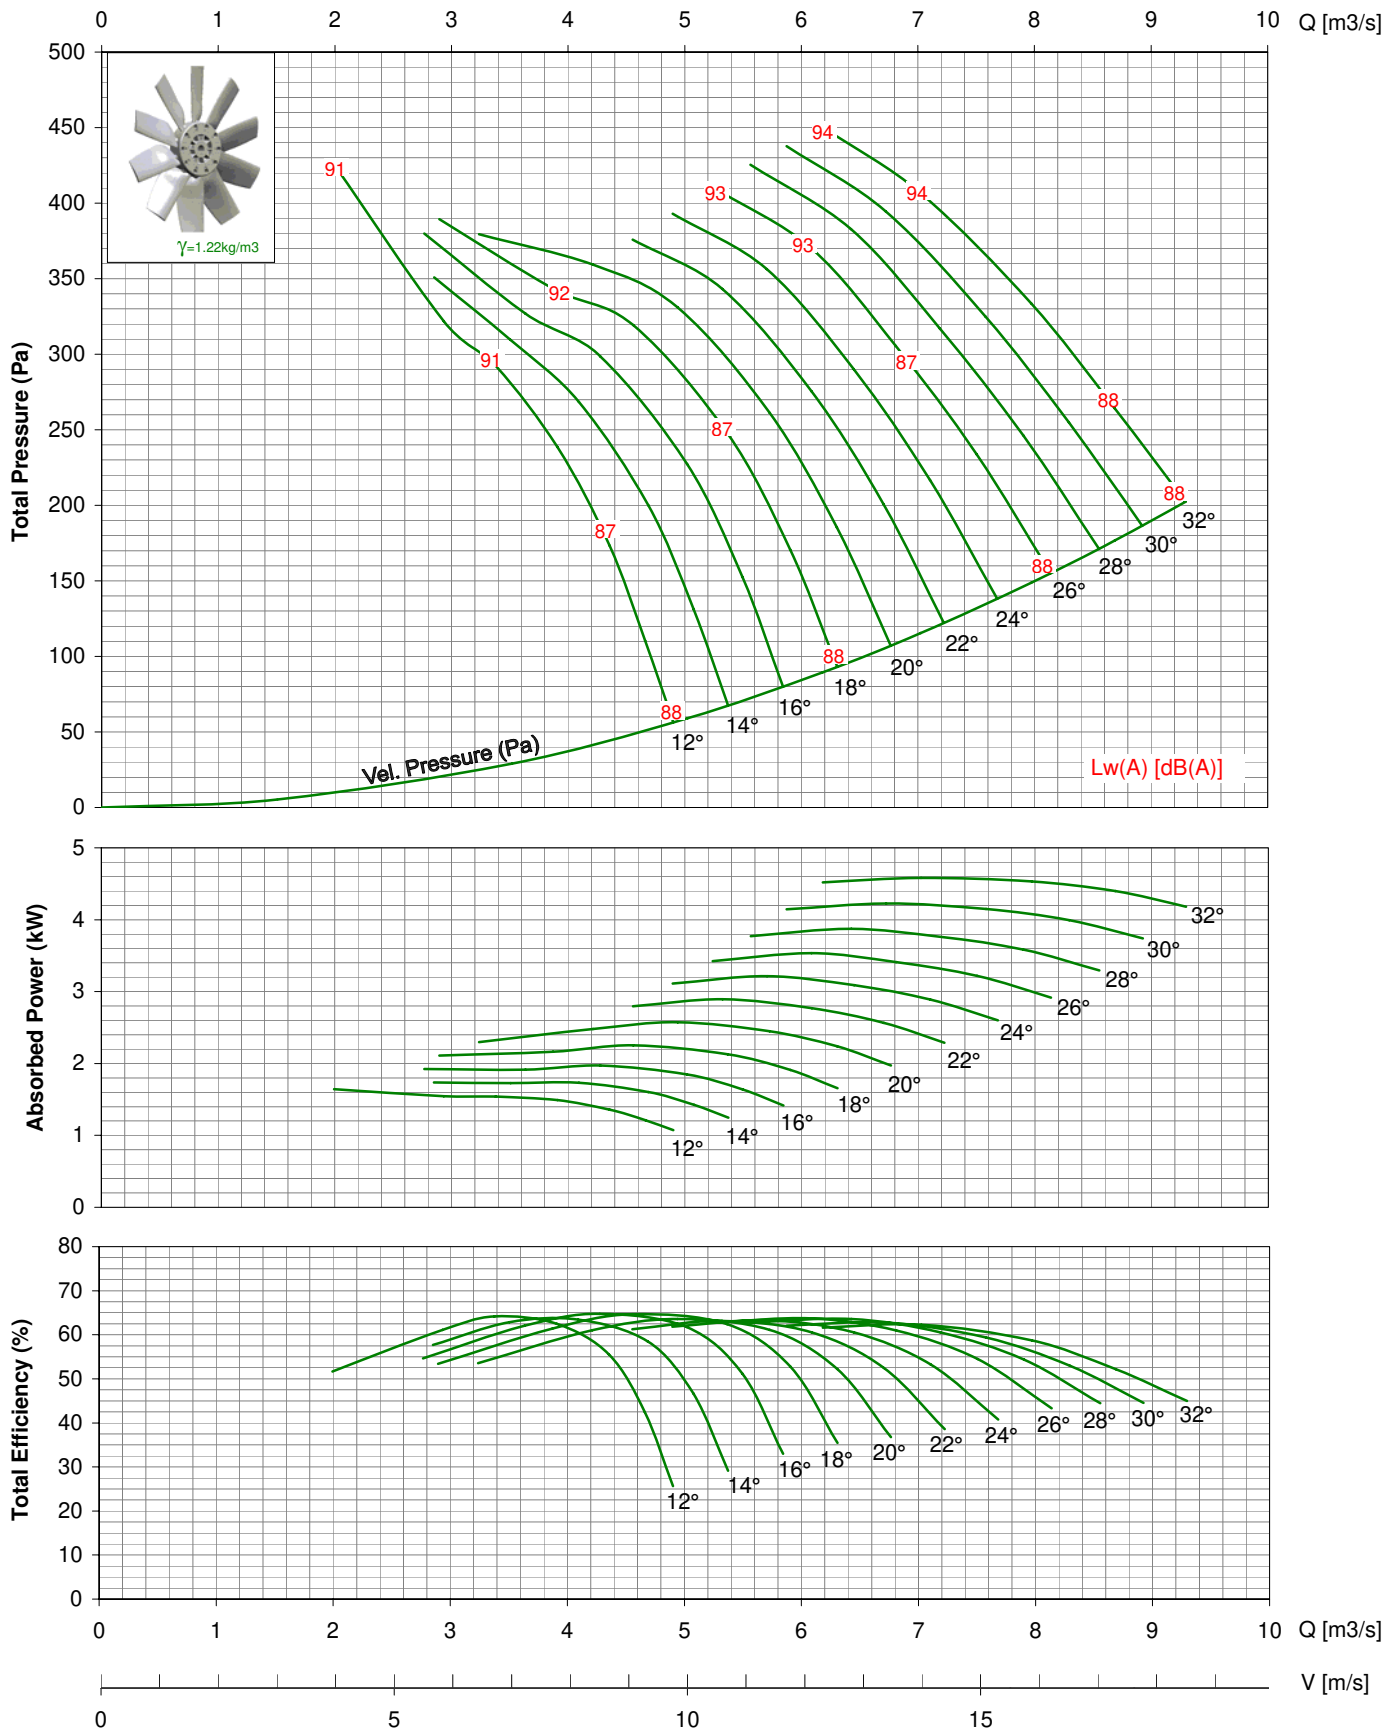

- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 800-V / 14AA/ 12-12/ _ _ / _ 1750rpm - 60Hz

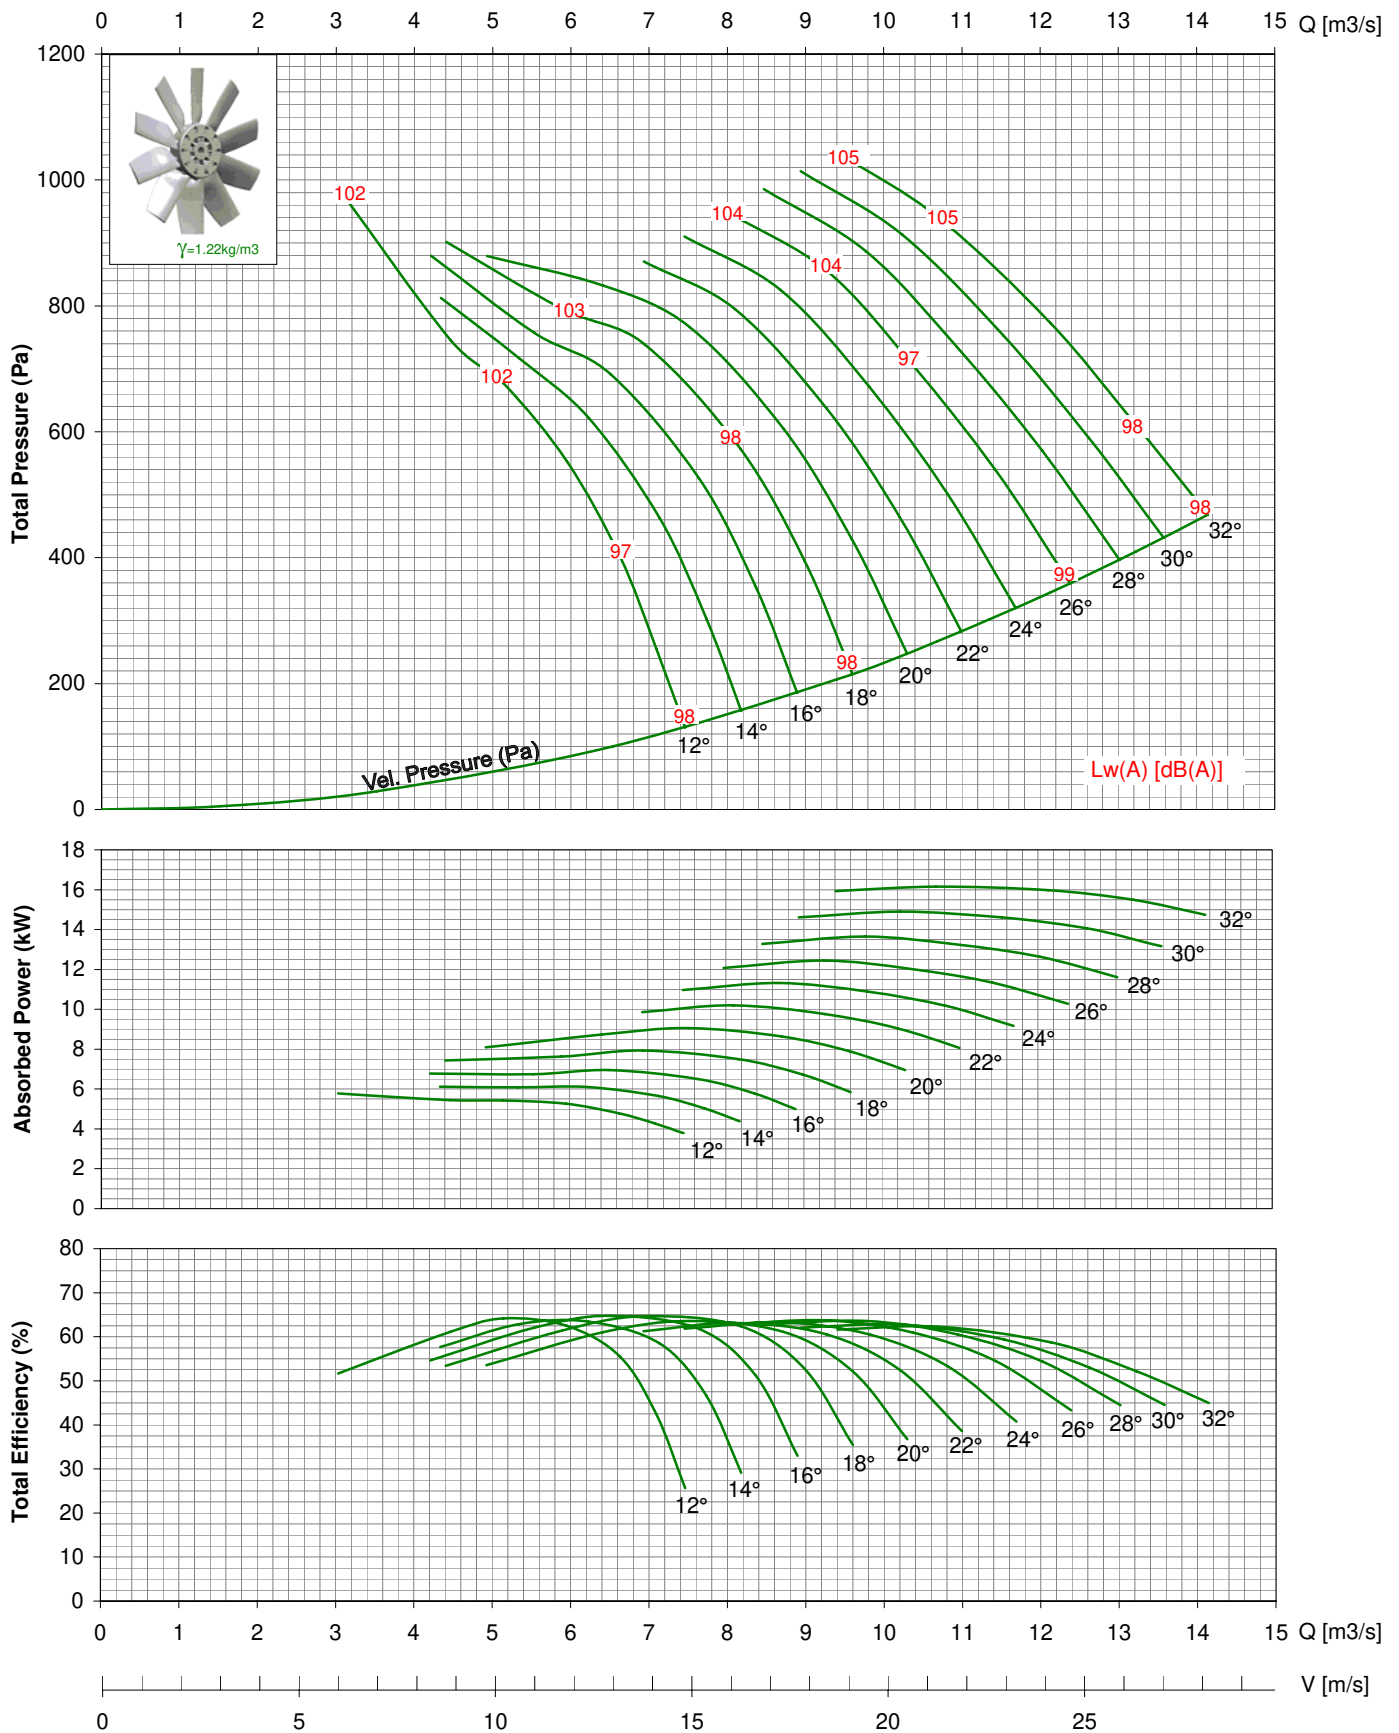

- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- Power ratings (kW) does not include transmission losses.

- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lw(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.

- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

VANE AXIAL FAN DIRECT DRIVEN

Series TDA-V

Features

For commercial and industrial applications where large volumes of air are required at moderate to high pressure, special designed integral straightening vanes, reduced turbulence, provide high performance and low sound level.

Construction

Double flanged casing is produced in mild steel or galvanised Steel, the impeller having manually adjustable pitch aerofoil blades is made of PPG, PAG or pressure-casted Aluminium.

Finish

Available in standard finishes of galvanisation or painting.

Operating Temperature

-20°C to +55°C

Motors

Totally enclosed Class 'F' motor, to a min. IP54 protection are fitted as standard. Standard motor up to 2.2kW are usually supplied on DOL starting, motor 3.0kW and above are star/delta starting.


Airflow Direction

Air flowing from impeller to motor is fitted as standard.





Kruger Ventilation Industries (India) Pvt Ltd. certifies that the TDA 900 -V shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with the AMCA publication 211 and comply with there quirements of the AMCA Certified Ratings Program.


MODEL: TDA 900-V / 14AA / 12-12 / _ / _

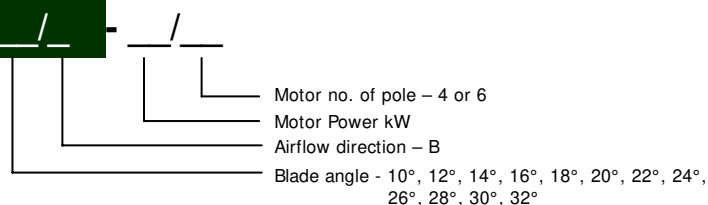


* All Dimension in mm

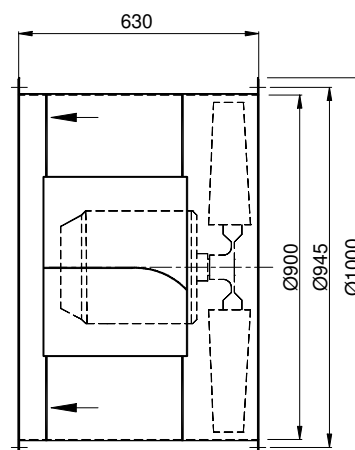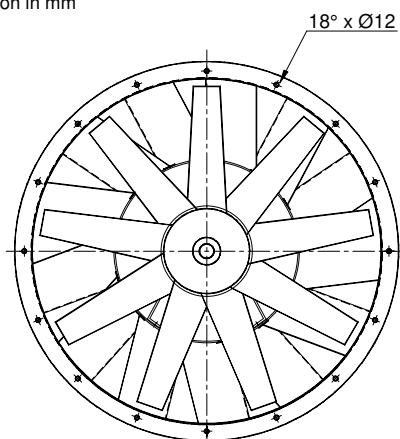


TDA 900-V / 14AA/ 12-12/ _ _ / _ 950rpm - 50Hz

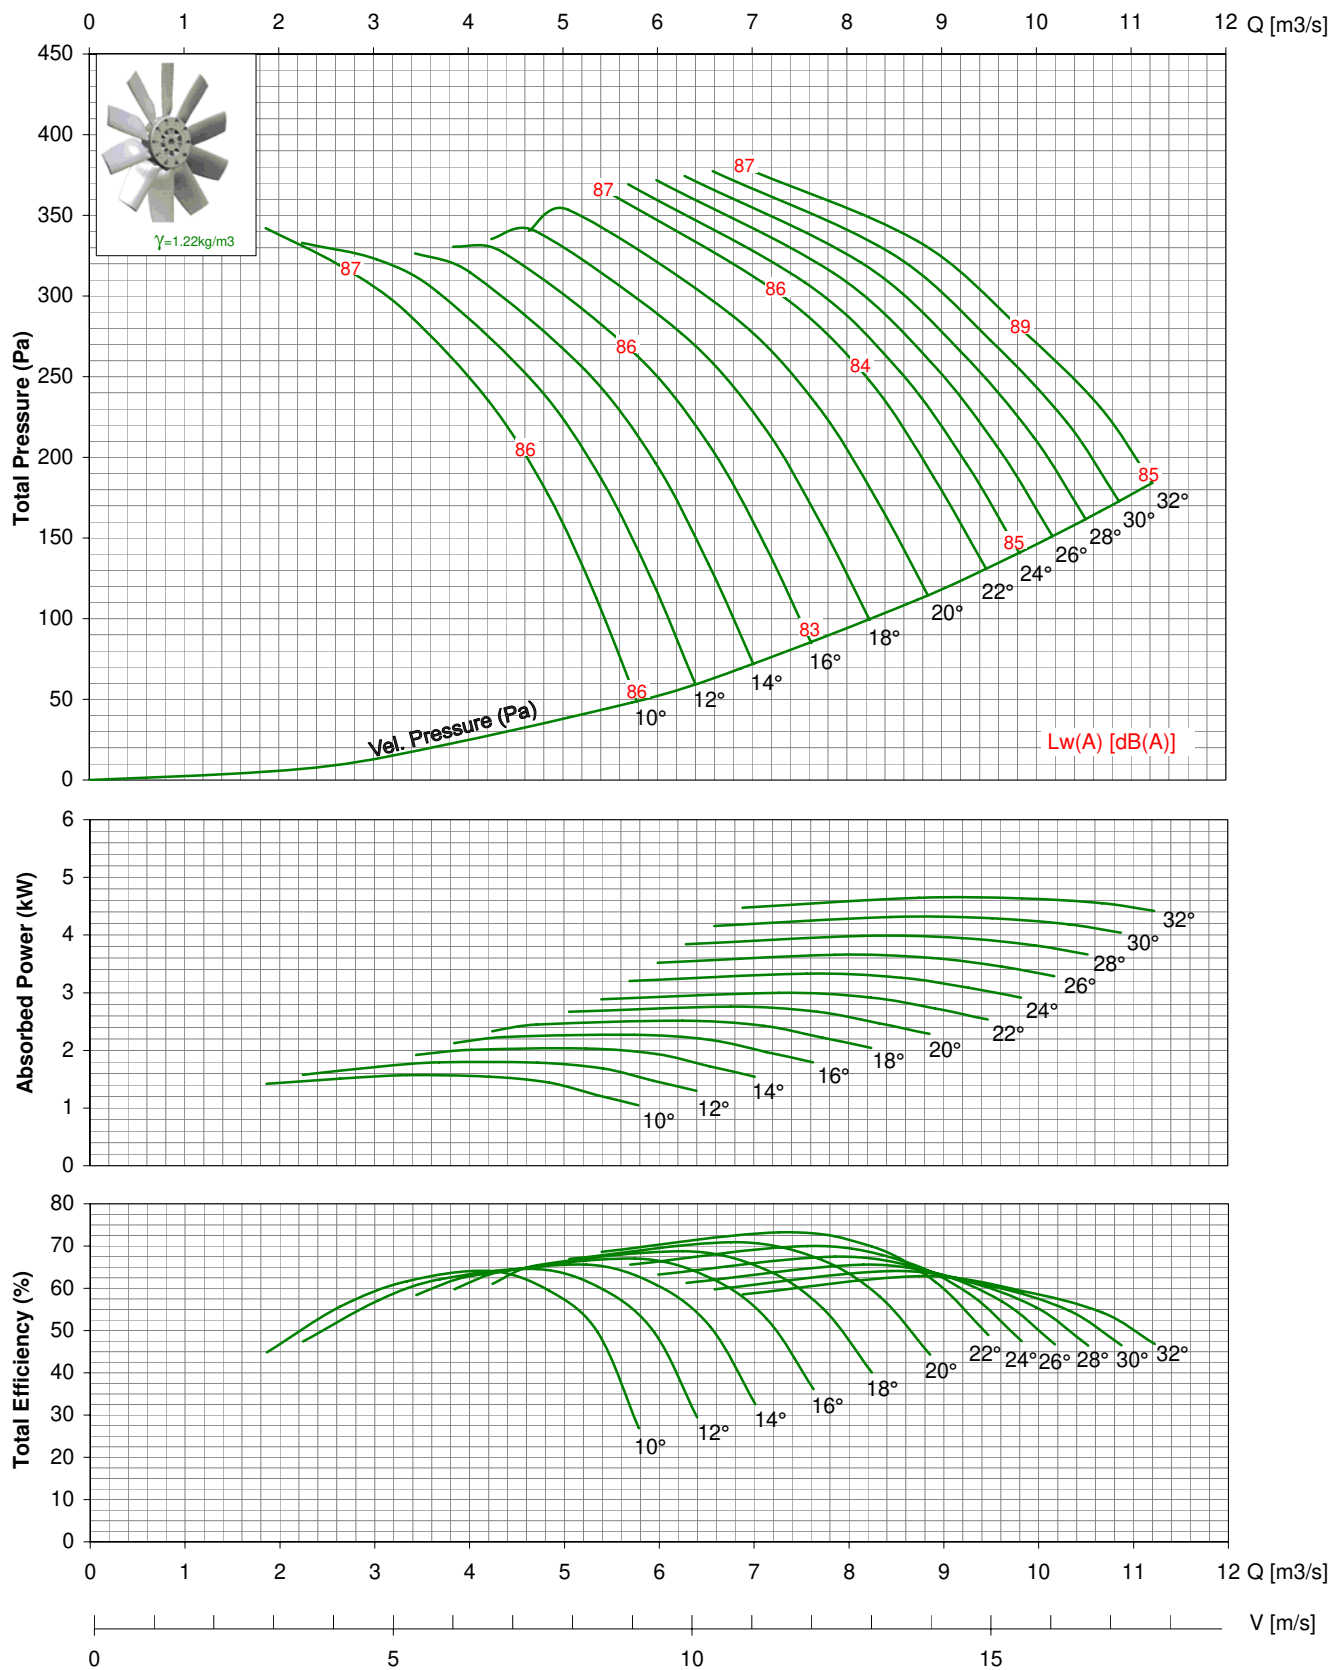

- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.




TDA 900-V / 14AA/ 12-12/ _ _ / _ 1150rpm - 60Hz

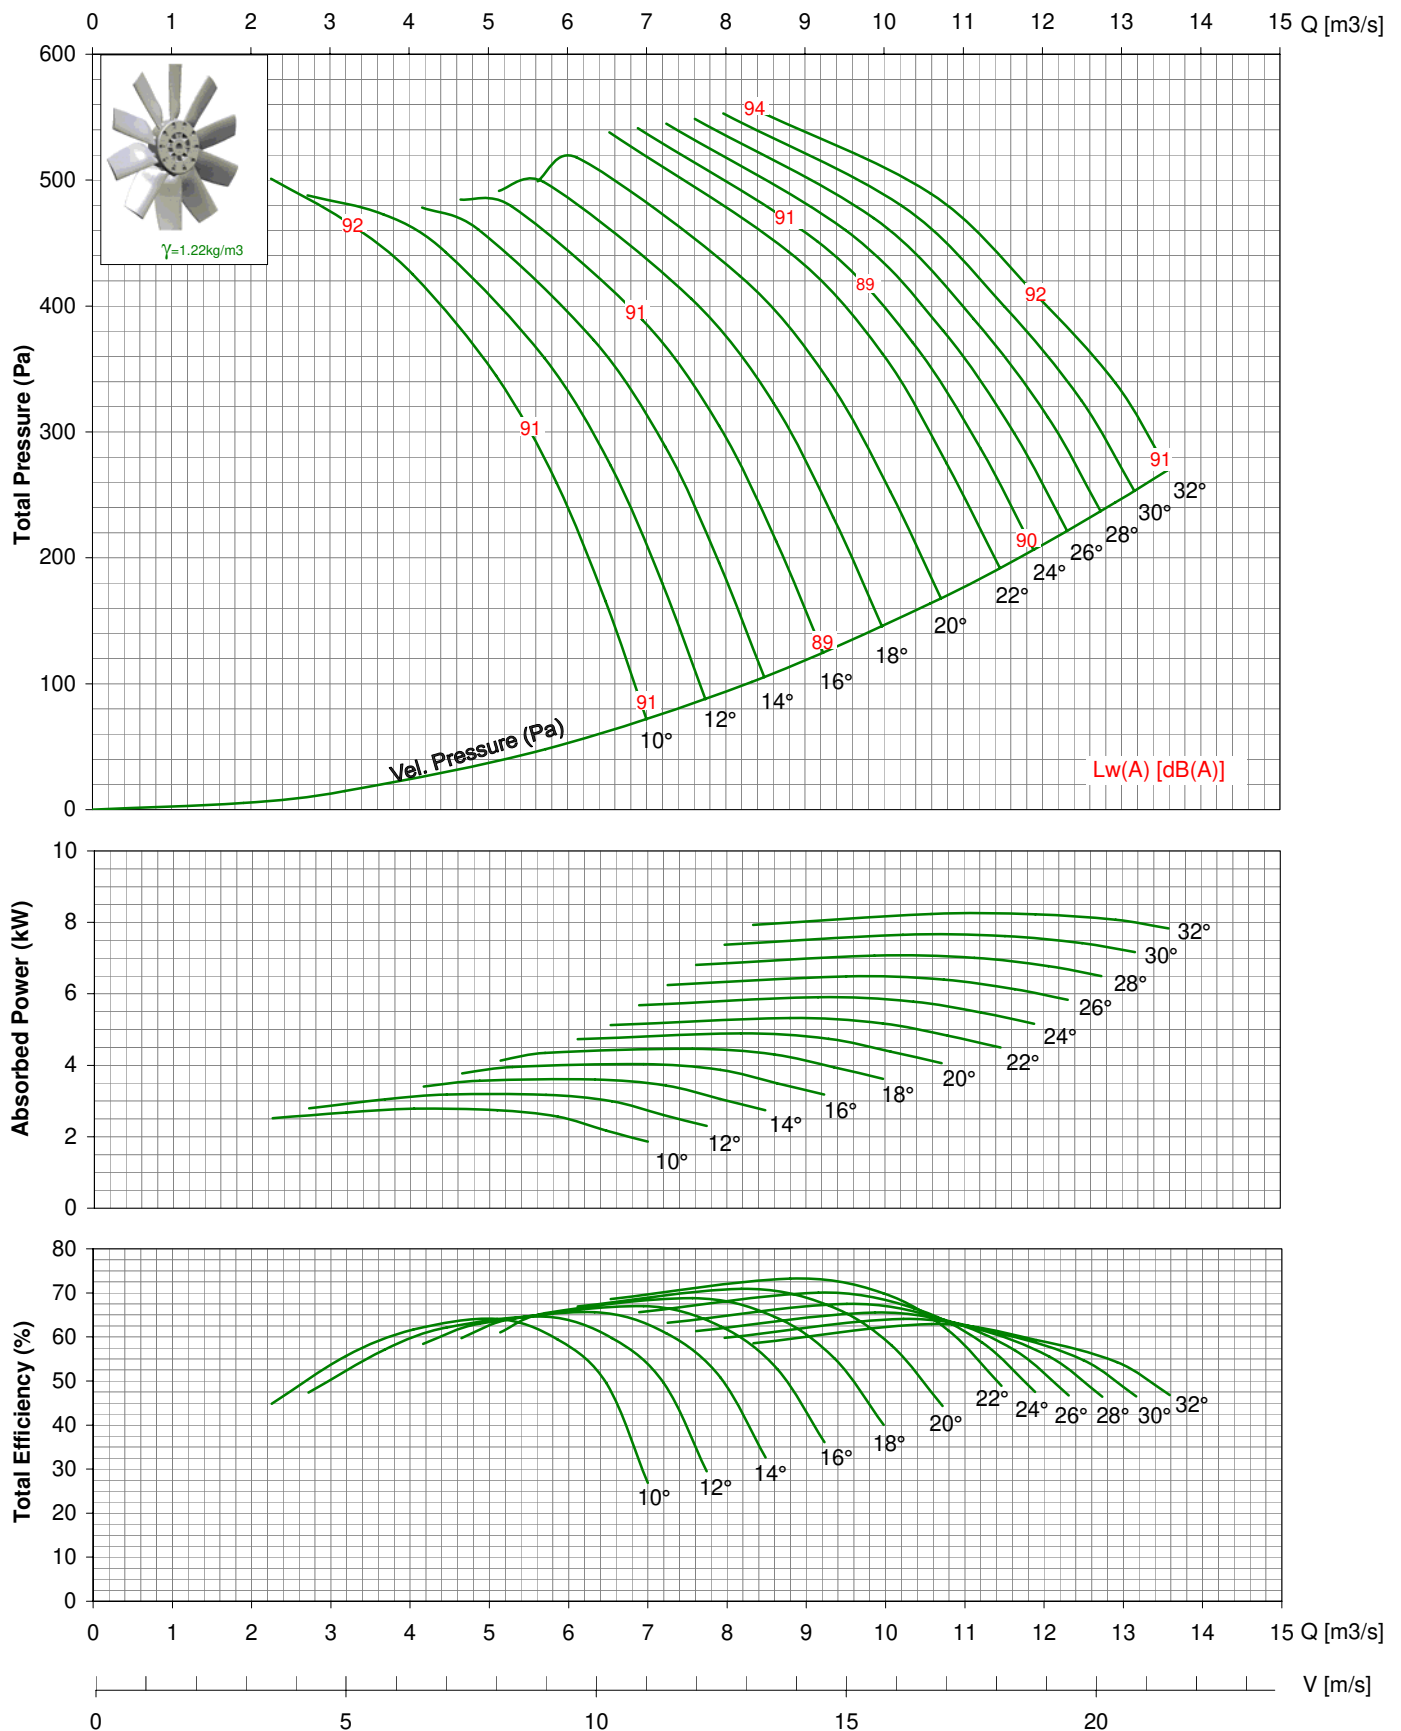

- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lw(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 900-V / 14AA/ 12-12/ _ _ / _ 1750rpm - 60Hz

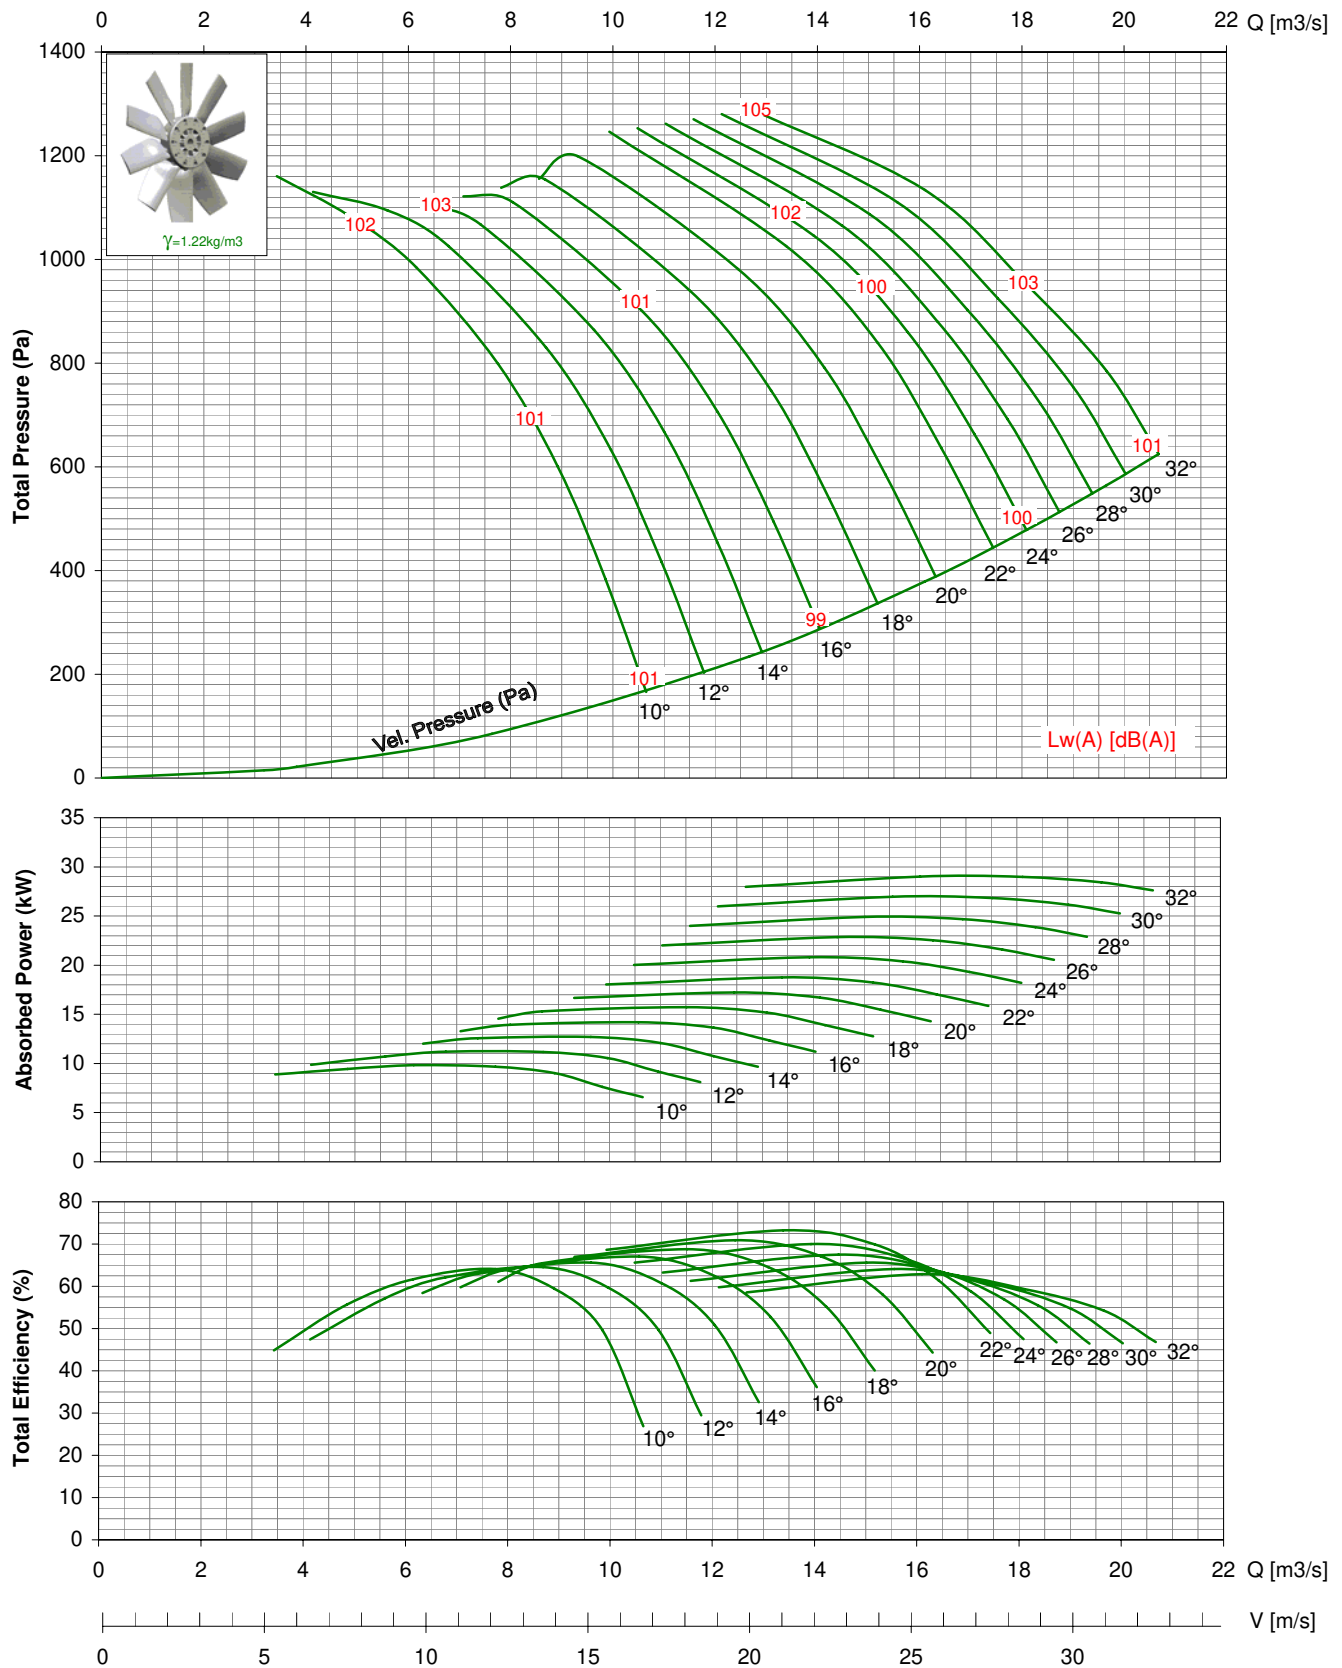

- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lwi(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

VANE AXIAL FAN DIRECT DRIVEN

Series TDA-V

Features

For commercial and industrial applications where large volumes of air are required at moderate to high pressure, special designed integral straightening vanes, reduced turbulence, provide high performance and low sound level.

Construction

Double flanged casing is produced in mild steel or galvanised Steel, the impeller having manually adjustable pitch aerofoil blades is made of PPG, PAG or pressure-casted Aluminium.

Finish

Available in standard finishes of galvanisation or painting.

Operating Temperature

-20°C to +55°C

Motors

Totally enclosed Class 'F' motor, to a min. IP54 protection are fitted as standard. Standard motor up to 2.2kW are usually supplied on DOL starting, motor 3.0kW and above are star/delta starting.


Airflow Direction

Air flowing from impeller to motor is fitted as standard.





Kruger Ventilation Industries (India) Pvt Ltd. certifies that the TDA 1000-V shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with the AMCA publication 211 and comply with there quirements of the AMCA Certified Ratings Program.




MODEL: TDA 1000-V / 14AA / 12-12 / _ / _ -

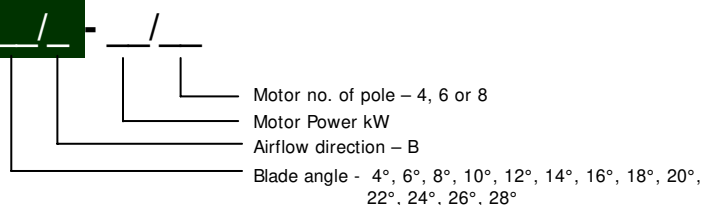

* All Dimension in mm

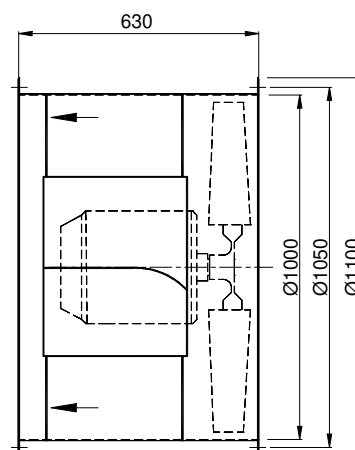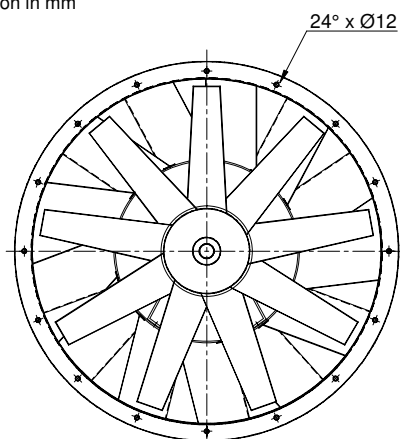


TDA 1000-V / 14AA/ 12-12/ _ _ / _ 725rpm - 50Hz

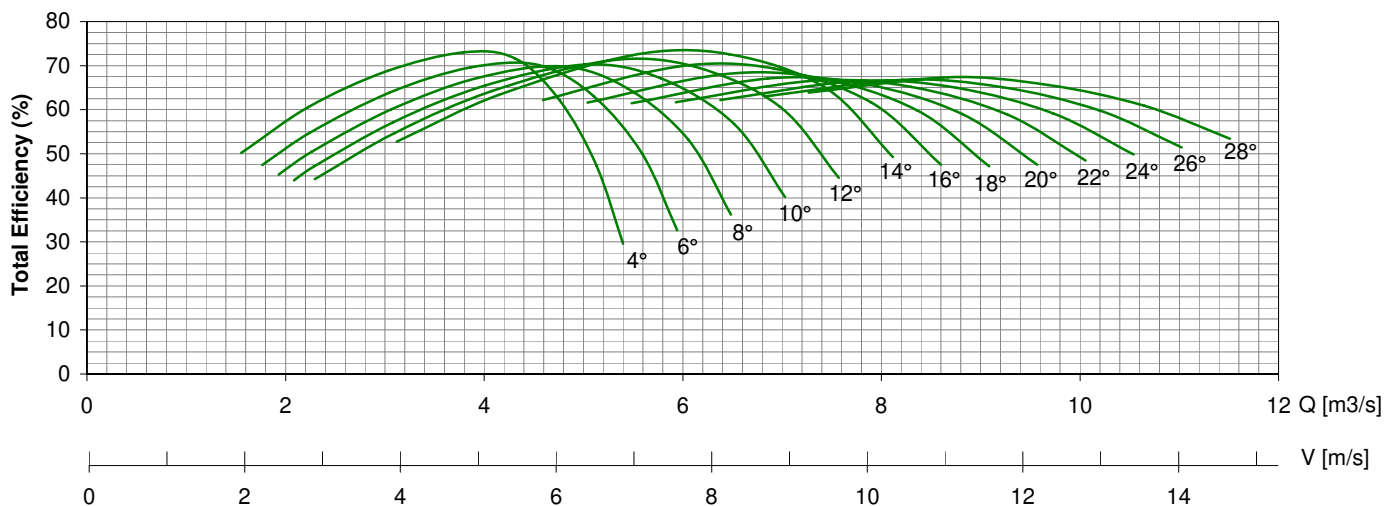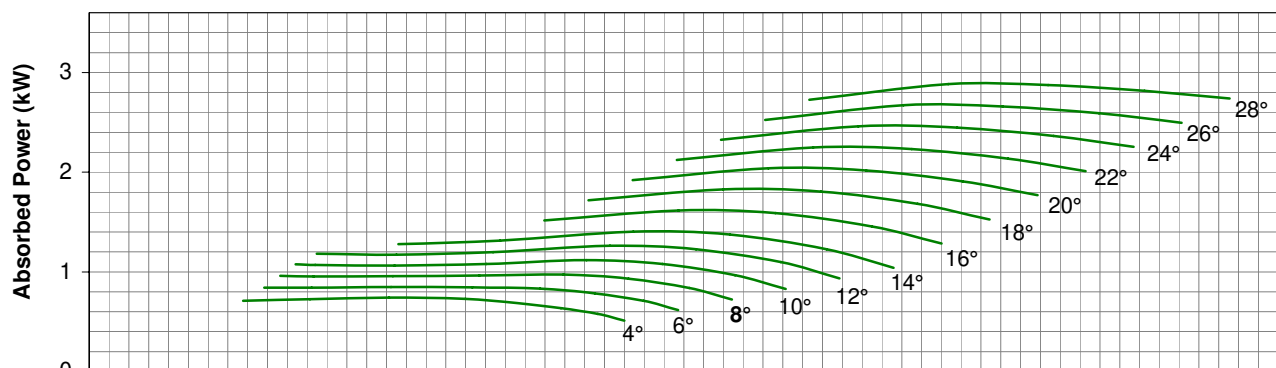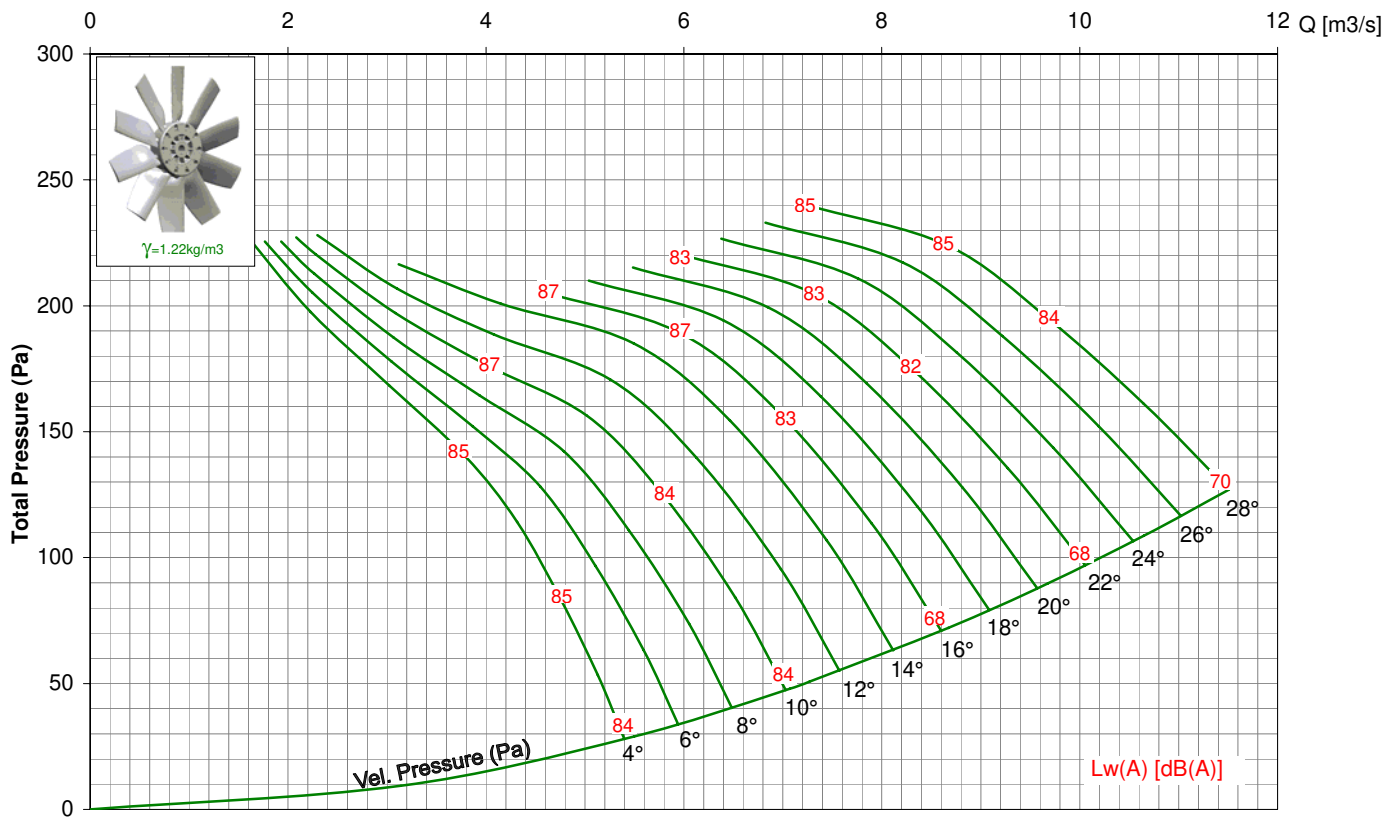


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lw(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 1000-V / 14AA/ 12-12/ _ _ / _ 950rpm - 50Hz

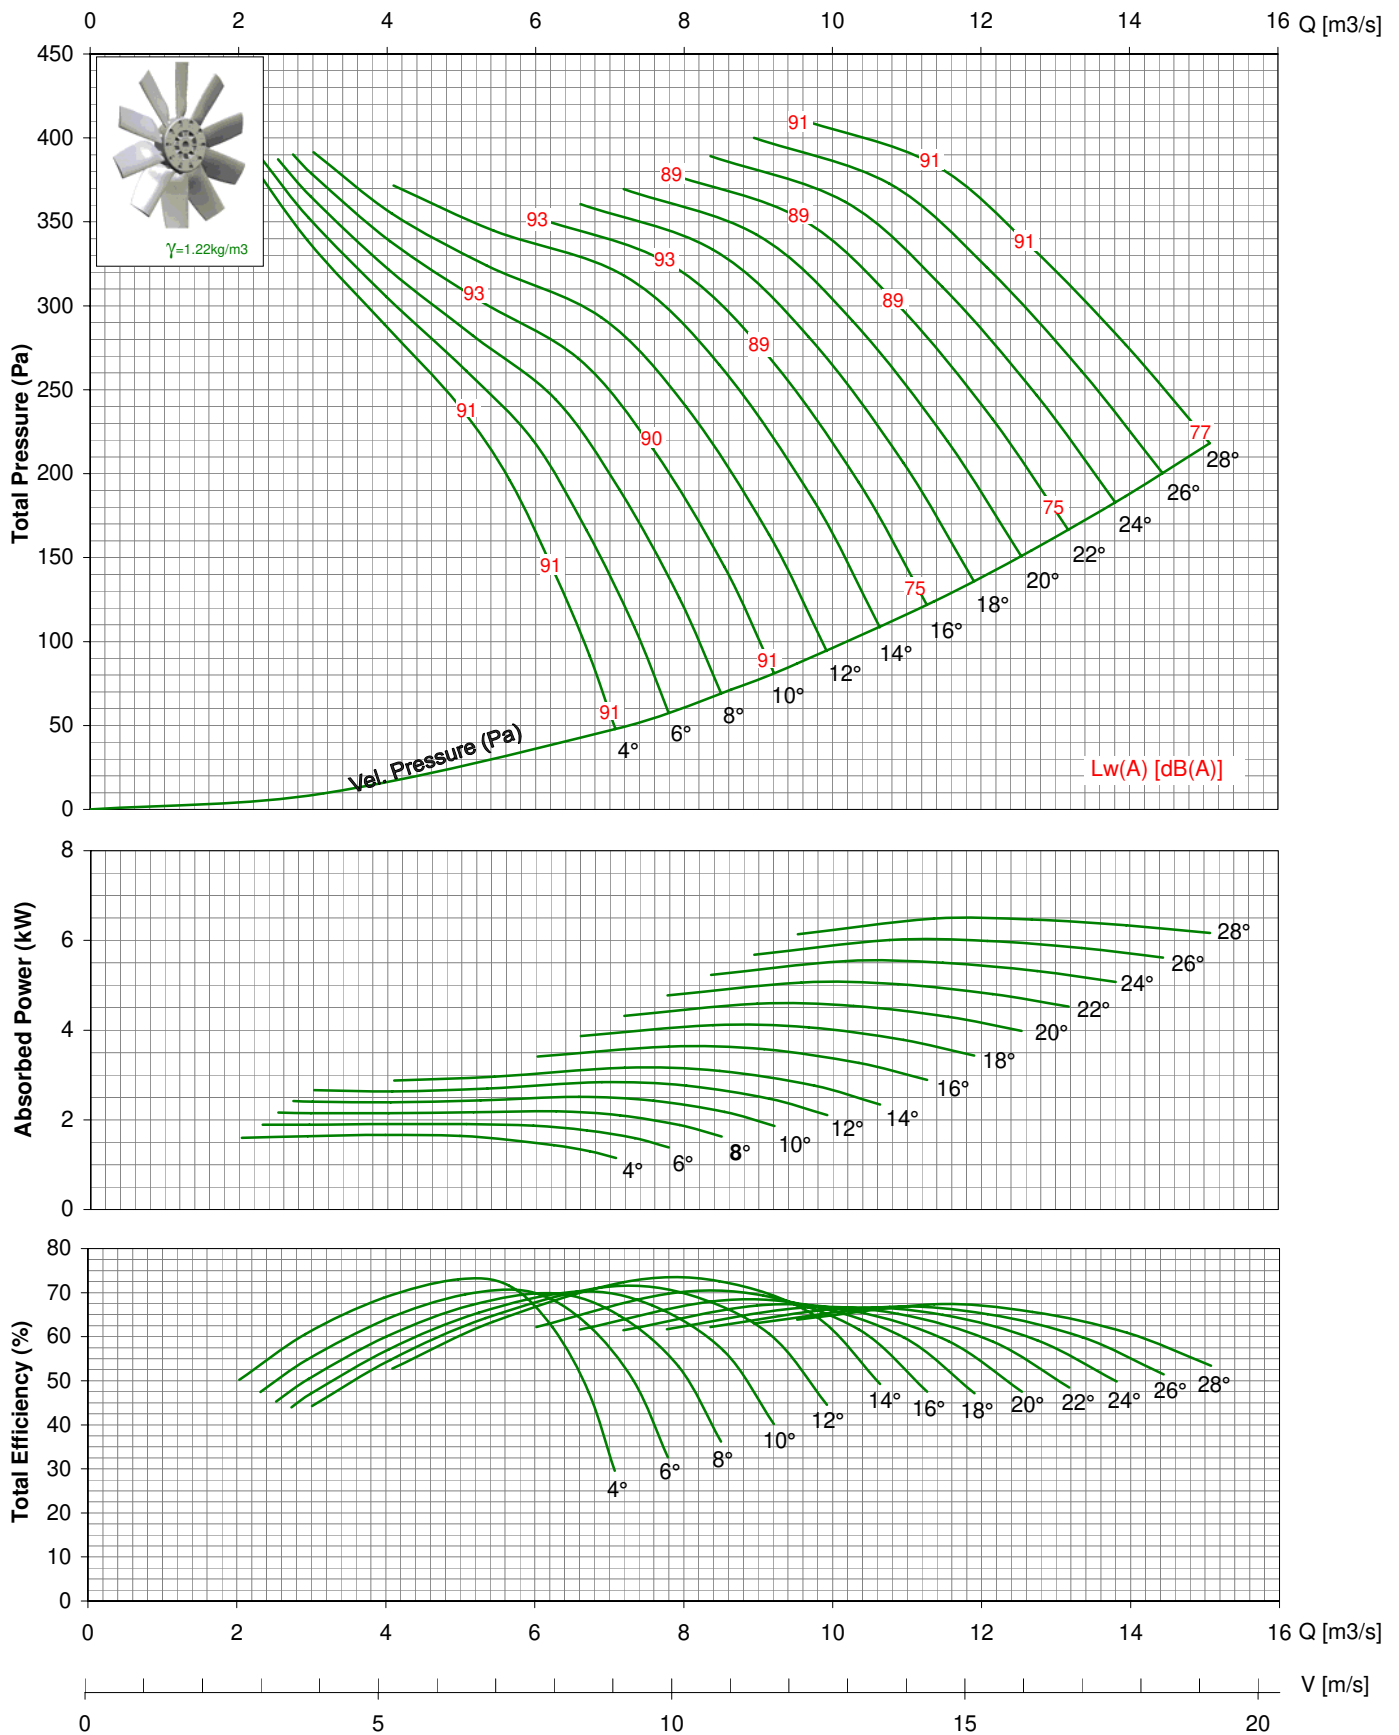

- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 1000-V / 14AA/ 12-12/ _ _ / _ 1450rpm - 50Hz

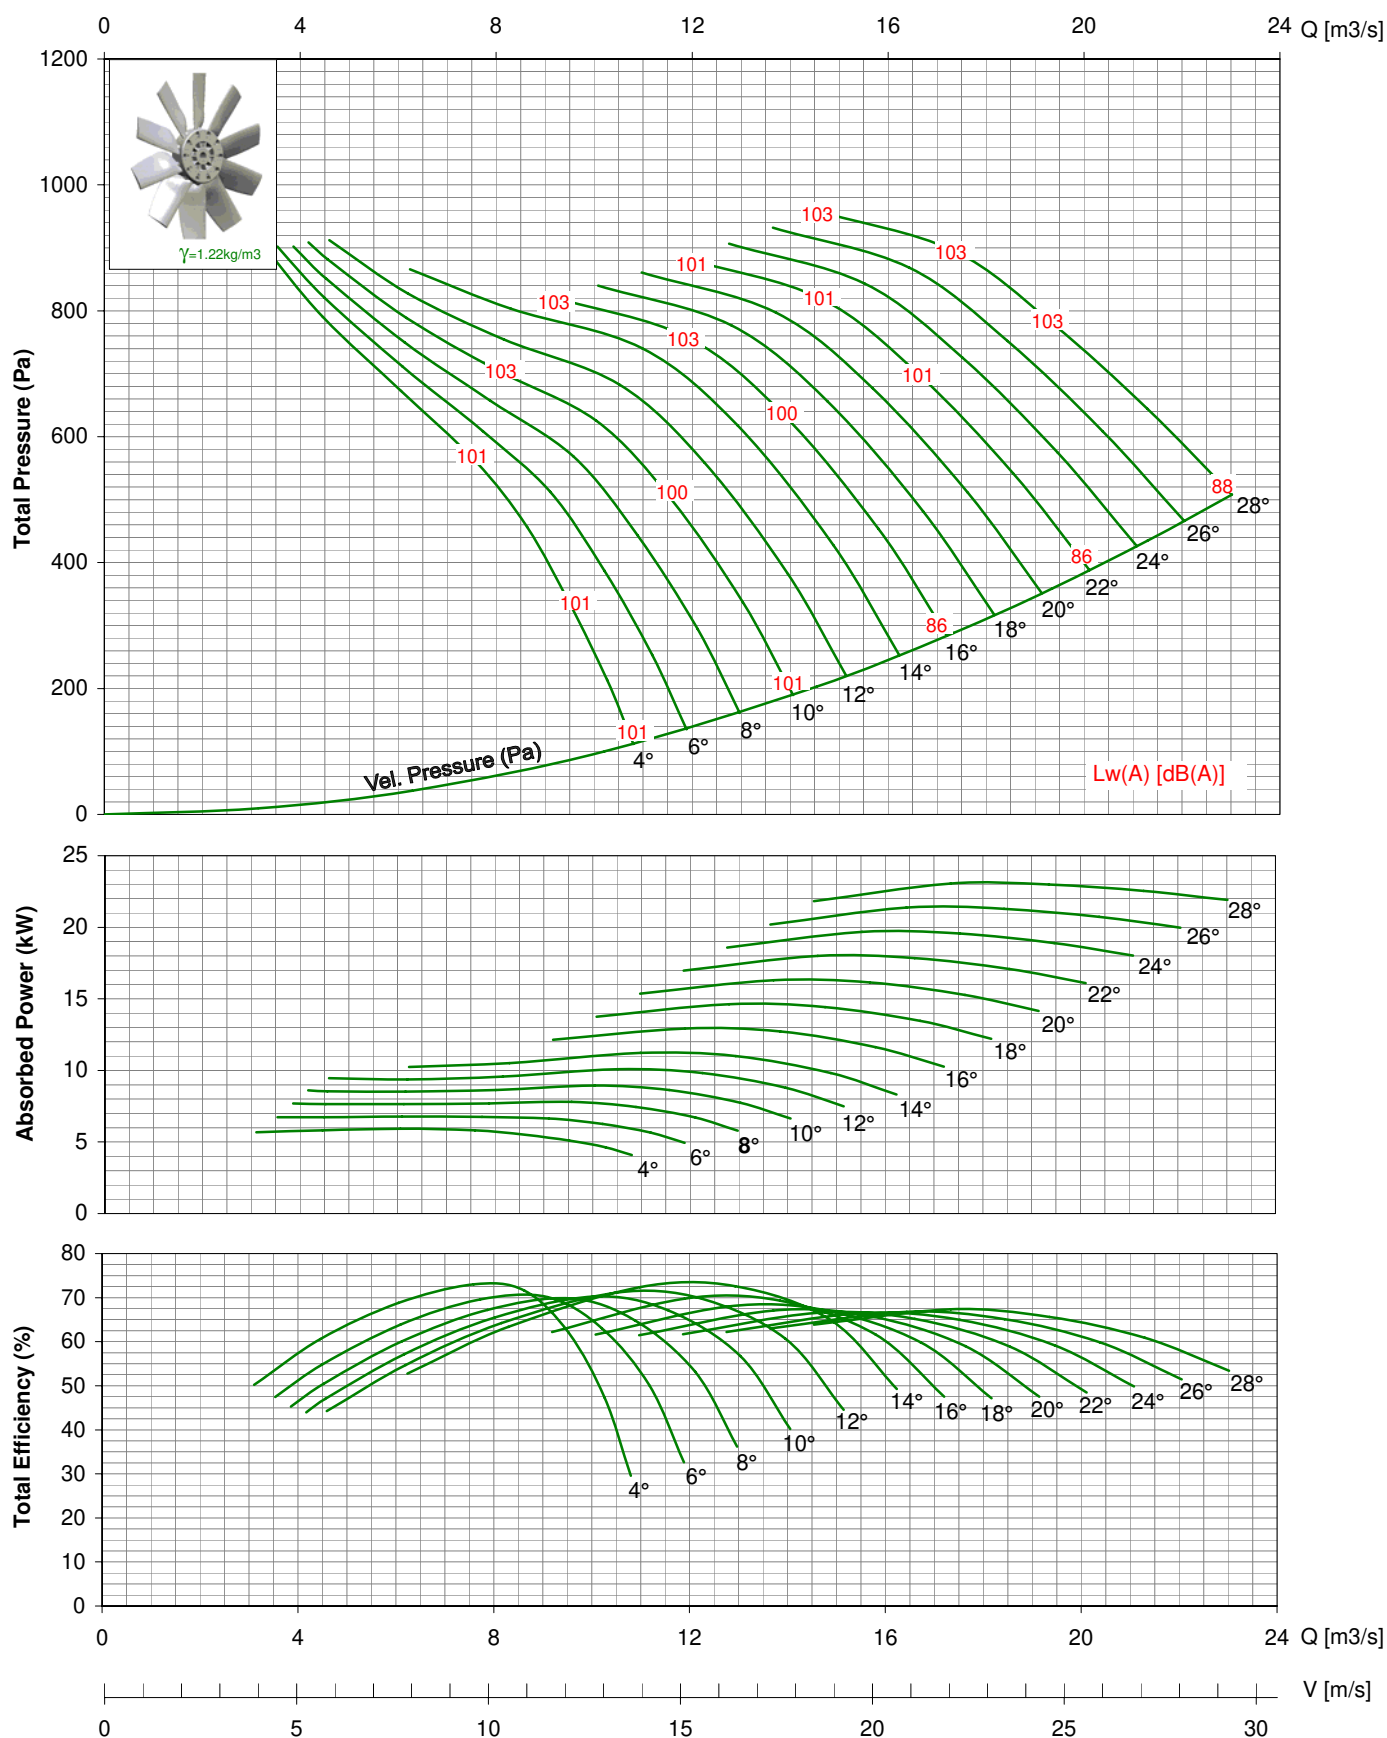


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- Power ratings (kW) does not include transmission losses.

- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.

- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 1000-V / 14AA/ 12-12/ _ _ / _ 875rpm - 60Hz

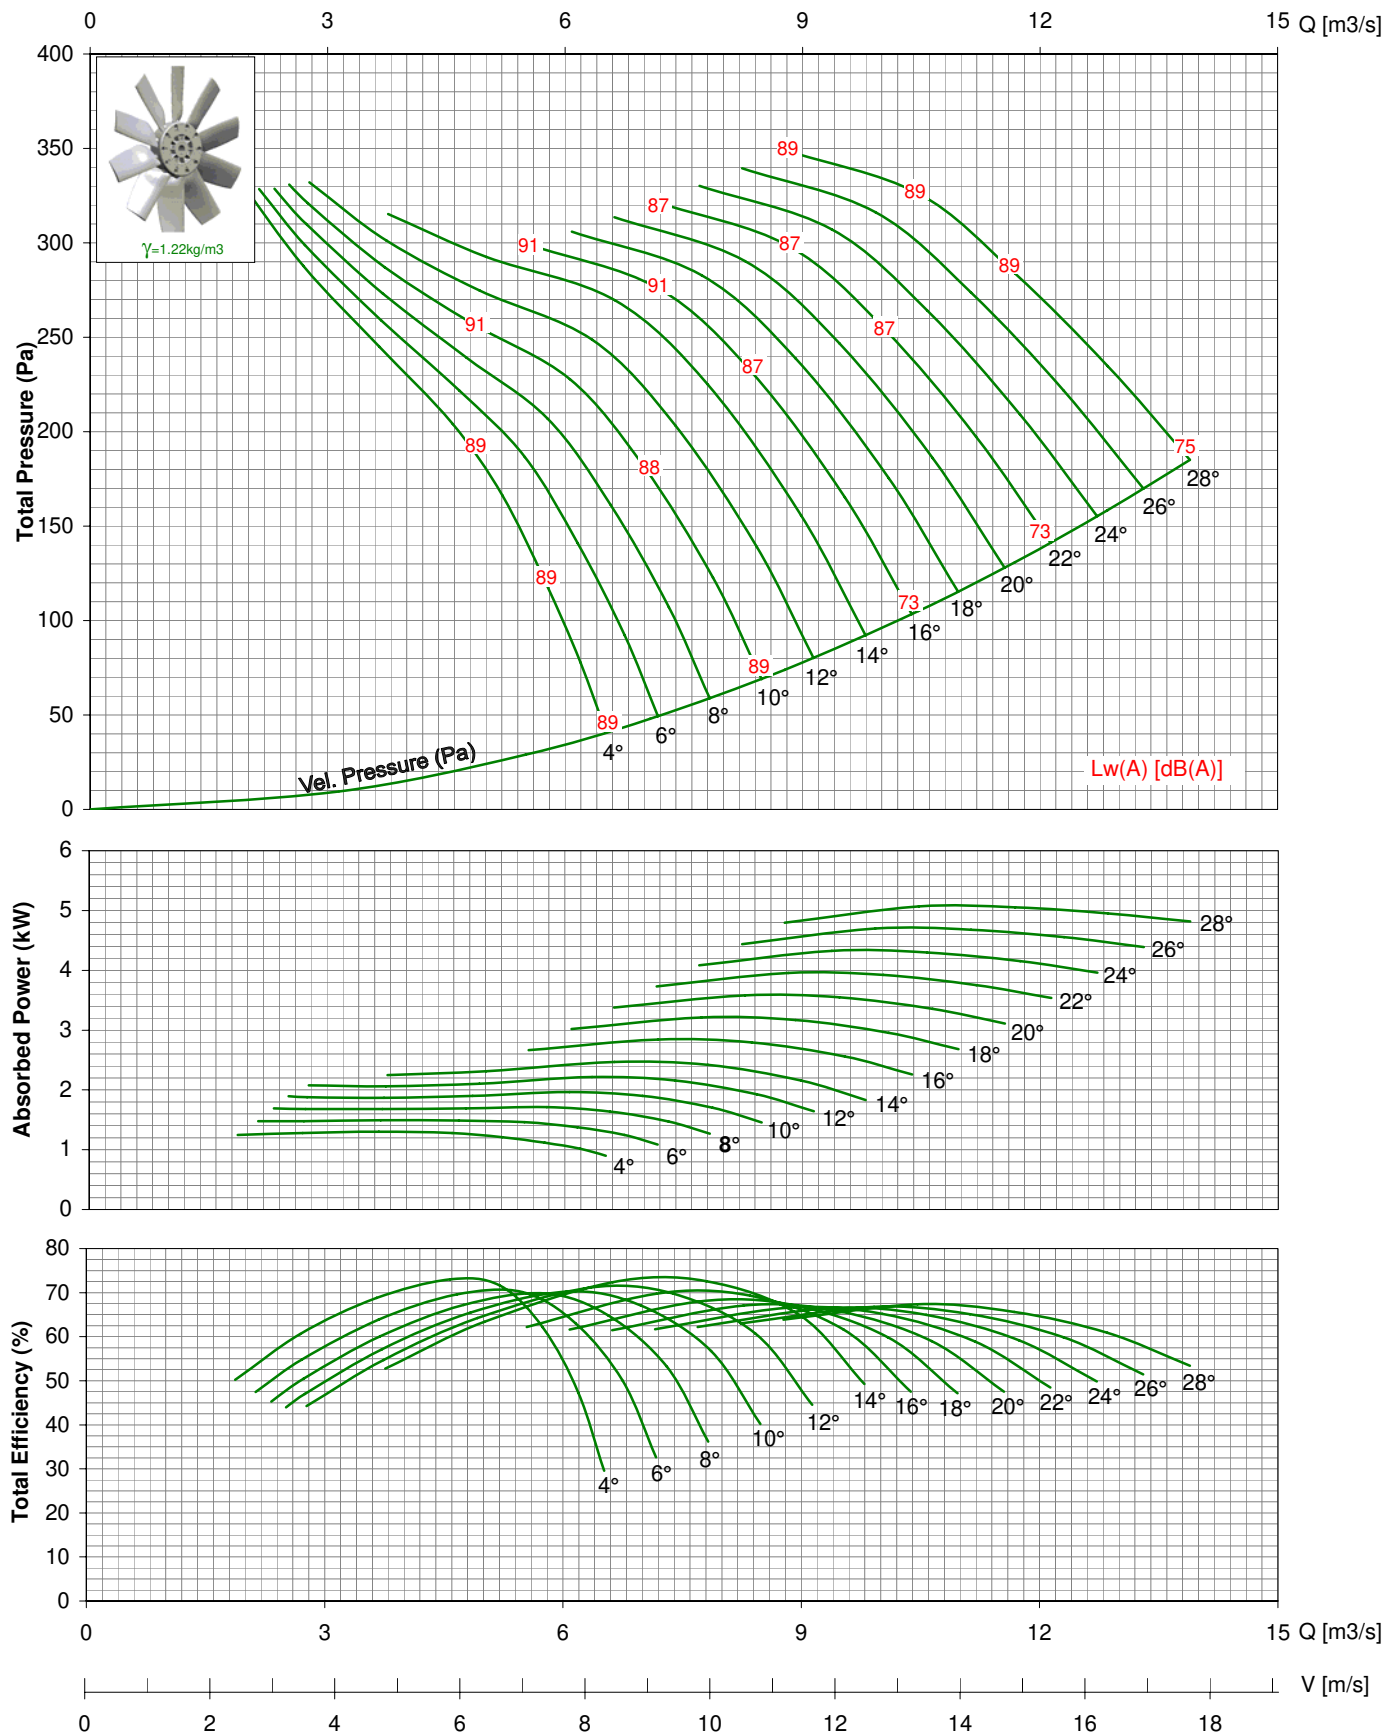


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- Power ratings (kW) does not include transmission losses.

- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.

- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 1000-V / 14AA/ 12-12/ _ _ / _ 1150rpm - 60Hz

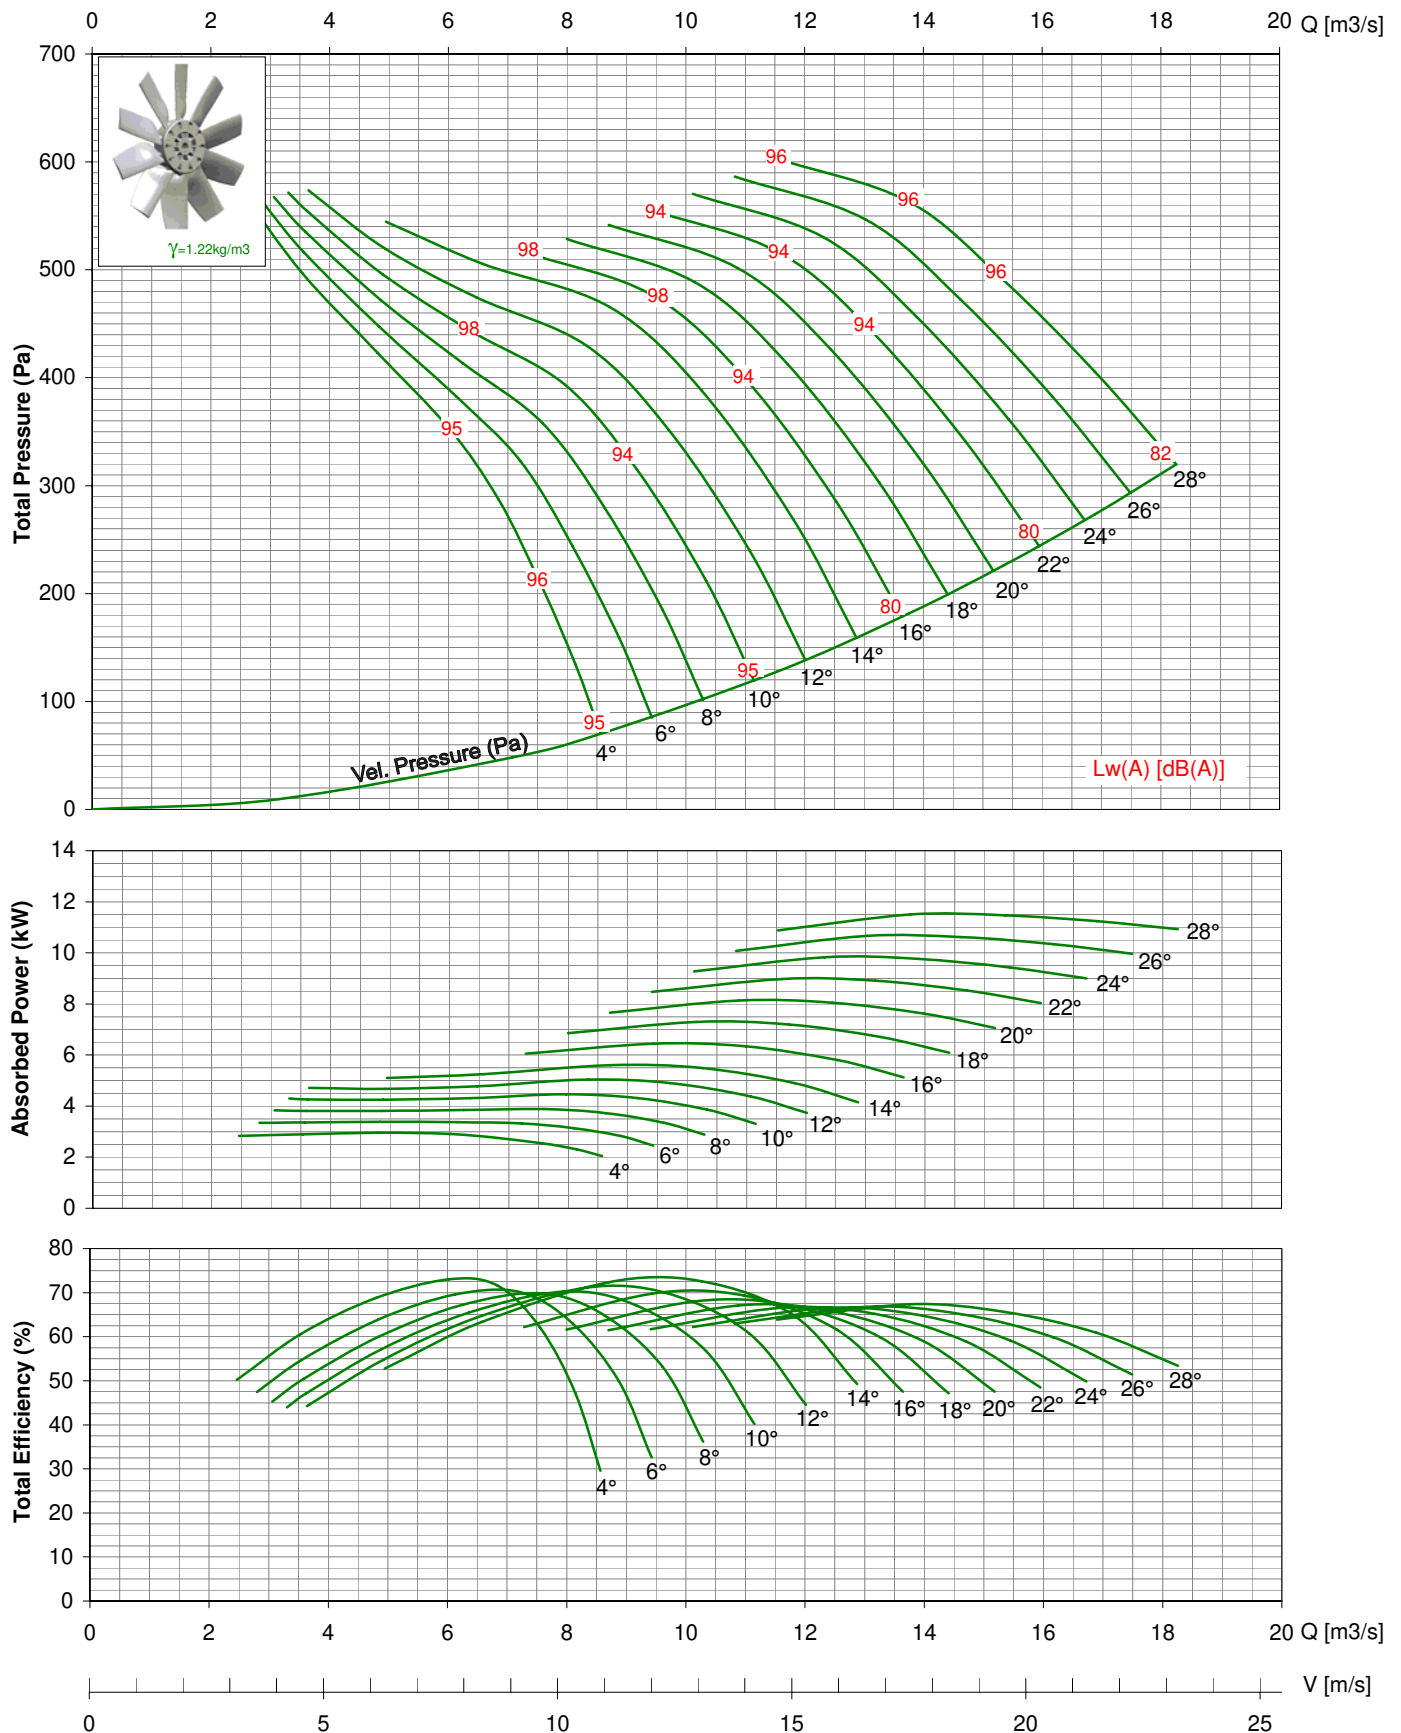


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- Power ratings (kW) does not include transmission losses.

- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lw(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.

- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 1000-V / 14AA/ 12-12/ _ _ / _ 1750rpm - 60Hz

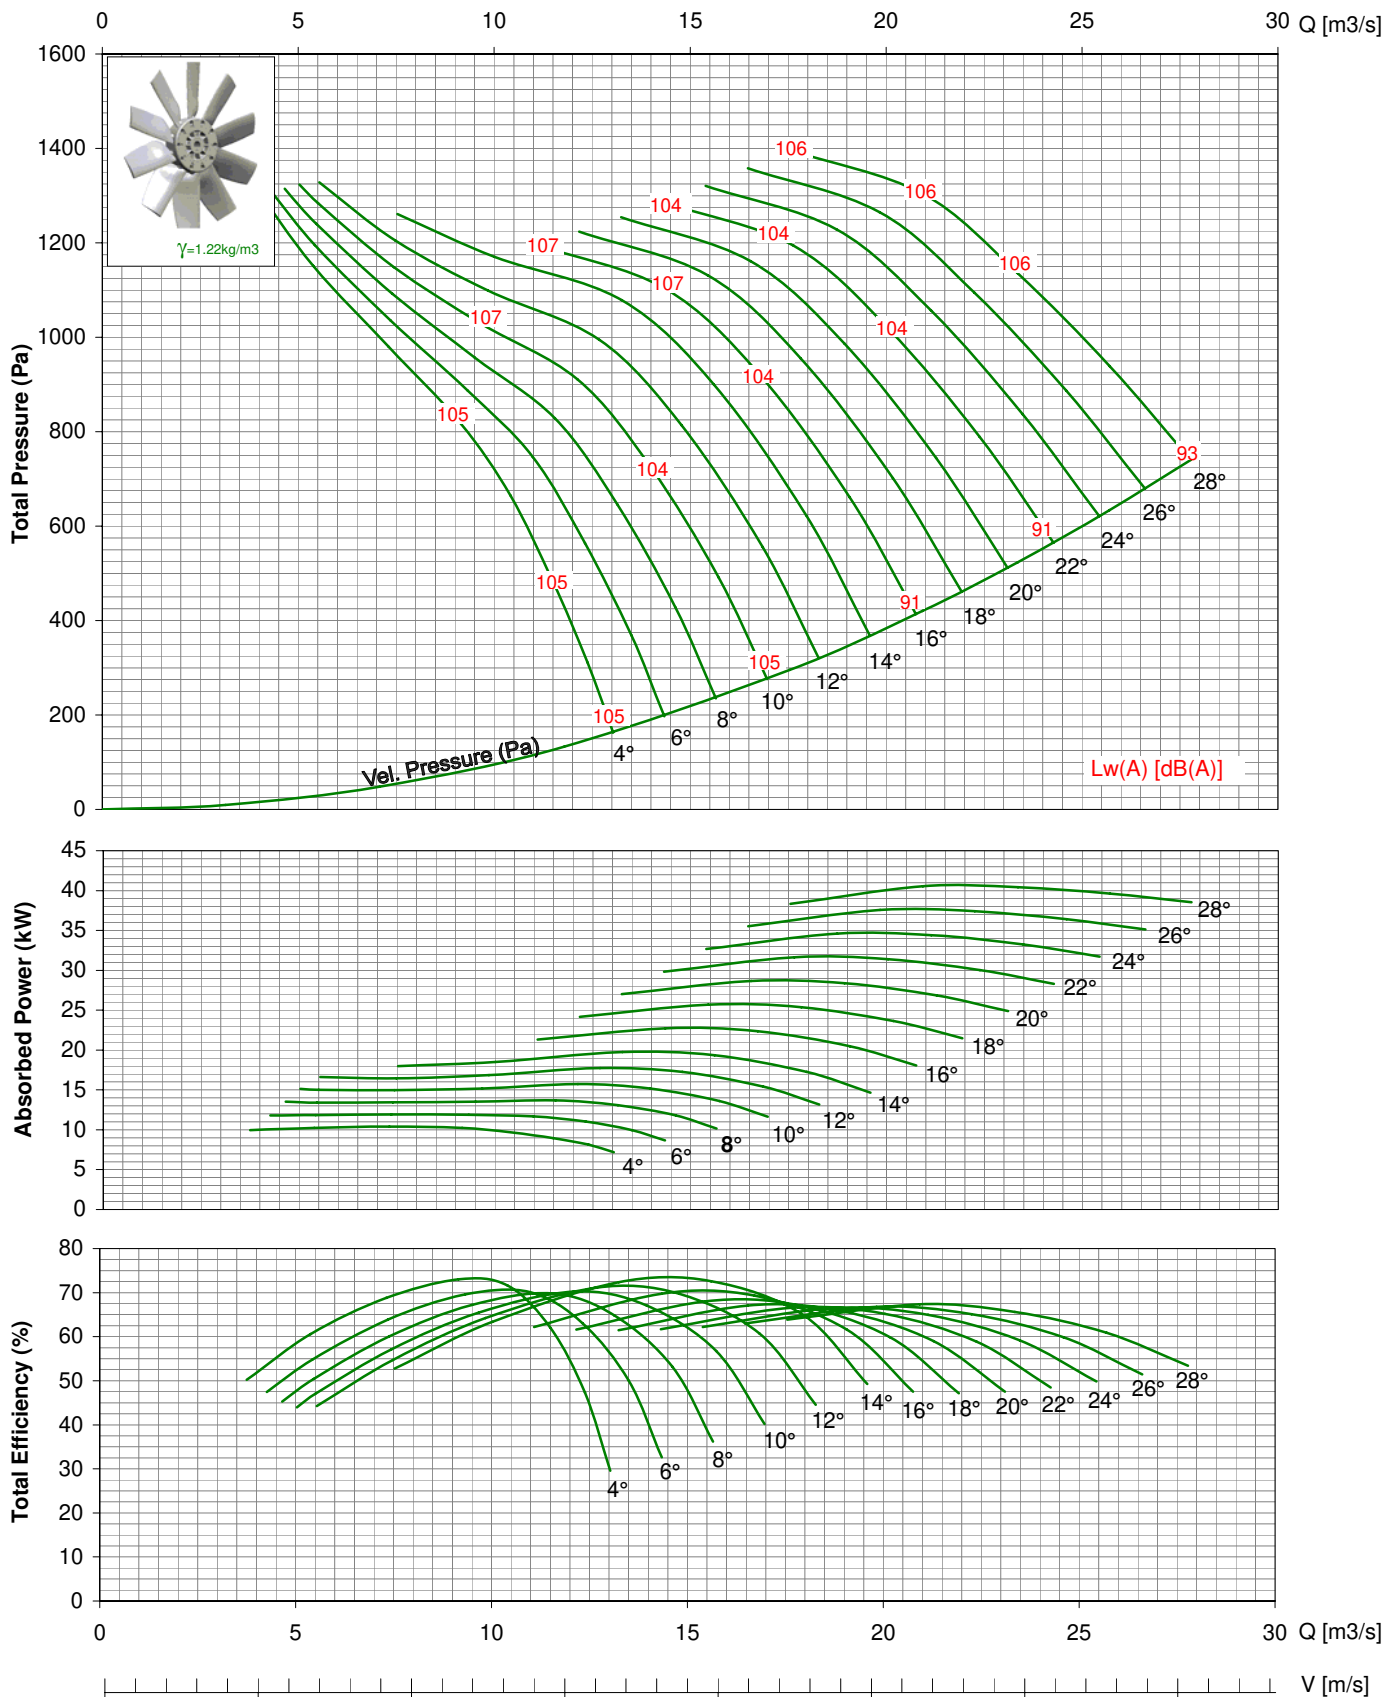

- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- Power ratings (kW) does not include transmission losses.

- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.

- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

VANE AXIAL FAN DIRECT DRIVEN

Series TDA-V

Features

For commercial and industrial applications where large volumes of air are required at moderate to high pressure, special designed integral straightening vanes, reduced turbulence, provide high performance and low sound level.

Construction

Double flanged casing is produced in mild steel or galvanised Steel, the impeller having manually adjustable pitch aerofoil blades is made of PPG, PAG or pressure-casted Aluminium.

Finish

Available in standard finishes of galvanisation or painting.

Operating Temperature

-20°C to +55°C

Motors

Totally enclosed Class 'F' motor, to a min. IP54 protection are fitted as standard. Standard motor up to 2.2kW are usually supplied on DOL starting, motor 3.0kW and above are star/delta starting.


Airflow Direction

Air flowing from impeller to motor is fitted as standard.





Kruger Ventilation Industries (India) Pvt Ltd. certifies that the TDA 1120-V shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with the AMCA publication 211 and comply with there quirements of the AMCA Certified Ratings Program.


MODEL: TDA 1120-V / 14AA / 12-12 / _ / _ -

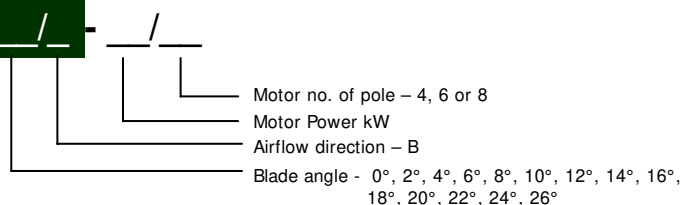

* All Dimension in mm

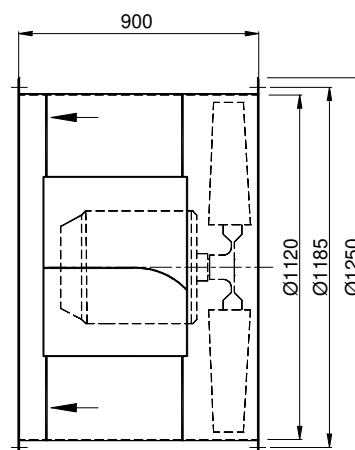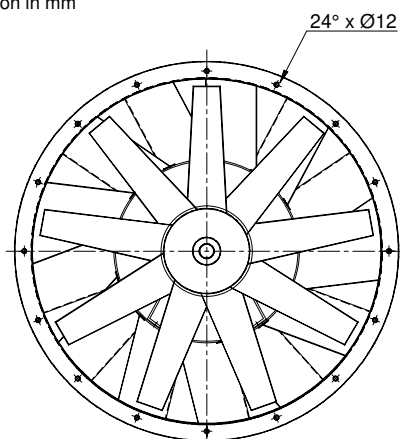


TDA 1120-V / 14AA/ 12-12/ _ _ / _ 725rpm - 50Hz

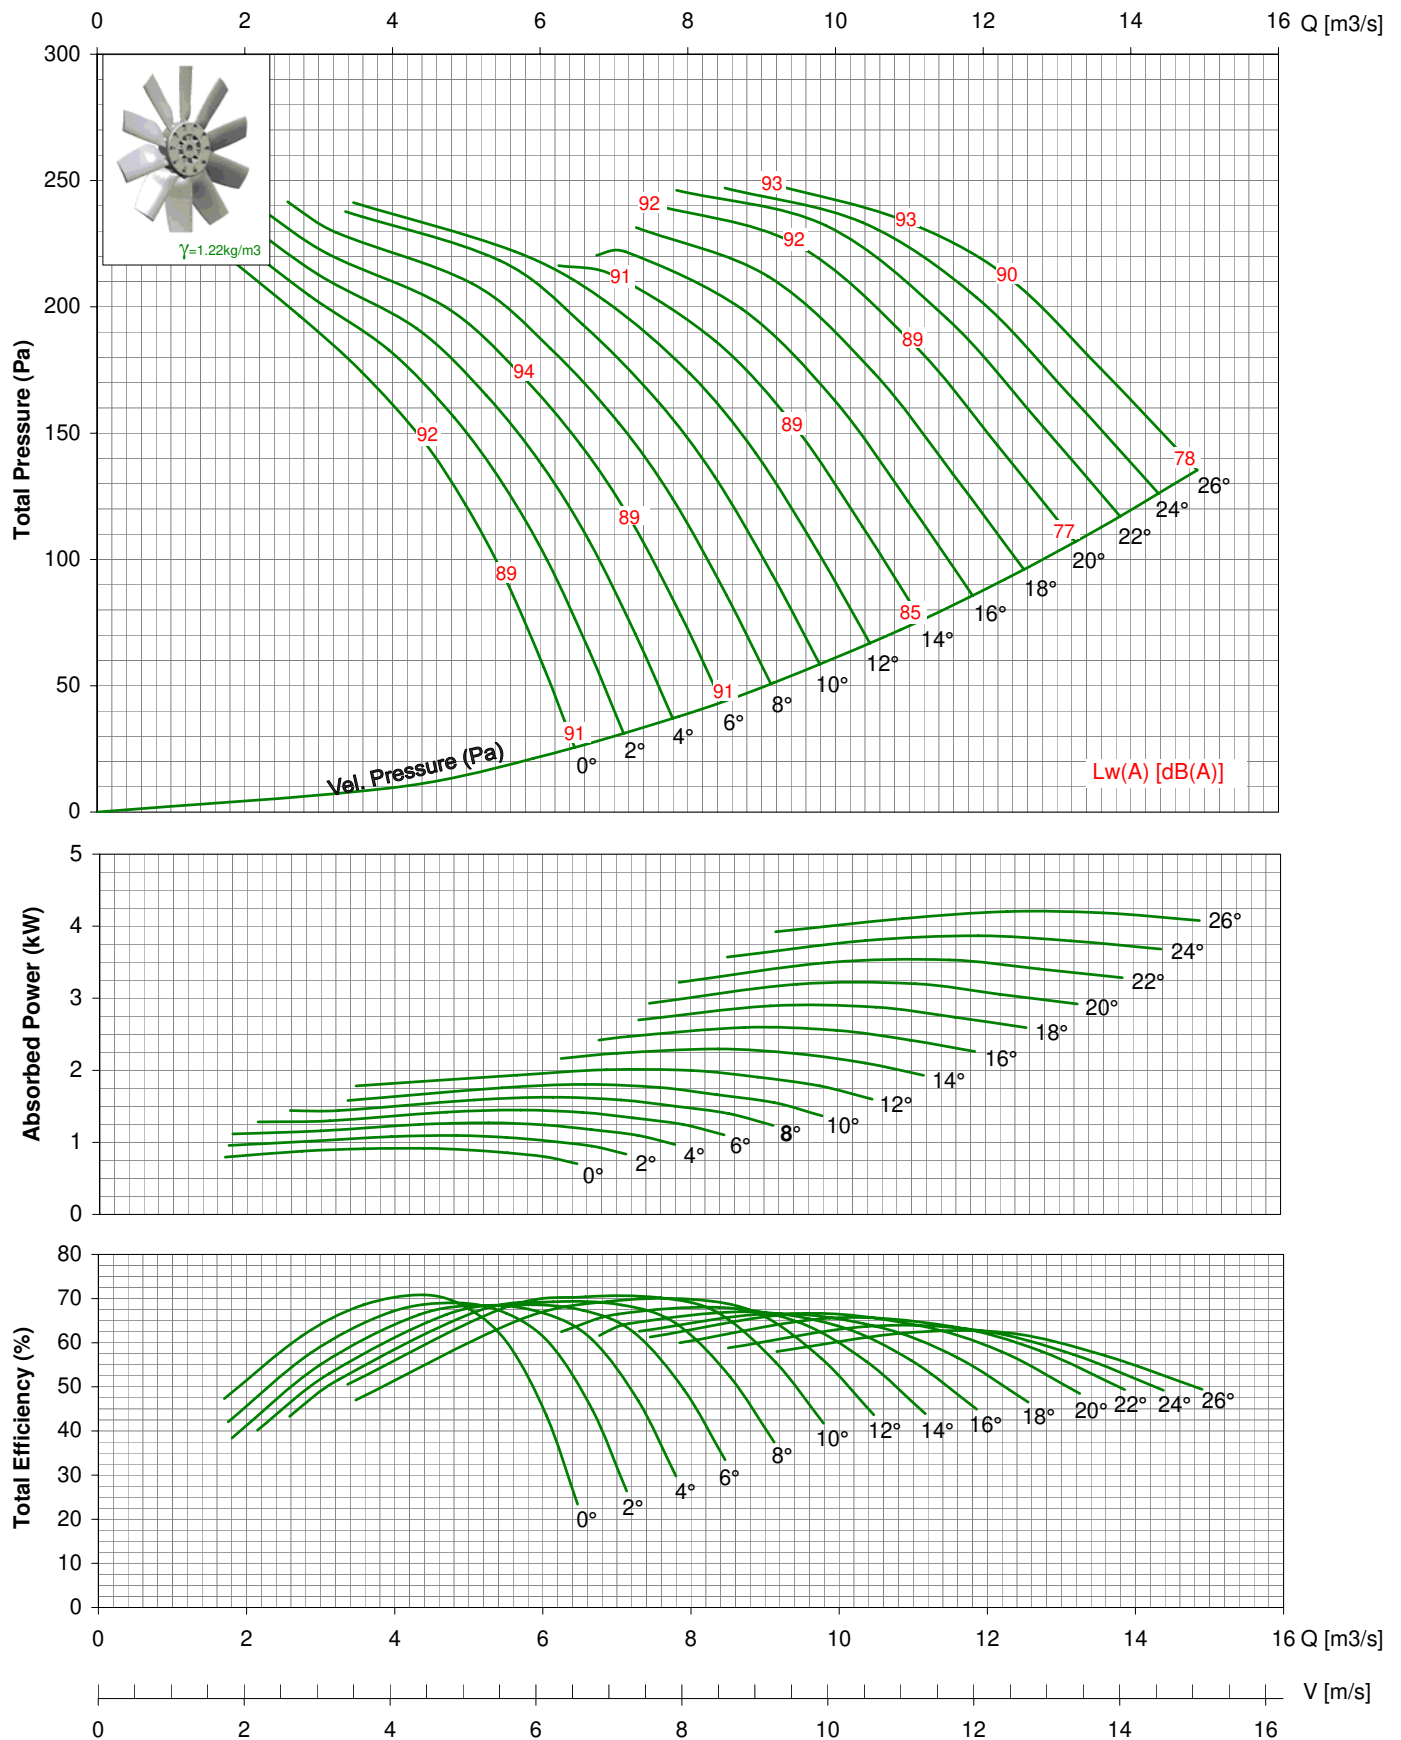


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 1120-V / 14AA/ 12-12/ _ _ / _ 950rpm - 50Hz

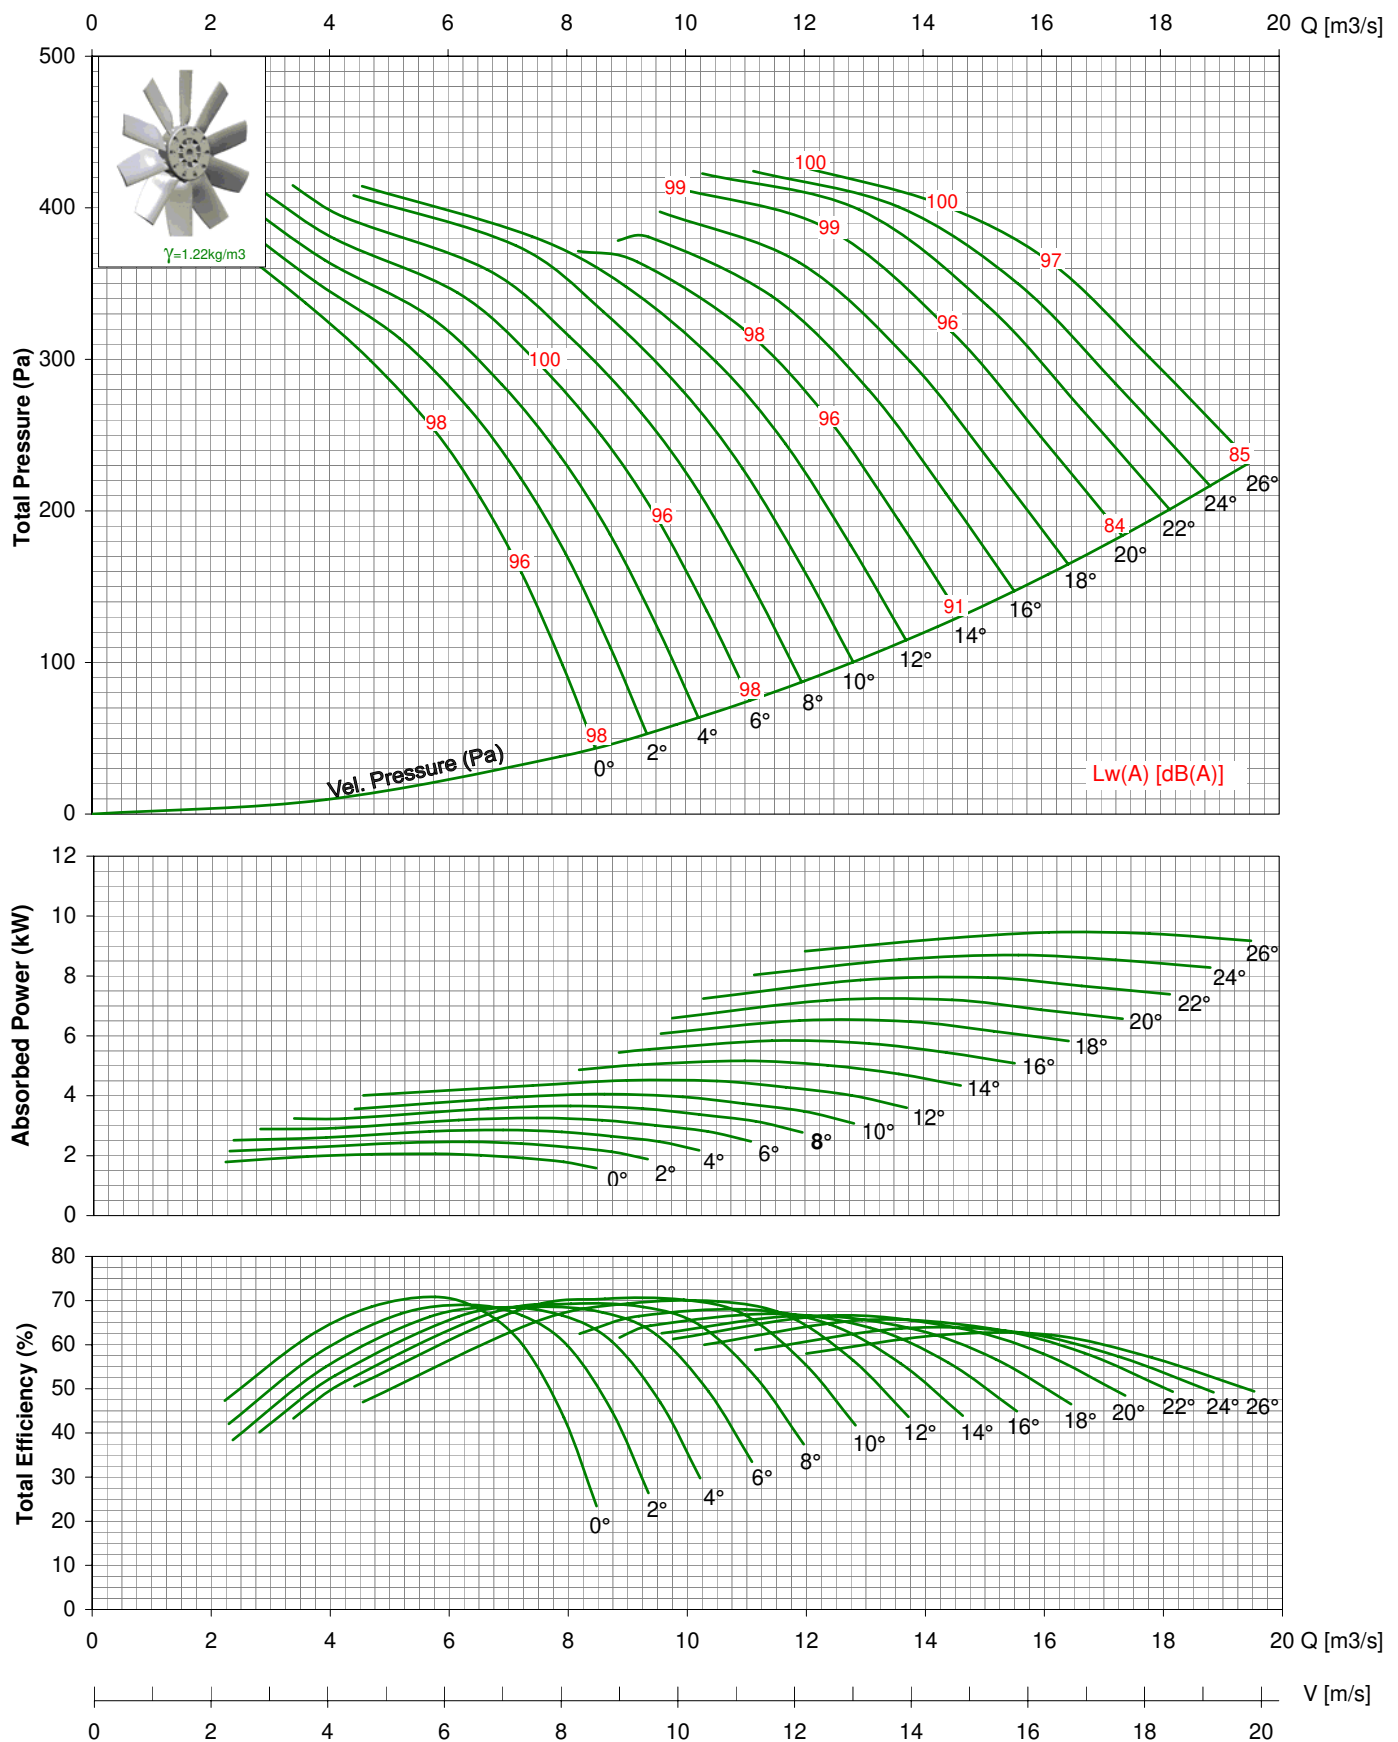


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
 - Power ratings (kW) does not include transmission losses.
 - The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
 - The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 1120-V / 14AA/ 12-12/ _ _ / _ 1450rpm - 50Hz

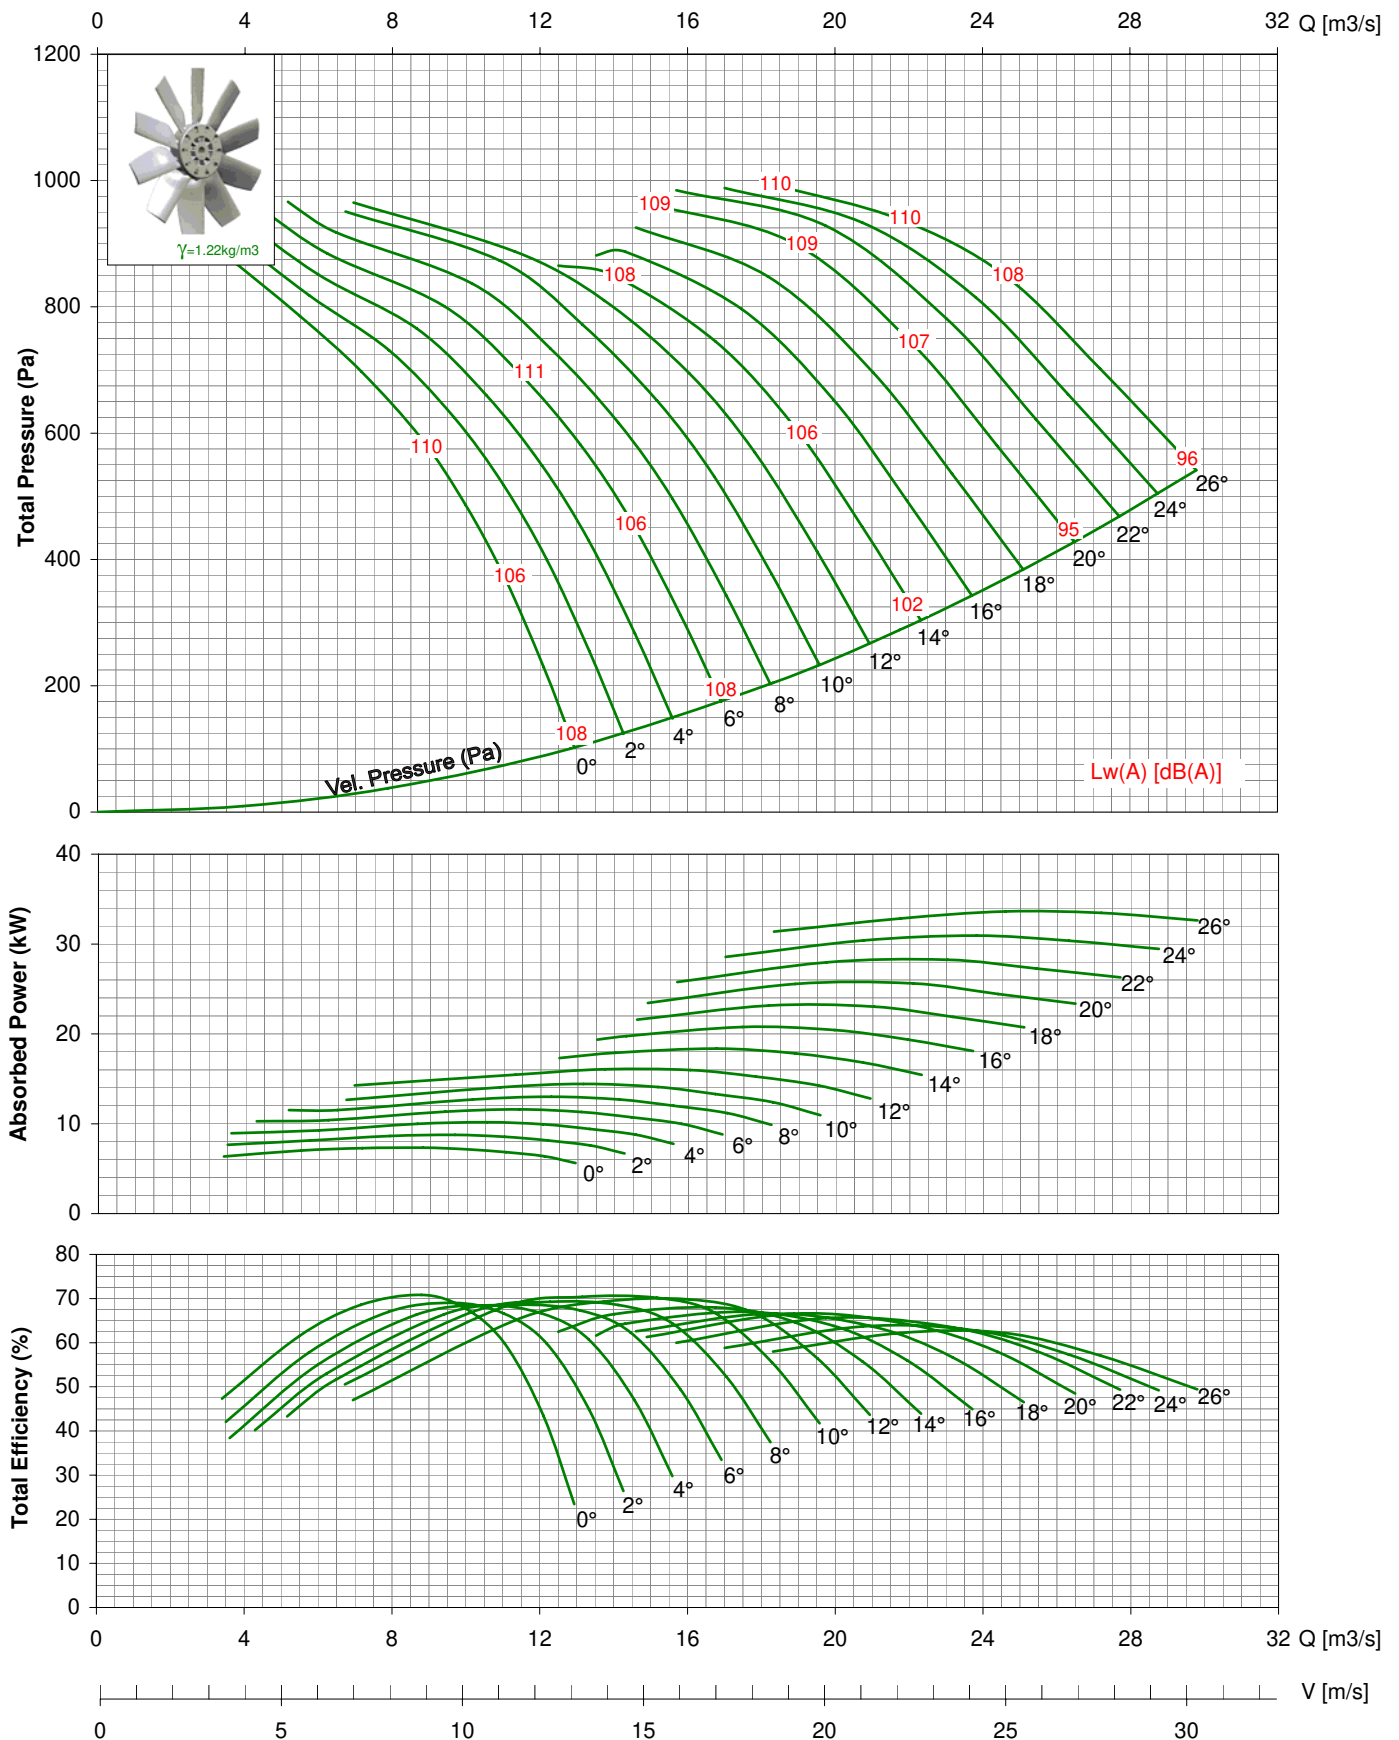


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 1120-V / 14AA/ 12-12/ _ _ / _ 875rpm - 60Hz

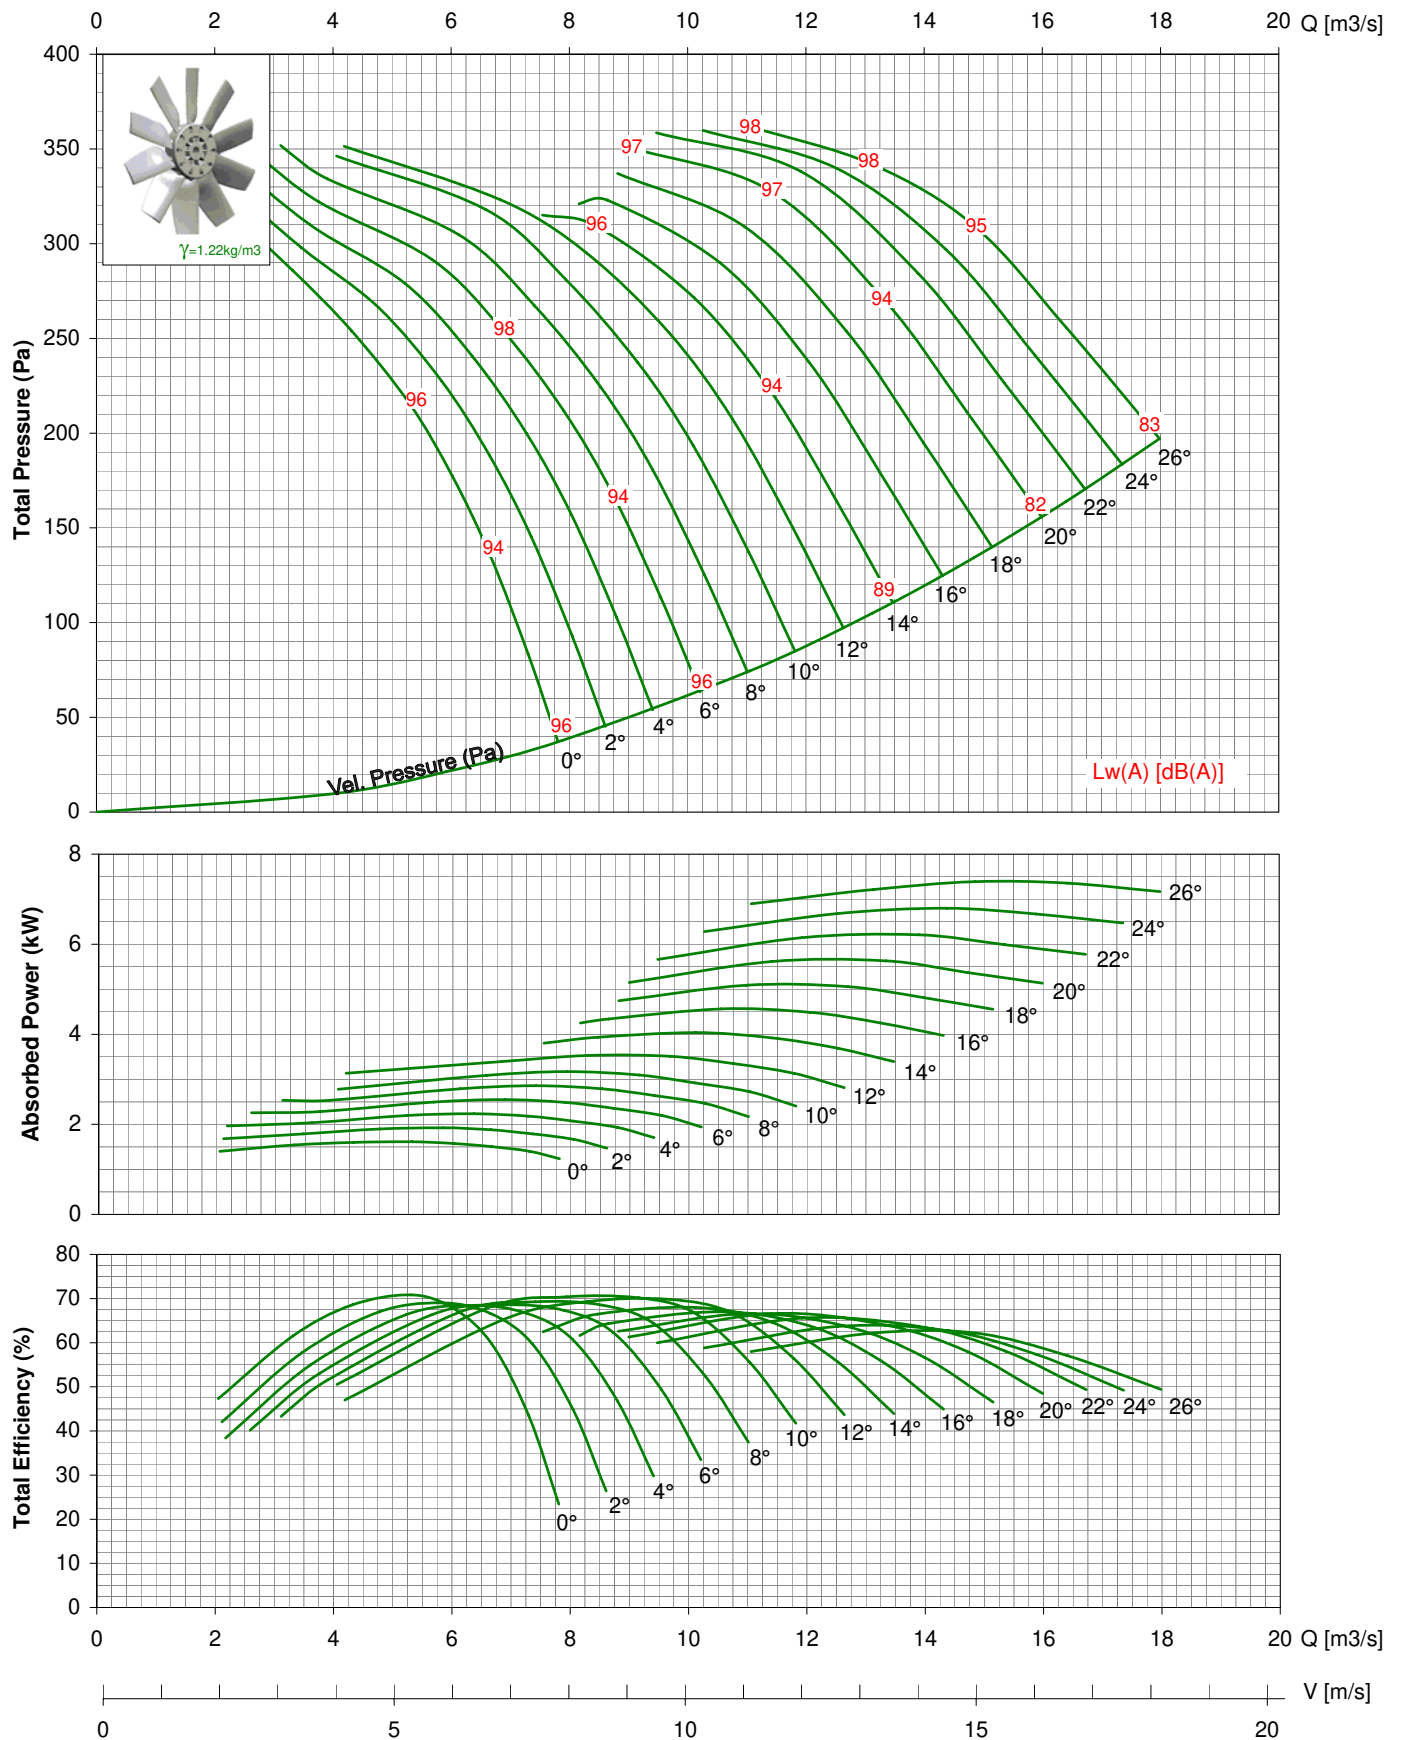

- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

TDA 1120-V / 14AA/ 12-12/ _ _ / _ 1150rpm - 60Hz

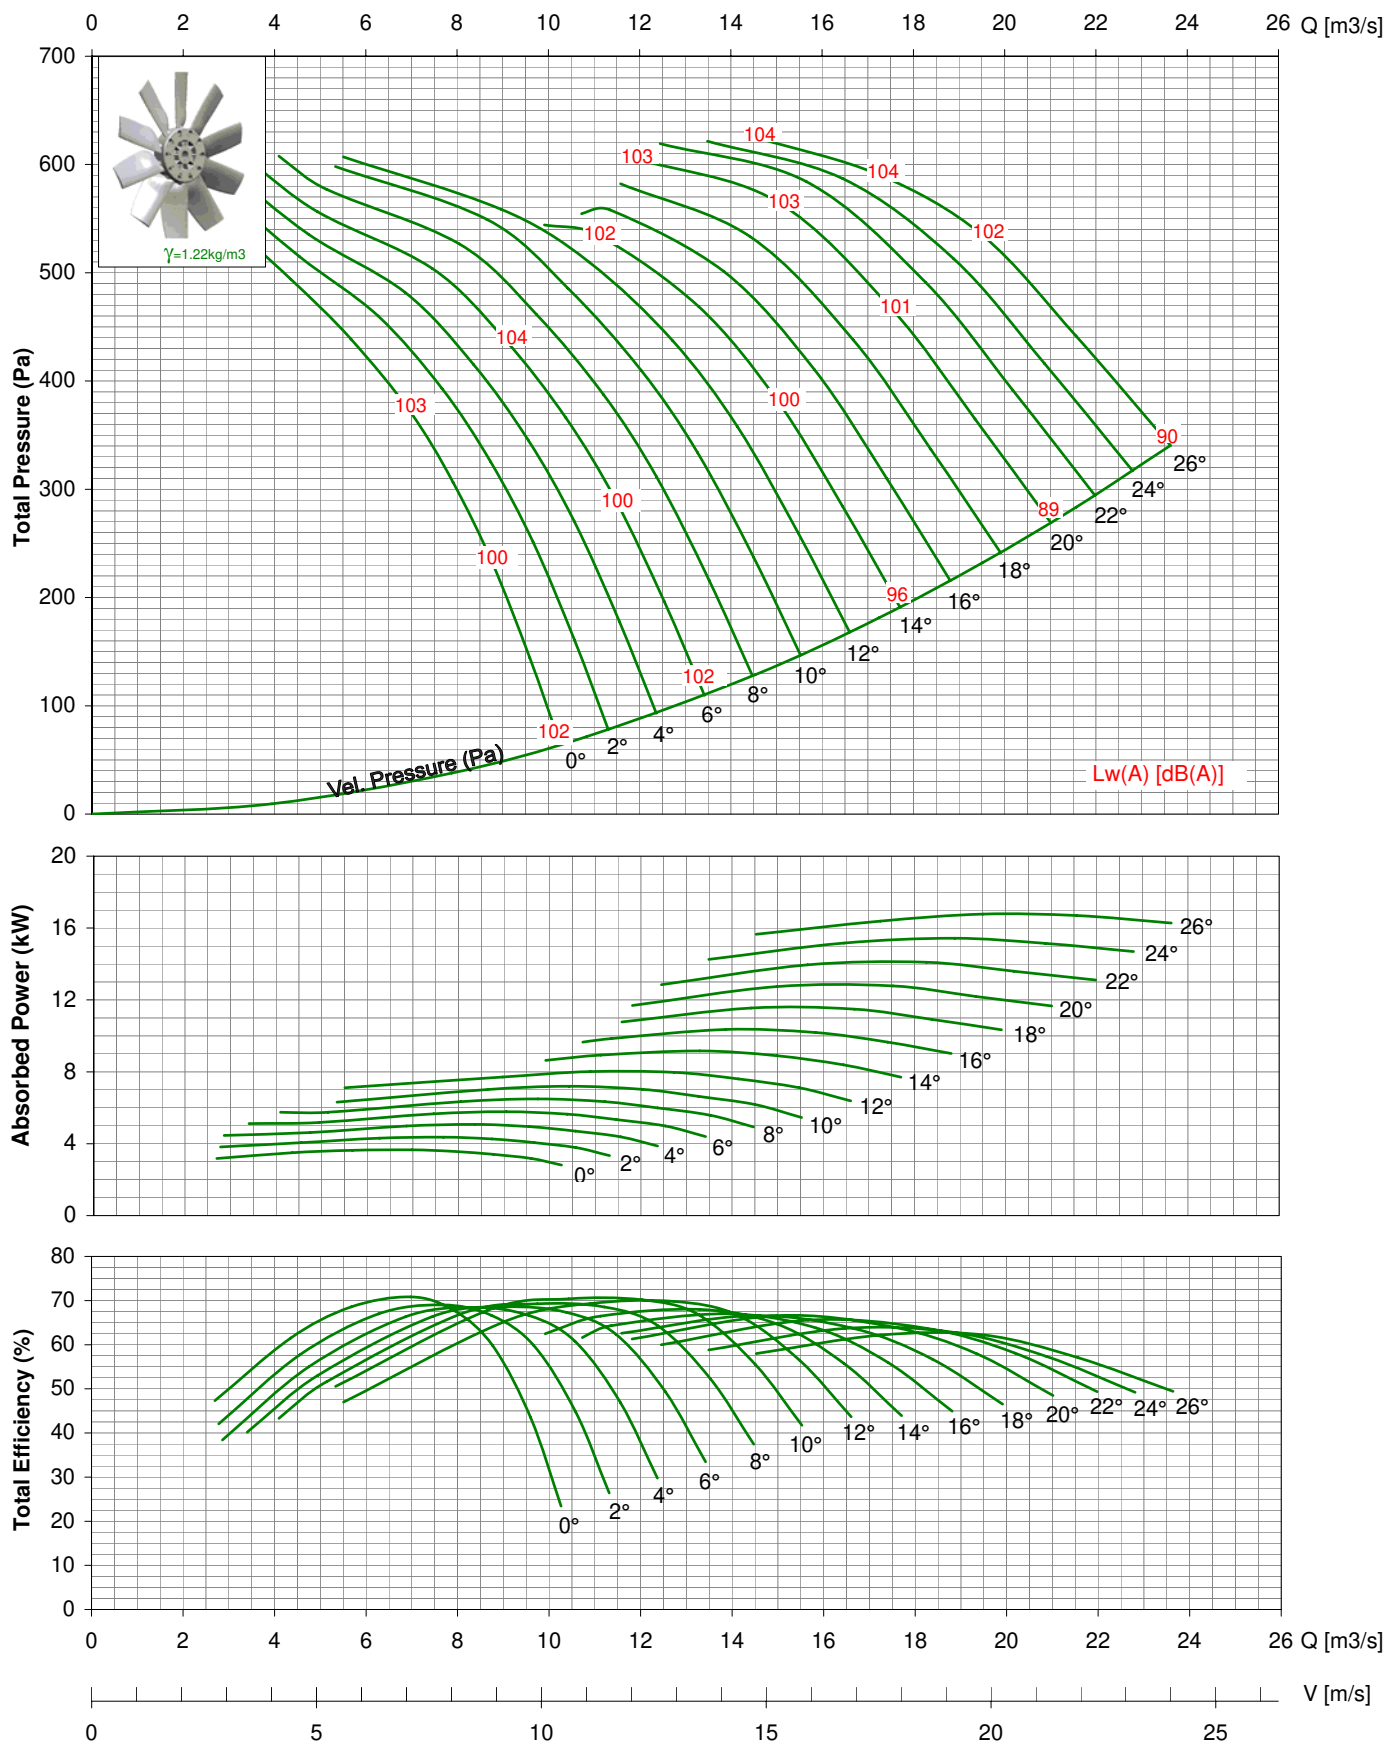

- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- Power ratings (kW) does not include transmission losses.
- The A-weighted sound ratings shown have been calculated per AMCA Standard 301. Values shown are for inlet Lw(A) sound power level for installation type D - ducted inlet, ducted outlet, rating include the effect of duct end correction.
- The AMCA Certified Ratings Seal applies to air performance only. dBA levels are not licensed by AMCA international.

KRUGER GROUP (VENTILATION)

• THAILAND (Regional HQ)

KRUGER VENTILATION INDUSTRIES ASIA CO. LTD.

30/159 Moo 1, Sinsakorn Industrial Estate,
Chetsadawithi Road, Khok Kham Mueng, Samuthsakorn 74000, Thailand
Tel. + 662 1054298 - Fax + 662 0248256-9
Website: www.krugerfan.com

• CHINA (GUANGZHOU)

GUANGZHOU KRUGER VENTILATION CO. LTD

No. 9 Huahui Road, Huashan, Huadu,
Guangzhou, P.R. China 510880
Tel. + 86 20-66356635 - Fax + 86 20-86786001/86786500
Email: kgv@krugerfan.com.cn

• CHINA (TIANJIN)

TIANJIN KRUGER VENTILATION CO. LTD

No.168 Anyuan Road, Jingjin Science and Technology Park
Wuqing District, Tianjin, China
Tel. + 86 22-22143480/3481 - Fax + 86 22-22143482
Email: ktj@krugerfan.com.cn

• HONG KONG

KRUGER VENTILATION (HONG KONG) LIMITED

Flat C, 9/F, Yeung Yiu Chung (No.8) Industrial Building,
20 Wang Hoi Road, Kowloon Bay, Kowloon, Hong Kong
Tel. + 852 22469182 - Fax + 852 22469187
Email: info@kruger.com.hk

• INDIA (Haryana)

KRUGER VENTILATION INDUSTRIES (INDIA) PVT. LTD.

Plant-1 :Khasra No. 150/20/2/1, 151/16/2/2, Village-Rohad,
Bahadurgarh, Jajhjar, Haryana – 124507, India
Plant-2 : Khasra No.: 2-0, 14/3, 4-10, 15/1, 6-2, 20 Area: 4 Kanal 4 Marla,
Khewat No.: 1007/868, Khata No.: 1068, Killa No.: 146/6 (7-12, 7/1)
Village Rohad, Bahadurgarh–Rohtak Road, Bahadurgarh, District
Jhajjar – 124507, Haryana, India
Tel. : +91 995 8991 652 / 998 8991 660 / 858 6966 303
E-mail : sales.kni@krugerventilation.com

• INDONESIA

P.T. KRUGER VENTILATION INDONESIA

JL. Teuku Umar No.20, RT. 001/RW. 001.
Karawaci - Tangerang 15115, Indonesia
Tel. +62 21-5512288/5513557/5513576/5514353
Fax. +62 21-5513502
Email: mktg@krugerventilation.co.id

• MALAYSIA

KRUVENT INDUSTRIES (M) SDN BHD

Lot 850, Jalan Subang 7, Taman Perindustrian Subang,
47500, Subang Jaya, Selangor D.E.
Tel. + 603 80743399 - Fax + 603 80743388
Email: mktg@kruger.com.my

• PHILIPPINES

KRUGER M&E INDUSTRIES CORPORATION

B3 Welborne Industria Park, Bancal,
Carmona, Cavite, Philippines 4116
Tel. +63 917 561 9088, +63 917 596 7288,
+63 917 712 84348, +63 917 306 8288
Email: mktg@krugerventilation.ph

• TAIPEI

KRUGER VENTILATION (TAIWAN) CO. LTD

No. 157, Ping-an Rd, Hengfeng Village,
Dayuan Shiang Taoyuan County 337, Taiwan
Tel. + 886 3-3859119 - Fax + 886 3-3859118
Email: sales@krugertwn.com.tw

• AUSTRALIA

S&P-KRUGER AUSTRALIA PTY LTD

2 Cunningham St, Moorebank N.S.W. 2170
Tel. + 61 2-98227747
Fax. + 61 2-98227757
Email: info@sandpkruger.com.au

• CHINA (SHANGHAI)

SHANGHAI KRUGER VENTILATION CO. LTD

No. 500 Yuanguo Road, Anting, Jiading,
Shanghai 201814 P.R. China
Tel. + 86 21-69573266 - Fax + 86 21-69573296
Email: ksh@krugerfan.com.cn

• CHINA (WUHAN)

WUHAN KRUGER VENTILATION CO. LTD

No. 805, Huian Ave, Dongxihu District, Wuhan, Hubei, P.R. China 430000
Tel. + 86 27- 83248840
Fax + 86 27- 83261886
Email: kwv@krugerfan.com.cn

• INDIA (Chennai)

KRUGER VENTILATION INDUSTRIES (INDIA) PVT. LTD.

Plot no : E-23/1, Survey no: 279, SIPCOT Industrial Estate,
Rungtattukottai, Sriperumbudur Taluk, Tamilnadu – 602117, India
Tel. : +91 978 9982 290
E-mail : giriprabhu@krugerventilation.com

• INDIA(Mumbai)

KRUGER VENTILATION INDUSTRIES (INDIA) PVT. LTD.

Village-Kalamgaon, Mumbai-Nashik Highway,
Tal-Shahapur, Dist. Thane- 421 601. Maharashtra, India
Tel. : +91 996 0558 899 / 997 5577 211 - Fax : +91 2527 240075
E-mail : sales@krugerventilation.com

• KOREA

NEOMATE CO. LTD

2-1010, Ace High Tech City B/D, 775 Gyeongin-ro,
Yeongdeungpo-gu, Seoul, Korea. Postal Code 07299
Tel. + 82-2-2679-2052 - Fax. + 82-2-2679-2174
Email: y7890@neomate.co.kr

• MIDDLE EAST

CONTACT : KRUGER VENTILATION INDUSTRIES (INDIA) PVT. LTD.

Tel. : +91 9766323730 / +91 9975577211
Email : rahul@krugerventilation.com

• SINGAPORE

KRUGER ENGINEERING PTE LTD

2 Venture Drive #20-23, Vision Exchange,
Singapore 608526.
Tel. + 65 68631191 - Fax + 65 68631151
Email: mktg@krugerfan.com

• VIETNAM

KRUGER VENTILATION INDUSTRIES (VIETNAM) CO. LTD

Lot A7. 2-4, C2 Road, Thanh Thanh Cong IZ,
Trang Bang Dist. Tay Ninh Province, Vietnam
Tel. + 84-276 3585200/01/02 - Fax + 84-276 3585199
Email: mktg@krugervn.com

The company is always improving and developing its products, therefore the company reserves the right of making changes to the illustrated products.
Certified dimension can be provided upon request.

Kruger Ventilation Industries(India) Pvt Ltd

Kruger Centre, MumbaiNasik Highway, Kalamgaon, Shahapur,
Thane 421601, Maharashtra, India

Tel: +919960558899/9975577211

Email: sales@krugerindia.com

Website: www.krugerfan.com

CNo.-CAT015.E2.KAG April 2026