

OPPOSED BLADE - PARALLEL BLADE DAMPER

Suggested Specifications:

Furnish and install at location shown on drawing or in accordance with schedules dampers meeting the following specifications: Rectangular damper shall have 16 gauge galvanized steel blades with galvanized steel rollformed frames. Damper to be equal to United Enertech MODEL CD-110 or CD-111.

Ratings:

Pressure - up to 8" [203mm] w.g.

FPM Table

12" wide	- 3500 FPM
24"	- 2800
36"	- 2300
48"	- 2100

Standard Features:

Frame: Rollformed Galvanized Steel

Blades: 4"-7" [102mm - 178mm]wide,
16ga. Galvanized Steel

Bearing: Nylon


Linkage: Concealed in frame

Axles: 3/8" [9.52mm] square plated steel


Control Shaft: Ø1/2" x 4-1/2" [13mm x 114mm] long shaft supplied with all single section dampers for field mounted actuators. Factory-installed jackshaft supplied with all multiple section dampers

Options:


- ☐ Blade Seals TPV (180° F) [82° C]
- ☐ Compression Jamb Seals (stainless steel)
- ☐ Header Plates (end flange)
- ☐ Hand Quadrant
- ☐ Stand Off Bracket, 2" [51mm]
- ☐ Factory Installed Pneumatic or Electric Actuators (see cat. sheet H-1)
- ☐ Face and Bypass Damper
- ☐ Chain Operator
- ☐ Position Switch
- ☐ Flange frame (one side)

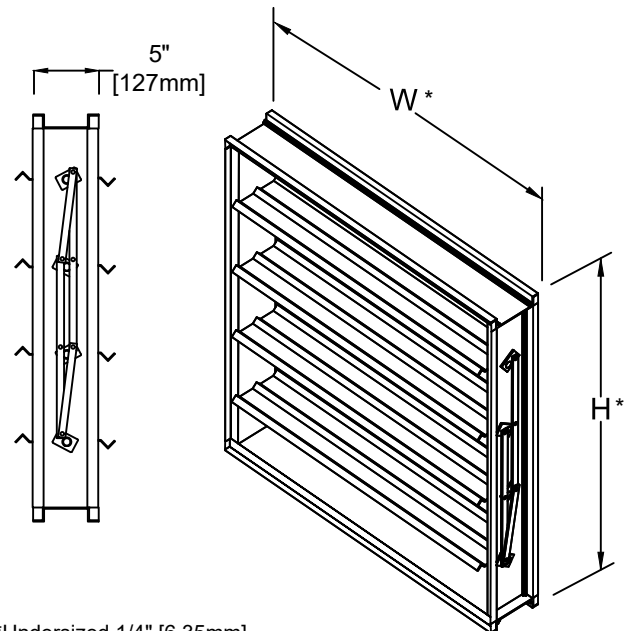

*Undersized 1/4" [6.35mm]
 Minimum Size: 6"w x 6"h [152mm x 152mm]
 Maximum Size: 48"w x 74"h [1219mm x 1880mm] (single section)
 9" [229mm]h and under - single blade
 Maximum multi-section: unlimited

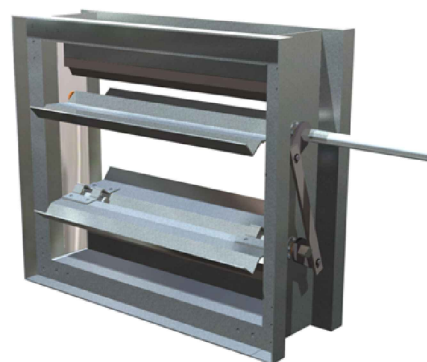

OPTIONAL:

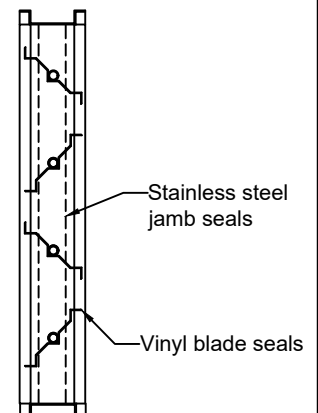

Job Name:	☐ MODEL CD-110 (Opposed)		
Location:	☐ MODEL CD-111 (Parallel)		
Architect:	DRAWN BY: CLJ	DATE: March 2026	
Engineer:	REV. NO. 1		DWG. NO.: A-3
Contractor:			

MODEL CD-110 PERFORMANCE DATA

Imperial Units (Forward Flow)

Damper Width X Height	1 in. w.g. Class	4 in. w.g. Class	8 in. wg Class	*Torque (per sq. ft.)
12" X 48"	Class 1	Class 1	Class 1	11.5 lbs-in
48" X 36"	Class 1A	Class 1	Class 1	11.33 lbs-in

Air leakage is based on operation between 50° F to 104° F. All data corrected to represent air density of 0.075 lbs/ft³.

Imperial Units (Reverse Flow)

Damper Width X Height	1 in. w.g. Class	4 in. w.g. Class	8 in. wg Class	*Torque (per sq. ft.)
12" X 48"	Class 1	Class 2	Class 3	11.5 lbs-in
48" X 36"	Class 1A	Class 1	Class 2	11.33 lbs-in

*Torque applied to hold damper in closed position

Standard International Units (Forward Flow)

Damper Width X Height (mm)	250 Pa Class	1 KPa Class	2 KPa Class	*Torque (per sq. m.)
305 X 1220	Class 1	Class 1	Class 1	13.97 N-m
1220 X 915	Class 1A	Class 1	Class 1	13.77 N-m


Air leakage is based on operation between 10° C to 40° C. All data corrected to represent air density of 1.201 kg/m³.

Standard International Units (Reverse Flow)

Damper Width X Height (mm)	250 Pa Class	1 KPa Class	2 KPa Class	*Torque (per sq. m.)
305 X 1220	Class 1	Class 2	Class 3	13.97 N-m
1220 X 915	Class 1A	Class 1	Class 2	13.77 N-m

*Torque applied to hold damper in closed position

Air leakage is based on operation between 50° F to 104° F. All data corrected to represent air density of 0.075 lbs/ft³. Tested per AMCA Standard 500-D (leakage), figure 5.4 Alternate.

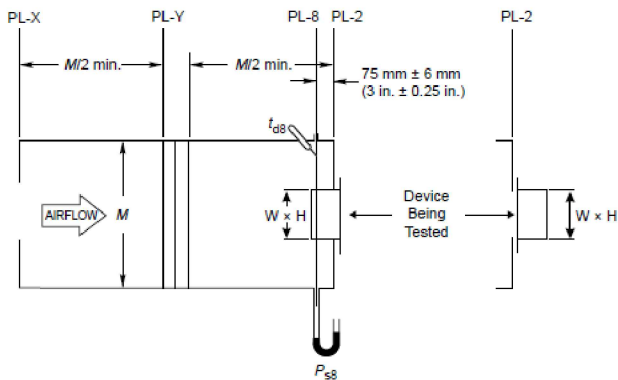

AMCA Standard 500-D (leakage), figure 5.4 Alternate.




United Enertech certifies that the CD-110 is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Rating Seal applies to Air Performance and Air Leakage ratings.

		Leakage, ft ³ /min /ft ²			
		Required Rating		Extended Ranges (optional)	
Pressure Class		1"	4"	8"	12"
1A		3	n/a	n/a	n/a
1		4	8	11	14
2		10	20	28	35
3		40	80	112	140

All data corrected to represent standard air at a density of 0.075 lbs/ft³


MODEL CD-110, 111 PERFORMANCE DATA

AIR FLOW RESISTANCE

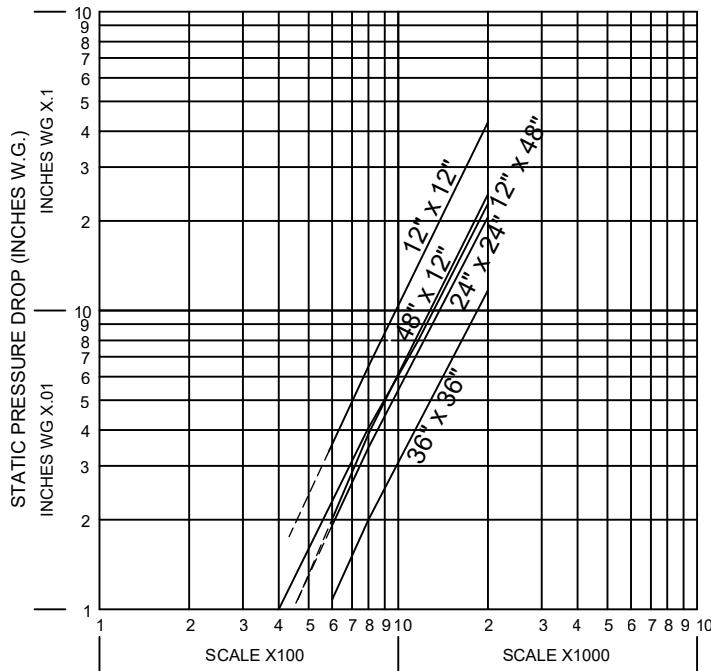

CD-110, 111 sizes: 12" x 12", 24" x 24", 48" x 12", 12" x 48", 36" x 36"
(305 x 305mm, 610 x 610mm, 1219 x 305mm, 305 x 1219mm, 914 x 914mm)
Data corrected to standard air density

Pressure drop test per AMCA Standard 500-D, Figure 5.3.

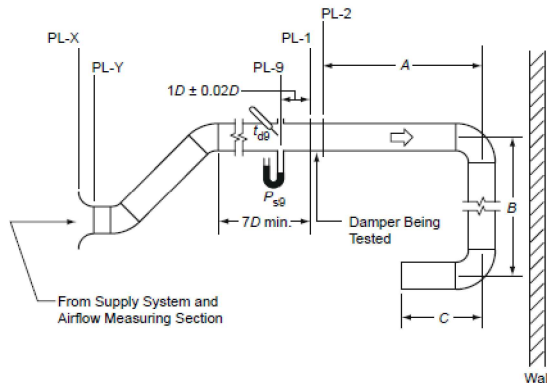

AMCA Figure 5.3 Pressure Drop



United Enertech certifies that the CD-110 is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Rating Seal applies to Air Performance and Air Leakage ratings.



United Enertech certifies that the CD-111 is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Rating Seal applies to Air Performance ratings only.

12"x48" Pressure Drop

Face Velocity		Pressure Drop	
fpm	(m/s)	inches w.g.	(Pa)
395	2.01	0.01	2
787	4.01	0.04	9
1182	6.03	0.08	20
1583	8.07	0.14	36
1978	10.09	0.22	55

Pressure drop test per AMCA Standard 500-D, Figure 5.3.

12"x12" Pressure Drop

Face Velocity		Pressure Drop	
fpm	(m/s)	inches w.g.	(Pa)
586	2.99	0.03	8
806	4.11	0.07	16
1206	6.15	0.15	38
1611	8.22	0.27	67
2025	10.33	0.43	106

Pressure drop test per AMCA Standard 500-D, Figure 5.3.

24"x24" Pressure Drop

Face Velocity		Pressure Drop	
fpm	(m/s)	inches w.g.	(Pa)
598	3.05	0.02	5
802	4.09	0.04	9
1202	6.13	0.08	19
1594	8.13	0.14	34
2000	10.20	0.21	53

Pressure drop test per AMCA Standard 500-D, Figure 5.3.

36"x36" Pressure Drop

Face Velocity		Pressure Drop	
fpm	(m/s)	inches w.g.	(Pa)
592	3.02	0.01	3
794	4.05	0.02	5
1196	6.10	0.05	11
1598	8.15	0.08	20
2006	10.23	0.12	30

Pressure drop test per AMCA Standard 500-D, Figure 5.3.

48"x12" Pressure Drop

Face Velocity		Pressure Drop	
fpm	(m/s)	inches w.g.	(Pa)
601	3.07	0.02	5
804	4.10	0.04	9
1206	6.15	0.09	21
1605	8.19	0.15	38
2009	10.25	0.24	60

Pressure drop test per AMCA Standard 500-D, Figure 5.3.