

# WELAIRE®

## TFA V series



## Adjustable Pitch Angle Axial Fan

### Vane Axial



Zhongshan SAIVER WELAIRE Air-Cond. Equip. Co. Ltd. certifies that the model: TFA/V shown herein is licensed to bear the AMCA Seal.  
The ratings shown are based on tests and procedures performance in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.




## Table of Contents

• Standard Features .....	02
• Adjustable Pitch Axial Fans - V Series .....	03
• Series TFA 630 / 250 / 14 / V / 2880 rpm .....	04
• Series TFA 630 / 250 / 14 / V / 1440 rpm .....	05
• Series TFA 630 / 250 / 14 / V / 960 rpm .....	06
• Series TFA 630 / 250 / 14 / V / 720 rpm .....	07
• Series TFA 800 / 250 / 14 / V / 2880 rpm .....	08
• Series TFA 800 / 250 / 14 / V / 1440 rpm .....	09
• Series TFA 800 / 250 / 14 / V / 960 rpm .....	10
• Series TFA 800 / 250 / 14 / V / 720 rpm .....	11
• Series TFA 800 / 250 / 12 / V .....	12
1440 rpm .....	
960 rpm .....	
720 rpm .....	
• Series TFA 1000 / 300 / 10 / V .....	13
• Series TFA 1000 / 350 / 12 / V .....	14
• Series TFA 1000 / 350 / 12 / V / 960 rpm .....	15
• Series TFA 1000 / 350 / 12 / V / 720 rpm .....	16
• Series TFA 1120 / 300 / 10 / V .....	17
• Series TFA 1120 / 350 / 12 / V .....	18
• Series TFA 1250 / 350 / 12 / V / 1440 rpm .....	19
• Series TFA 1250 / 350 / 12 / V / 960 rpm .....	20
• Series TFA 1250 / 350 / 12 / V / 720 rpm .....	21
• Series TFA 1400 / 350 / 12 / V / 1440 rpm .....	22
• Series TFA 1400 / 350 / 12 / V / 960 rpm .....	23
• Series TFA 1400 / 350 / 12 / V / 720 rpm .....	24
• Series TFA 1400 / 350 / 12 / V / 580 rpm .....	25
• Series TFA 1400 / 420 / 11 / V / 1440 rpm .....	26
• Series TFA 1400 / 420 / 11 / V / 960 rpm .....	27
• Series TFA 1400 / 420 / 11 / V / 720 rpm .....	28
• Series TFA 1400 / 420 / 11 / V / 580 rpm .....	29
• Series TFA 1600 / 420 / 11 / V / 1440 rpm .....	30
• Series TFA 1600 / 420 / 11 / V / 960 rpm .....	31
• Series TFA 1600 / 420 / 11 / V / 720 rpm .....	32
• Series TFA 1600 / 420 / 11 / V / 580 rpm .....	33
• TFA Series Dimension .....	34

# Standard Features

- A** High static pressure
- B** High air volume
- C** High efficiency with low energy consumption
- D** Uniquely designed guide vanes
- E** Aerofoil impeller featured with adjustable pitch angle
- F** Precision die cast Aluminum hub and blades
- G** High strength and rigidity spun flanges design
- H** Terminal box in UIP55 mounted externally on casing for easy wiring connection
- I** Equipped with single or three-phase motor in IP55 and class F insulation

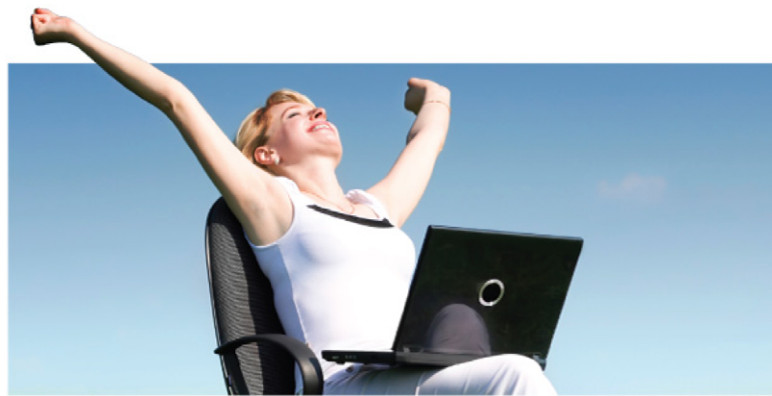

Exova Warringtonfire Aus Pty Ltd  
10/21, 10/22, 10/23, 10/24, 10/25, 10/26, 10/27, 10/28, 10/29, 10/30, 10/31  
10/21, 10/22, 10/23, 10/24, 10/25, 10/26, 10/27, 10/28, 10/29, 10/30, 10/31  
10/21, 10/22, 10/23, 10/24, 10/25, 10/26, 10/27, 10/28, 10/29, 10/30, 10/31

Postal Address:  
10/21, 10/22, 10/23, 10/24, 10/25, 10/26, 10/27, 10/28, 10/29, 10/30, 10/31  
10/21, 10/22, 10/23, 10/24, 10/25, 10/26, 10/27, 10/28, 10/29, 10/30, 10/31  
10/21, 10/22, 10/23, 10/24, 10/25, 10/26, 10/27, 10/28, 10/29, 10/30, 10/31

Testing, Advising, Assuring

**EXOVA**  
Warringtonfire

**EWFA CERTIFICATE OF TEST**      CERTIFICATE No: SFC 2144500a.6      Page 1 of 1

Report Sponsor	Certificate Issue Date
GTU Industries Sdn Bhd, 25-2, 1st Floor, Jalan P.U.J.3/36A, Sungei Chini, 75700, Kuala Lumpur, Malaysia	03/04/2013

**Introduction**  
The element of construction described below was tested by this laboratory on behalf of the test sponsor in accordance with the stated test standard and achieved the results stated below. Refer to the referenced test report for further information.

Referenced Reports	Report Date	Test Standard
WFR 2144500a.1	24/03/07	BS7346

**Description of Test Assembly**  
The test assembly comprised an electrically powered axial fan within a fan casing and installed within an instrumented section of duct.  
**TEST SPECIMEN** - The axial fan was a GTU Model No. T within a fan casing of nominal ID 1250 mm. Other model the manufacturer to be WELFARE - TFA 1250/420/101. The fan impeller consisted of 4 aluminum blades with a pitch angle of 10° to the inside of the fan casing.  
The tested motor was a JEM Squirrel Cage Induction Motor 415 V / 50 Hz with a maximum FLC at ambient of 30.75 ampere rated speed was 1440 rpm. The frame size was O-RENTATION - The specimen was installed with the fan & motor to the full report, WFR 2144500a.1, for a complete & behaviour.

**Test Results**

Test	Result
Structural	No failure at 120 minutes
Electrical	No failure at 120 minutes
Aerodynamic	No failure at 120 minutes
Fire Rating Classification	0

**Notes**  
THIS CERTIFICATE IS PROVIDED FOR GENERAL INFORMATION ONLY AND DOES NOT COMPLY WITH THE REGULATORY REQUIREMENTS FOR EVIDENCE OF COMPLIANCE. Reference should be made to the relevant test report to determine the applicability of the test result to a proposed installation. The results of these tests may be used to assess the hazard, but it should be recognised that a simple test method will not provide a full assessment of fire hazard under all conditions.

**TESTING AUTHORITY**  
Exova Warringtonfire Aus Pty Ltd  
10/21, 10/22, 10/23, 10/24, 10/25, 10/26, 10/27, 10/28, 10/29, 10/30, 10/31  
10/21, 10/22, 10/23, 10/24, 10/25, 10/26, 10/27, 10/28, 10/29, 10/30, 10/31  
10/21, 10/22, 10/23, 10/24, 10/25, 10/26, 10/27, 10/28, 10/29, 10/30, 10/31

Reviewed By: *[Signature]*

## Smoke Spill Application (on request)

The TFA V series can be used for smoke spill applications. The fan with class H insulation is capable of withstanding up to 250°C for 2 hours in accordance to BS7346: Part 2, which was tested by Exova Warringtonfire Aus Pty Ltd.

# Adjustable Pitch Axial Fans V Series

**WELAIRE®** fully adjustable pitch vane axial fans are available in various sizes from 630mm diameter up to 1400mm diameter. The V series comes with uniquely designed guide vanes that enable the fan to deliver high air volume for high pressure applications at high efficiency.

The wide range of fan diameters, various hub designs and blade configurations, different pitch angles and motor speeds allow accurate selection of the fan to match the specific duty.

Pitch angle adjustment can be readily carried out on site allowing the fan performance to be modified to the final system resistance.

Whilst the standard range of axial fan cover most applications, purposed designed casings and mountings are available.



## Standard Product

### SPECIFICATION

#### Guide Vane

Multi vane section designed to serve as static regain device to ensure maximum efficiency in converting the velocity pressure to static pressure with minimal turbulence.

The function of the guide vanes is to improve the efficiency and the pressure characteristics by converting rotational energy at the propeller discharge into useful work.

#### Impellers

Precision cast aluminum adjustable pitch aerofoil blades are attached to injection cast aluminum hub, incorporate a taper lock bushing and keyed to the motor shaft for easy installation and removal.

Large hub to blade ratio prevents backflow of air and moves large volumes of air at high pressures.

#### Housings

Heavy gauge, mild steel casing, drum and rolled steel flanges finishes in hot-dipped galvanised (as standard) or epoxy powder coated (on request)

#### Motors

Motors are 415V / 3 Phase / 50Hz, foot mounted TEA squirrel cage induction type with class F insulation.

#### Options are available for varying range of applications including:

- Single phase
- Special frequency
- Explosion proof
- Speed control
- High temperature
- 2 speed
- Smoke spill
- Thermal overload protection
- Special voltage
- Special insulation

#### Product Identification

##### TFA 630/250/14/V-20

- TFA - Model Tube Axial
- 630 - Case Diameter
- 250 - Hub Diameter
- 14 - No. of Blades
- V - Vane Axial Series
- 20 - Blade angle

#### Options

- Inlet and discharge cones
- Inlet and discharge guards
- Flexible Connections
- Matching flanges
- Mounting feet
- Vibration isolation mounts
- Sound attenuators

# SERIES TFA 630/250/14/V


Impeller Code : 630/250  
 Size : 630mm  
 Outlet Area : 0.312m<sup>2</sup>

## Adjustable Pitch Angle Vane Axial Fan

FEG67

50Hz  
 2880 rpm

$\rho = 1.2\text{kg/m}^3$

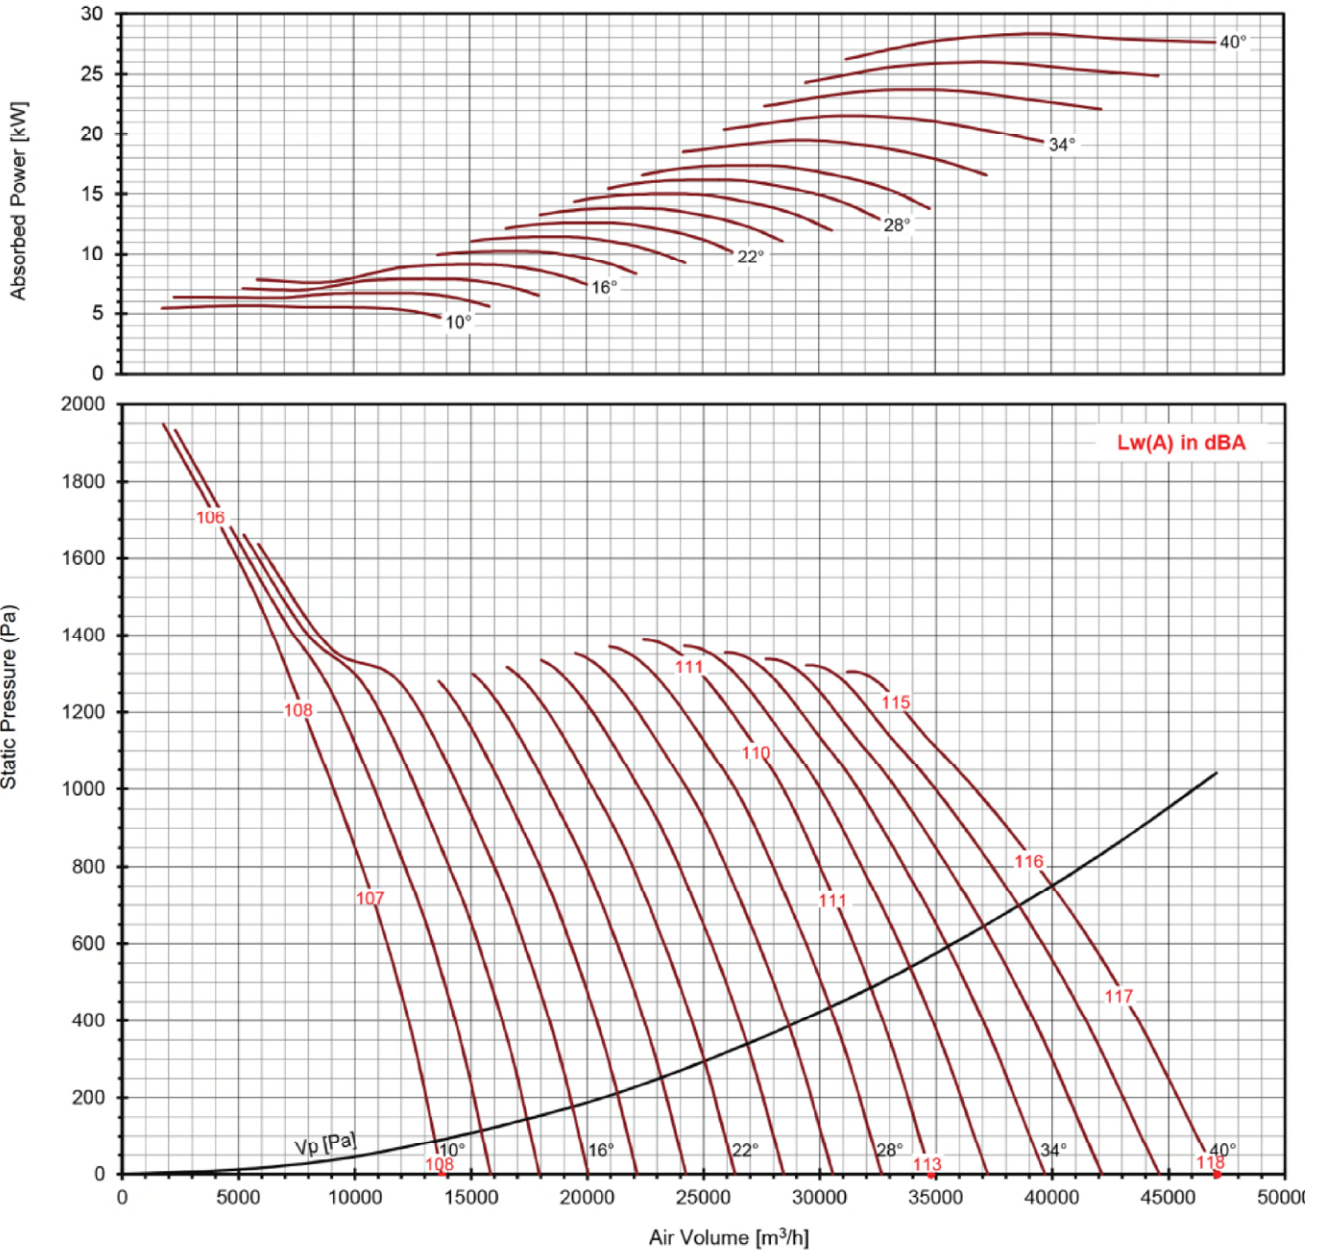

N (rpm)	Blade Pitch Angle														Lp(A) at 3m		
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°		38°	40°
2880	5.67	6.69	7.88	9.06	10.25	11.44	12.62	13.81	14.99	16.18	17.37	19.43	21.50	23.63	25.98	28.34	-20
motor		7.5		11			15			18.5		22			30		

\* Performance certified is for installation type D - Ducted Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D: ducted inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.



**SERIES TFA 630/250/14/V**


Impeller Code : 630/250  
 Size : 630mm  
 Outlet Area : 0.312m<sup>2</sup>

**Adjustable Pitch Angle Vane Axial Fan**

**FEG67**

**50Hz**  
**1440 rpm**

$\rho = 1.2\text{kg/m}^3$

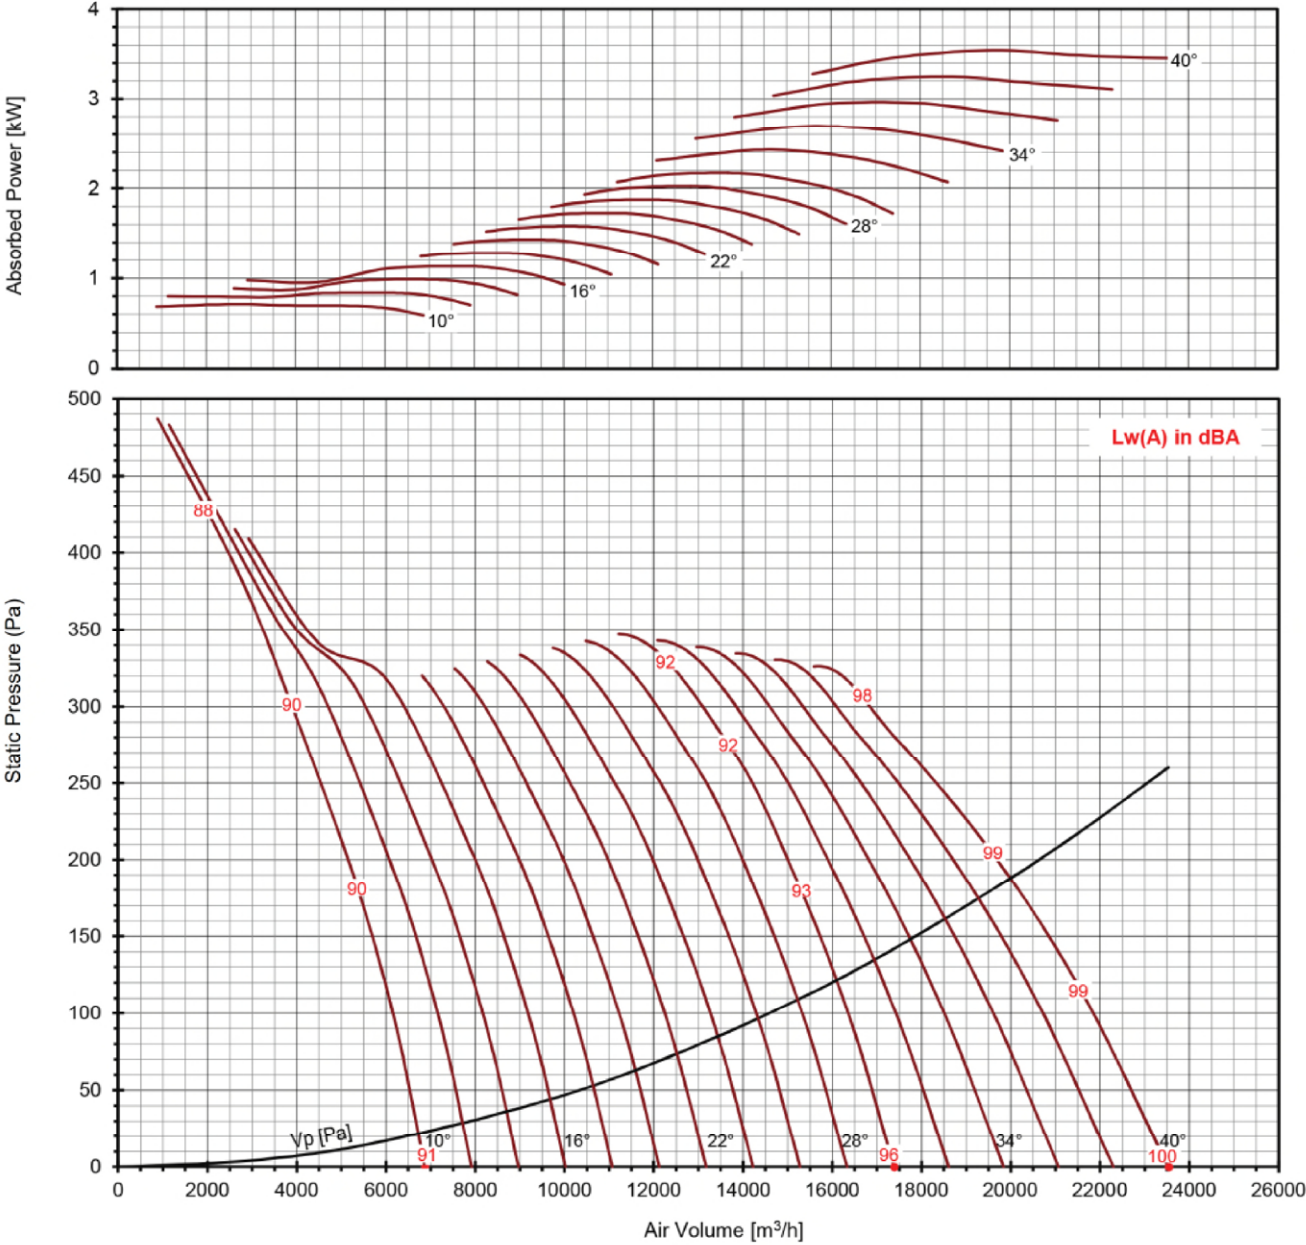

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle																Lp(A) at 3m
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	
1440	0.709	0.836	0.985	1.133	1.281	1.430	1.578	1.726	1.874	2.023	2.171	2.429	2.687	2.954	3.248	3.542	-20
motor	0.75	1.1	1.5	2.2	3	4											

\* Performance certified is for installation type D - Ducted Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D: ducted inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.



**SERIES TFA 630/250/14/V**


Impeller Code : 630/250  
 Size : 630mm  
 Outlet Area : 0.312m<sup>2</sup>

**Adjustable Pitch Angle Vane Axial Fan**

**FEG67**

**50Hz**  
**960 rpm**

$\rho = 1.2\text{kg/m}^3$

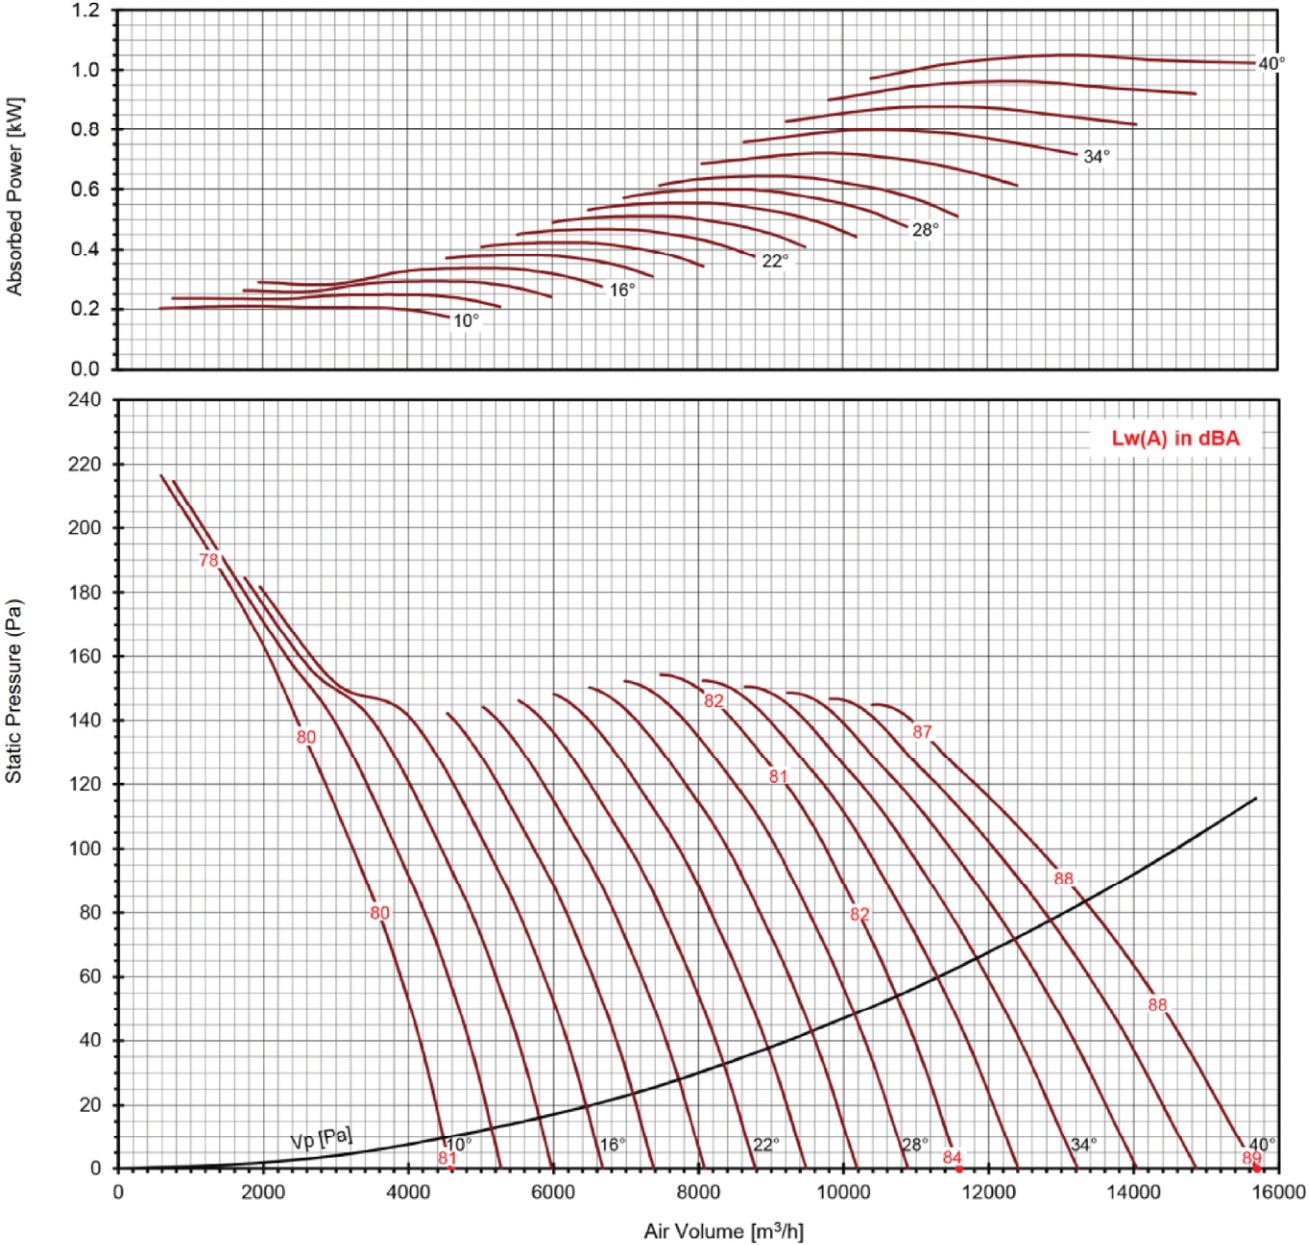

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle																Lp(A) at 3m
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	
960 motor	0.210	0.248	0.292	0.336	0.380	0.424	0.468	0.511	0.555	0.599	0.643	0.720	0.796	0.875	0.962	1.049	-20
		0.37				0.55				0.75				1.1			

\* Performance certified is for installation type D - Ducted Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet LwA sound power levels for installation type D: ducted inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.



**SERIES TFA 630/250/14/V**


Impeller Code : 630/250  
 Size : 630mm  
 Outlet Area : 0.312m<sup>2</sup>

**Adjustable Pitch Angle Vane Axial Fan**

**FEG67**

**50Hz**  
**720 rpm**

$\rho = 1.2\text{kg/m}^3$

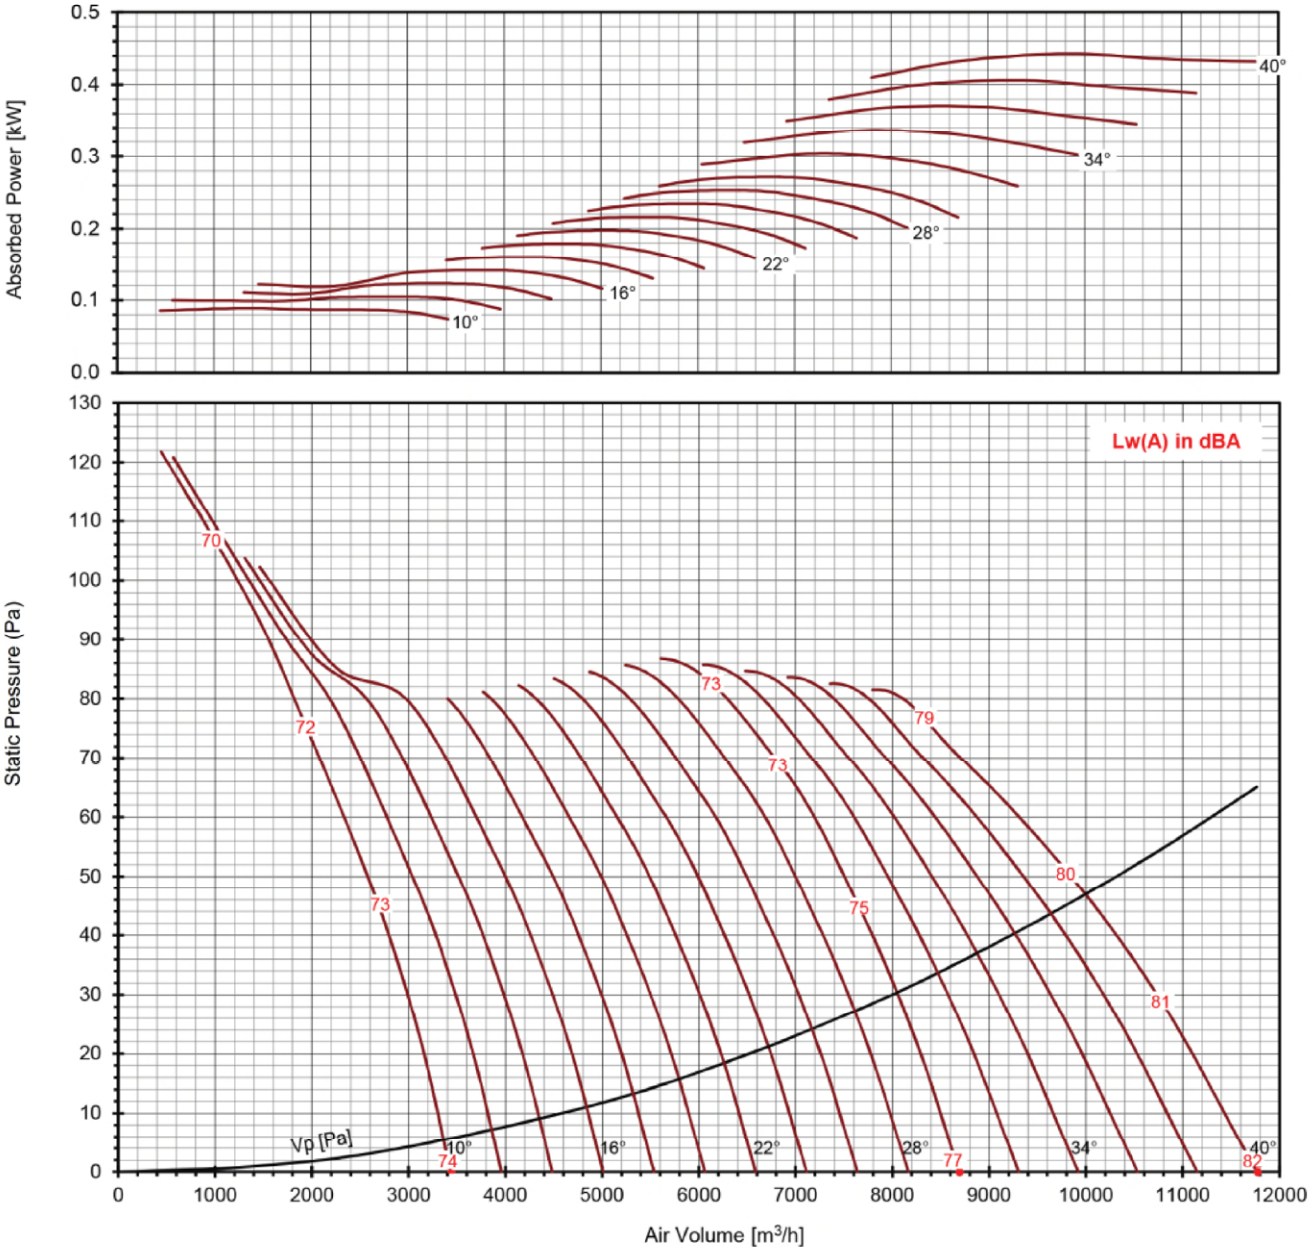

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle														Lp(A) at 3m			
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°		38°	40°	
720 motor	0.089	0.105	0.123	0.142	0.160	0.179	0.197	0.216	0.234	0.253	0.271	0.304	0.336	0.369	0.406	0.443	0.55	-20

\* Performance certified is for installation type D - Ducted Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D: ducted inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.





# SERIES TFA 800/250/14/V


Impeller Code : 800/250  
 Size : 800mm  
 Outlet Area : 0.503m<sup>2</sup>

## Adjustable Pitch Angle Vane Axial Fan

FEG75

**50Hz**  
**2880 rpm**

$\rho = 1.2\text{kg/m}^3$

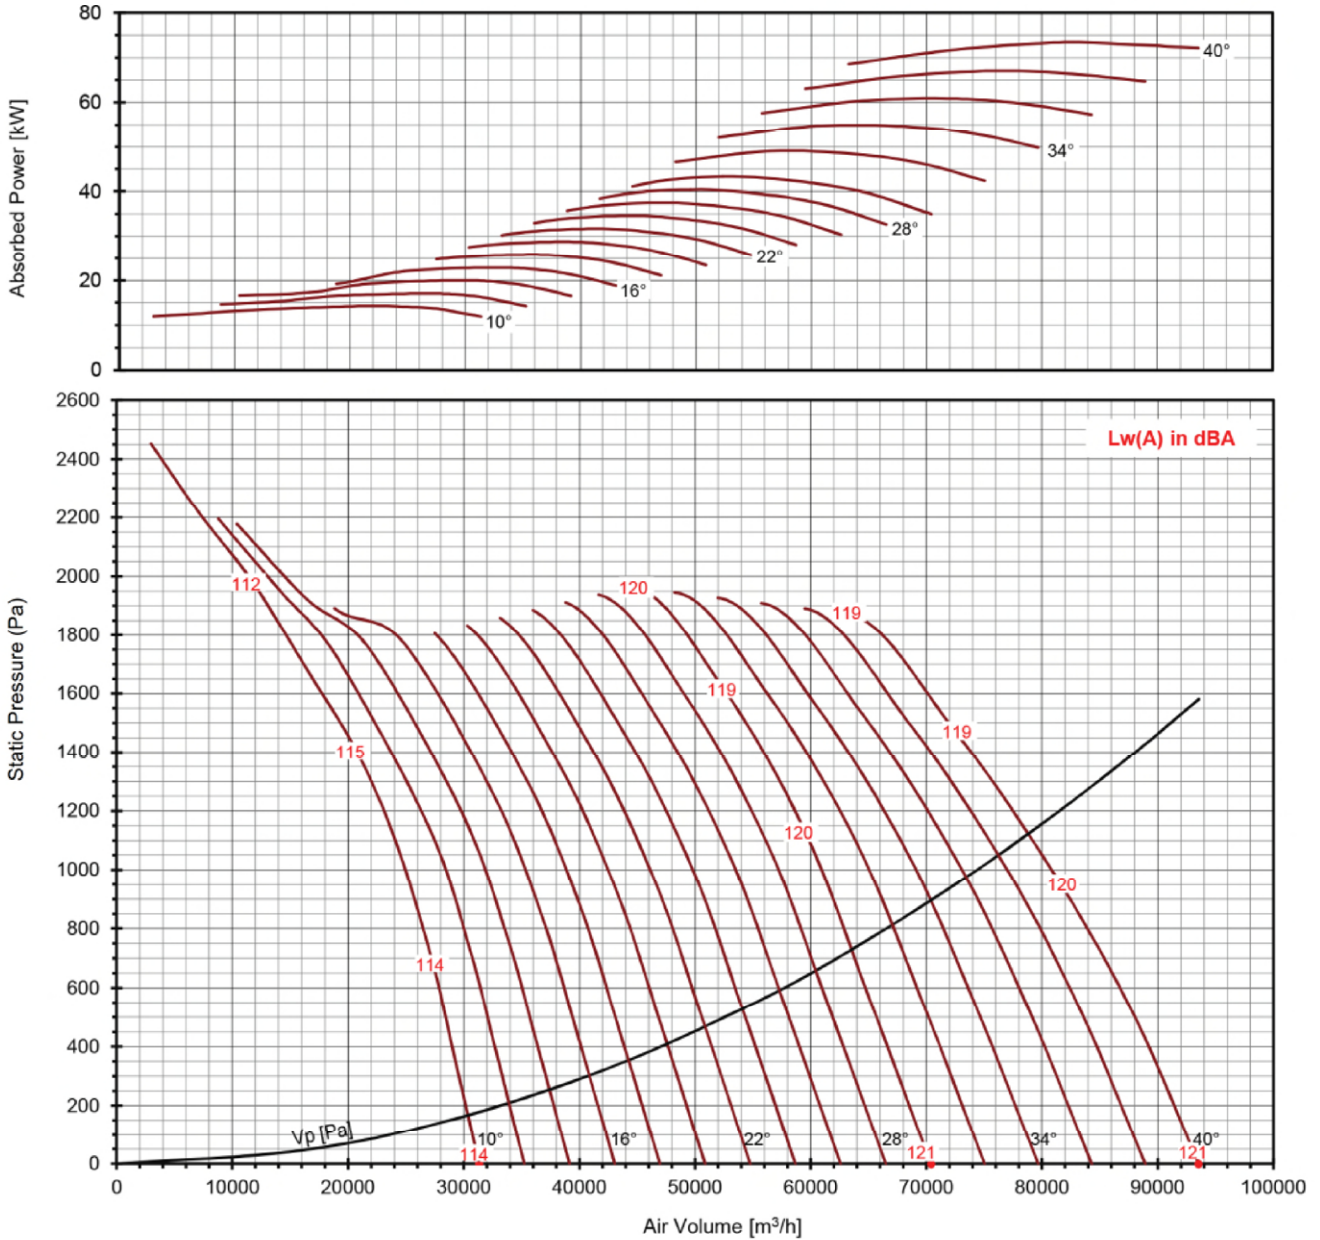

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle																Lp(A) at 3m
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	
2880	14.2	17.1	20.0	22.9	25.8	28.8	31.7	34.7	37.5	40.4	43.3	49.0	54.7	60.9	67.1	73.4	-20
motor	15	18.5	22		30		37		45		55		75				

\* Performance certified is for installation type D - Ducted Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D: ducted inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.



**SERIES TFA 800/250/14/V**


Impeller Code : 800/250  
 Size : 800mm  
 Outlet Area : 0.503m<sup>2</sup>

**Adjustable Pitch Angle Vane Axial Fan**

**FEG75**

**50Hz**  
**1440 rpm**

$\rho = 1.2\text{kg/m}^3$

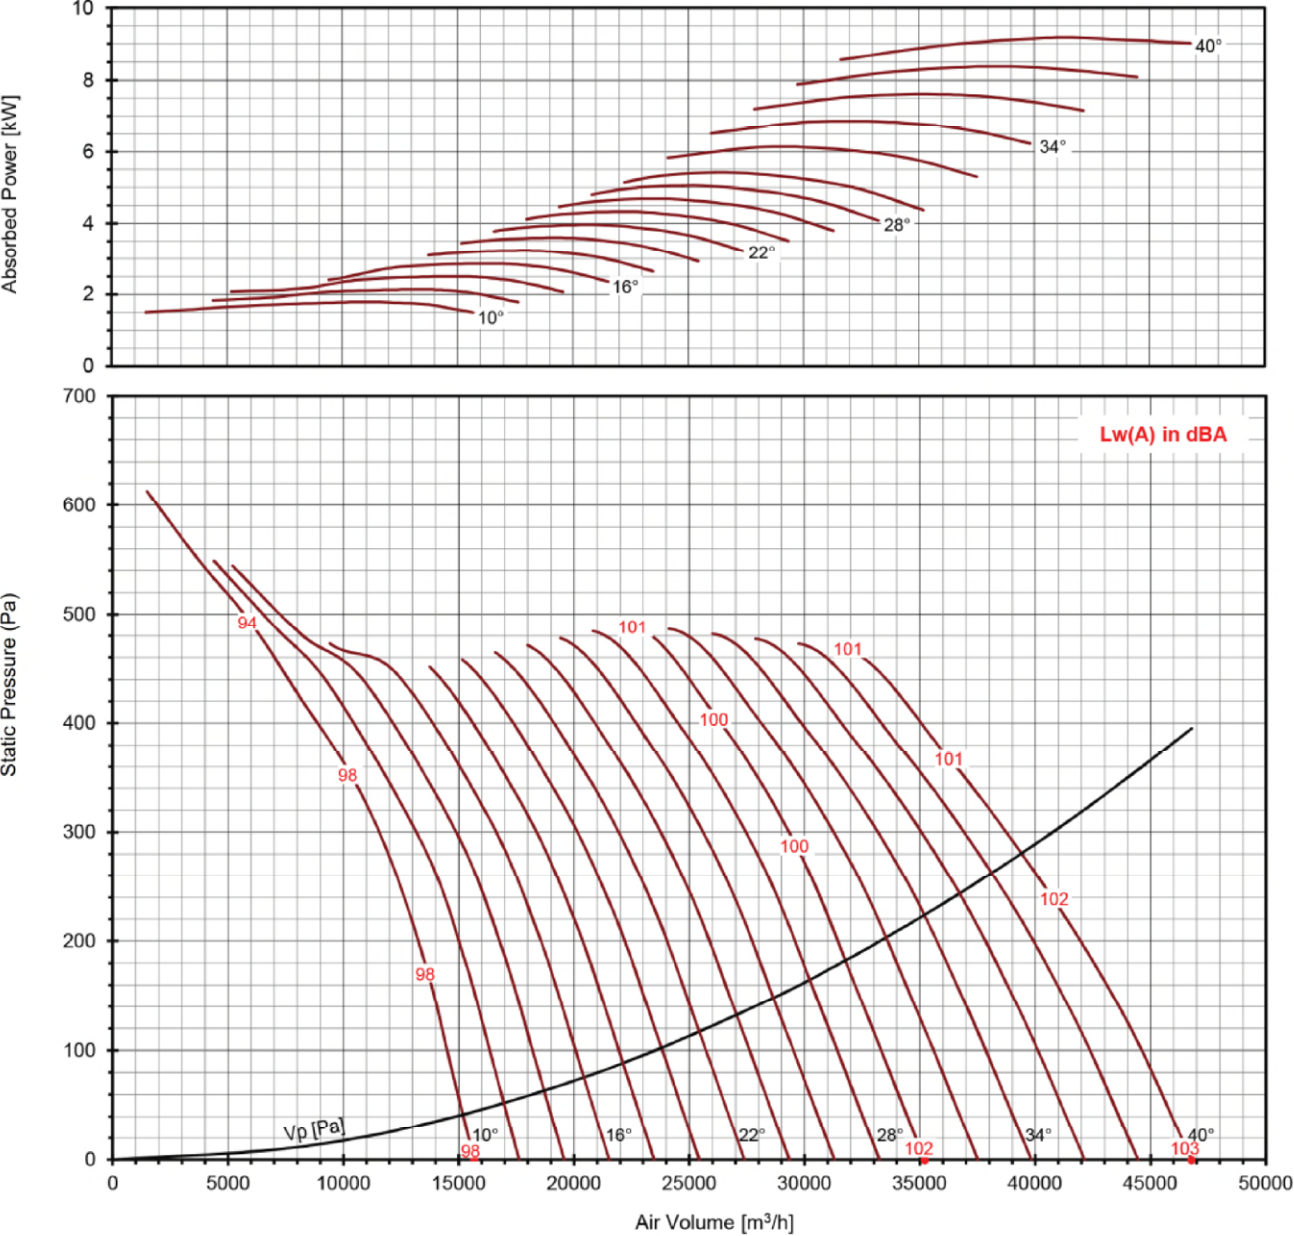

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle															Lp(A) at 3m	
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°		40°
1440	1.78	2.14	2.50	2.86	3.23	3.59	3.96	4.33	4.69	5.05	5.42	6.13	6.84	7.61	8.39	9.17	-20
motor	2.2	3	4	5.5	7.5	11											

\* Performance certified is for installation type D - Ducted Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D: ducted inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.



**SERIES TFA 800/250/14/V**



Impeller Code : 800/250  
 Size : 800mm  
 Outlet Area : 0.503m<sup>2</sup>

**Adjustable Pitch Angle Vane Axial Fan**

**FEG75**

**50Hz**  
**960 rpm**

$\rho = 1.2\text{kg/m}^3$

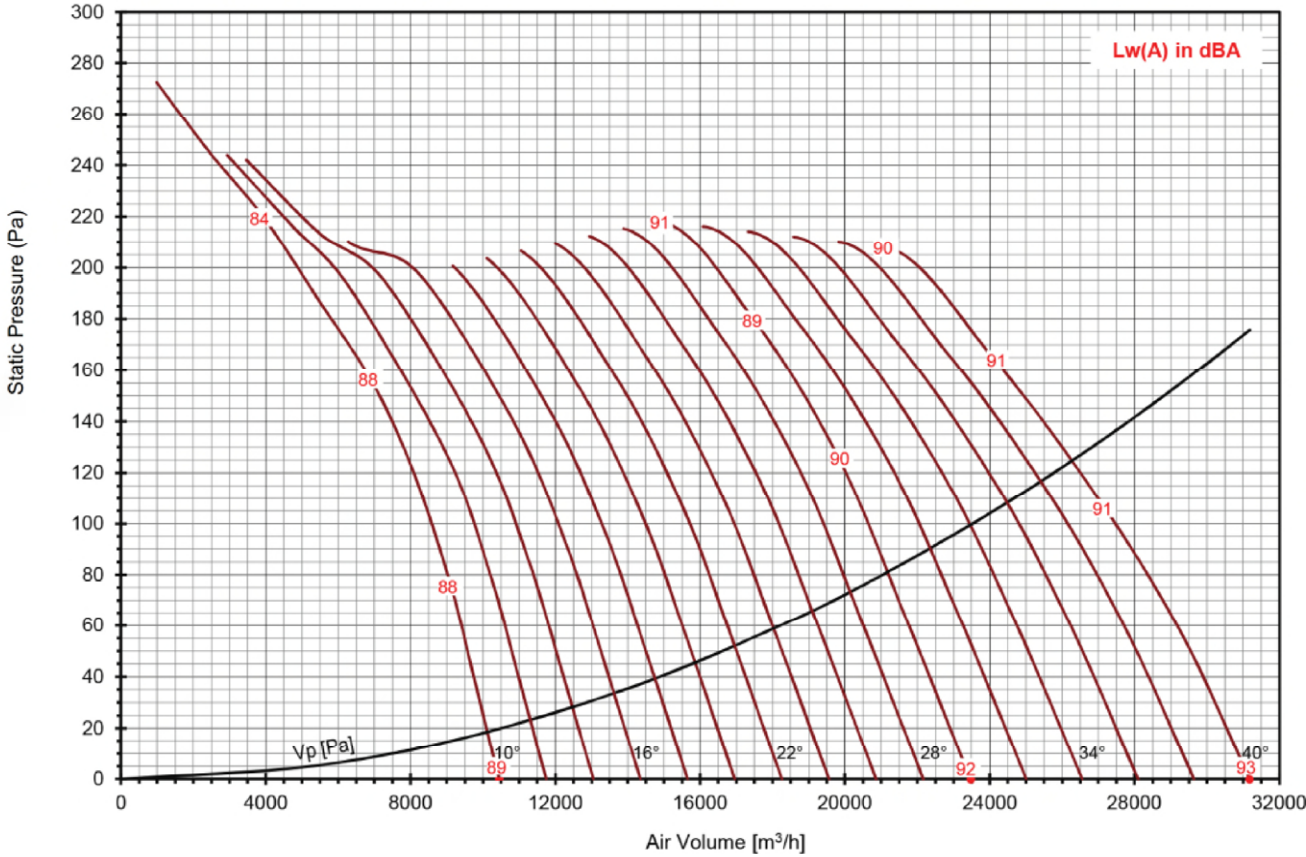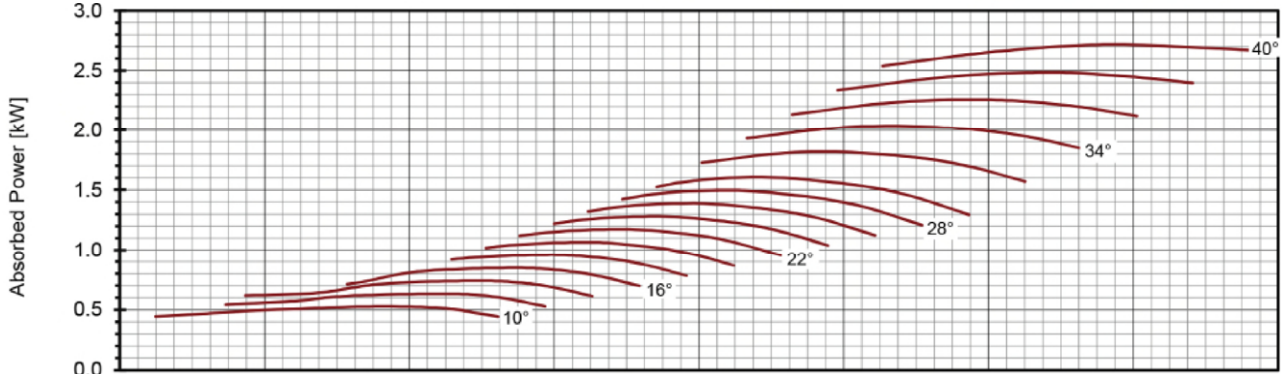

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle																Lp(A) at 3m
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	
960	0.53	0.63	0.74	0.85	0.96	1.06	1.17	1.28	1.39	1.50	1.61	1.82	2.03	2.25	2.49	2.72	-20
motor	0.55	0.75		1.1		1.5		2.2		3							

\* Performance certified is for installation type D - Ducted Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D: ducted inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.



# SERIES TFA 800/250/14/V


Impeller Code : 800/250  
 Size : 800mm  
 Outlet Area : 0.503m<sup>2</sup>

## Adjustable Pitch Angle Vane Axial Fan

FEG75

50Hz  
 720 rpm

$\rho = 1.2\text{kg/m}^3$

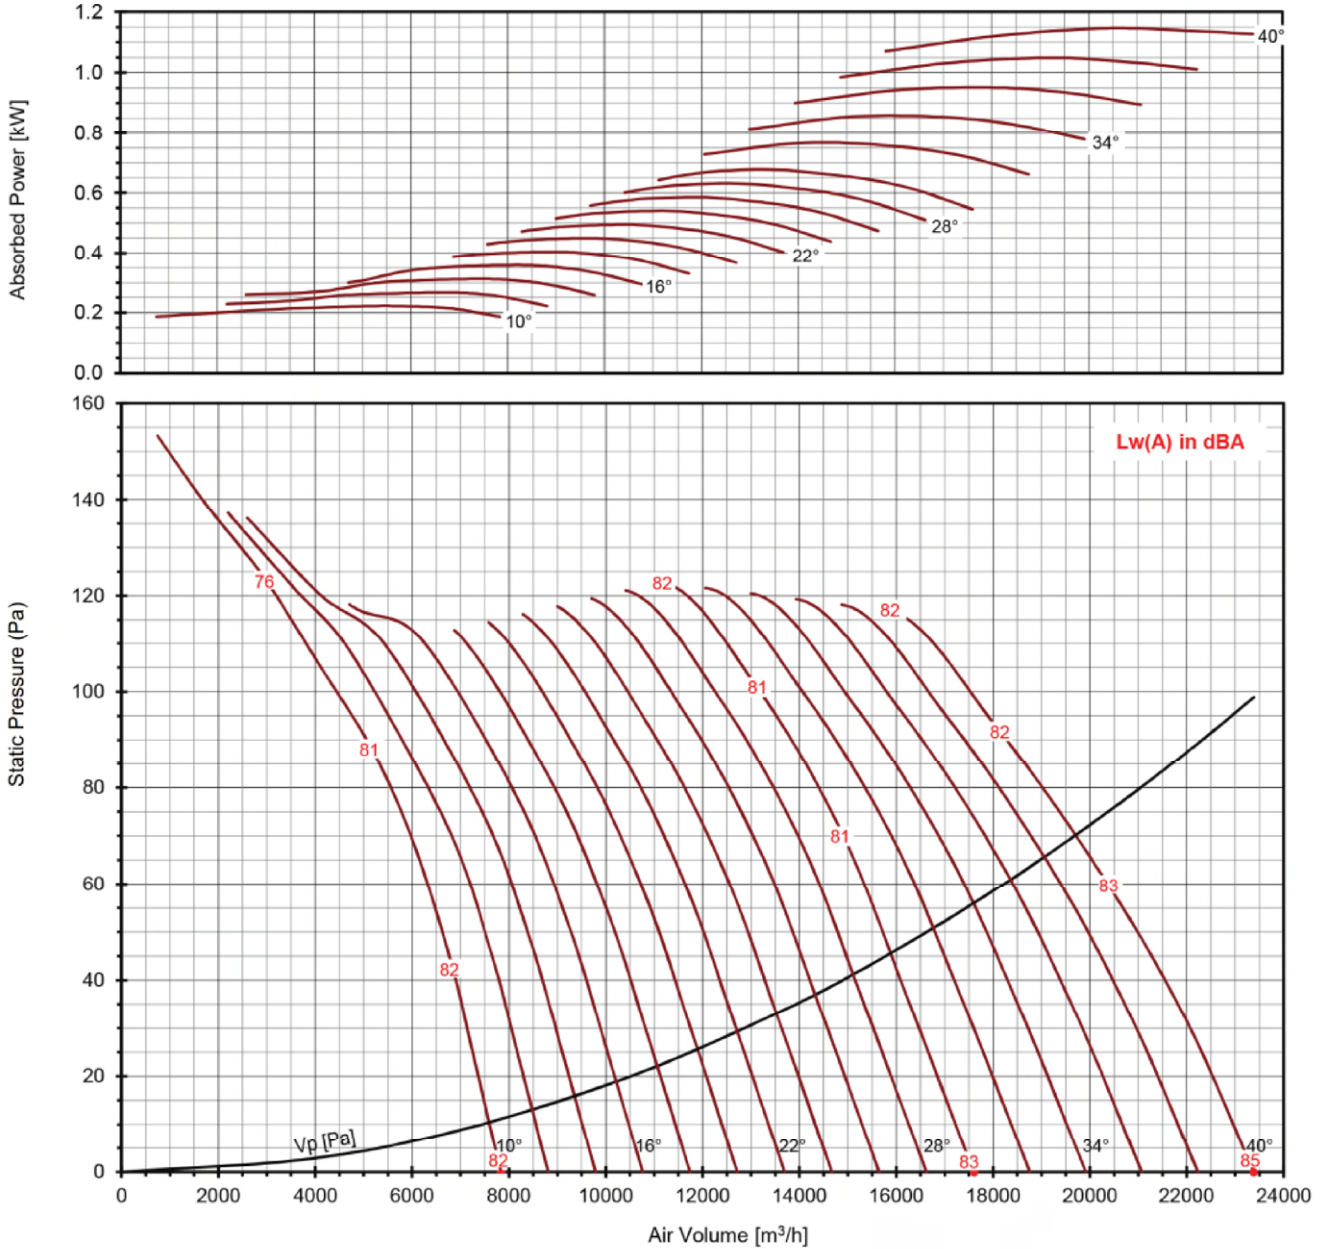

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle																Lp(A) at 3m
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	
720 motor	0.22	0.27	0.31	0.36	0.40	0.45	0.49	0.54	0.59	0.63	0.68	0.77	0.85	0.95	1.05	1.15	-20
		0.37				0.55			0.75				1.1			1.5	

\* Performance certified is for installation type D - Ducted Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D: ducted inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.




# SERIES TFA 800/350/12/V

Adjustable Pitch Angle Vane Axial Fan

Impeller Code : 800/350  
 Size : 800 mm  
 Outlet area : 0.503 m<sup>2</sup>

**FEG 63**

**50Hz**

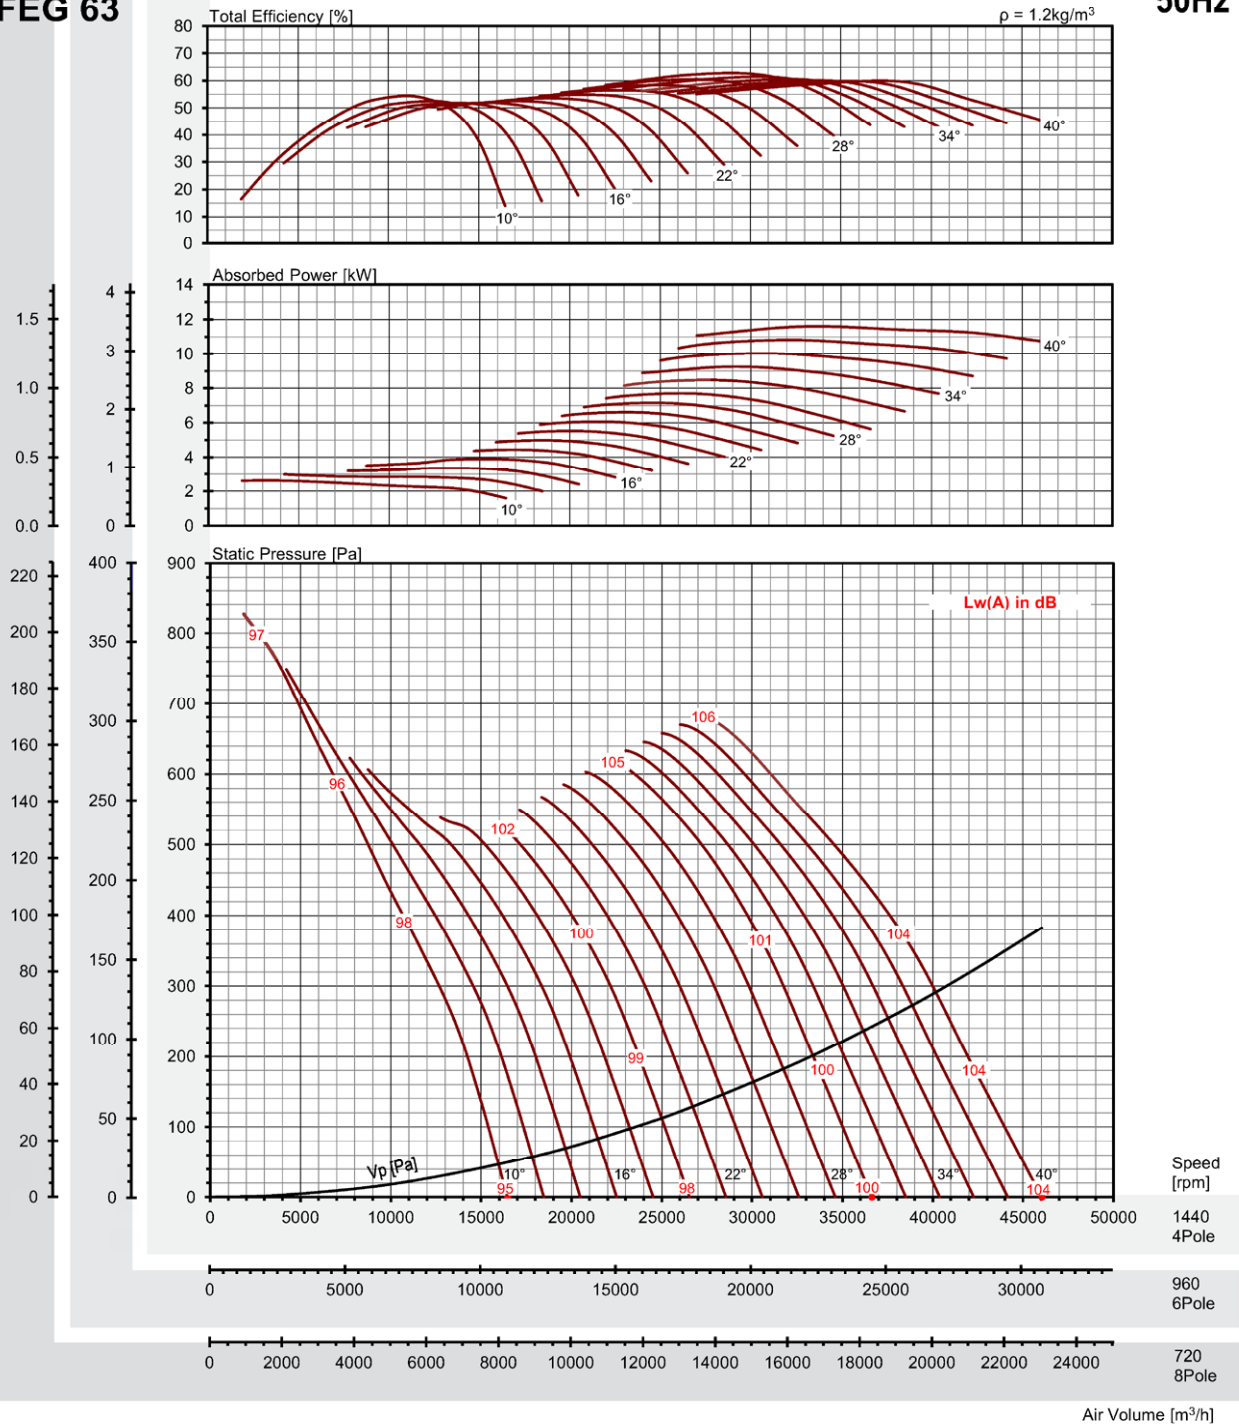

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle														Lw(A) in dB	Lp(A) at 3m		
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°			38°	40°
720 motor	0.33	0.37	0.42	0.49	0.55	0.62	0.69	0.76	0.83	0.89	0.96	1.06	1.16	1.25	1.35	1.45	-18	-38
960 motor	0.78	0.88	0.99	1.15	1.31	1.47	1.63	1.80	1.96	2.12	2.28	2.51	2.74	2.97	3.21	3.44	-9	-29
1440 motor	2.62	2.98	3.35	3.89	4.43	4.98	5.52	6.06	6.61	7.15	7.69	8.47	9.25	10.04	10.82	11.60	0	-20

\* Performance certified is for installation type D - Ducted inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet LwiA sound power levels for installation type D: ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA levels are not licensed by AMCA International




# SERIES TFA 1000/300/10/V

Impeller Code : 1000/300  
 Size : 1000mm  
 Outlet Area : 0.785m<sup>2</sup>

## Adjustable Pitch Angle Vane Axial Fan

FEG 67

50Hz

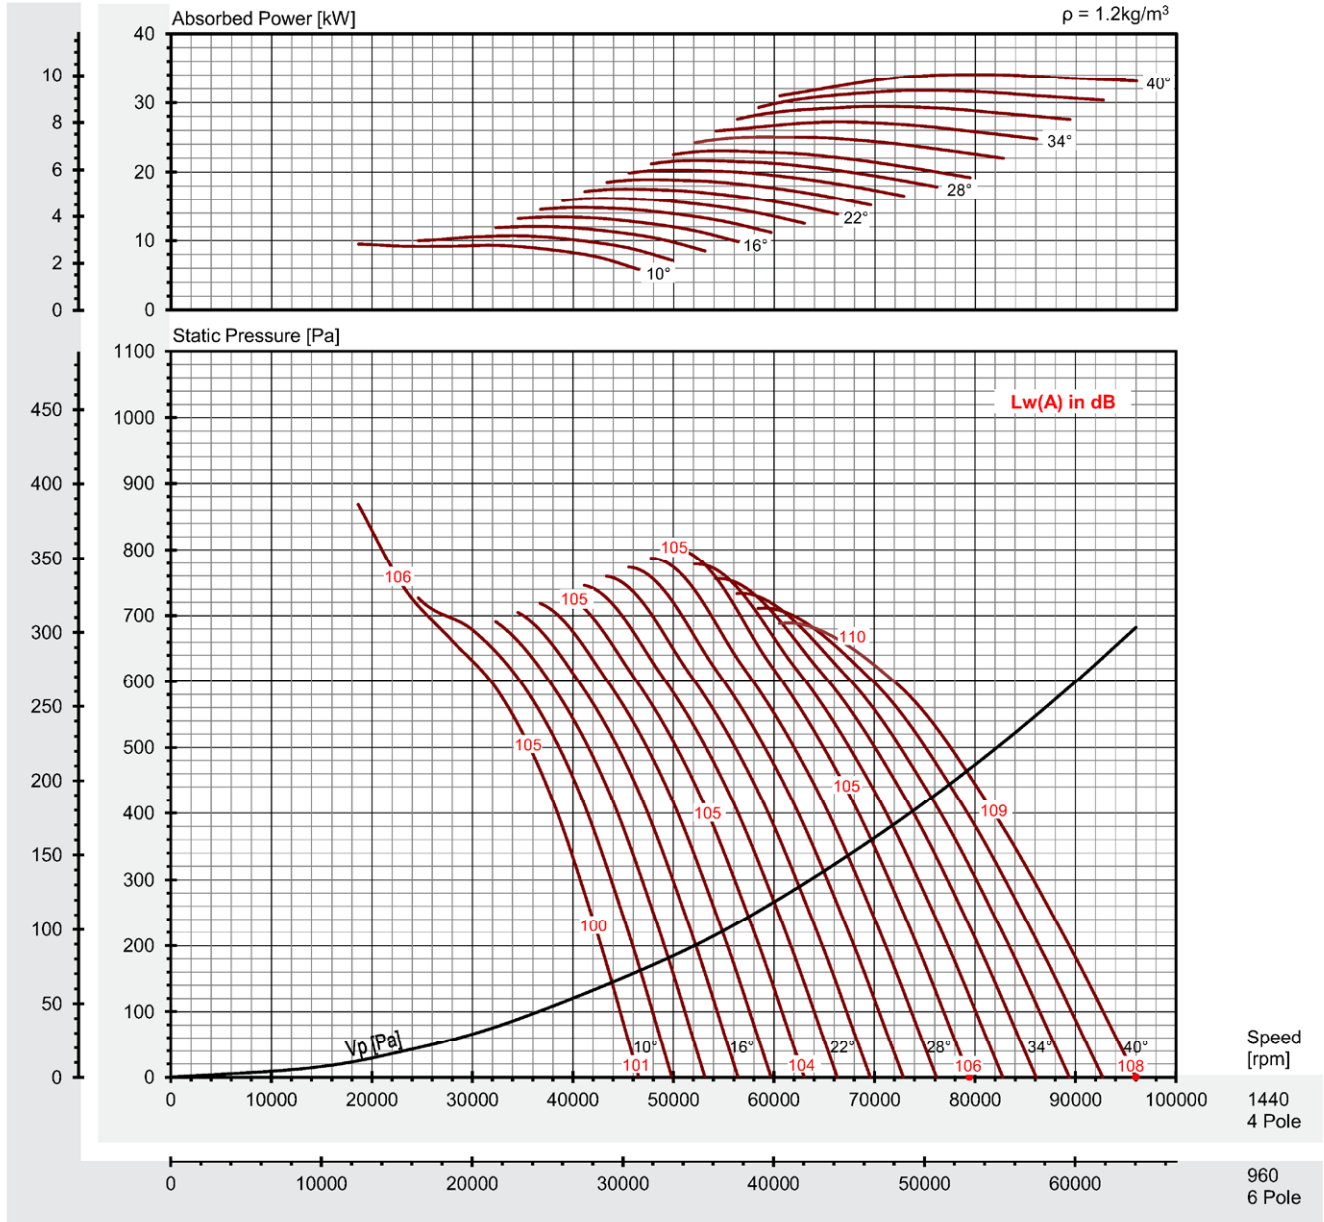

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle															Lw(A) in dBA	Lp(A) at 3m	
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°			40°
960 motor	2.82	3.16	3.56	3.96	4.36	4.76	5.17	5.57	5.97	6.37	6.77	7.17	8.04	8.68	9.38	10.09	-9	-29
1440 motor	9.51	10.67	12.02	13.37	14.73	16.08	17.43	18.79	20.14	21.49	22.85	25.00	27.15	29.30	31.64	34.05	0	-20

\* Performance certified is for installation type D - Ducted inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D: ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA levels are not licensed by AMCA International



# SERIES TFA 1000/350/12/V


Impeller Code : 1000/350  
 Size : 1000mm  
 Outlet Area : 0.786m<sup>2</sup>

## Adjustable Pitch Angle Vane Axial Fan

FEG75

50Hz  
 1440 rpm

$\rho = 1.2\text{kg/m}^3$

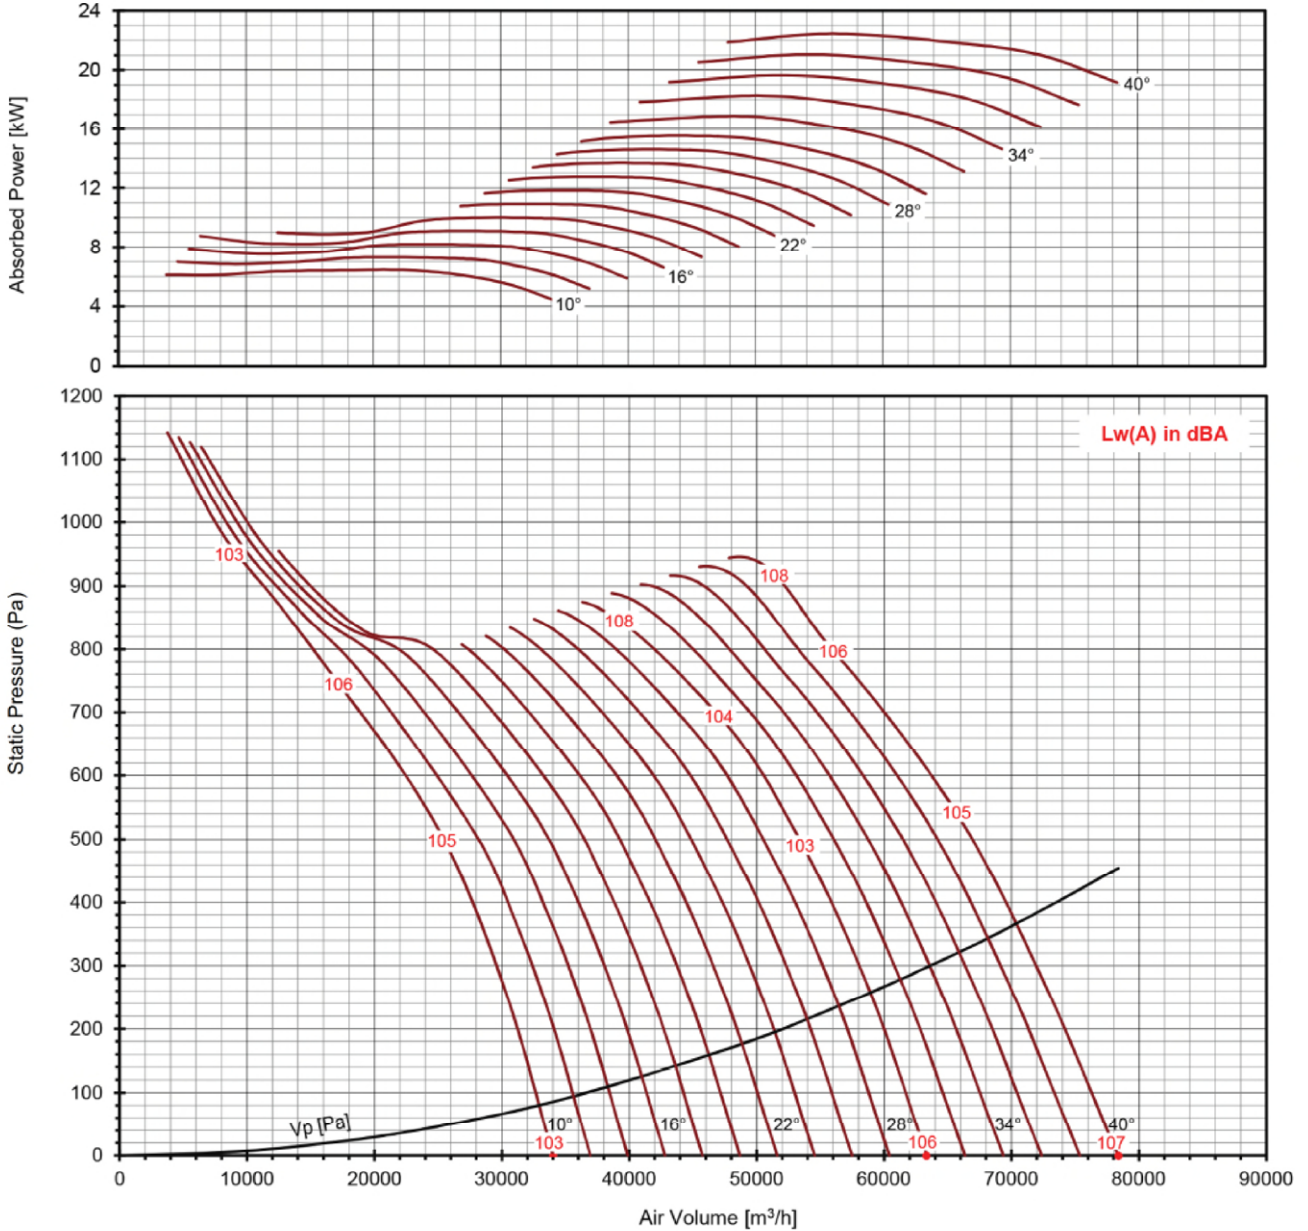

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle														Lp(A) at 3m			
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°		38°	40°	
1440	6.45	7.28	8.15	9.03	9.94	10.9	11.8	12.7	13.6	14.6	15.5	16.9	18.3	19.7	21.1	22.4		
motor		7.5			11				15			18.5			22		30	-20

\* Performance certified is for installation type D - Ducted Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet LwA sound power levels for installation type D: ducted inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.



# SERIES TFA 1000/350/12/V



Impeller Code : 1000/350  
 Size : 1000mm  
 Outlet Area : 0.786m<sup>2</sup>

## Adjustable Pitch Angle Vane Axial Fan

FEG75

50Hz  
 960 rpm

$\rho = 1.2\text{kg/m}^3$

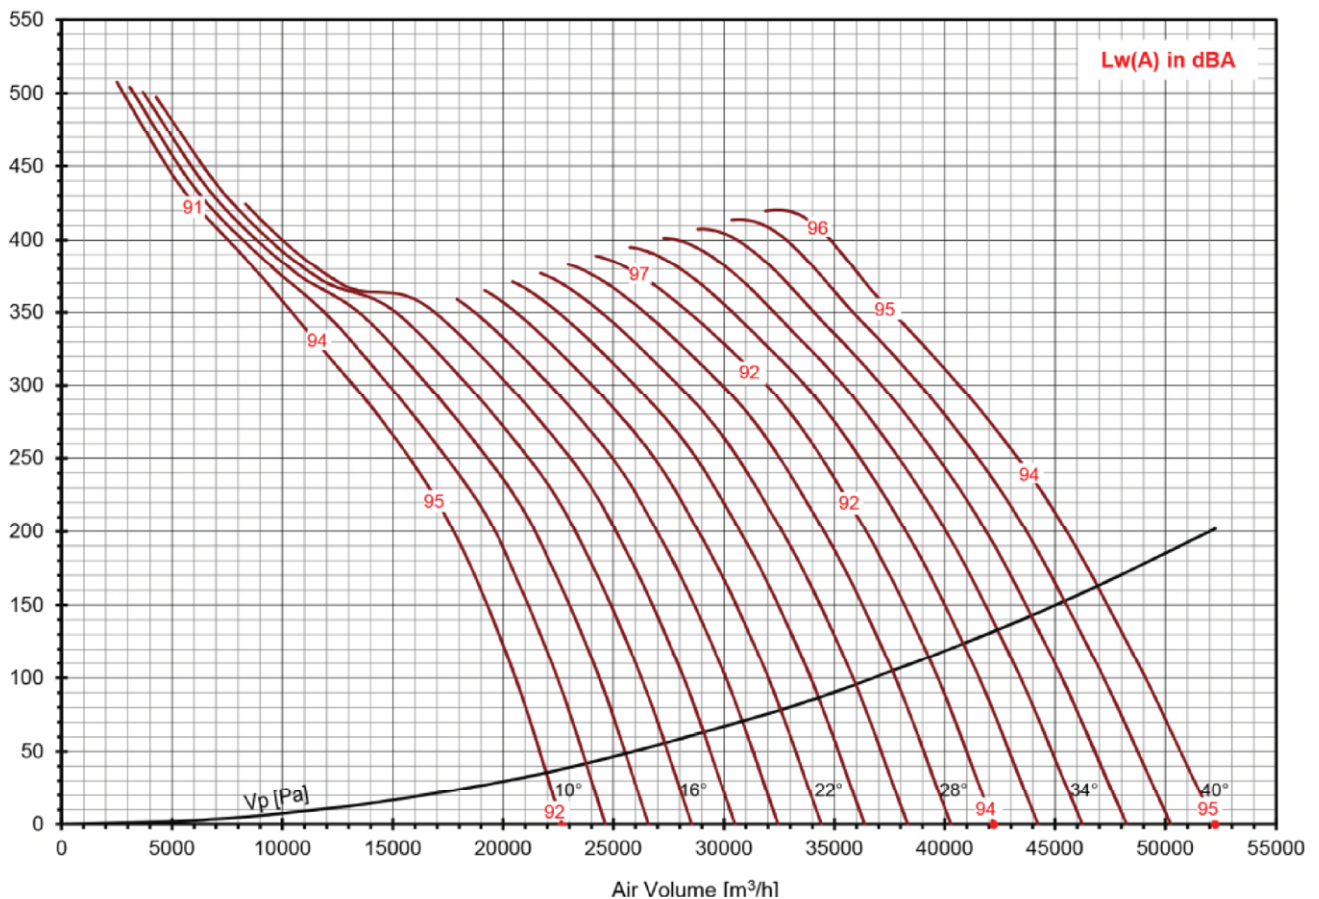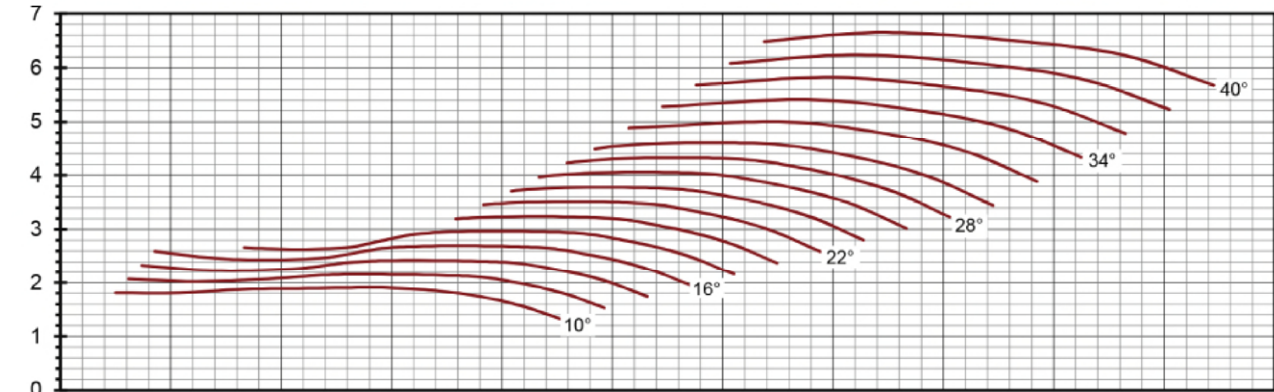

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle														Lp(A) at 3m		
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°		38°	40°
960 motor	1.91	2.16	2.42	2.67	2.94	3.22	3.49	3.77	4.04	4.31	4.59	5.00	5.41	5.83	6.24	6.65	-20

\* Performance certified is for installation type D - Ducted Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet LwA sound power levels for installation type D: ducted inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.





# SERIES TFA 1000/350/12/V


Impeller Code : 1000/350  
 Size : 1000mm  
 Outlet Area : 0.786m<sup>2</sup>

## Adjustable Pitch Angle Vane Axial Fan

FEG75

50Hz  
 720 rpm

$\rho = 1.2\text{kg/m}^3$

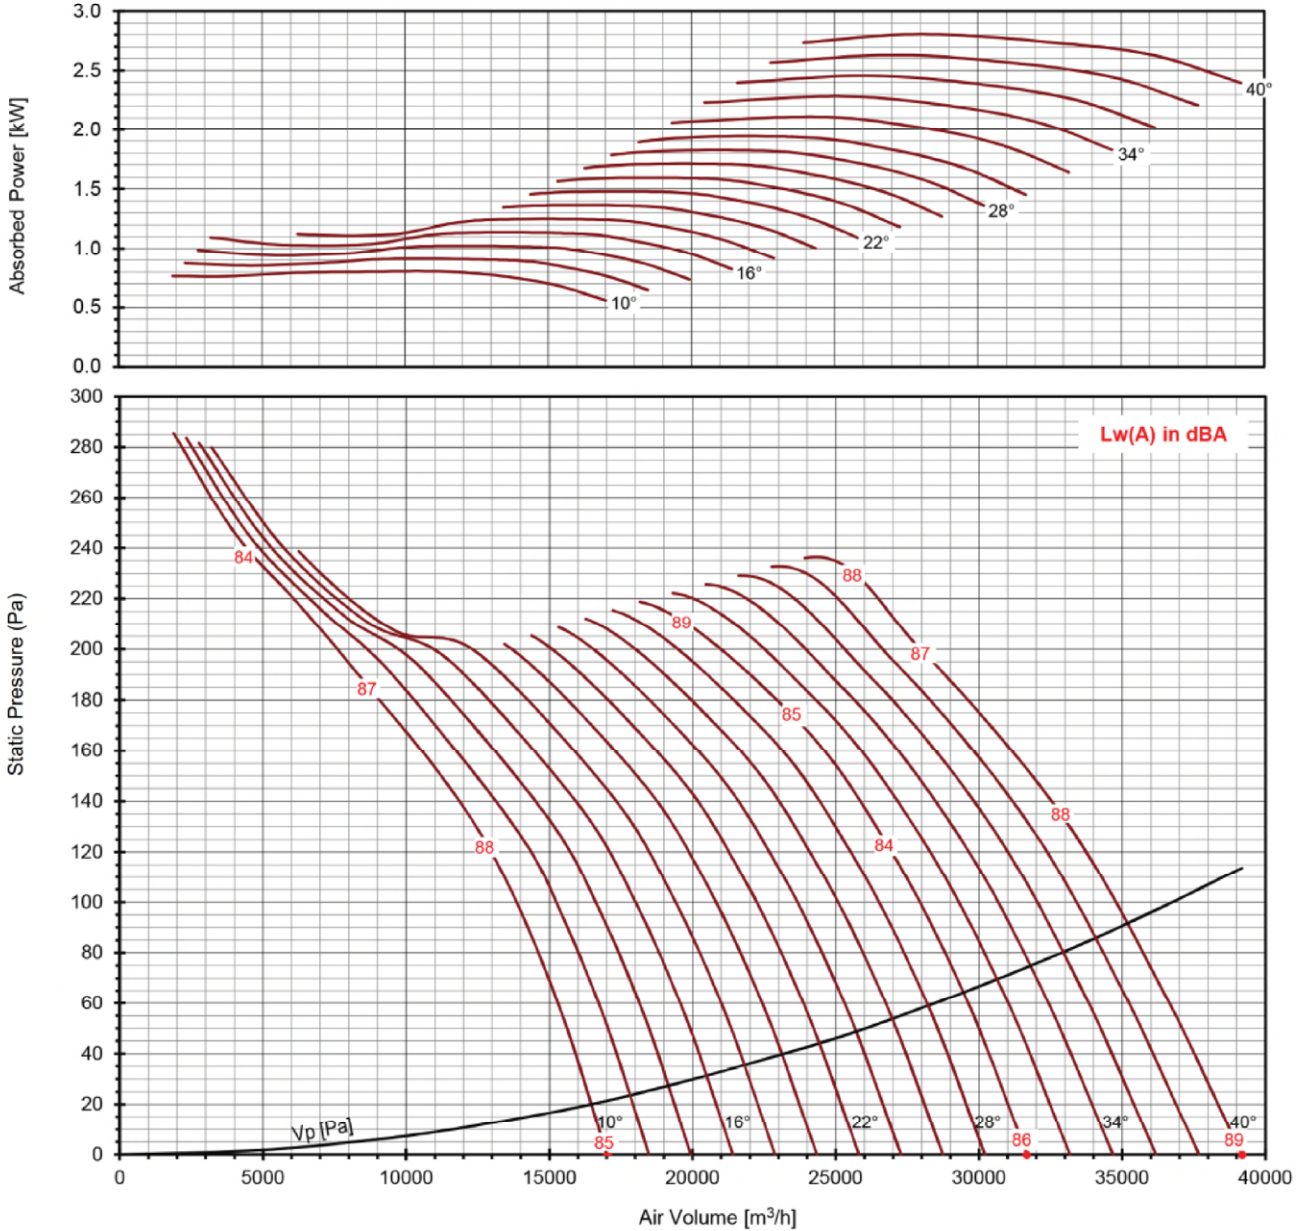

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle																Lp(A) at 3m
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	
720 motor	0.81	0.91	1.02	1.13	1.24	1.36	1.47	1.59	1.70	1.82	1.94	2.11	2.28	2.46	2.63	2.81	20

\* Performance certified is for installation type D - Ducted Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet LwA sound power levels for installation type D: ducted inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.




Adjustable Pitch Angle Vane Axial Fan  
**FEG 71**

**SERIES TFA 1120/300/10/V**

Impeller Code : 1120/300  
 Size : 1120 mm  
 Outlet area : 0.994m<sup>2</sup>

**50Hz**

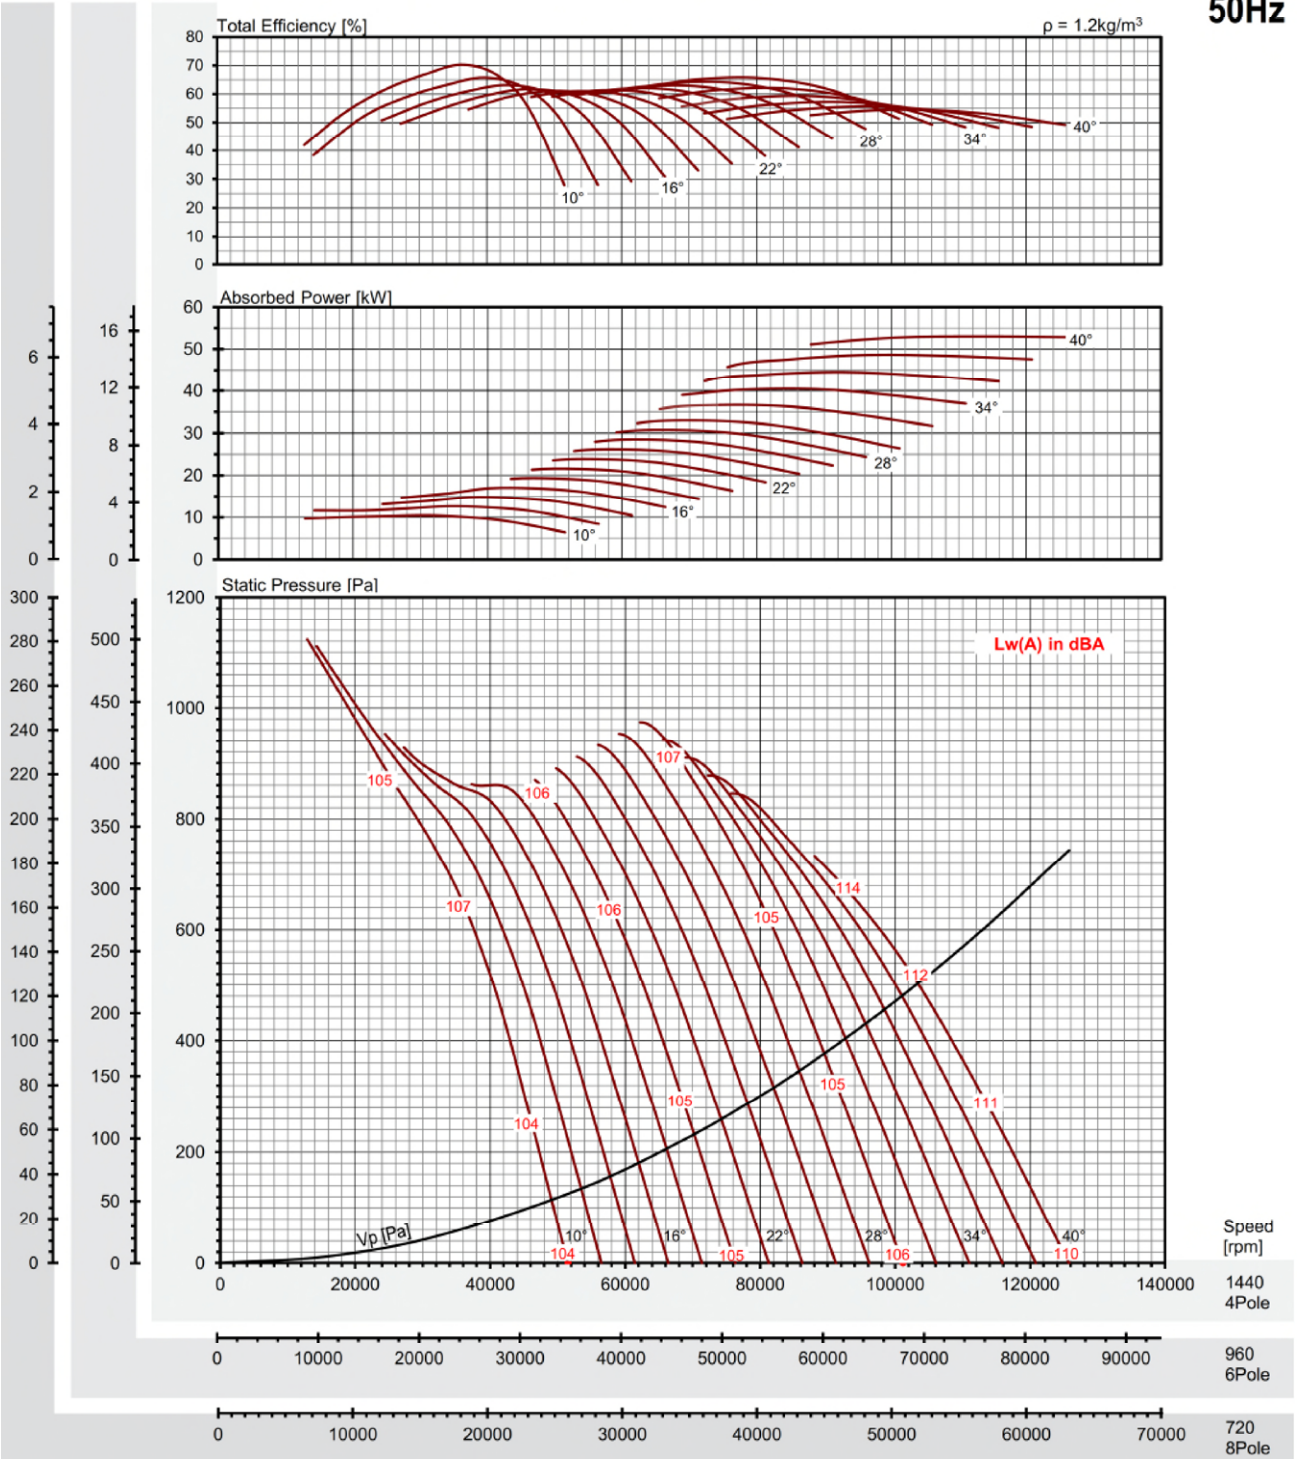

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle																Lw(A) in dBA	Lp(A) at 3m
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°		
720 motor	1.30	1.57	1.85	2.12	2.41	2.69	2.98	3.27	3.55	3.84	4.13	4.58	5.05	5.56	6.08	6.63	-17	-37
960 motor	3.08	3.73	4.38	5.03	5.70	6.38	7.06	7.74	8.42	9.10	9.78	10.85	11.97	13.19	14.41	15.72	-9	-29
1440 motor	10.41	12.60	14.79	16.98	19.25	21.54	23.83	26.13	28.42	30.71	33.01	36.63	40.39	44.51	48.63	53.05	0	-20

Air Volume [m<sup>3</sup>/h]

\* Performance certified is for installation type D - Ducted inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).


\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D: ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA levels are not licensed by AMCA International

# SERIES TFA 1120/350/12/V

Adjustable Pitch Angle Vane Axial Fan  
**FEG 67**

Impeller Code : 1120/350  
 Size : 1120 mm  
 Outlet area : 0.994m<sup>2</sup>

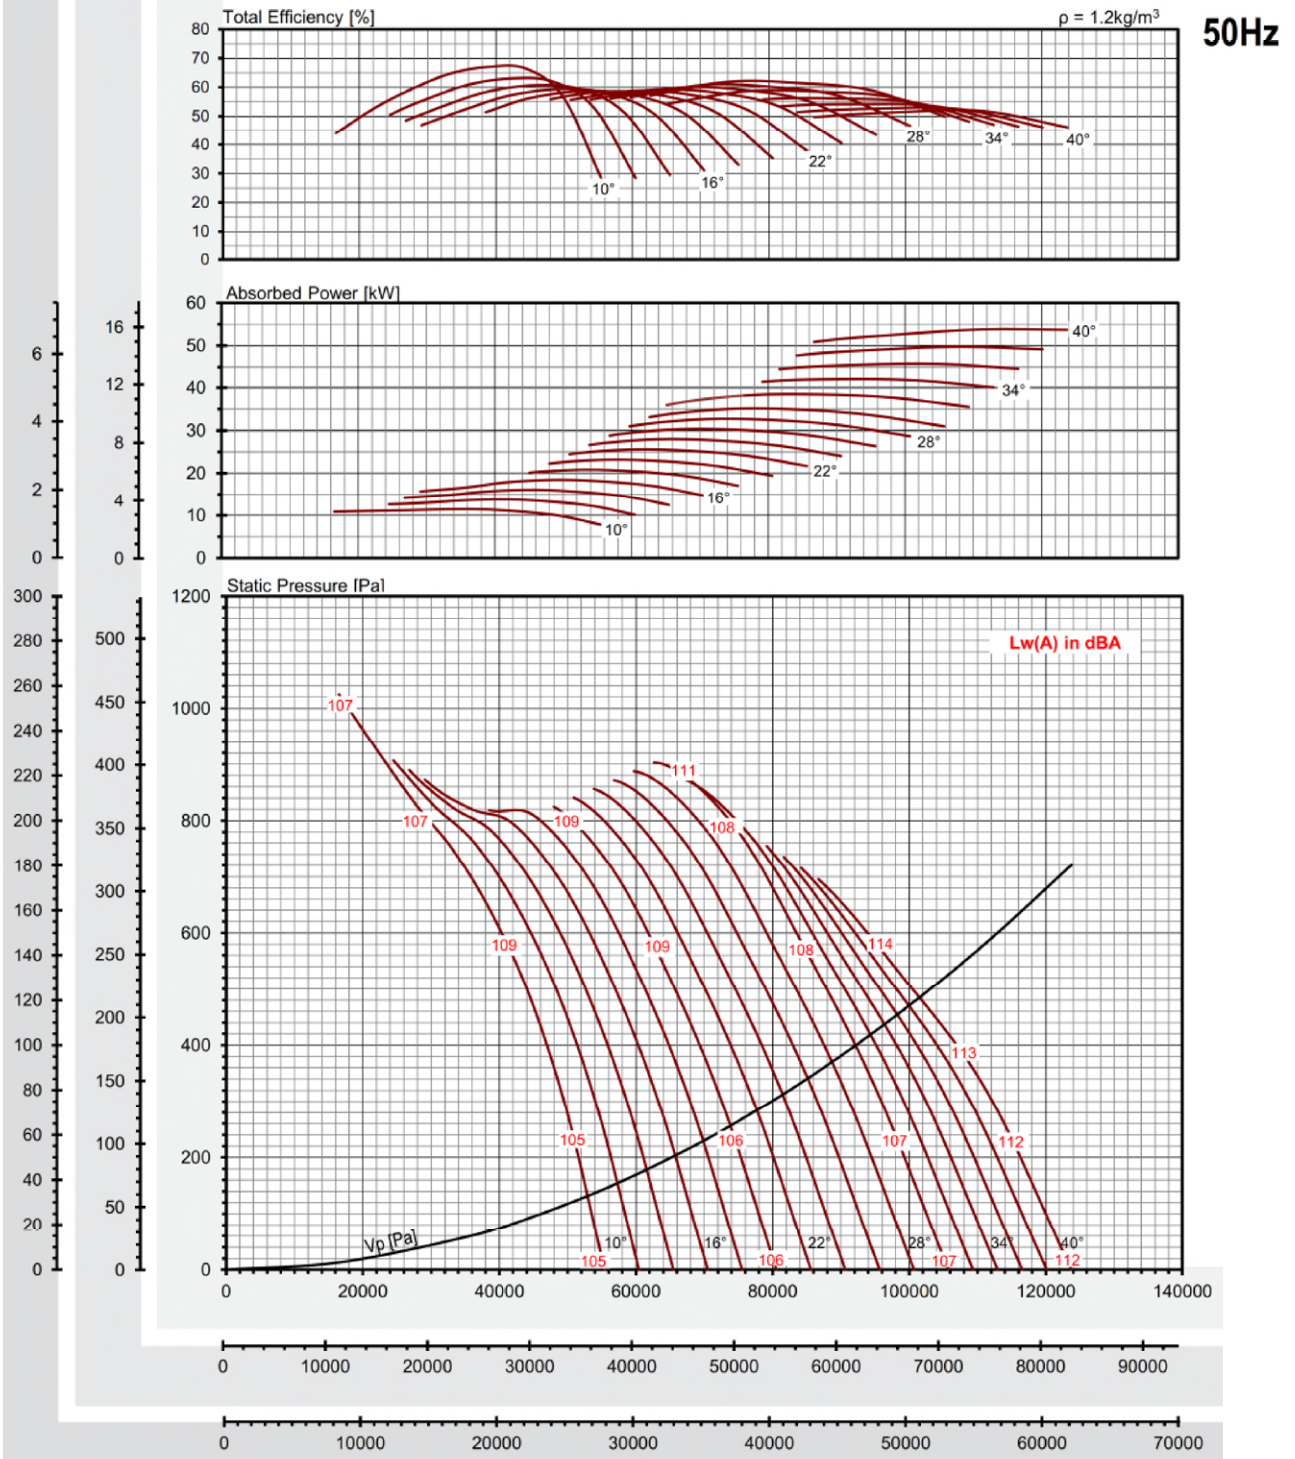

N (rpm)	Blade Pitch Angle																Lw(A) in dBA	Lp(A) at 3m
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°		
720 motor	1.43	1.72	2.01	2.31	2.60	2.90	3.19	3.49	3.79	4.08	4.38	4.80	5.25	5.72	6.22	6.73	-17	-37
960 motor	3.38	4.07	4.77	5.47	6.17	6.87	7.57	8.27	8.97	9.67	10.37	11.39	12.44	13.56	14.75	15.95	-10	-30
1440 motor	11.41	13.73	16.09	18.46	20.82	23.19	25.56	27.92	30.29	32.65	35.02	38.43	41.98	45.75	49.80	53.85	0	-20

\* Performance certified is for installation type D - Ducted inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D: ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA levels are not licensed by AMCA International




# SERIES TFA 1250/350/12/V

Impeller Code : 1250/350  
 Size : 1250mm  
 Outlet Area : 1.227m<sup>2</sup>

## Adjustable Pitch Angle Vane Axial Fan

FEG71

**50Hz**  
 1440 rpm

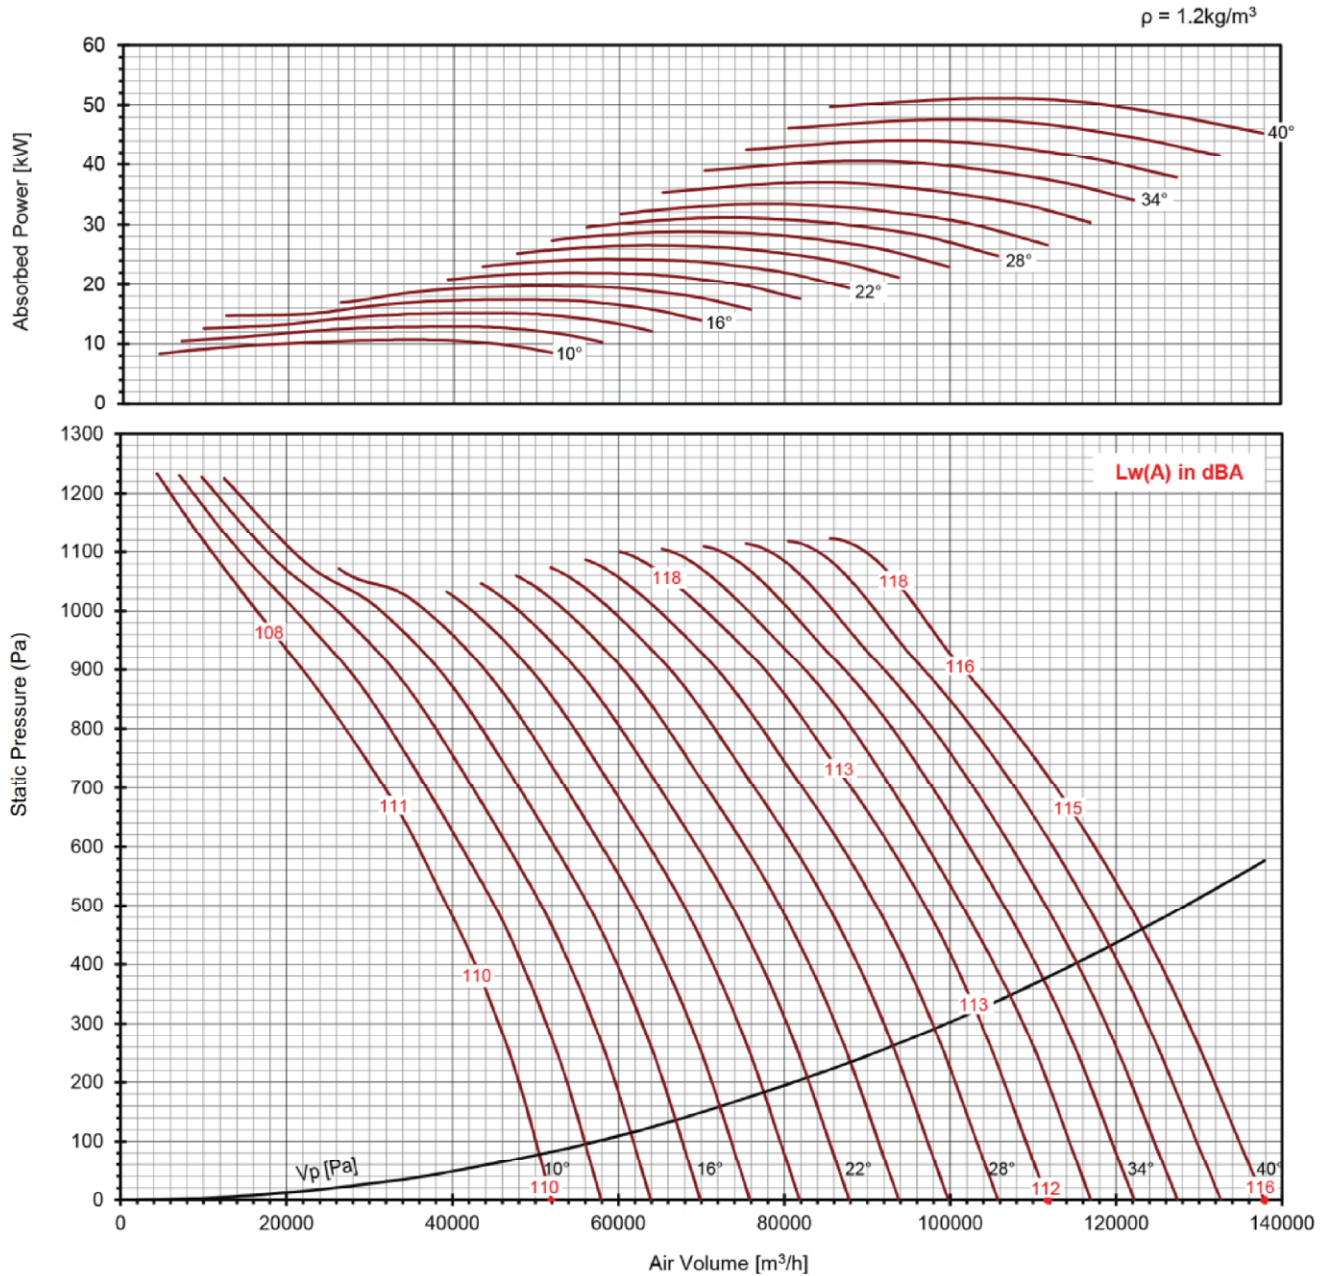

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle																Lp(A) at 3m
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	
1440	10.7	12.8	15.1	17.3	19.6	21.9	24.2	26.5	28.8	31.1	33.4	36.9	40.4	44.0	47.5	51.1	-20
motor	11	15	18.5	22	30	37	45	55									

\* Performance certified is for installation type D - Ducted Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D: ducted inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.



# SERIES TFA 1250/350/12/V



Impeller Code : 1250/350  
 Size : 1250mm  
 Outlet Area : 1.227m<sup>2</sup>

## Adjustable Pitch Angle Vane Axial Fan

FEG71

**50Hz**  
**960 rpm**

$\rho = 1.2\text{kg/m}^3$

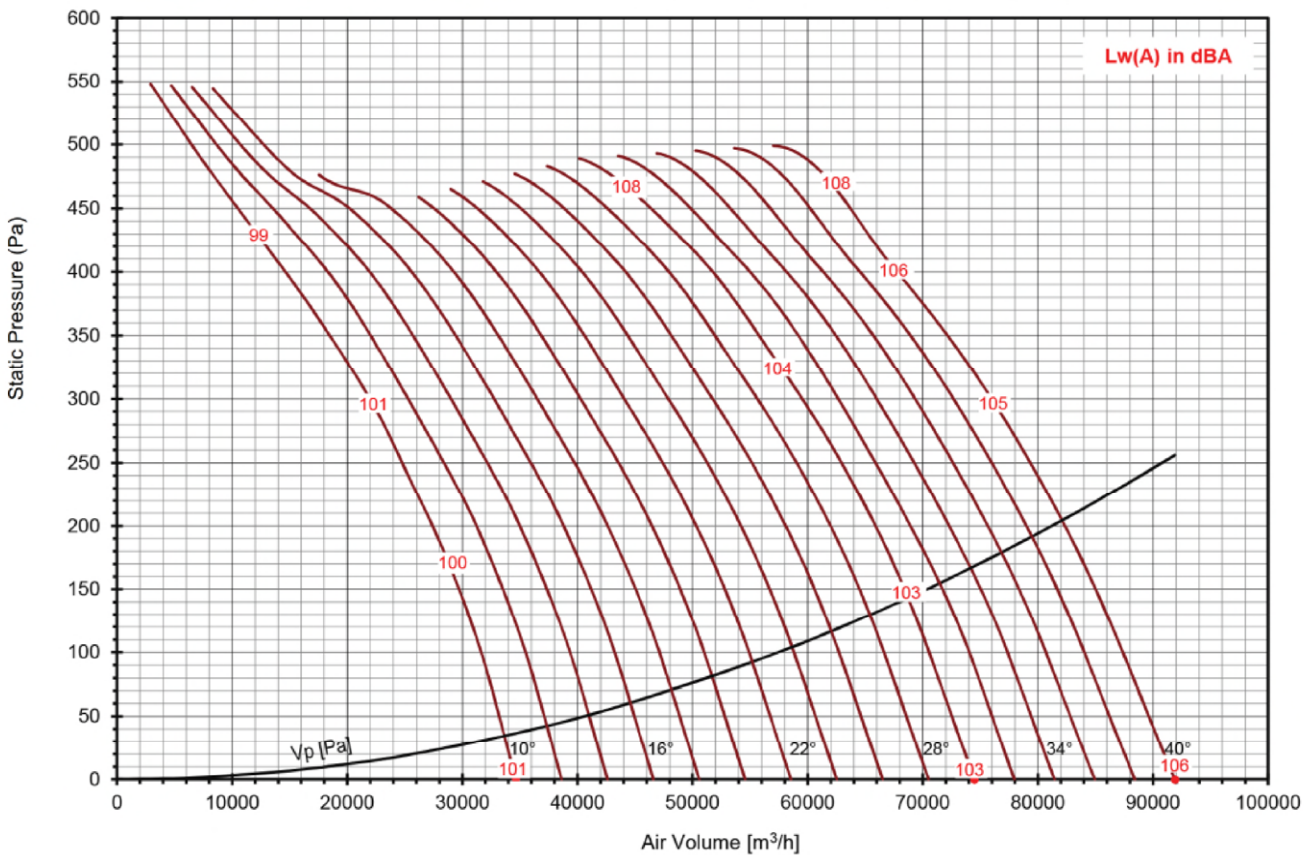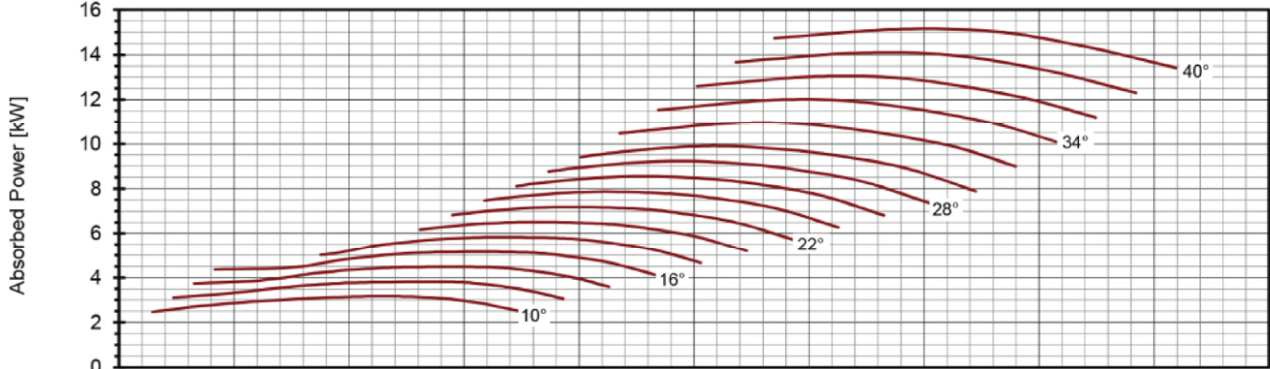

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle																Lp(A) at 3m
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	
960	3.16	3.80	4.47	5.13	5.81	6.49	7.17	7.85	8.53	9.21	9.89	10.9	12.0	13.0	14.1	15.1	-20
motor	4		5.5		7.5			11				15				18.5	

\* Performance certified is for installation type D - Ducted Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D: ducted inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.



# SERIES TFA 1250/350/12/V


Impeller Code : 1250/350  
 Size : 1250mm  
 Outlet Area : 1.227m<sup>2</sup>

## Adjustable Pitch Angle Vane Axial Fan

FEG71

50Hz  
 720 rpm

$\rho = 1.2\text{kg/m}^3$

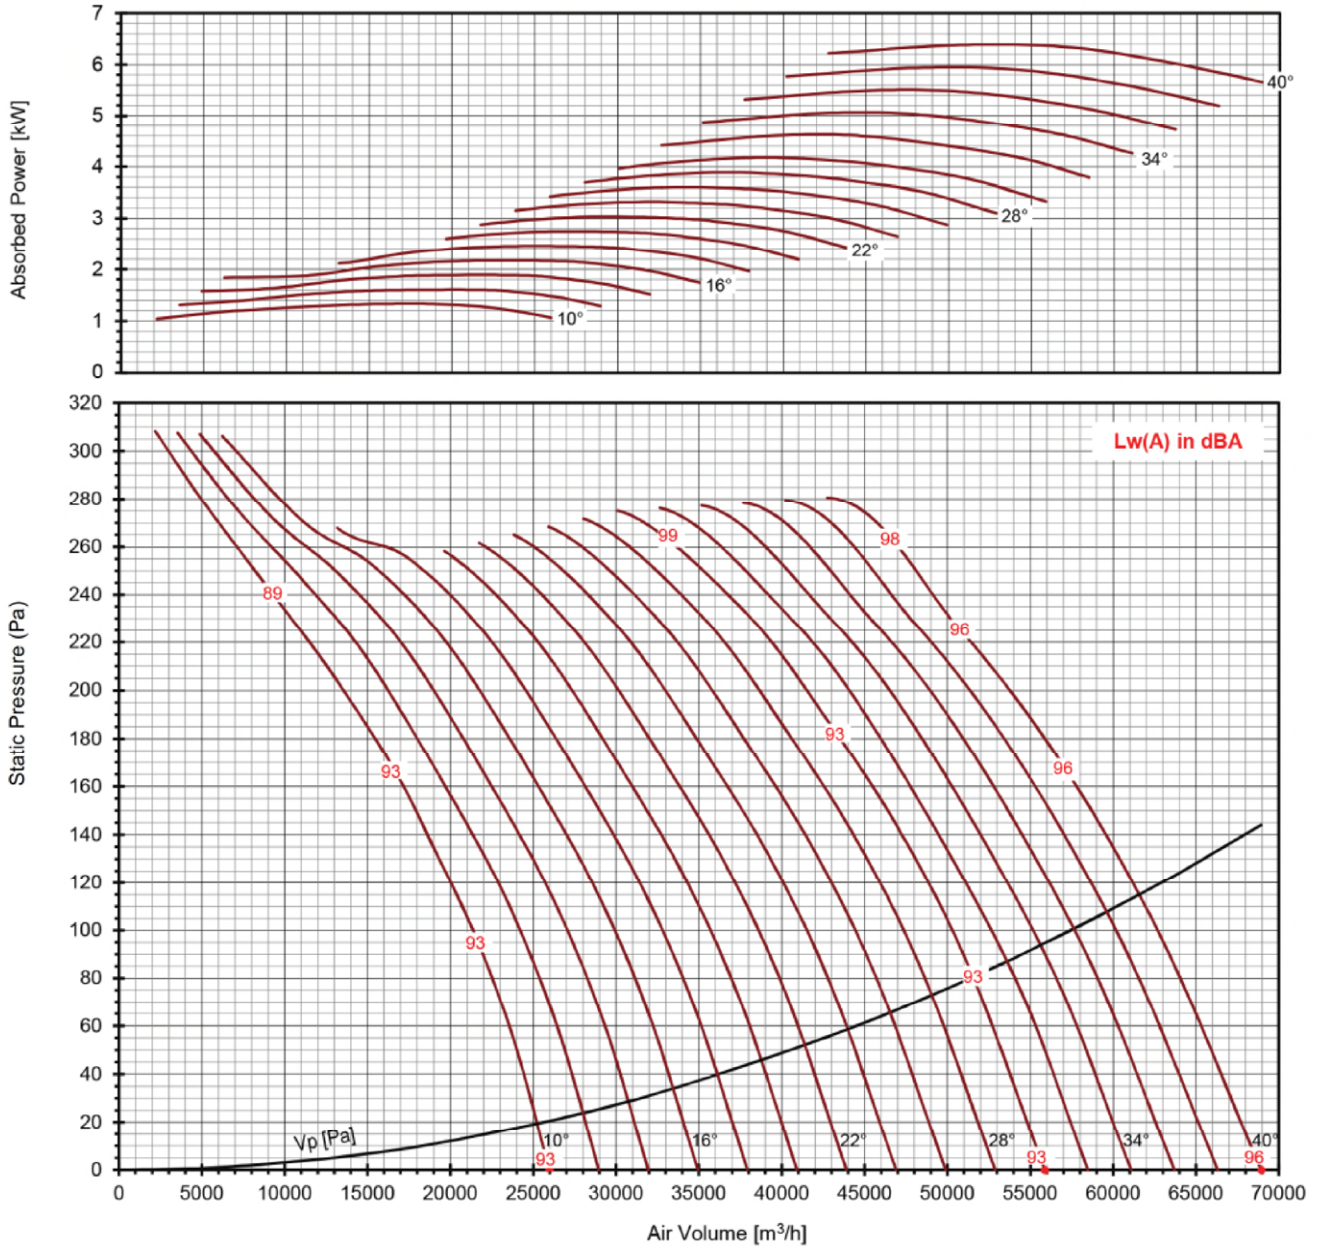

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle																Lp(A) at 3m
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	
720	1.33	1.61	1.88	2.16	2.45	2.74	3.02	3.31	3.60	3.89	4.17	4.61	5.06	5.50	5.94	6.38	-20
motor	1.5	2.2	3	4	5.5	7.5											

\* Performance certified is for installation type D - Ducted Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D: ducted inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.



# SERIES TFA 1400/350/12/V



Impeller Code : 1400/350  
 Size : 1400mm  
 Outlet Area : 1.540m<sup>2</sup>

## Adjustable Pitch Angle Vane Axial Fan

### FEG75

**50Hz**  
 1440 rpm

$\rho = 1.2\text{kg/m}^3$

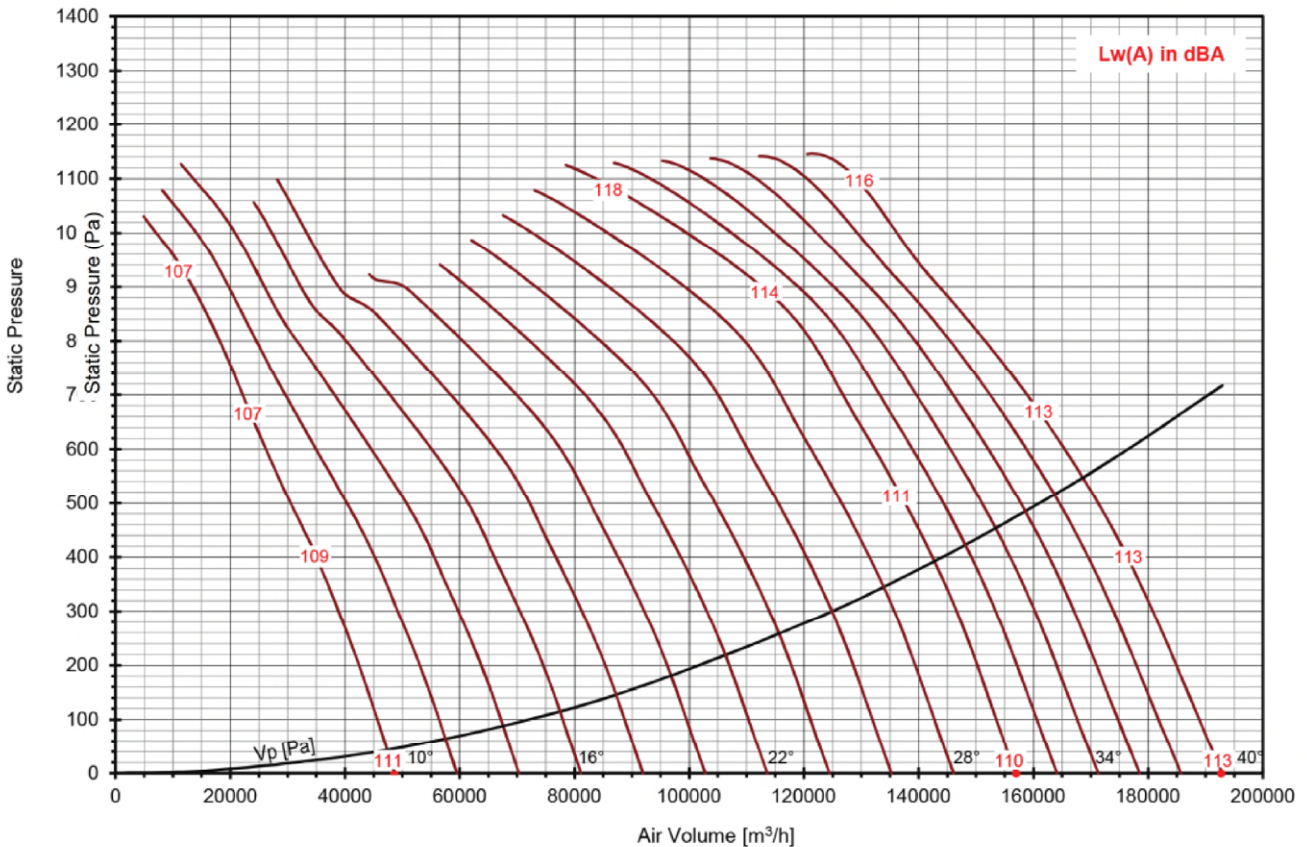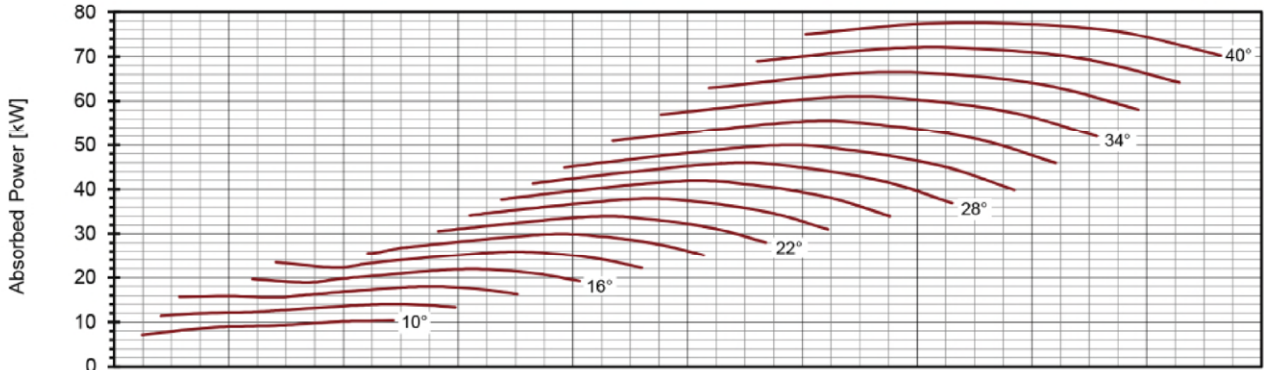

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle														Lp(A) at 3m		
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°		38°	40°
1440	10.4	14.0	17.9	21.8	25.8	29.8	33.8	37.8	41.8	45.8	49.8	55.3	60.9	66.4	71.9	77.4	-20
motor	11	15	18.5	22	30	37	45	55	75	90							

\* Performance certified is for installation type B - Free Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for outlet LwoA sound power levels for installation type B: free inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.



# SERIES TFA 1400/350/12/V


Impeller Code : 1400/350  
 Size : 1400mm  
 Outlet Area : 1.540m<sup>2</sup>

## Adjustable Pitch Angle Vane Axial Fan

FEG75

**50Hz**  
**960 rpm**

$\rho = 1.2\text{kg/m}^3$

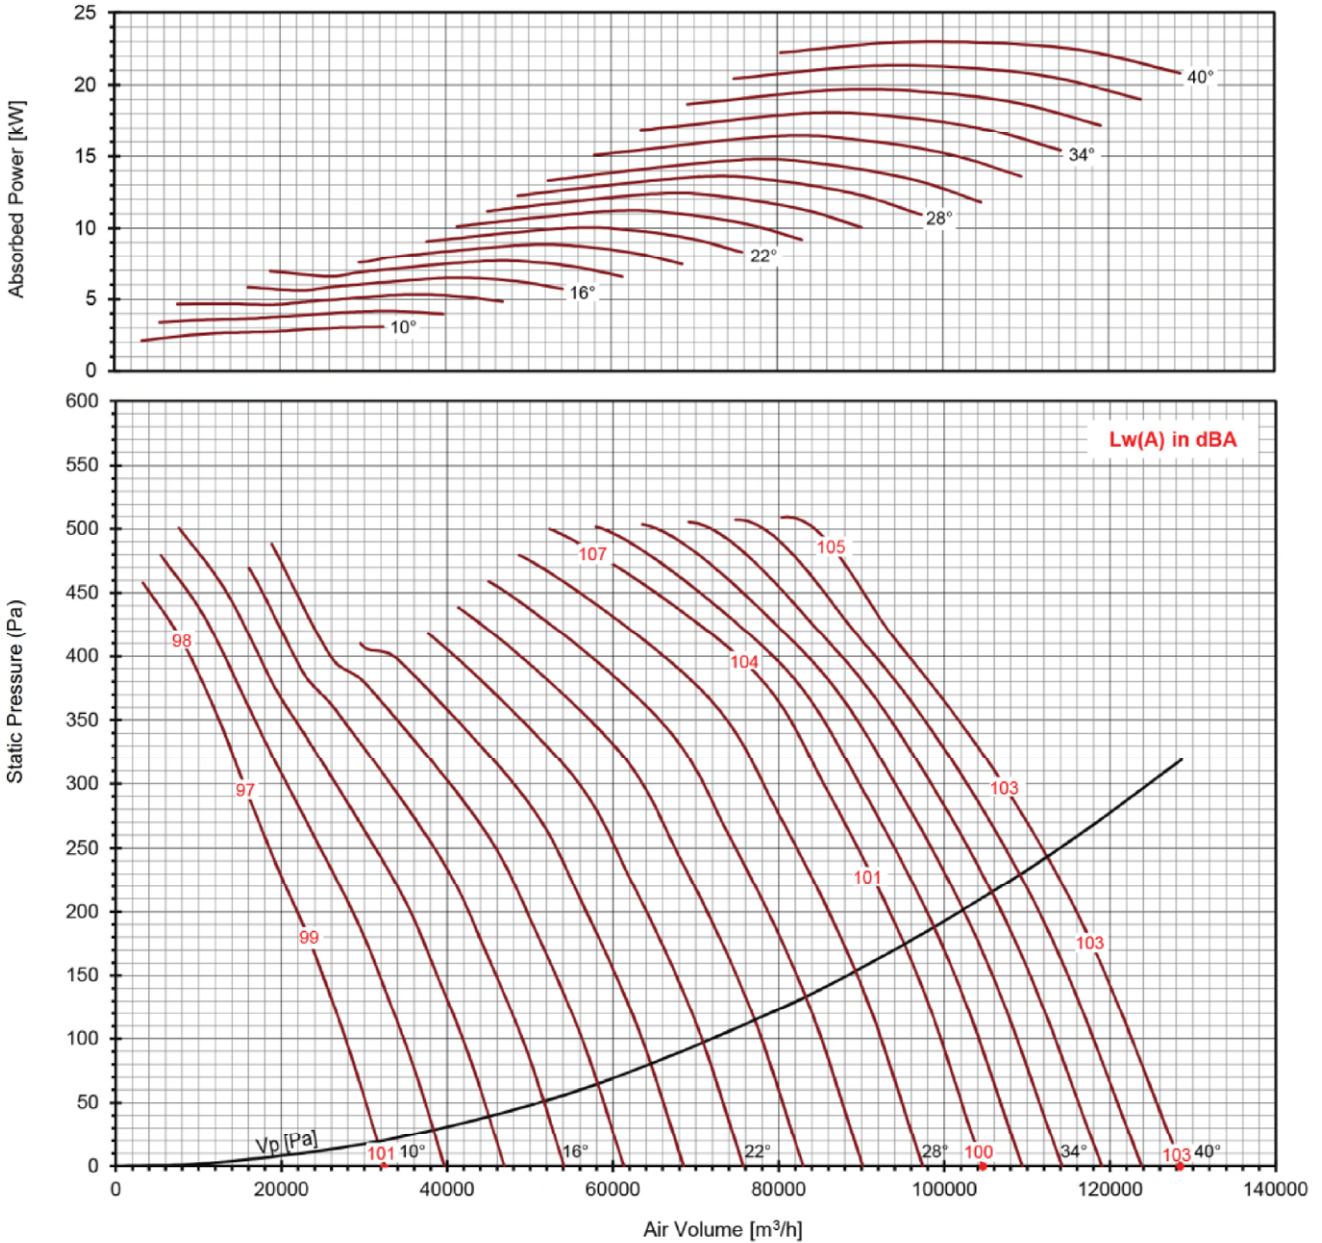

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle														Lp(A) at 3m		
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°		38°	40°
960 motor	3.08	4.16	5.30	6.45	7.64	8.83	10.0	11.2	12.4	13.6	14.8	16.4	18.0	19.7	21.3	22.9	-20
	4	5.5	7.5	11	15	18.5	22	30									

\* Performance certified is for installation type B - Free Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for outlet LwoA sound power levels for installation type B: free inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.





# SERIES TFA 1400/350/12/V


Impeller Code : 1400/350  
 Size : 1400mm  
 Outlet Area : 1.540m<sup>2</sup>

## Adjustable Pitch Axial Fan - V Series

FEG75

50Hz  
 720 rpm

$\rho = 1.2\text{kg/m}^3$

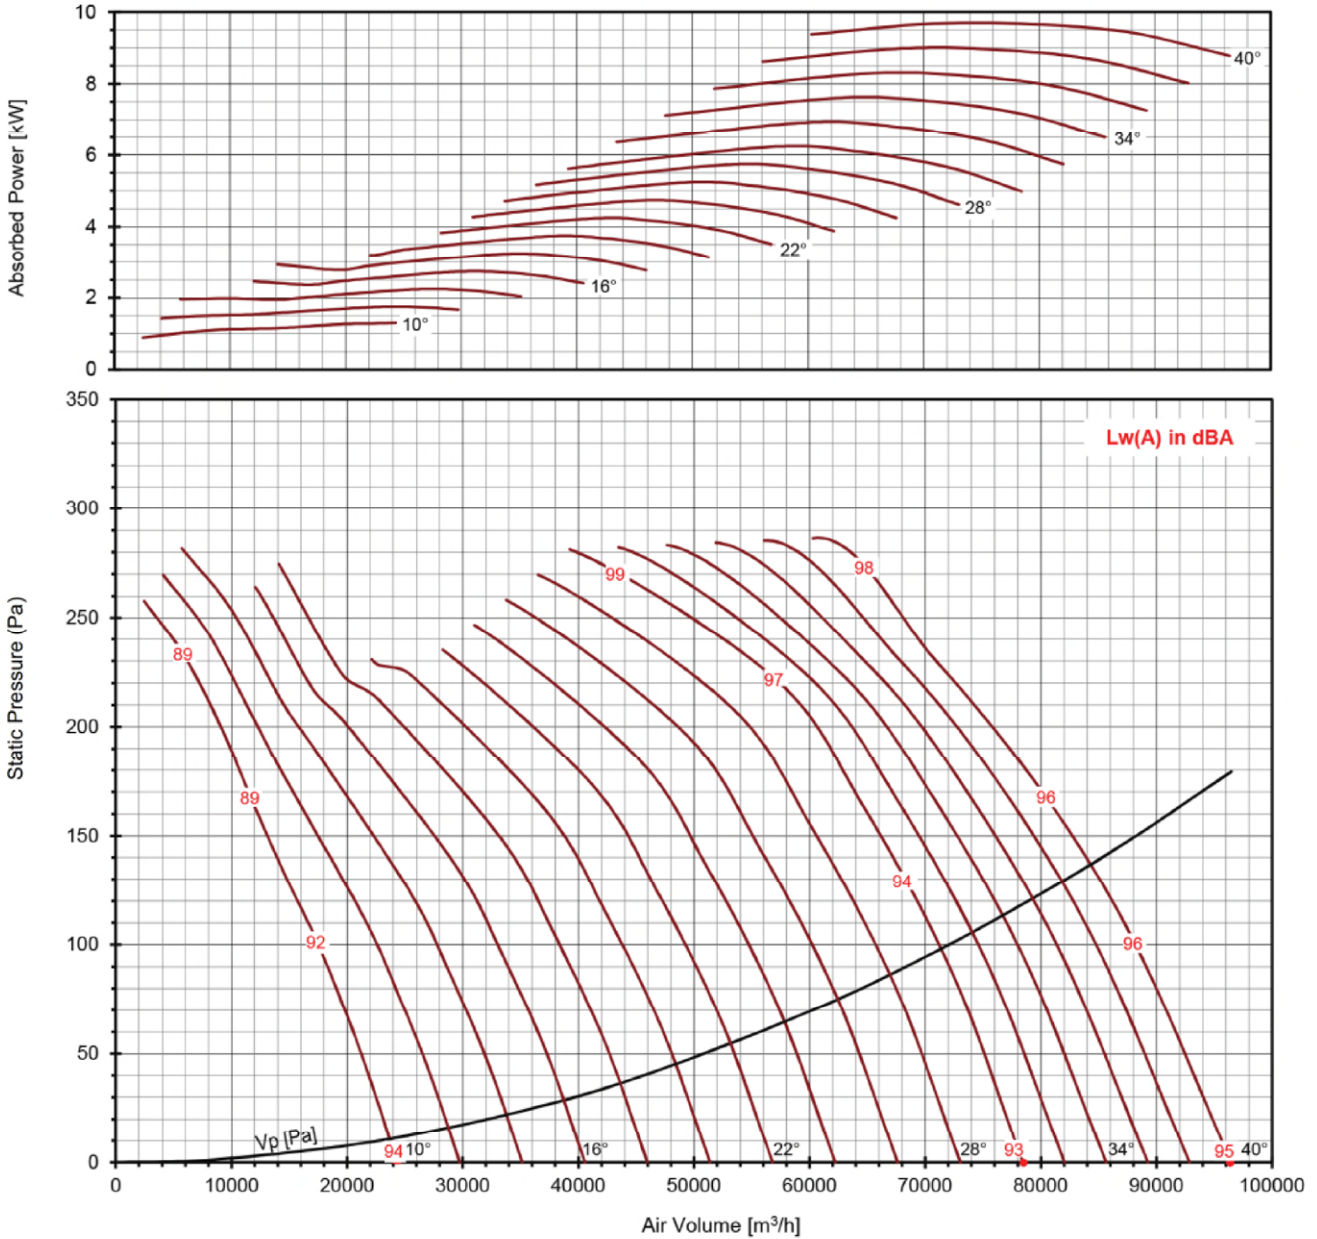

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle															Lp(A) at 3m	
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°		40°
720	1.30	1.75	2.24	2.72	3.22	3.72	4.22	4.72	5.22	5.72	6.23	6.92	7.61	8.30	8.99	9.68	-20
motor	1.5	2.2	3	4	5.5	7.5	11										

\* Performance certified is for installation type B - Free Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for outlet LwoA sound power levels for installation type B: free inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.



# SERIES TFA 1400/350/12/V


Impeller Code : 1400/350  
 Size : 1400mm  
 Outlet Area : 1.540m<sup>2</sup>

## Adjustable Pitch Angle Vane Axial Fan

FEG75

**50Hz**  
 580 rpm

$\rho = 1.2\text{kg/m}^3$

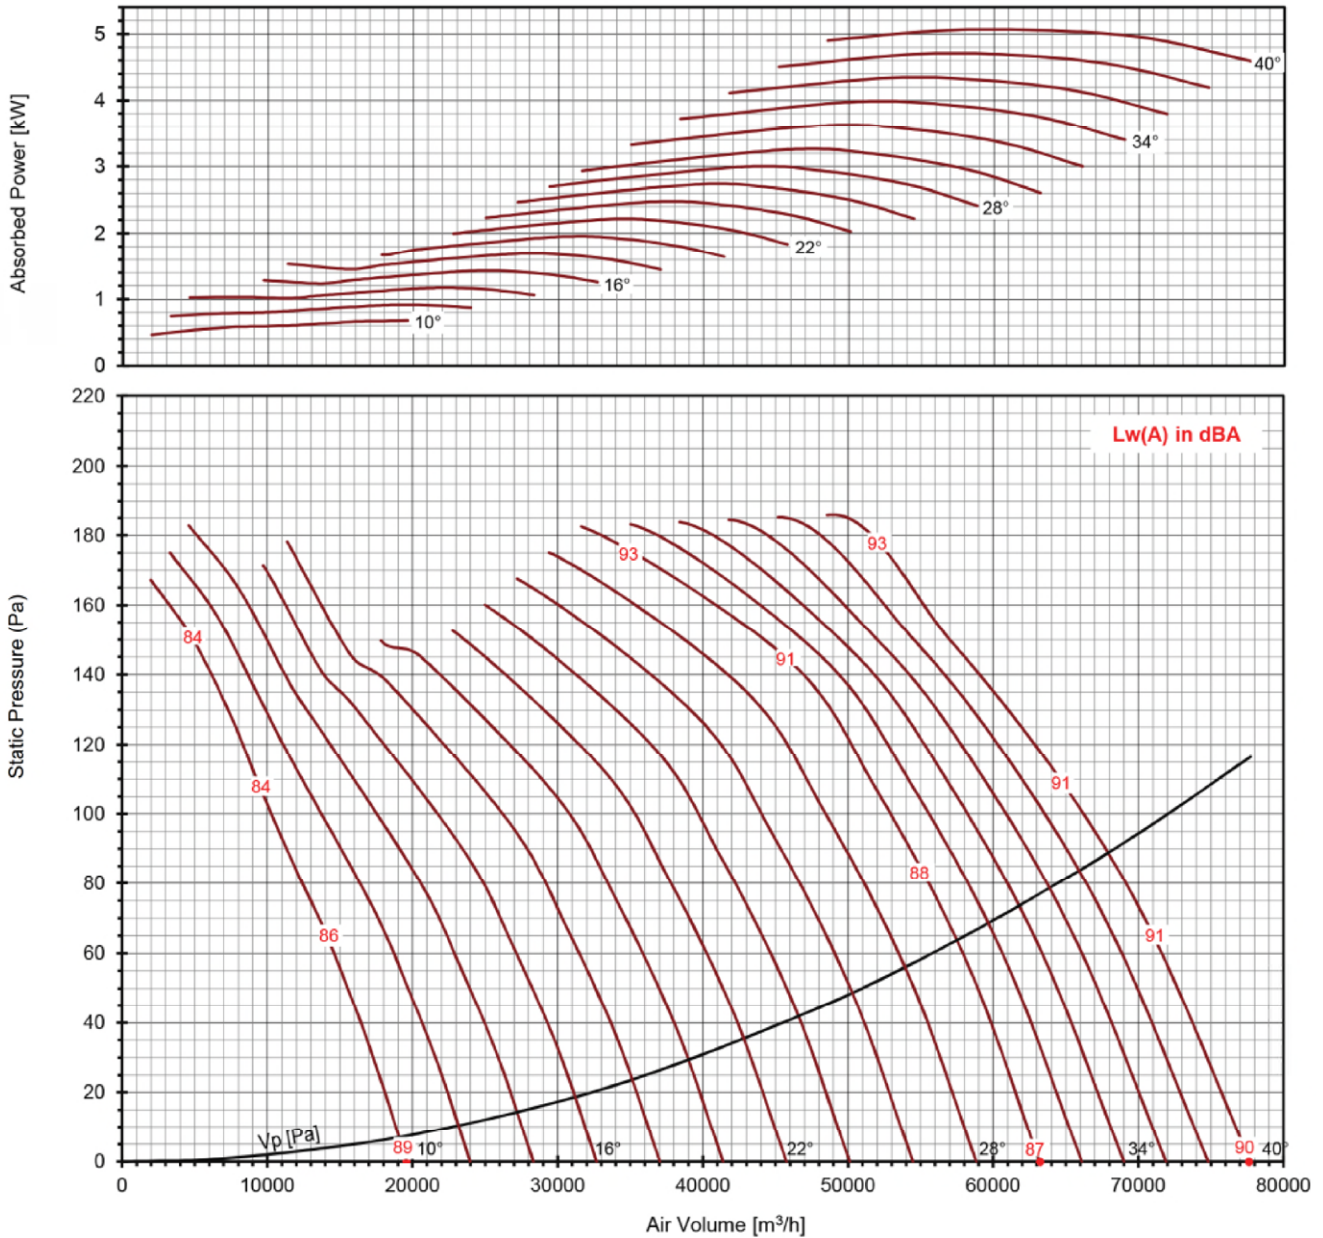

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle																Lp(A) at 3m
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	
580	0.68	0.92	1.17	1.42	1.68	1.95	2.21	2.47	2.73	2.99	3.25	3.62	3.98	4.34	4.70	5.06	-20
motor	0.75	1.1	1.5	2.2	3	4	5.5										

\* Performance certified is for installation type B - Free Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for outlet LwoA sound power levels for installation type B: free inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.



# SERIES TFA 1400/420/11/V


Impeller Code : 1400/420  
 Size : 1400mm  
 Outlet Area : 1.540m<sup>2</sup>

## Adjustable Pitch Angle Vane Axial Fan

FEG71

**50Hz**  
 1440 rpm

$\rho = 1.2\text{kg/m}^3$

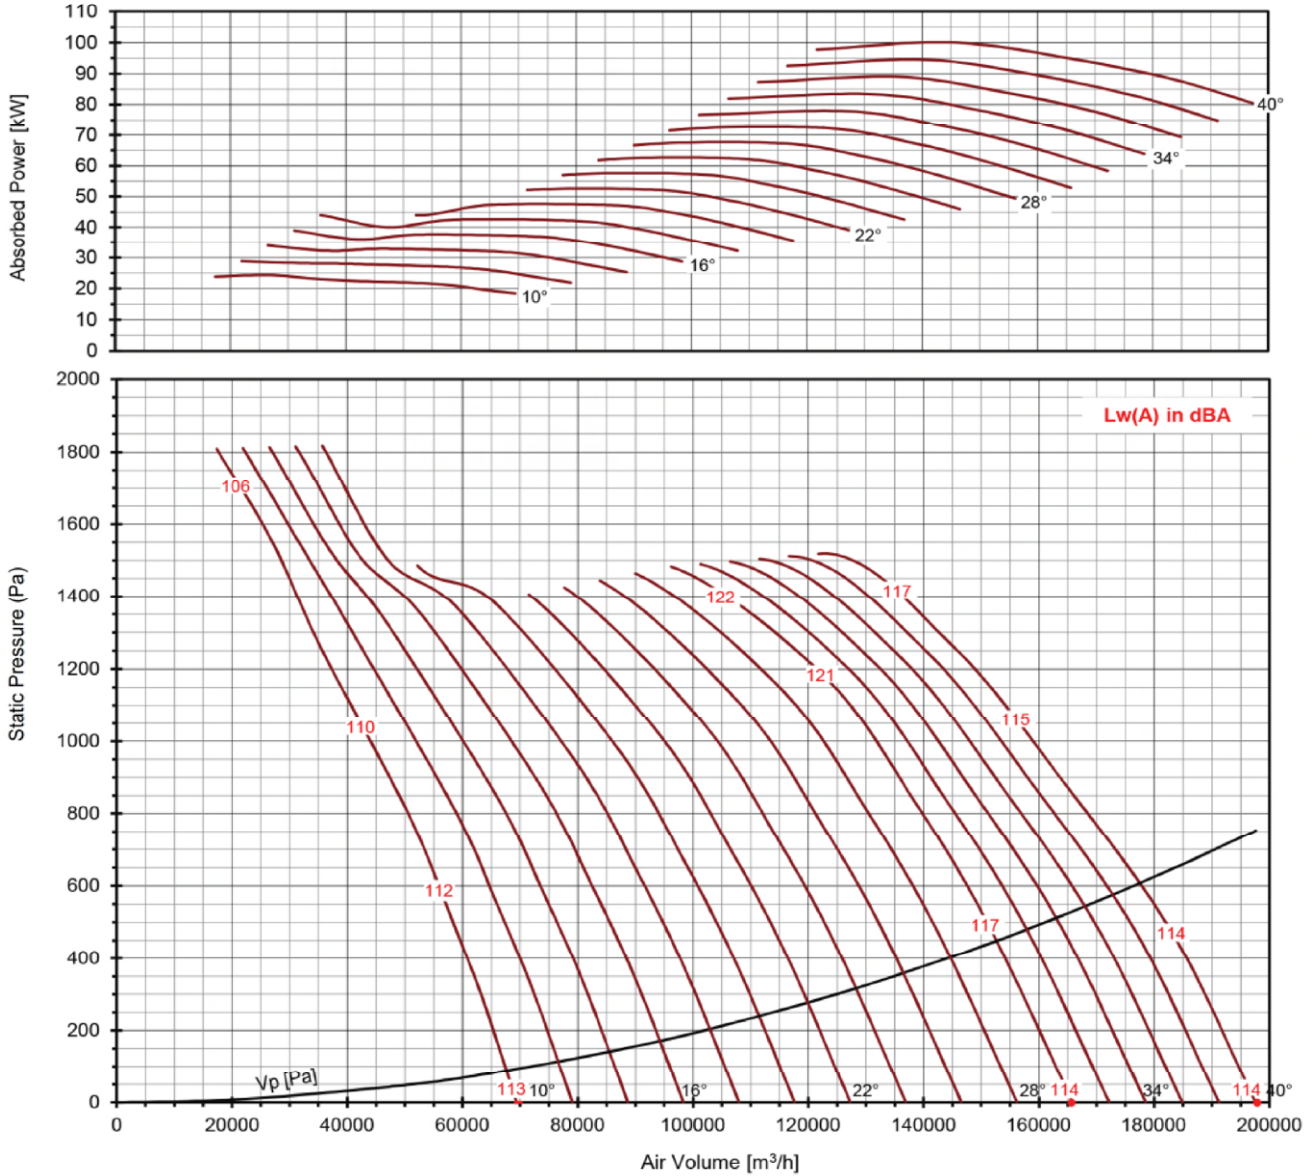

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle																Lp(A) at 3m
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	
1440	24.3	28.9	33.9	38.9	44.0	47.3	52.1	57.2	62.2	67.3	72.3	77.9	83.4	89.0	94.5	100.1	20
motor	30	37	45	55	75	90	110										

\* Performance certified is for installation type B - Free Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for outlet LwoA sound power levels for installation type B: free inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.



**SERIES TFA 1400/420/11/V**



Impeller Code : 1400/420  
 Size : 1400mm  
 Outlet Area : 1.540m<sup>2</sup>

**Adjustable Pitch Angle Vane Axial Fan**

**FEG71**

**50Hz**  
**960 rpm**

$\rho = 1.2\text{kg/m}^3$

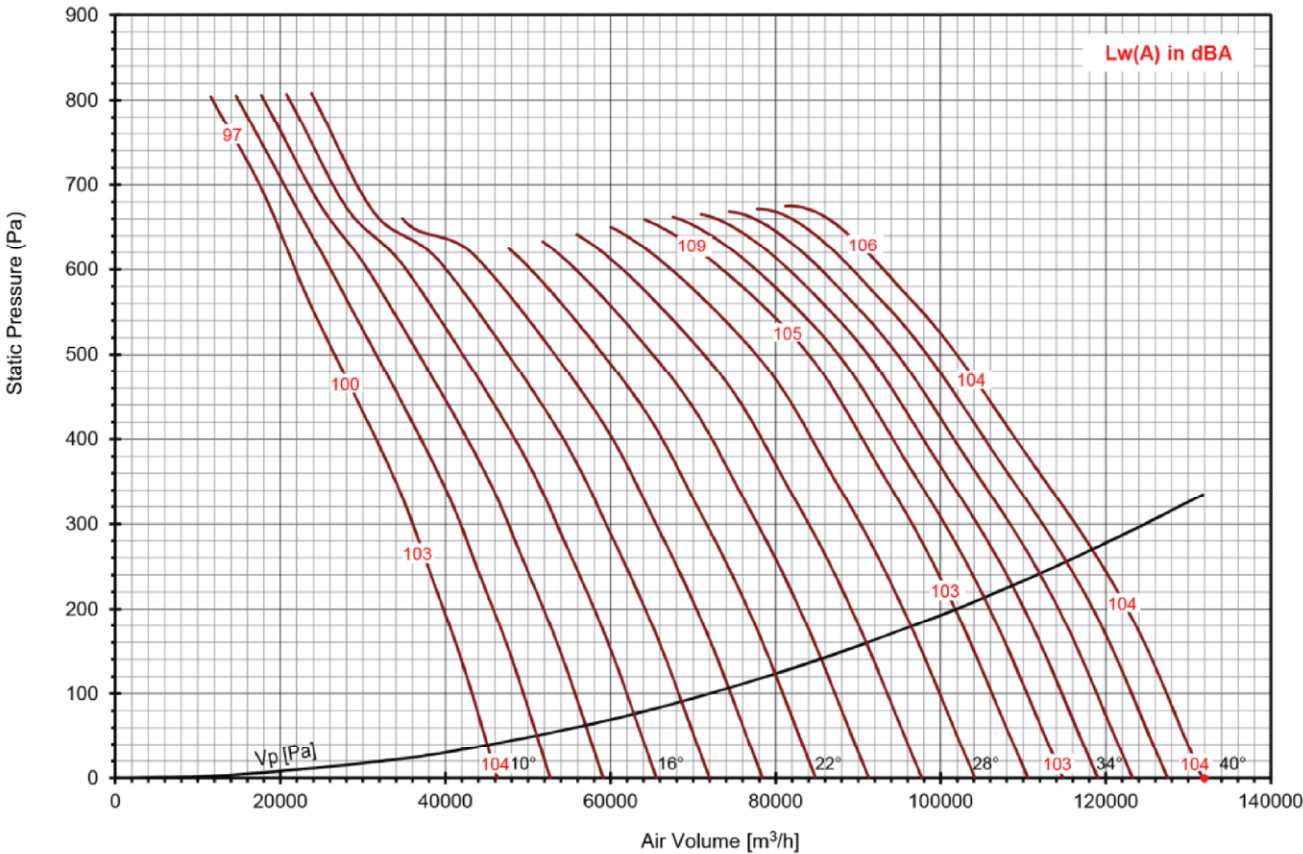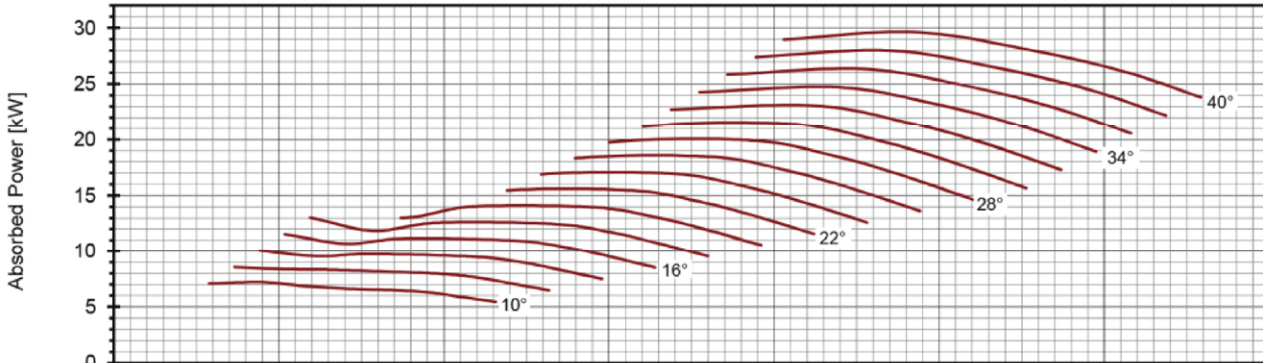

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle															Lp(A) at 3m	
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°		40°
960	7.2	8.6	10.0	11.5	13.0	14.0	15.5	16.9	18.4	19.9	21.4	23.1	24.7	26.4	28.0	29.7	-20
motor	7.5	11		15			18.5		22			30					

\* Performance certified is for installation type B - Free Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for outlet LwoA sound power levels for installation type B: free inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.



# SERIES TFA 1400/420/11/V


Impeller Code : 1400/420  
 Size : 1400mm  
 Outlet Area : 1.540m<sup>2</sup>

## Adjustable Pitch Angle Vane Axial Fan

FEG71

50Hz  
 720 rpm

$\rho = 1.2\text{kg/m}^3$

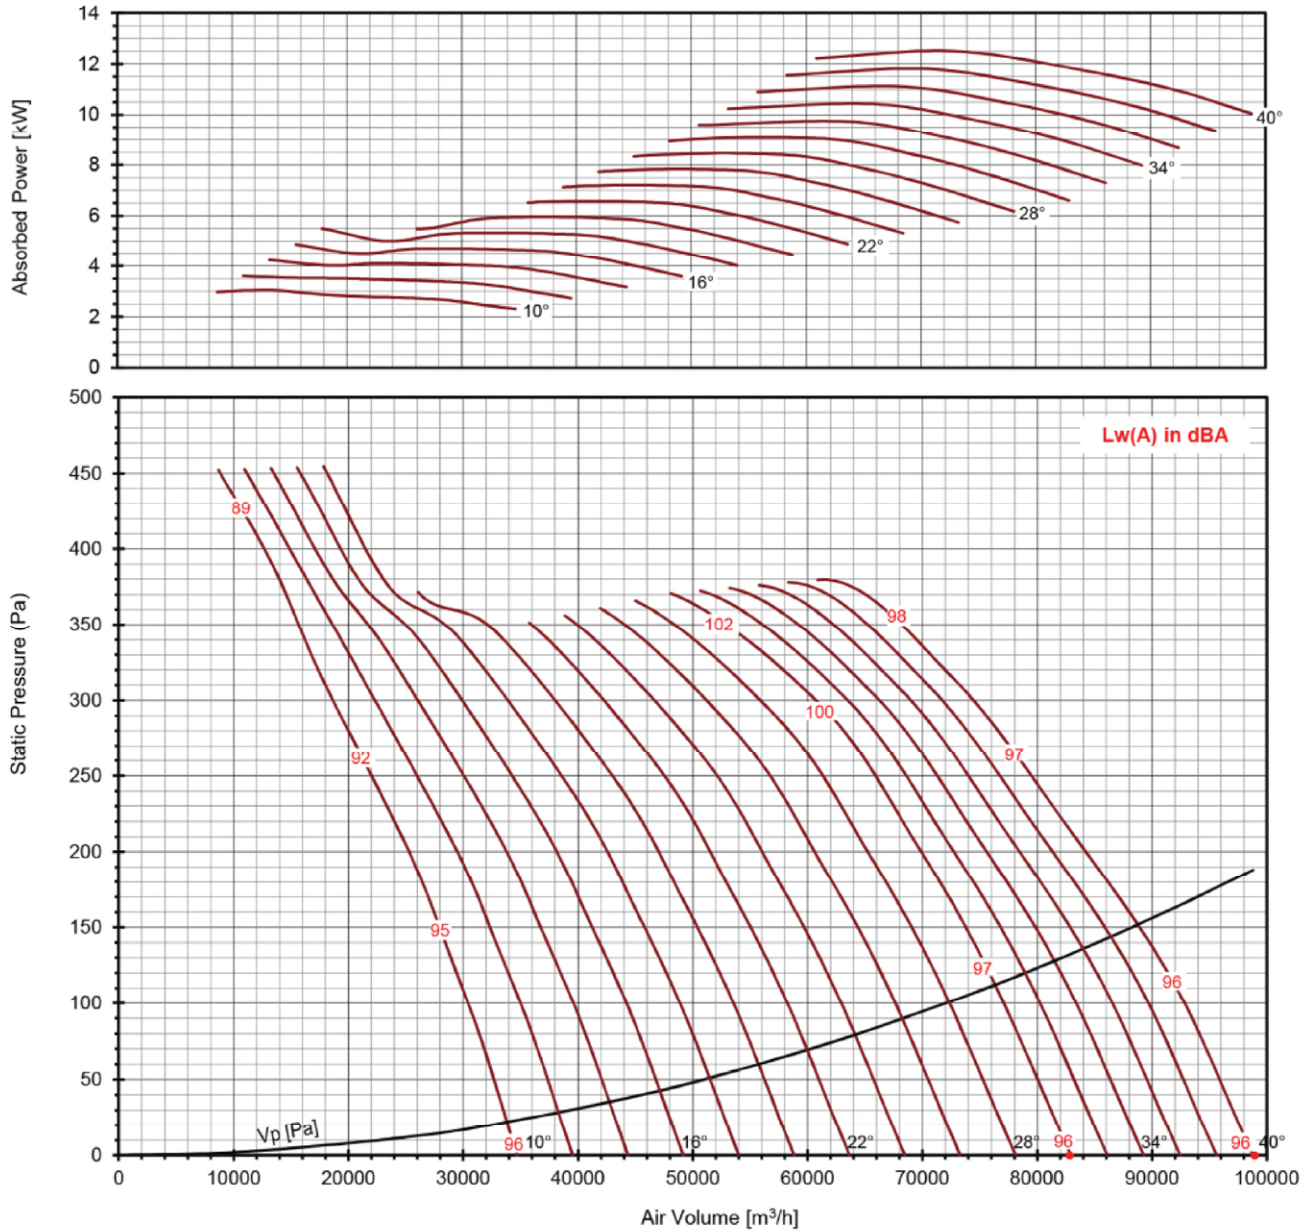

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle															Lp(A) at 3m	
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°		40°
720	3.04	3.61	4.24	4.87	5.50	5.91	6.52	7.15	7.78	8.41	9.04	9.73	10.43	11.12	11.82	12.51	-20
motor	4		5.5				7.5				11				15		

\* Performance certified is for installation type B - Free Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for outlet LwA sound power levels for installation type B: free inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.



# SERIES TFA 1400/420/11/V



Impeller Code : 1400/420  
 Size : 1400mm  
 Outlet Area : 1.540m<sup>2</sup>

## Adjustable Pitch Angle Vane Axial Fan

FEG71

50Hz  
 580 rpm

$\rho = 1.2\text{kg/m}^3$

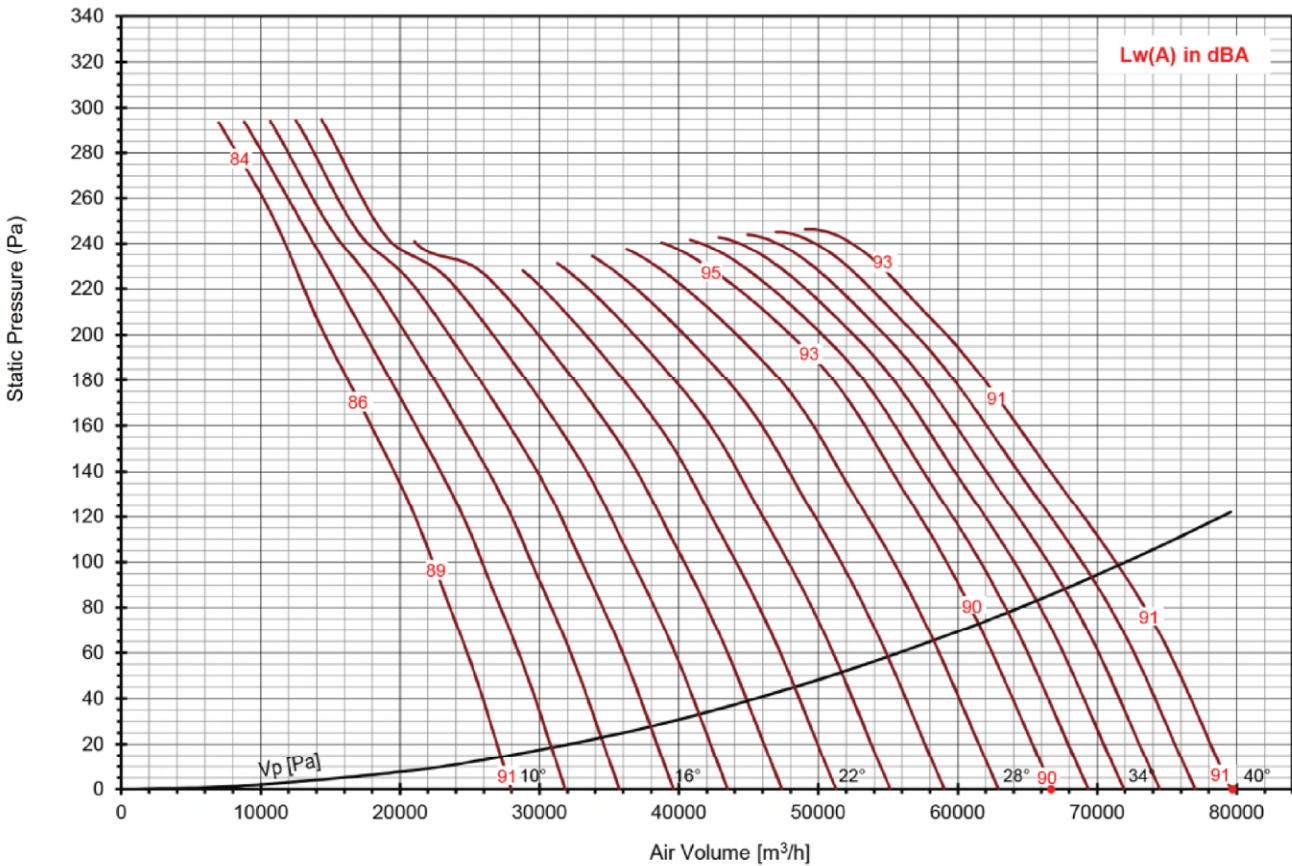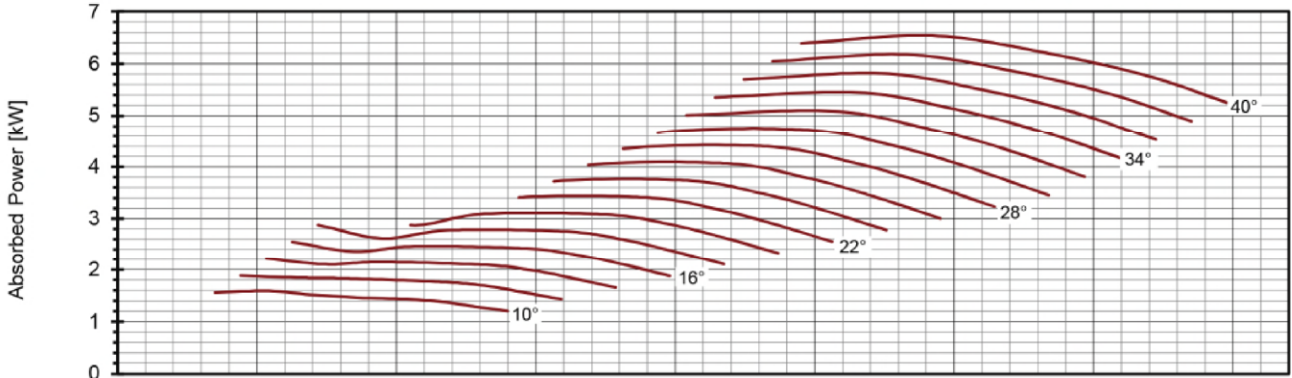

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle																Lp(A) at 3m
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	
580 motor	1.59	1.89	2.22	2.54	2.87	3.09	3.41	3.74	4.07	4.40	4.73	5.09	5.45	5.81	6.18	6.54	-20

\* Performance certified is for installation type B - Free Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances (accessories).

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for outlet LwA sound power levels for installation type B: free inlet ducted outlet. Ratings include the effects of duct end correction.

\* Lp(A) - dBA Levels are not licensed by AMCA International.



# SERIES TFA 1600/420/11/V


Impeller Code : 1600/420  
 Size : 1600mm  
 Outlet Area : 2.011m<sup>2</sup>

## Adjustable Pitch Angle Vane Axial Fan

FEG71

50Hz  
 1440 rpm

$\rho = 1.2\text{kg/m}^3$

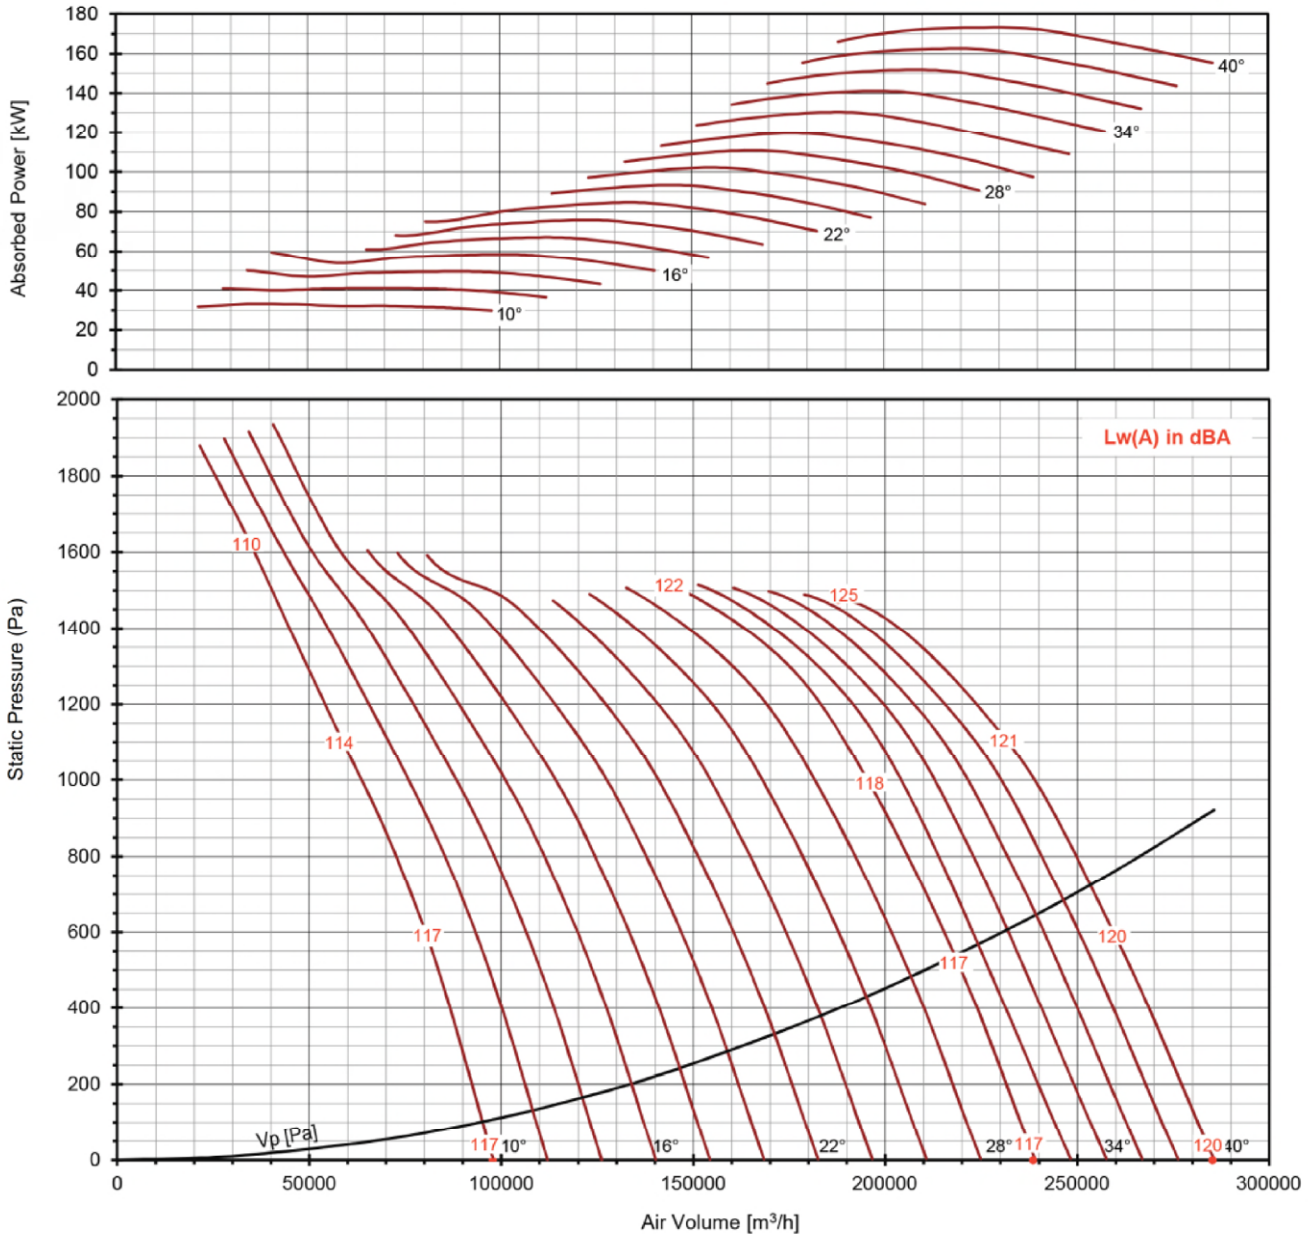

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle																Lp(A) at 3m
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	
1440	33.0	40.9	50.2	59.4	67.1	75.9	84.6	93.4	102.1	110.8	119.6	130.3	141.1	151.8	162.5	173.3	-20
motor	37	45	55	75	90	110	132	160	200								

\* Performance certified is for installation Type A - Free Inlet, Free Outlet with partition. Performance ratings do not include the effects of appurtenances (accessories)

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for outlet LwoA sound power levels for installation type A: free inlet, free outlet with partition

\* Lp(A) - dBA Levels are not licensed by AMCA International



# SERIES TFA 1600/420/11/V


Impeller Code : 1600/420  
 Size : 1600mm  
 Outlet Area : 2.011m<sup>2</sup>

## Adjustable Pitch Angle Vane Axial Fan

FEG71

**50Hz**  
**960 rpm**

$\rho = 1.2\text{kg/m}^3$

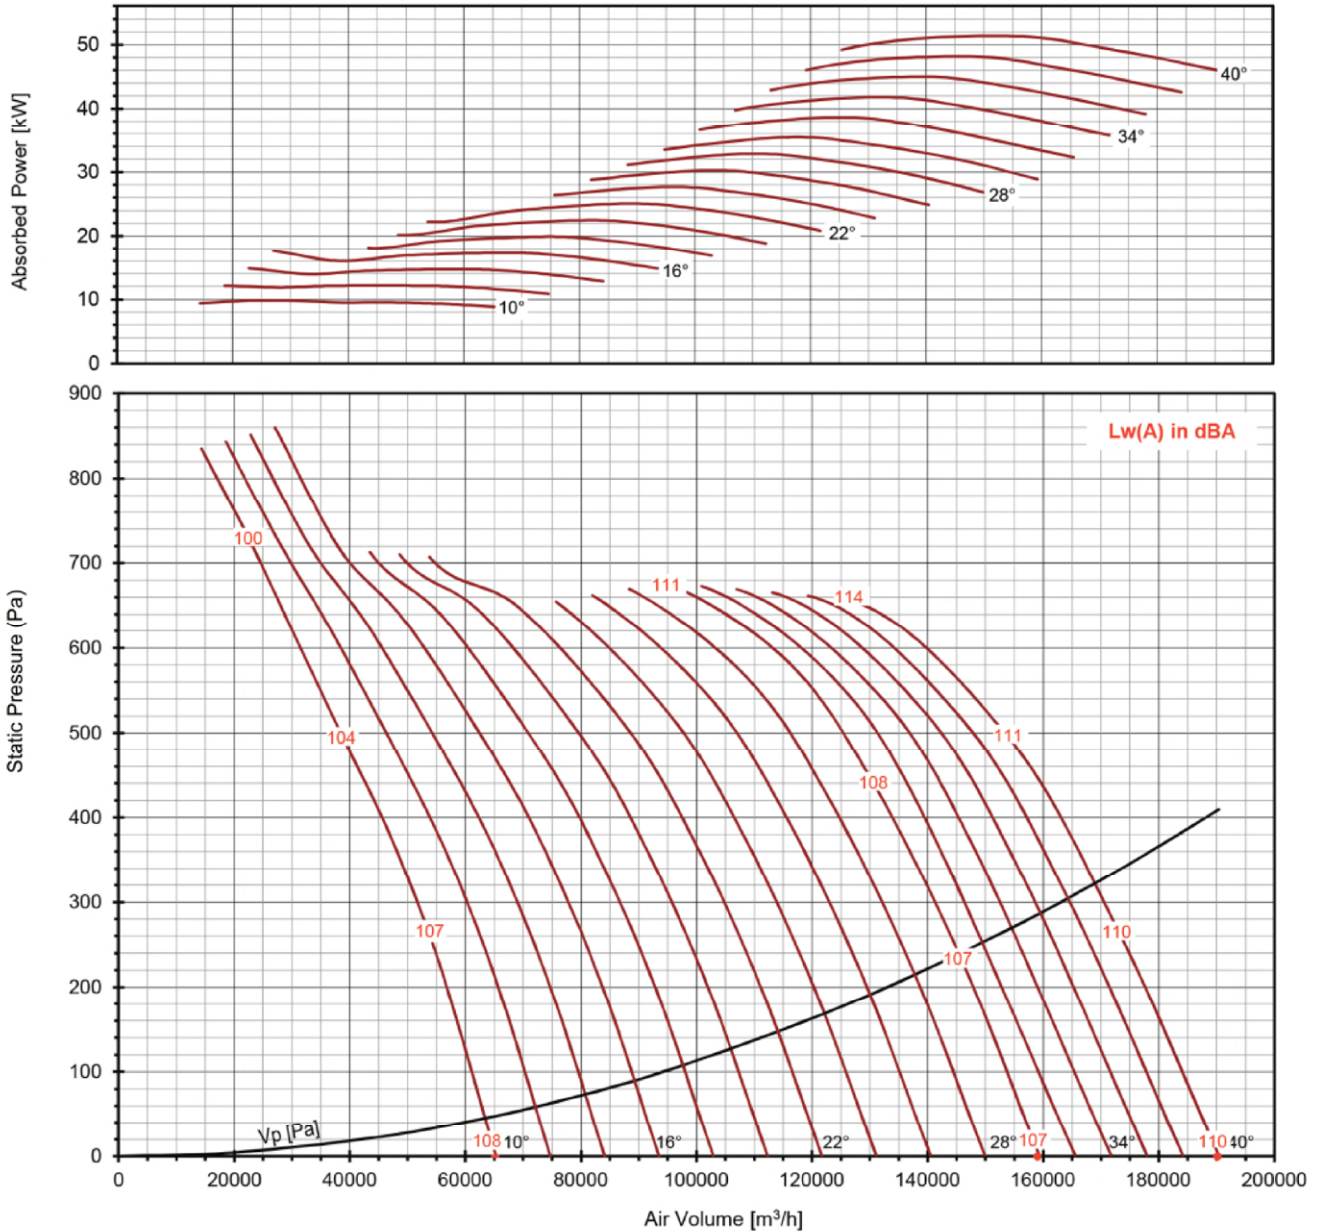

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle																Lp(A) at 3m
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	
960 motor	9.8	12.1	14.9	17.6	19.9	22.5	25.1	27.7	30.3	32.8	35.4	38.6	41.8	45.0	48.2	51.3	-20
	11	15	18.5	22	30	37											55

\* Performance certified is for installation Type A - Free Inlet, Free Outlet with partition. Performance ratings do not include the effects of appurtenances (accessories)

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for outlet LwoA sound power levels for installation type A: free inlet, free outlet with partition

\* Lp(A) - dBA Levels are not licensed by AMCA International





# SERIES TFA 1600/420/11/V



Impeller Code : 1600/420  
 Size : 1600mm  
 Outlet Area : 2.011m<sup>2</sup>

## Adjustable Pitch Angle Vane Axial Fan

FEG71

50Hz  
 720 rpm

$\rho = 1.2\text{kg/m}^3$

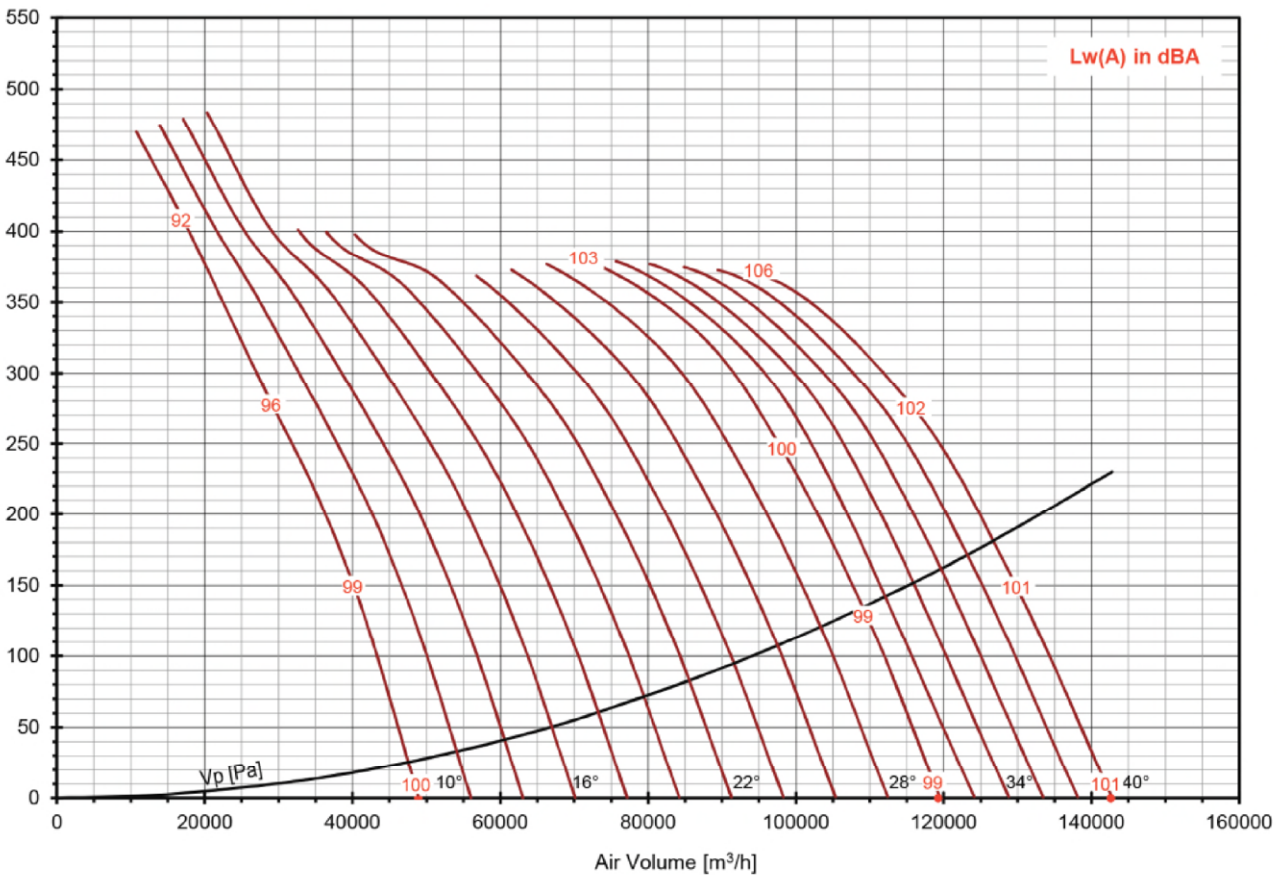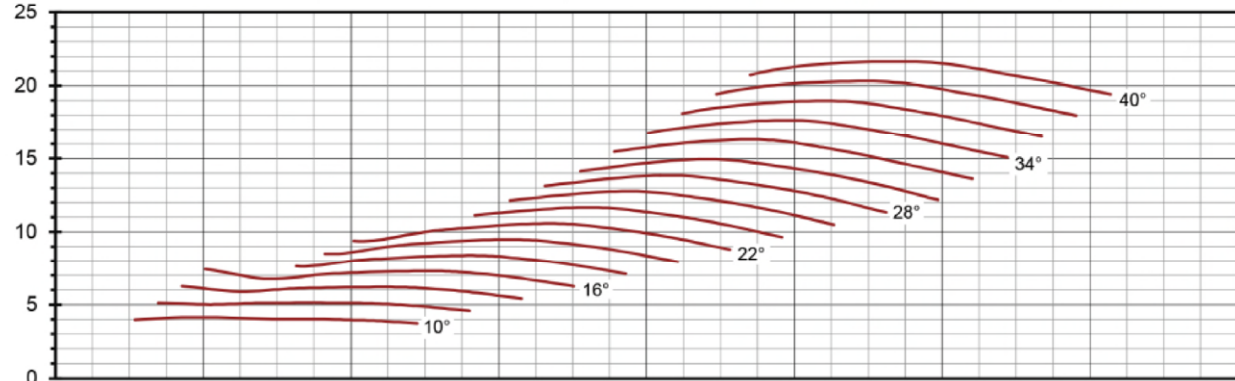

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle															Lp(A) at 3m	
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°		40°
720	4.13	5.12	6.27	7.42	8.39	9.49	10.58	11.67	12.76	13.86	14.95	16.29	17.63	18.97	20.32	21.66	-20
motor	5.5	7.5	11	15	18.5	22											

\* Performance certified is for installation Type A - Free Inlet, Free Outlet with partition.  
 Performance ratings do not include the effects of appurtenances (accessories)

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for outlet LwoA sound power levels for installation type A: free inlet, free outlet with partition

\* Lp(A) - dBA Levels are not licensed by AMCA International



# SERIES TFA 1600/420/11/V


Impeller Code : 1600/420  
 Size : 1600mm  
 Outlet Area : 2.011m<sup>2</sup>

## Adjustable Pitch Angle Vane Axial Fan

FEG71

50Hz  
 580 rpm

$\rho = 1.2\text{kg/m}^3$

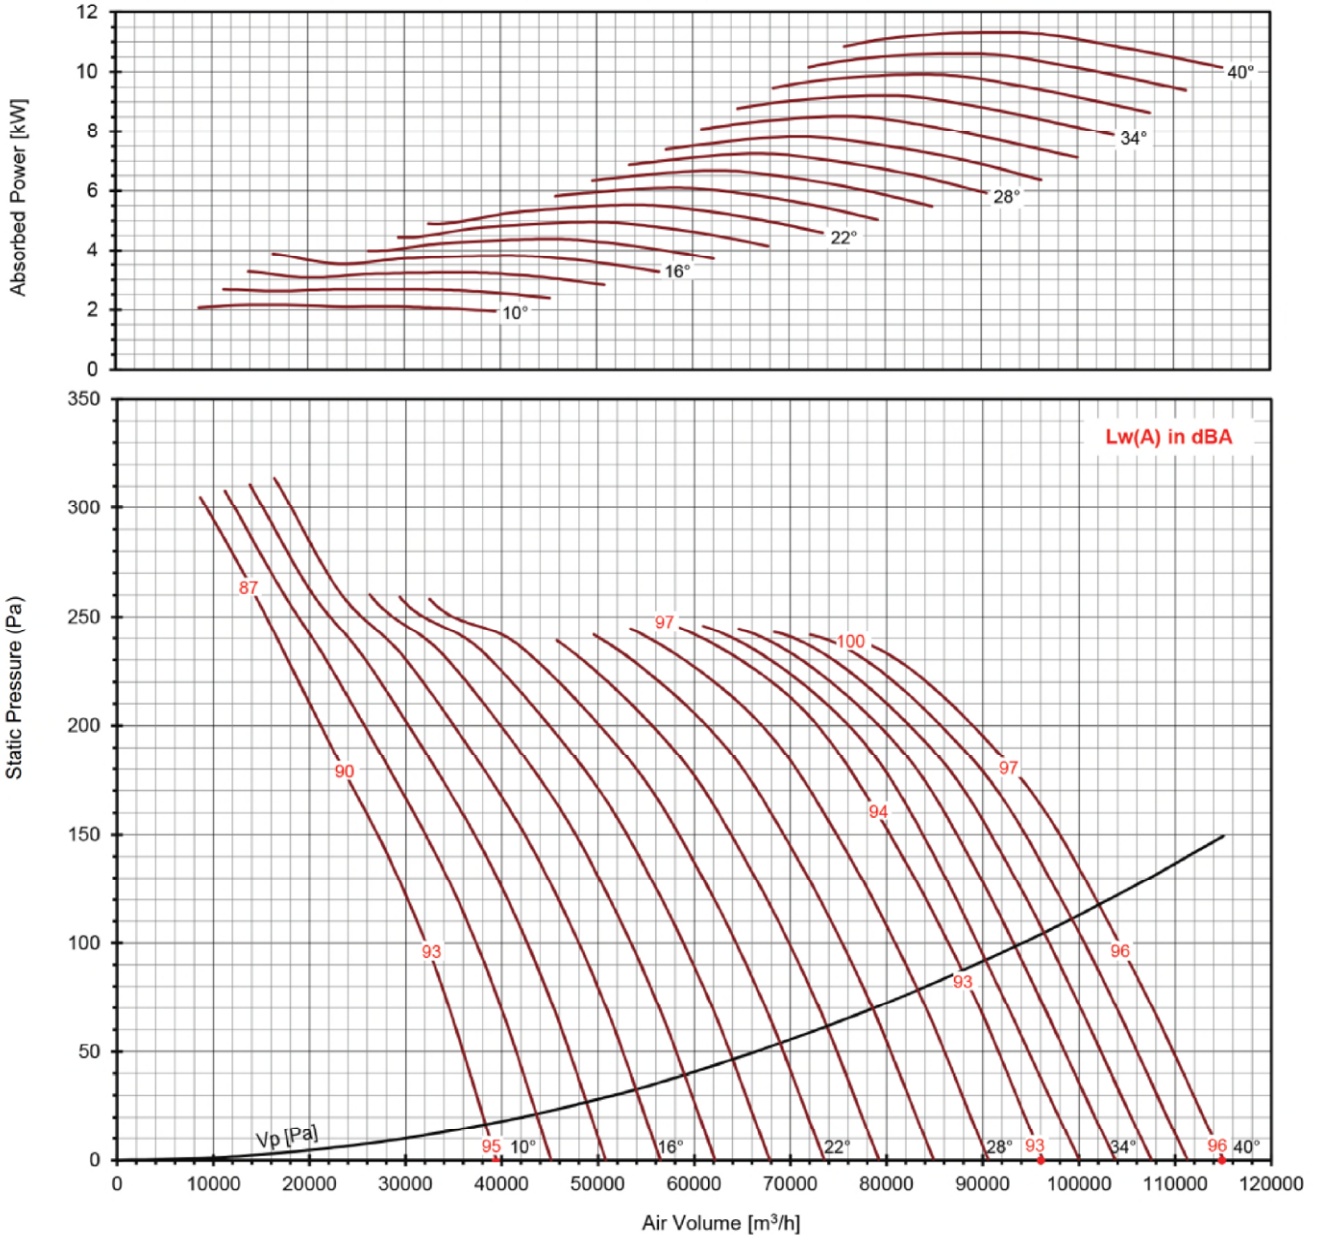

Peak Absorbed Power (kW)

N (rpm)	Blade Pitch Angle																Lp(A) at 3m
	10°	12°	14°	16°	18°	20°	22°	24°	26°	28°	30°	32°	34°	36°	38°	40°	
580	2.16	2.67	3.28	3.88	4.39	4.96	5.53	6.10	6.67	7.24	7.81	8.52	9.22	9.92	10.62	11.32	-20
motor	2.2	3	4		5.5		7.5					11				15	


\* Performance certified is for installation Type A - Free Inlet, Free Outlet with partition. Performance ratings do not include the effects of appurtenances (accessories)

\* The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for outlet LwoA sound power levels for installation type A: free inlet, free outlet with partition

\* Lp(A) - dBA Levels are not licensed by AMCA International



# TFA V Series Dimensions

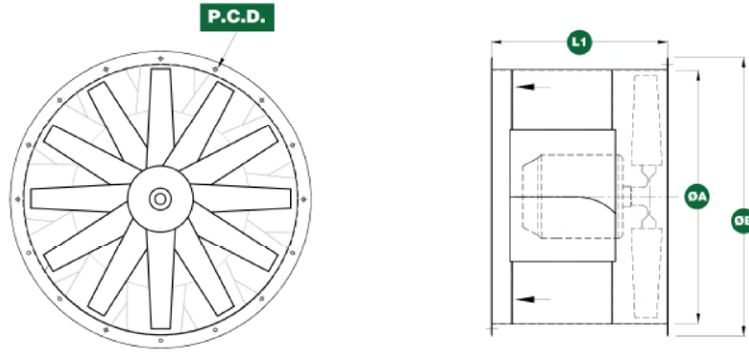

All Dimension in mm

Size	Electric Motor (kW)			ØA	ØB	ØD	Flange Size	PCD	No. of Holes	Approx. Weight (kg), L1	Approx. Weight (kg), L2	Max Motor Frame Size
	6P	4P	2P									
TFA 630/250/14/V	-	-	-	460	630	720	678	45	12	12	41	112M
	-	-	7.50	530	630	720	678	45	12	12	44	132S
	-	-	15.00	650	630	720	678	45	12	12	53	160M
	-	-	18.50	695	630	720	678	45	12	12	56	160L
TFA 800/250/14/V	1.50	3.00	-	495	800	900	856	50	12	12	64	100L
	2.20	4.00	-	495	800	900	856	50	12	12	64	112M
	3.00	5.50	-	530	800	900	856	50	12	12	67	132S
	-	7.50	-	565	800	900	856	50	12	12	70	132M
	-	15.00	18.50	650	800	900	856	50	12	12	78	160L
	-	-	22.00	715	800	900	856	50	12	12	85	180M
	-	-	37.00	825	800	900	856	50	12	12	100	200L
TFA 800/350/12/V	1.50	3.00	-	515	800	900	856	50	12	12	66	100L
	2.20	4.00	-	515	800	900	856	50	12	12	66	112M
	3.00	5.50	-	550	800	900	856	50	12	12	68	132S
	-	7.50	-	585	800	900	856	50	12	12	71	132M
	-	15.00	-	670	800	900	856	50	12	12	80	160L
	-	-	37.00	845	800	900	856	50	12	12	102	200L
TFA 1000/350/12/V	5.50	7.50	-	645	1000	1100	1056	50	12	12	113	132M
	7.50	11.00	-	670	1000	1100	1056	50	12	12	115	160M
	-	15.00	-	670	1000	1100	1056	50	12	12	116	160L
	-	18.50	-	735	1000	1100	1056	50	12	12	121	180M
	-	22.00	-	780	1000	1100	1056	50	12	12	126	180L
	-	30.00	-	845	1000	1100	1056	50	12	12	136	200L
	-	-	37.00	845	1000	1100	1056	50	12	12	136	200L
TFA 1000/300/10/V	5.50	7.50	-	645	1000	1100	1056	50	12	12	113	132M
	7.50	11.00	-	670	1000	1100	1056	50	12	12	115	160M
	-	15.00	-	670	1000	1100	1056	50	12	12	116	160L
	-	18.50	-	735	1000	1100	1056	50	12	12	121	180M
	-	22.00	-	780	1000	1100	1056	50	12	12	126	180L
	-	30.00	-	845	1000	1100	1056	50	12	12	136	200L
TFA 1120/300/10/V	15.00	22.00	-	815	1120	1220	1176	50	16	15	179	180L
	22.00	30.00	-	845	1120	1220	1176	50	16	15	182	200L
	-	37.00	-	885	1120	1220	1176	50	16	15	184	225S
	-	45.00	-	910	1120	1220	1176	50	16	15	187	225M
	-	55.00	-	1000	1120	1220	1176	50	16	15	199	250M
TFA 1120/350/12/V	15.00	22.00	-	815	1120	1220	1176	50	16	15	TBA	180L
	22.00	30.00	-	845	1120	1220	1176	50	16	15	TBA	200L
	-	37.00	-	885	1120	1220	1176	50	16	15	TBA	225S
	-	45.00	-	910	1120	1220	1176	50	16	15	TBA	225M
	-	55.00	-	1000	1120	1220	1176	50	16	15	TBA	250M
TFA 1250/350/12/V	15.00	22.00	-	815	1250	1350	1306	50	16	15	200	180L
	22.00	30.00	-	845	1250	1350	1306	50	16	15	203	200L
	-	37.00	-	885	1250	1350	1306	50	16	15	205	225S
	-	45.00	-	910	1250	1350	1306	50	16	15	209	225M
	-	55.00	-	1000	1250	1350	1306	50	16	15	222	250M
TFA 1400/350/12/V	30.00	45.00	-	915	1400	1510	1456	55	16	15	244	225M
	-	55.00	-	1000	1400	1510	1456	55	16	15	264	250M
	-	90.00	-	1065	1400	1510	1456	55	16	15	275	280M
TFA 1400/420/11/V	30.00	45.00	-	955	1400	1510	1456	55	16	15	29	225M
	-	55.00	-	1040	1400	1510	1456	55	16	15	268	250M
	-	90.00	-	1105	1400	1510	1456	55	16	15	280	280M
	-	110.00	-	1305	1400	1510	1456	55	16	15	311	315S
TFA 1600/420/11/V	30.00	45.00	-	970	1600	1720	1656	60	24	20	337	225M
	37.00	55.00	-	1040	1600	1720	1656	60	24	20	356	250M
	55.00	90.00	-	1105	1600	1720	1656	60	24	20	372	280M
	-	110.00	-	1305	1600	1720	1656	60	24	20	413	315S
	-	132.00	-	1375	1600	1720	1656	60	24	20	434	315M
-	200.00	-	1475	1600	1720	1656	60	24	20	459	315L	

\* The actual dimension is subject to the motor frame size used, kindly refer to GTG Technical Submittal for further details.

\* Weight indicated above excluded the weight of motor, hub and fan blades.

# WELAIRE<sup>®</sup>

## **ZHONGSHAN SAIVER WELAIRE AIR-COND. EQUIP. CO. LTD.**

Block 1, Meiping Street, Maling Village, South District,  
Zhongshan City, Guangdong Province, 528455, China.

Tel : (86) 760 2333 1878  
Fax : (86) 760 2333 1178  
E-mail : sales@saiver-welaire.com.cn  
Website : www.saiver-welaire.com



---

## **WELCOME AIR-TECH (MALAYSIA) SDN. BHD.**

Lot 4351, Jalan Bukit Kemuning,  
Batu 8, Taman Sri Muda, Seksyen 25,  
40400 Shah Alam, Selangor D.E., Malaysia

Tel : (603) 5121-8090  
Fax : (603) 5122-8090  
E-mail : sales@saiver-welaire.com.my  
Website : www.saiver-welaire.com.my



Specification subject to changes  
without prior notice.

WE-PDFLT-AMCATFAV-2025.02  
FEBRUARY 2025