

# AFG501

FEMA Louver | Chevron Blade | Aluminum

UL Classified: R26078

## Standard Construction

<b>Frame</b>	Heavy gauge extruded 5052-H32 aluminum, 5.5 in. (140 mm) x 0.25 in. (6 mm) nominal wall thickness
<b>Blades</b>	Chevron design, heavy gauge extruded 6061-T6 aluminum, 0.25 in. (6 mm) nominal wall thickness, positioned 45° on approximately 2 in. (51 mm) centers
<b>Louver Depth</b>	5.5 in. (152 mm)
<b>Construction</b>	Welded
<b>Finish</b>	Mill
<b>Mounting</b>	Channel Frame Recessed/Flush
<b>Mounting Angles</b>	The 1/4 in. (6 mm) thick frame is extended along the jambs, or head and sill, with mounting holes
<b>Minimum Section Size</b>	12 in. W x 12 in. H (305 mm W x 305 mm H)
<b>Maximum Single Section Size</b>	96 in. x 120 in. (2438 mm x 3048 mm) Limited to 50 sq. ft. (4.6 sq. m), maximum size is also dependent on frame configuration and finish process ( <a href="#">See size limitations chart</a> )
<b>Maximum Opening Width</b>	Unlimited, larger openings may be configured of multiple louver panels without additional structural reinforcing when configured as head and sill mount
<b>Approx. Weight</b>	13 PSF (0.6 kPa), integral lifting lugs included
<b>Wind Load</b>	+/-250 PSF (1.2 kPa)

## Performance Ratings




Airolite certifies that the AFG501 louvers shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the

AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to Water Penetration and Air Performance ratings.

Louvers were tested in accordance with AMCA Standard 500-L.

### Performance of 48 in. x 48 in. (1219 mm x 1219 mm) Louver

<b>Free Area</b>	
Area	7.60 sq. ft. (0.706 sq. m)
Percent	47.5%
<b>Performance at Beginning Point of Water Penetration</b>	
Free Area Velocity	552.5 fpm (2.807 m/s)
Max Intake Volume	4199 cfm (1.982 m <sup>3</sup> /s)
<b>Performance at 6,000 CFM (2.832 m<sup>3</sup>/s) Intake</b>	
Pressure Drop	0.157 in. wg (0.039 kPa)

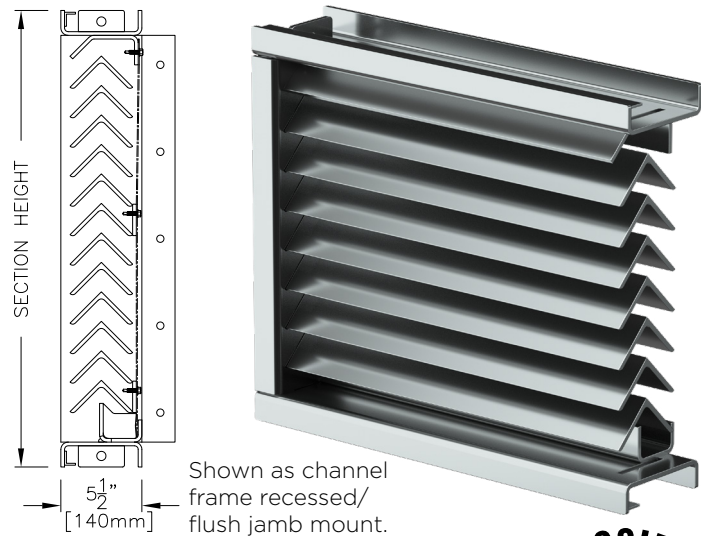

The AFG501 is a UL Classified Wind-Storm Rated Assembly in accordance with FEMA Guidelines P-320 and P-361, and ICC 500 (2020) to static and cyclical design pressures of positive/negative 250 PSF and debris impact of a 15 lb sawn lumber 2x4 traveling at 100 MPH (6.8 kg at 44.7 m/s).



## Options and Accessories

- Cantilever and Flange Style Mounting
- [Extended Sill](#)
- Flange Frame
- Head and Sill Mounting Configuration
- [Insect Screen](#)
- [Variety of Architectural Finishes](#)

## Product Details

- [AFL-501 Standard Details](#)
- [Exterior Flange \(IOM #483332\)](#)
- [Interior Flange \(IOM #483333\)](#)
- [Exterior Cantilevered \(IOM #483334\)](#)
- [Interior Cantilevered \(IOM #483335\)](#)
- [Flush Mount \(IOM #483336\)](#)

Structural reinforcing members may be required to adequately support and install multiple louver sections within a large opening. Structural reinforcing members along with any associated installation hardware is not provided by Airolite unless indicated otherwise by Airolite. Options and accessories including, but not limited to, screens, filter racks, louver doors, and blank off panels are not subject to structural analysis unless indicated otherwise by Airolite.



# AFG501

FEMA Louver | Chevron Blade | Aluminum

## Free Area Chart

Free Area Chart shows free area in square feet.

		Rough Opening Width (Inches)																			
		-	12	14.13	20.13	26.13	32.13	38.13	44.13	50.13	56.13	60	62.13	68.13	72	74.13	80.13	86.13	92.13	96	
Equivalent Cantilever R.O.Size	Recessed/ Flanged	12	15.88	18	24	30	36	42	48	54	60	63.88	66	72	-	78	84	90	96	-	
	Rough Opening Height (Inches)	-	12	0.24	0.35	0.41	0.58	0.76	0.93	1.11	1.28	1.45	1.62	1.74	1.80	1.97	2.08	2.15	2.32	2.50	2.67
12		15.88	0.37	0.54	0.64	0.91	1.17	1.44	1.71	1.98	2.24	2.51	2.69	2.78	3.05	3.23	3.32	3.59	3.86	4.13	4.31
14.13		18	0.43	0.64	0.75	1.07	1.38	1.70	2.02	2.34	2.64	2.96	3.16	3.28	3.59	3.80	3.91	4.23	4.55	4.86	5.07
20.13		24	0.62	0.92	1.09	1.55	2.01	2.47	2.93	3.39	3.83	4.29	4.59	4.75	5.21	5.51	5.67	6.14	6.60	7.06	7.36
26.13		30	0.82	1.21	1.42	2.03	2.63	3.23	3.84	4.44	5.02	5.63	6.02	6.23	6.83	7.23	7.44	8.04	8.65	9.25	9.64
32.13		36	1.01	1.49	1.76	2.51	3.25	4.00	4.75	5.50	6.21	6.96	7.44	7.71	8.46	8.94	9.20	9.95	10.70	11.45	11.93
38.13		42	1.21	1.78	2.10	2.99	3.88	4.77	5.66	6.55	7.40	8.30	8.87	9.19	10.08	10.65	10.97	11.86	12.75	13.64	14.21
44.13		48	1.40	2.07	2.43	3.47	4.50	5.54	6.57	7.60	8.60	9.63	10.30	10.66	11.70	12.37	12.73	13.77	14.80	15.83	16.50
50		53.88	1.59	2.35	2.77	3.95	5.13	6.30	7.48	8.66	9.79	10.96	11.72	12.14	13.32	14.08	14.50	15.67	16.85	18.03	18.79
50.13		54	1.59	2.35	2.77	3.95	5.13	6.30	7.48	8.66	9.79	10.96	11.72	12.14	13.32	14.08	14.50	15.67	16.85	18.03	
56.13		60	1.79	2.64	3.11	4.43	5.75	7.07	8.39	9.71	10.98	12.30	13.15	13.62	14.94	15.79	16.26	17.58	18.90	20.22	
62.13		66	1.98	2.93	3.45	4.91	6.37	7.84	9.30	10.77	12.17	13.63	14.58	15.10	16.56	17.51	18.02	19.49	20.95	22.42	
67		-	2.15	3.18	3.75	5.34	6.93	8.52	10.11	11.70	13.23	14.82	15.84	16.41	18.00	19.03					
68.13		72	2.18	3.21	3.78	5.39	7.00	8.61	10.21	11.82	13.36	14.97	16.00	16.57	18.18						
72.13		76	2.31	3.41	4.01	5.71	7.41	9.12	10.82	12.52	14.15	15.86	16.96	17.56	19.26						
74.13		78	2.37	3.50	4.12	5.87	7.62	9.37	11.12	12.87	14.55	16.30	17.43								
80.13		84	2.56	3.79	4.46	6.35	8.25	10.14	12.03	13.93	15.74	17.64	18.86								
86.13		90	2.76	4.07	4.80	6.83	8.87	10.91	12.94	14.98	16.93	18.97	20.29								
92.13		96	2.95	4.36	5.13	7.31	9.49	11.67	13.85	16.03	18.12	20.30	21.71								
98.13		102	3.15	4.65	5.47	7.79	10.12	12.44	14.76	17.09	19.31	21.64	23.14								
104.13	108	3.34	4.93	5.81	8.27	10.74	13.21	15.67	18.14	20.51	22.97	24.57									
110.13	114	3.53	5.22	6.14	8.75	11.37	13.98	16.59	19.20	21.70	24.31	25.99									
116.13	120	3.73	5.51	6.48	9.24	11.99	14.74	17.50	20.25	22.89	25.64	27.42									
120	-	-	5.70	6.71	9.56	12.40	15.25	18.10	20.95	23.68	26.53	28.37									

## Document Links

[Architectural Louvers Catalog](#)

[Finishes & Colors](#)

[Qwik Ship Guide](#)

[Aiolite Warranty Statement](#)



# AFG501

FEMA Louver | Chevron Blade | Aluminum

## Free Area Chart

Free Area Chart shows free area in square meters.

Equivalent Cantilever R.O.Size		Rough Opening Width (Meters)																		
		-	0.30	0.36	0.51	0.66	0.82	0.97	1.12	1.27	1.43	1.52	1.58	1.73	1.83	1.88	2.04	2.19	2.34	2.44
-	Recessed/Flanged	0.30	0.40	0.46	0.61	0.76	0.91	1.07	1.22	1.37	1.52	1.62	1.68	1.83	-	1.98	2.13	2.29	2.44	-
	0.30	0.01	0.01	0.01	0.01	0.02	0.02	0.03	0.03	0.04	0.04	0.04	0.05	0.05	0.05	0.05	0.06	0.06	0.07	-
0.30	0.40	0.01	0.01	0.02	0.02	0.03	0.04	0.04	0.05	0.06	0.06	0.07	0.07	0.08	0.08	0.08	0.09	0.10	0.10	0.11
0.36	0.46	0.01	0.02	0.02	0.03	0.04	0.04	0.05	0.06	0.07	0.08	0.08	0.08	0.09	0.10	0.10	0.11	0.12	0.12	0.13
0.51	0.61	0.02	0.02	0.03	0.04	0.05	0.06	0.07	0.09	0.10	0.11	0.12	0.12	0.13	0.14	0.14	0.16	0.17	0.18	0.19
0.66	0.76	0.02	0.03	0.04	0.05	0.07	0.08	0.10	0.11	0.13	0.14	0.15	0.16	0.17	0.18	0.19	0.20	0.22	0.23	0.24
0.82	0.91	0.03	0.04	0.04	0.06	0.08	0.10	0.12	0.14	0.16	0.18	0.19	0.20	0.21	0.23	0.23	0.25	0.27	0.29	0.30
0.97	1.07	0.03	0.05	0.05	0.08	0.10	0.12	0.14	0.17	0.19	0.21	0.23	0.23	0.26	0.27	0.28	0.30	0.32	0.35	0.36
1.12	1.22	0.04	0.05	0.06	0.09	0.11	0.14	0.17	0.19	0.22	0.24	0.26	0.27	0.30	0.31	0.32	0.35	0.38	0.40	0.42
1.27	1.37	0.04	0.06	0.07	0.10	0.13	0.16	0.19	0.22	0.25	0.28	0.30	0.31	0.34	0.36	0.37	0.40	0.43	0.46	0.48
1.27	1.37	0.04	0.06	0.07	0.10	0.13	0.16	0.19	0.22	0.25	0.28	0.30	0.31	0.34	0.36	0.37	0.40	0.43	0.46	-
1.43	1.52	0.05	0.07	0.08	0.11	0.15	0.18	0.21	0.25	0.28	0.31	0.33	0.35	0.38	0.40	0.41	0.45	0.48	0.51	-
1.58	1.68	0.05	0.07	0.09	0.12	0.16	0.20	0.24	0.27	0.31	0.35	0.37	0.38	0.42	0.44	0.46	0.50	0.53	0.57	-
1.70	-	0.05	0.08	0.10	0.14	0.18	0.22	0.26	0.30	0.34	0.38	0.40	0.42	0.46	0.48	-	-	-	-	-
1.73	1.83	0.06	0.08	0.10	0.14	0.18	0.22	0.26	0.30	0.34	0.38	0.41	0.42	0.46	-	-	-	-	-	-
1.83	1.93	0.06	0.09	0.10	0.15	0.19	0.23	0.27	0.32	0.36	0.40	0.43	0.45	0.49	-	-	-	-	-	-
1.88	1.98	0.06	0.09	0.10	0.15	0.19	0.24	0.28	0.33	0.37	0.41	0.44	-	-	-	-	-	-	-	-
2.04	2.13	0.07	0.10	0.11	0.16	0.21	0.26	0.31	0.35	0.40	0.45	0.48	-	-	-	-	-	-	-	-
2.19	2.29	0.07	0.10	0.12	0.17	0.23	0.28	0.33	0.38	0.43	0.48	0.52	-	-	-	-	-	-	-	-
2.34	2.44	0.07	0.11	0.13	0.19	0.24	0.30	0.35	0.41	0.46	0.52	0.55	-	-	-	-	-	-	-	-
2.49	2.59	0.08	0.12	0.14	0.20	0.26	0.32	0.37	0.43	0.49	0.55	0.59	-	-	-	-	-	-	-	-
2.64	2.74	0.08	0.13	0.15	0.21	0.27	0.34	0.40	0.46	0.52	0.58	0.62	-	-	-	-	-	-	-	-
2.80	2.90	0.09	0.13	0.16	0.22	0.29	0.36	0.42	0.49	0.55	0.62	0.66	-	-	-	-	-	-	-	-
2.95	3.05	0.09	0.14	0.16	0.23	0.30	0.37	0.44	0.51	0.58	0.65	0.70	-	-	-	-	-	-	-	-
3.05	-	-	0.14	0.17	0.24	0.31	0.39	0.46	0.53	0.60	0.67	0.72	-	-	-	-	-	-	-	-




# AFG501

FEMA Louver | Chevron Blade | Aluminum

## Airflow Resistance

Standard Air - 0.075 lb/ft<sup>3</sup> (1.2 kg/m<sup>3</sup>)

Test size 48 in. x 48 in. (1219 mm x 1219 mm)

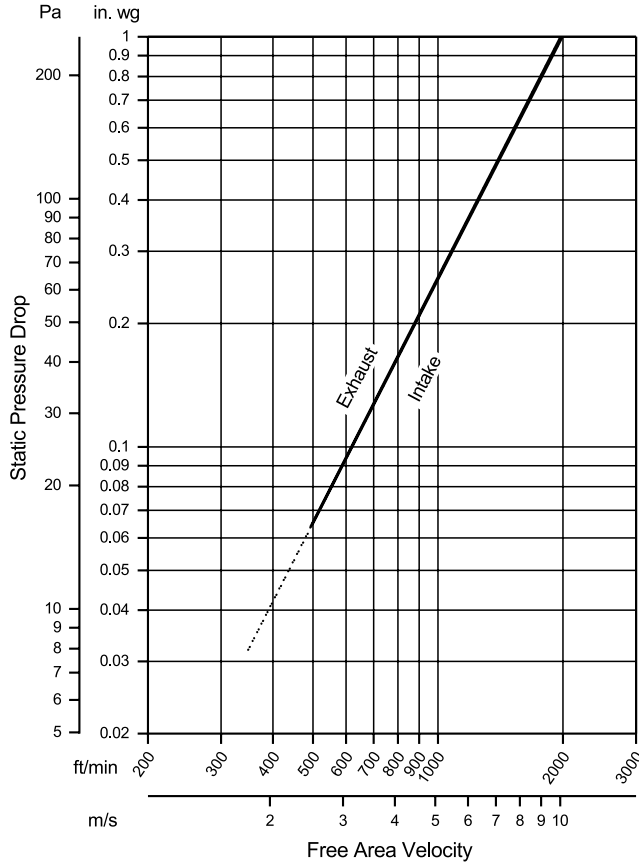


Model AFG501 resistance to airflow (pressure drop) varies depending on louver application (air intake or air exhaust). Free area velocities (shown) are higher than average velocity through the overall louver size. See louver selection information. (Test Figure 5.5-6.5)

## Water Penetration

Standard Air - 0.075 lb/ft<sup>3</sup> (1.2 kg/m<sup>3</sup>)

Test size 48 in. x 48 in. (1219 mm x 1219 mm)

Test duration of 15 min.

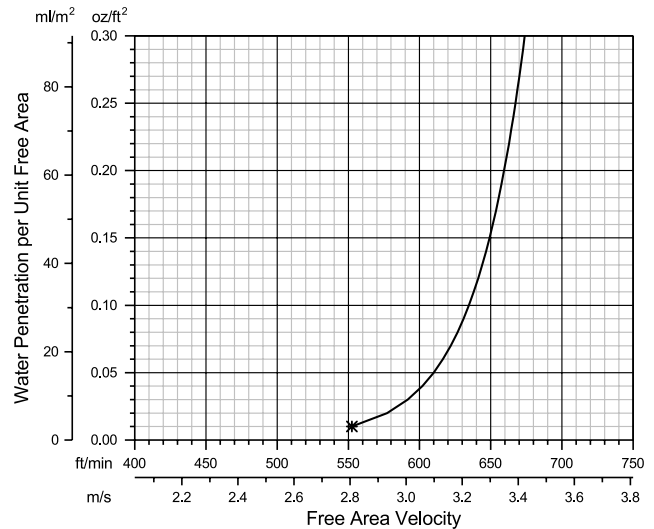

The AMCA Water Penetration Test provides a method for comparing various louver models and designs as to their efficiency in resisting the penetration of rainfall under specific laboratory test conditions. The beginning point of water penetration is defined as that velocity where the water penetration curve projects through 0.01 oz. (3 g) of water (penetration) per sq. ft. (m<sup>2</sup>) of louver free area.

**\*The beginning point of water penetration for Model AFG501 is 552.5 fpm (2.807 m/s) free area velocity.**

These performance ratings do not guarantee a louver to be weatherproof or stormproof and should be used in combination with other factors including good engineering judgement in selecting louvers.

