

Application

The SMD-302 is a leakage rated smoke damper with airfoil blades for operational closure in emergency smoke control situations. The SMD-302 may be installed vertically (with blades running horizontal) or horizontally and is rated for airflow and leakage in either direction.

Ratings

UL 555S Leakage Rating

Leakage Class: II

Operational Rating: Actual ratings are size dependent

Velocity: Up to 4000 fpm (20.3 m/s)

Pressure: Up to 8 in. wg (2 kPa)

Temperature: Up to 350°F (177°C) - depending upon the actuator



W and H dimensions furnished approximately 1/4 in. (6mm) undersize. Add sleeve thickness for overall sleeved damper dimension.

Right hand drive is shown.



See complete marking on product.

UL 555S Classification
R13317

Size Limitations

W x H	Minimum Size	Maximum Size*	
		Single Section	Multiple Section
Inches	4 x 4*	32 x 50	192 x 100
mm	102 x 102	813 x 1270	4877 x 2540

Overall damper size is 8 in. x 6 in. (203 mm x 152 mm).

*Note: Maximum sizes are dependent on velocities and pressures.

Model SMD-301 meets the requirements for smoke dampers established by:


National Fire Protection Association
NFPA Standards 90A, 92, 101 & 105

IBC International Building Codes

CSFM California State Fire Marshal
Leakage (Smoke) Damper Listing (#3230-0981:104)

Construction

	Standard	Optional
Frame Material	Galvanized steel	-
Frame Material Thickness	16 ga. (1.5 mm)	-
Frame Type	5 in. x 1 in. (127 mm x 25 mm) hat channel	-
Blade Action	Opposed	-
Blade Material	Galvanized steel	-
Blade Material Thickness	14 ga. (2 mm) equivalent	-
Blade Type	Double skin airfoil	-
Blade Orientation	Opposed	-
Linkage	Plated steel out of airstream, concealed in jamb	316SS
Axle Bearings	316SS	-
Axle Material	Plated steel	316SS
Blade Seals	Silicone	-
Jamb Seals	Stainless Steel	-
Mounting	Vertical	Horizontal

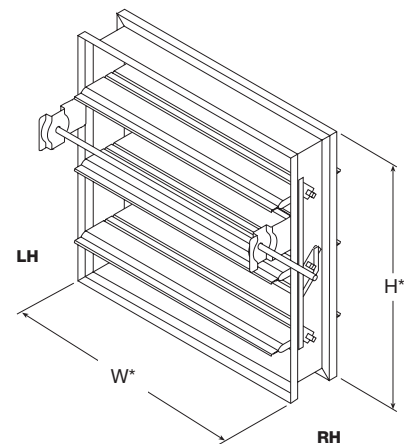

Note:


The frames are constructed with reinforced corners. Low profile head and sill are used on sizes less than 17 in. high (432 mm) for lower pressure drop and improved damper performance.

Options

- Access door mounted in sleeve
- [BACnet test module - 120V](#)
- [BACnet test module - 24V](#)
- [Breakaway connections](#)
- Clean wrap
- [Greenheck Test Switches \(GTS\)](#)
- Grille tabs
- [Momentary test switch](#)
- [Retaining angles](#)
- [OCI \(Open Closed Indicator Switches\)](#)
- Sealed transitions and sleeves
- [Security bars](#)
- [Smoke detector - no flow](#)
- [Smoke detector - low flow](#)
- Transitions: R, C, O


Pressure Drop

AMCA Figure 5.2

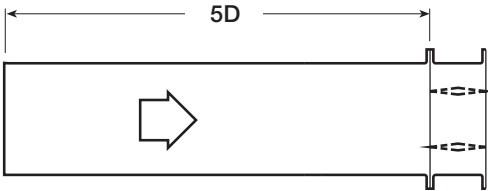


12 in. x 12 in. (305mm x 305mm)		24 in. x 24 in. (610mm x 610mm)		36 in. x 36 in. (914mm x 914mm)		12 in. X 48 in. (305mm x 1219mm)		48 in. x 12 in. (1219mm x 305mm)	
Velocity (fpm)	Pressure Drop (in. wg)	Velocity (fpm)	Pressure Drop (in. wg)	Velocity (fpm)	Pressure Drop (in. wg)	Velocity (fpm)	Pressure Drop (in. wg)	Velocity (fpm)	Pressure Drop (in. wg)
500	0.03	500	0.01	500	0.01	500	0.01	500	0.02
1000	0.11	1000	0.06	1000	0.05	1000	0.05	1000	0.08
1500	0.24	1500	0.12	1500	0.12	1500	0.12	1500	0.18
2000	0.42	2000	0.22	2000	0.21	2000	0.21	2000	0.33
2500	0.66	2500	0.34	2500	0.32	2500	0.33	2500	0.51
3000	0.95	3000	0.49	3000	0.47	3000	0.48	3000	0.74
3500	1.30	3500	0.67	3500	0.63	3500	0.65	3500	1.00
4000	1.70	4000	0.87	4000	0.83	4000	0.85	4000	1.31

AMCA Figure 5.3

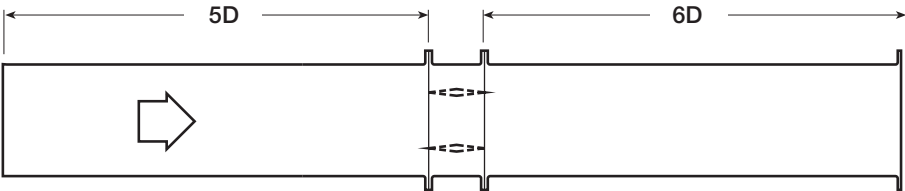

12 in. x 12 in. (305mm x 305mm)		24 in. x 24 in. (610mm x 610mm)		36 in. x 36 in. (914mm x 914mm)		12 in. X 48 in. (305mm x 1219mm)		48 in. x 12 in. (1219mm x 305mm)	
Velocity (fpm)	Pressure Drop (in. wg)	Velocity (fpm)	Pressure Drop (in. wg)	Velocity (fpm)	Pressure Drop (in. wg)	Velocity (fpm)	Pressure Drop (in. wg)	Velocity (fpm)	Pressure Drop (in. wg)
500	0.01	500	0.01	500	0.01	500	0.01	500	0.01
1000	0.06	1000	0.02	1000	0.02	1000	0.03	1000	0.04
1500	0.13	1500	0.06	1500	0.05	1500	0.06	1500	0.10
2000	0.23	2000	0.10	2000	0.09	2000	0.11	2000	0.18
2500	0.37	2500	0.16	2500	0.14	2500	0.18	2500	0.29
3000	0.53	3000	0.23	3000	0.21	3000	0.25	3000	0.42
3500	0.73	3500	0.32	3500	0.29	3500	0.34	3500	0.57
4000	0.95	4000	0.42	4000	0.38	4000	0.45	4000	0.74

AMCA Figure 5.5

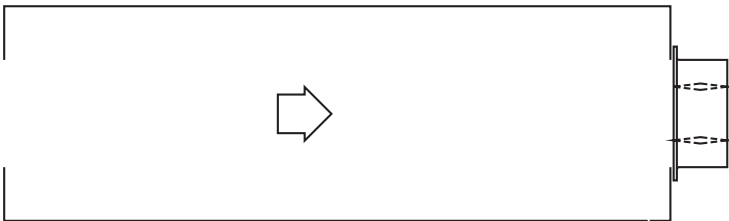

12 in. x 12 in. (305mm x 305mm)		24 in. x 24 in. (610mm x 610mm)		36 in. x 36 in. (914mm x 914mm)		12 in. X 48 in. (305mm x 1219mm)		48 in. x 12 in. (1219mm x 305mm)	
Velocity (fpm)	Pressure Drop (in. wg)	Velocity (fpm)	Pressure Drop (in. wg)	Velocity (fpm)	Pressure Drop (in. wg)	Velocity (fpm)	Pressure Drop (in. wg)	Velocity (fpm)	Pressure Drop (in. wg)
500	0.04	500	0.03	500	0.03	500	0.03	500	0.03
1000	0.18	1000	0.13	1000	0.12	1000	0.12	1000	0.14
1500	0.42	1500	0.29	1500	0.27	1500	0.27	1500	0.32
2000	0.75	2000	0.52	2000	0.48	2000	0.49	2000	0.57
2500	1.17	2500	0.81	2500	0.75	2500	0.77	2500	0.89
3000	1.68	3000	1.17	3000	1.08	3000	1.11	3000	1.28
3500	2.29	3500	1.60	3500	1.48	3500	1.51	3500	1.75
4000	2.09	4000	2.14	4000	1.93	4000	1.97	4000	2.29




Greenheck Fan Corporation certifies that the model SMD-302 shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Programs. The AMCA Certified Ratings Seal applies to air performance ratings only.

Space Envelopes

Externally mounted actuators always require space outside of the damper sleeve. The “S” dimension illustrates the clearance required for various available actuators.

Worst case space envelopes shown below. Exact dimensions may vary based on specific damper configuration. Consult factory for specific space envelope if necessary.

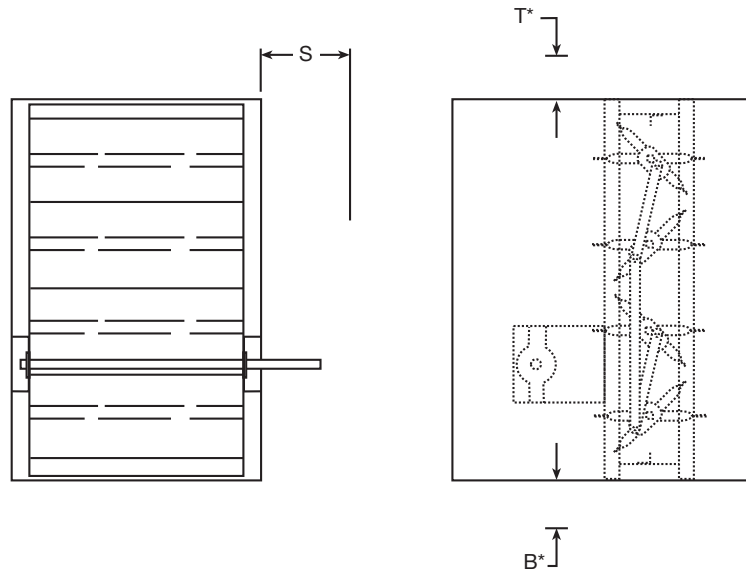


Actuator Type/Model	B*	T*	S	
	With RRL, RRL/OCI, or TOR	With RRL, RRL/OCI, or TOR	Piggyback	
			No	Yes
Belimo				
FSAFB24-SR (-S)	1½ in (38mm)	9¼ in. (235mm)	6 in. (152mm)	9 in. (229mm)
FSLF series	8 in. (203mm)	1½ in (38mm)	6½ in. (165mm)	NA
FSNF series	1½ in (38mm)	9¼ in. (235mm)	6 in. (152mm)	9 in. (229mm)
FSTF Series	8 in. (203mm)	1½ in (38mm)	6½ in. (165mm)	NA
Siemens				
GJD Series	7 in. (178mm)	1½ in (38mm)	6½ in. (165mm)	NA
GRD Series	1½ in (38mm)	7½ in (191mm)	6½ in. (165mm)	NA
GXVD Series	1½ in (38mm)	9¼ in. (235mm)	6 in. (152mm)	9 in. (229mm)
Honeywell				
MS4103, MS8103 Series	8¾ in. (222mm)	1½ in (38mm)	6½ in. (165mm)	NA
MS4104, MS4604, MS8104 Series	1½ in (38mm)	8½ in (216mm)	6½ in. (165mm)	NA
MS4109, MS4609, MS8109 Series	1½ in (38mm)	8½ in (216mm)	6½ in. (165mm)	NA
MS4120, MS4620, MS8120 Series	1½ in (38mm)	9½ in. (241mm)	6 in. (152mm)	9 in. (229mm)

* For dampers 18 in. (457mm) or more in height these dimensions are 0 in.

Contained Actuator Option


Dampers can be ordered with a “contained actuator option”. This option will result in the actuator being oriented such that it extends no more than 1½ inches above or below the sleeve. Note that some damper configurations that are 11 inches high or less will have the OCI mounted on the side opposite the actuator when the contained actuator option is selected.

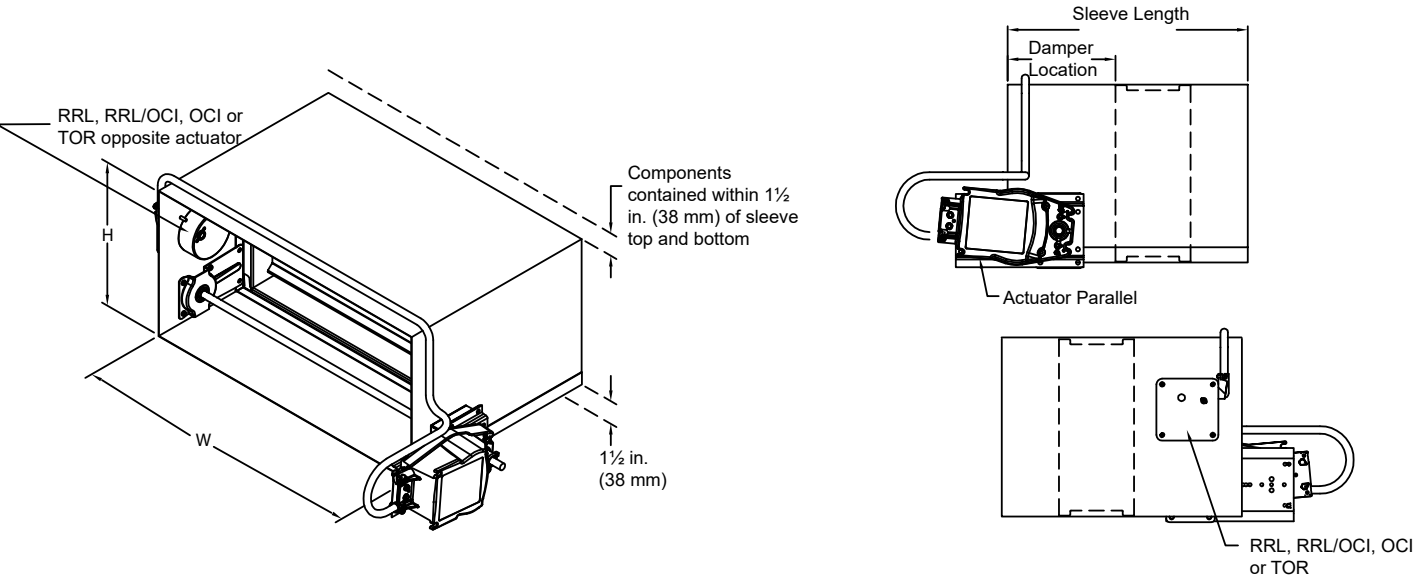

Sleeve and Sideplate Dimensions


The drawings below and corresponding table show the position of the SMD-302 damper when mounted in a factory sleeve ("A" dimension). The standard mounting locations provide enough space for the mounting of actuators, controls and allow space for installation of retaining angles and duct connections. The following options may affect the range of available mounting locations: smoke detector, NEMA 7 enclosure, transitions, security bars, grille tabs.

The standard location of a damper mounted in a factory sleeve ("A" dimension) is shown below. The damper can be positioned at other locations within a range of 6 in. (152mm) to 16 in. (406mm) for the "A" dimension.

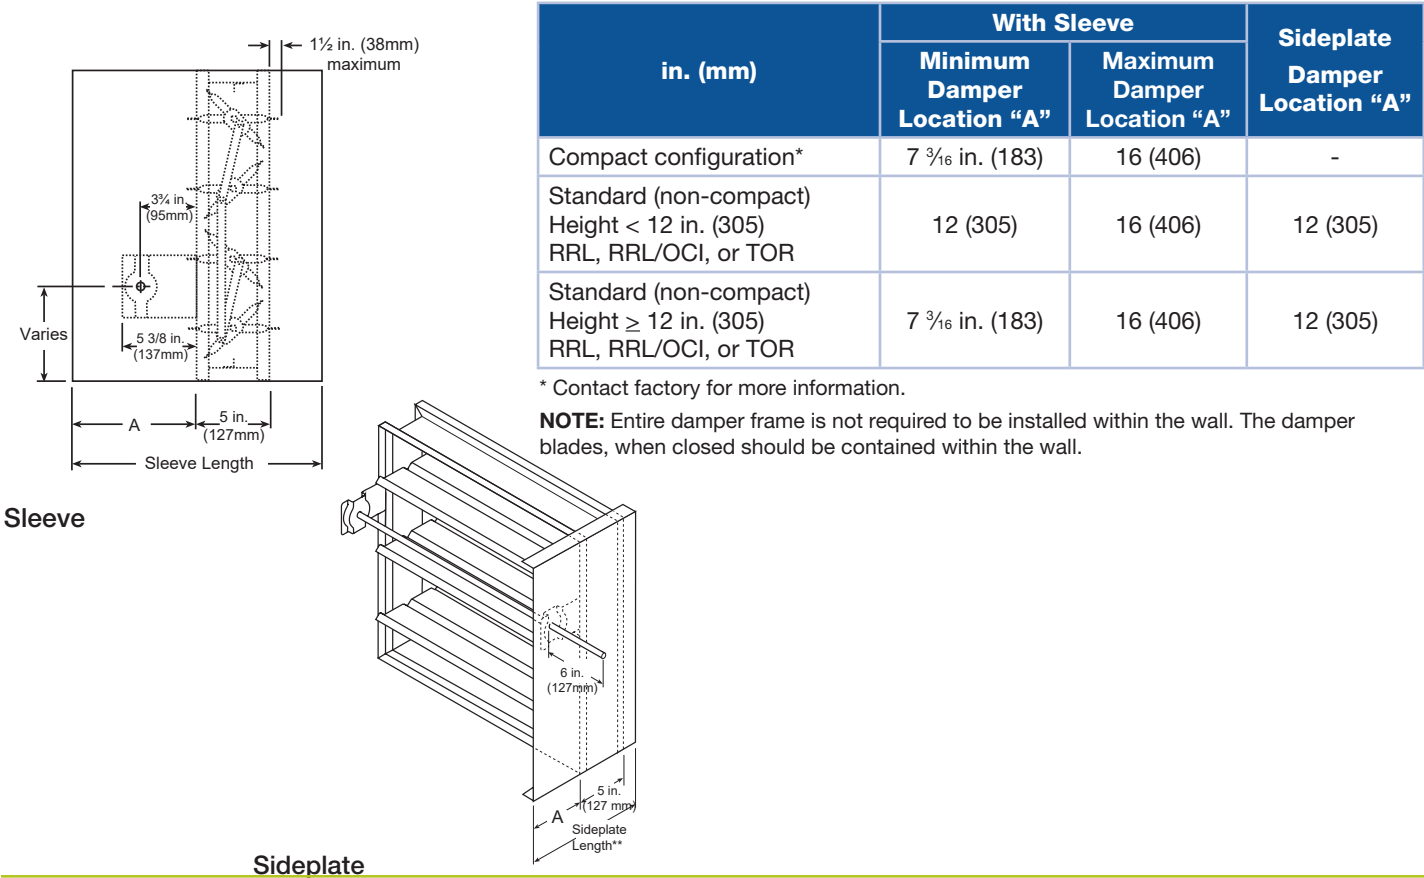

Transitioned Damper Dimensions

When a smoke damper is being used in conjunction with round or oval ductwork, the SMD-302 can be supplied in a factory sleeve with round or oval transitions on both ends of the sleeve. Dampers should be ordered to the duct dimensions. Drawings below show overall damper size.

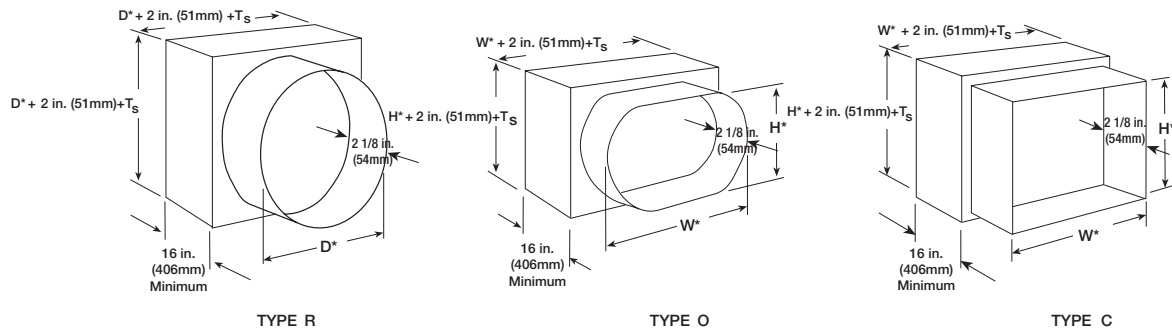


* These dimensions are furnished approximately $\frac{1}{4}$ in. (6mm) undersize, except round and oval dimensions which are approximately $\frac{1}{8}$ in. (3mm) undersize.


$T_s = (2)(\text{Sleeve Thickness})$

Multiple Section Dampers

Dampers larger than maximum single section size are supplied as a factory assembly of two or more sections of equal size. The following figures show maximum damper section size and assembly configurations for multi-section dampers.

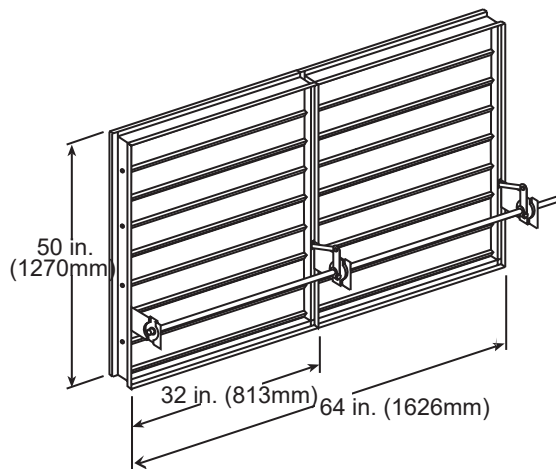

2 section

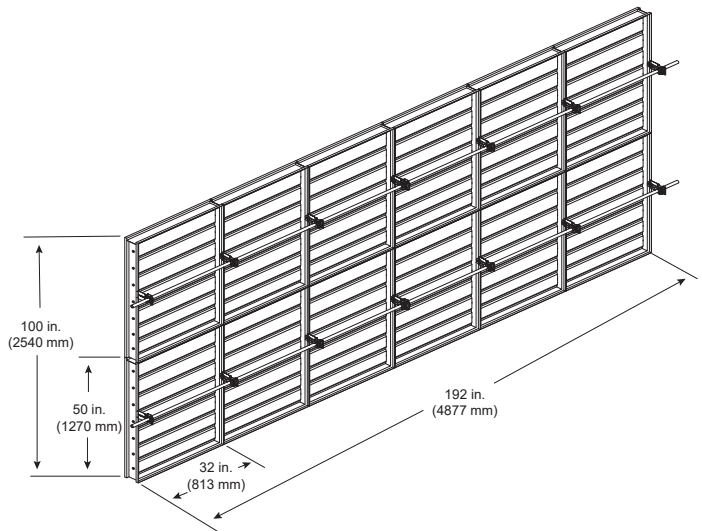

**6 sections wide
2 sections high**



[INSTALLATION](#)



[CATALOG](#)



[SELECTION GUIDE](#)



[SPECIFICATIONS](#)



[WARRANTY](#)