
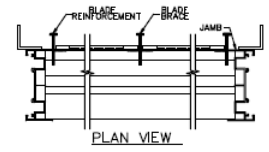


Model DC-5304
5" (127 mm) Storm Resistant Dade County Hurricane Louver

NOA: 22-0208.01
 Florida Product Approval: FL-15929
 Maximum Design Windload 120 PSF

Material:

Material:	6063-T6 Alloy
Nominal Thickness (heads, sills, jambs, & mullions):	0.080" (2.03 mm)
Nominal Blade Thickness:	0.060" (1.52 mm)
Furnished With:	Birdscreen: ½" intercrimp aluminum mesh, 0.063" diameter wire removeable aluminum bird screen in an aluminum frame
Additional Options (at additional cost):	Insect screen (in lieu of bird screen), Continuous clip angles for attachment Sheet blank off, Insulated blank off Sill pans, Flange frames Integrated glazing frames

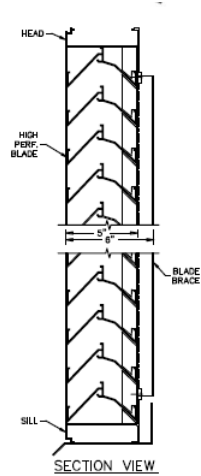

Test Summary:

For a 4 Foot by 4 Foot Unit.

Tested with mill finish and no screen

- Free area = 7.24 ft² (0.67 m²)
- Percent free area = 45.3%
- Intake pressure drop at 1,000 FPM free area velocity = 0.41in. H₂O (101.8 Pa)
- To maintain a CLASS A (99%) effectiveness rating* with:
 - a 29.1 mph wind speed and rainfall rate of 3 in/hr
 - Max. intake core velocity 1.5 m/s (294 FPM)
 - Max. intake free area velocity 2.88 m/s (566 FPM)

Discharge Coefficient

Intake Cd = 0.22 (Class 3)

AMCA certifies the coefficient class only



Construction Specialties Inc. certifies that the louver model DC-5304 shown herein is licensed to bear the AMCA Seal.

The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified ratings Program. The AMCA Certified ratings Seal applies to wind driven rain and air performance ratings ratings.

Dade County Protocols:

- TAS-201: Large and small missile impact
- TAS-202: Criteria for testing impact and not impact resistant building envelope components using static uniform air pressure
- TAS-203: Criteria for testing products subject to cyclic wind pressure

Wind Driven Rain Performance: Tested with 1m² core area, mill finish and no screen*

29.1 mph (13 m/s) & 3" (75 mm) rain per hour


Core Velocity Through Cal. Plate (m/s):	0.0	0.5	1.0	1.5	2.0	2.5	3.0	3.5
Core Velocity Through Louver (ft/min):	0	101	195	294	394	470	581	680
Free Area Velocity (ft/min):	0	195	375	566	759	905	1119	1310
Rating Effectiveness:	A	A	A	A	B	B	C	D
Effectiveness Ratio (%):		99.7	99.5	99.0	98.3	96.8	92.6	78.7
Effectiveness Rating:	A = 1 to 0.99		B = 0.989 to 0.95		C = 0.949 to 0.80		D = Below 0.80	

Model DC-5304

5" (127 mm) Storm Resistant Dade County Hurricane Louver

Water Penetration Statement

AMCA defines the point of beginning water penetration as the free area velocity at which the AMCA water test has yielded 0.01 or less ounces of water per square foot of louver free area during a 15-minute test period.

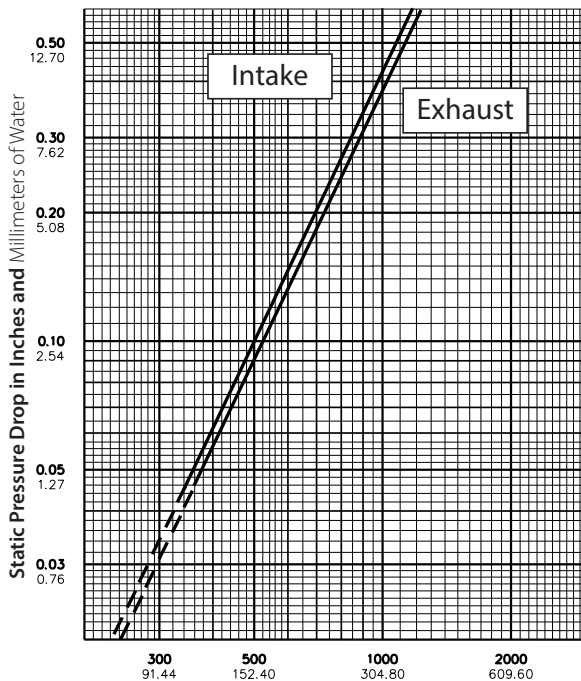

Air Velocity in Feet and Meters per Minute Through Free Area

Data corrected to standard air density.
48" x 48" louver tested to figure 5.5.

Free Area Table (Free area in sq. feet and sq. meters)

For additional sizes, please visit:

<https://www.c-sgroup.com/architectural-louvers/louvers-airflow-tool>

		Width in Inches and Meters									
		18	24	30	36	42	48	54	60	66	
		0.46	0.61	0.76	0.91	1.07	1.22	1.37	1.52	1.68	
18	0.58	0.86	1.14	1.42	1.70	1.98	2.26	2.54	2.82		
	0.46	0.05	0.08	0.11	0.13	0.16	0.18	0.21	0.24	0.26	
24	0.90	1.34	1.78	2.21	2.65	3.09	3.53	3.97	4.40		
	0.61	0.08	0.12	0.17	0.21	0.25	0.29	0.33	0.37	0.41	
30	1.23	1.82	2.42	3.01	3.61	4.20	4.80	5.39	5.99		
	0.76	0.11	0.17	0.22	0.28	0.34	0.39	0.45	0.50	0.56	
36	1.54	2.29	3.03	3.78	4.53	5.28	6.03	6.77	7.52		
	0.91	0.14	0.21	0.28	0.35	0.42	0.49	0.56	0.63	0.70	
42	1.83	2.72	3.61	4.50	5.39	6.27	7.16	8.05	8.94		
	1.07	0.17	0.25	0.34	0.42	0.50	0.58	0.67	0.75	0.83	
48	2.11	3.14	4.16	5.19	6.21	7.24	8.26	9.29	10.32		
	1.22	0.20	0.29	0.39	0.48	0.58	0.67	0.77	0.86	0.96	
54	2.43	3.61	4.79	5.97	7.15	8.33	9.51	10.69	11.86		
	1.37	0.23	0.34	0.44	0.55	0.66	0.77	0.88	0.99	1.10	
60	2.75	4.09	5.43	6.76	8.10	9.44	10.78	12.11	13.45		
	1.52	0.26	0.38	0.50	0.63	0.75	0.88	1.00	1.13	1.25	
66	3.08	4.57	6.07	7.56	9.06	10.55	12.05	13.54	15.03		
	1.68	0.29	0.42	0.56	0.70	0.84	0.98	1.12	1.26	1.40	
72	3.38	5.02	6.66	8.30	9.94	11.58	13.22	14.86	16.51		
	1.83	0.31	0.47	0.62	0.77	0.92	1.08	1.23	1.38	1.53	
78	3.66	5.44	7.21	8.99	10.77	12.55	14.33	16.10	17.88		
	1.98	0.34	0.51	0.67	0.84	1.00	1.17	1.33	1.50	1.66	
84	3.95	5.88	7.80	9.72	11.64	13.56	15.48	17.40	19.32		
	2.13	0.37	0.55	0.72	0.90	1.08	1.26	1.44	1.62	1.80	
90	4.28	6.36	8.44	10.52	12.59	14.67	16.75	18.83	20.91		
	2.29	0.40	0.59	0.78	0.98	1.17	1.36	1.56	1.75	1.94	
96	4.60	6.84	9.08	11.31	13.55	15.79	18.02	20.26	22.50		
	2.44	0.43	0.64	0.84	1.05	1.26	1.47	1.67	1.88	2.09	
102	4.92	7.31	9.69	12.08	14.47	16.86	19.25	21.64	24.03		
	2.59	0.46	0.68	0.90	1.12	1.34	1.57	1.79	2.01	2.23	
108	5.21	7.74	10.27	12.80	15.33	17.86	20.39	22.92	25.45		
	2.74	0.48	0.72	0.95	1.19	1.42	1.66	1.89	2.13	2.36	
114	5.49	8.16	10.82	13.49	16.16	18.82	21.49	24.16	26.82		
	2.90	0.51	0.76	1.01	1.25	1.50	1.75	2.00	2.24	2.49	
120	5.81	8.63	11.45	14.27	17.09	19.91	22.73	25.55	28.37		
	3.05	0.54	0.80	1.06	1.33	1.59	1.85	2.11	2.37	2.64	
126	6.13	9.11	12.09	15.06	18.04	21.02	24.00	26.98	29.96		
	3.20	0.57	0.85	1.12	1.40	1.68	1.95	2.23	2.51	2.78	
132	6.45	9.59	12.73	15.86	19.00	22.13	25.27	28.40	31.54		
	3.35	0.60	0.89	1.18	1.47	1.76	2.06	2.35	2.64	2.93	
138	6.76	10.04	13.32	16.60	19.88	23.17	26.45	29.73	33.01		
	3.51	0.63	0.93	1.24	1.54	1.85	2.15	2.46	2.76	3.07	
144	7.04	10.46	13.87	17.29	20.71	24.13	27.55	30.97	34.39		
	3.66	0.65	0.97	1.29	1.61	1.92	2.24	2.56	2.88	3.19	
150	7.33	10.89	14.46	18.02	21.58	25.14	28.71	32.27	35.83		
	3.81	0.68	1.01	1.34	1.67	2.00	2.34	2.67	3.00	3.33	
156	7.66	11.38	15.10	18.82	22.54	26.26	29.98	33.70	37.42		
	3.96	0.71	1.06	1.40	1.75	2.09	2.44	2.78	3.13	3.48	
162	7.98	11.86	15.74	19.61	23.49	27.37	31.25	35.12	39.00		
	4.11	0.74	1.10	1.46	1.82	2.18	2.54	2.90	3.26	3.62	
168	8.29	12.32	16.35	20.38	24.41	28.44	32.47	36.50	40.53		
	4.27	0.77	1.14	1.52	1.89	2.27	2.64	3.02	3.39	3.77	
174	8.59	12.76	16.93	21.10	25.27	29.44	33.61	37.78	41.95		
	4.42	0.80	1.19	1.57	1.96	2.35	2.74	3.12	3.51	3.90	
180	8.87	13.17	17.48	21.79	26.10	30.40	34.71	39.02	43.33		
	4.57	0.82	1.22	1.62	2.02	2.42	2.82	3.22	3.63	4.03	

Upper Numerals English Units/Lower Numerals Metric Units