


BCZ Series

DOUBLE INLET CENTRIFUGAL FAN

With Backward Inclined Wheels



POWER VENTILATOR
45GD

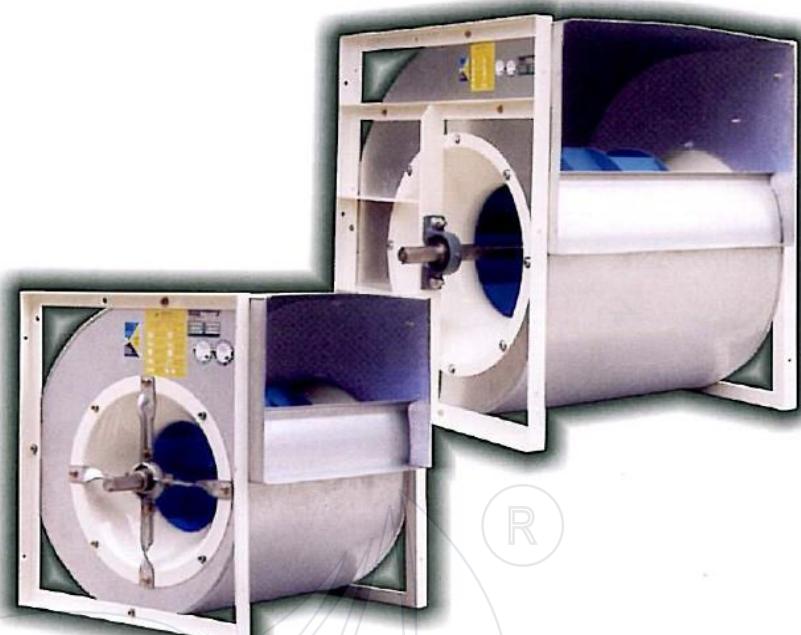

封面風機顏色僅供參考

Ventilation Performance Laboratory



常溫風機性能測試設備 Fan Performance Testing Facility

測試標準 (Standards)

- AMCA 210-85
- BS 848-1
- ISO 5801
- DIN 24163-2

消音箱/消音百葉測試設備 Silencer / Acoustical Louver Testing Facility


測試標準 (Standards)

- ASTM-E477
- ISO 7235

風門、百葉壓損測試設備 Louver Pressure Drop Testing Facility

測試標準 (Standards)

- AMCA 500

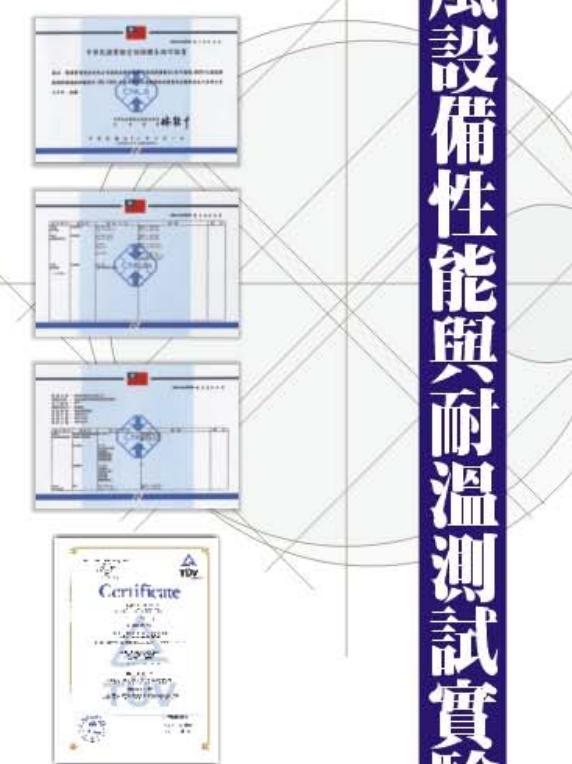


因為有您的支持
陽鼎實現了大家的夢！

我們擁有...

世界級的認證

通風設備性能與耐溫測試實驗室



全響室 退風道出口
Exhaust Duct exit of Reverberant



流量孔
Multiple Noles for Flow Measurement



整流裝置
Flow Straightener



全響室
Reverberant Room
360° 旋轉噪音器
360° Routing Microphone in Reverberant



全響室 退風道裝置
Silencer in Exhaust Duct
360° Routing Microphone in Reverberant

測試標準 :

- AMCA 210-85
- BS 7346-2
- ISO 5801
- AMCA 300
- BS 848-1
- ISO 7235
- AMCA 500
- BS 848-2
- ISO 10294
- AS 4429
- BS 848-10
- ISO 13350
- ASTM-E477
- GA 211
- UL 555
- ASHRAE 149
- GB 15930
- UL 555S
- DIN 24163-2
- prEN 12101-3



排煙閘門洩漏測試設備 Smoke Damper Leakage Testing Facility

測試標準 (Standards)

- AMCA 500
- ISO 10294
- UL 555S
- GB 15930



防火風門測試設備 Fire Damper Testing Facility

測試標準 (Standards)

- UL 555



BCZ Series



DOUBLE INLET CENTRIFUGAL FAN with Backward Inclined Wheels

Low and Medium pressure high efficiency centrifugal fan




Flowtech Co., Ltd. Certifies that the Model BCZ shown on pages 14-32 and 34-52 is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.



POWER VENTILATOR
45GD

BCZ Series are listed for electrical
(UL/cUL 705) File no. E323432

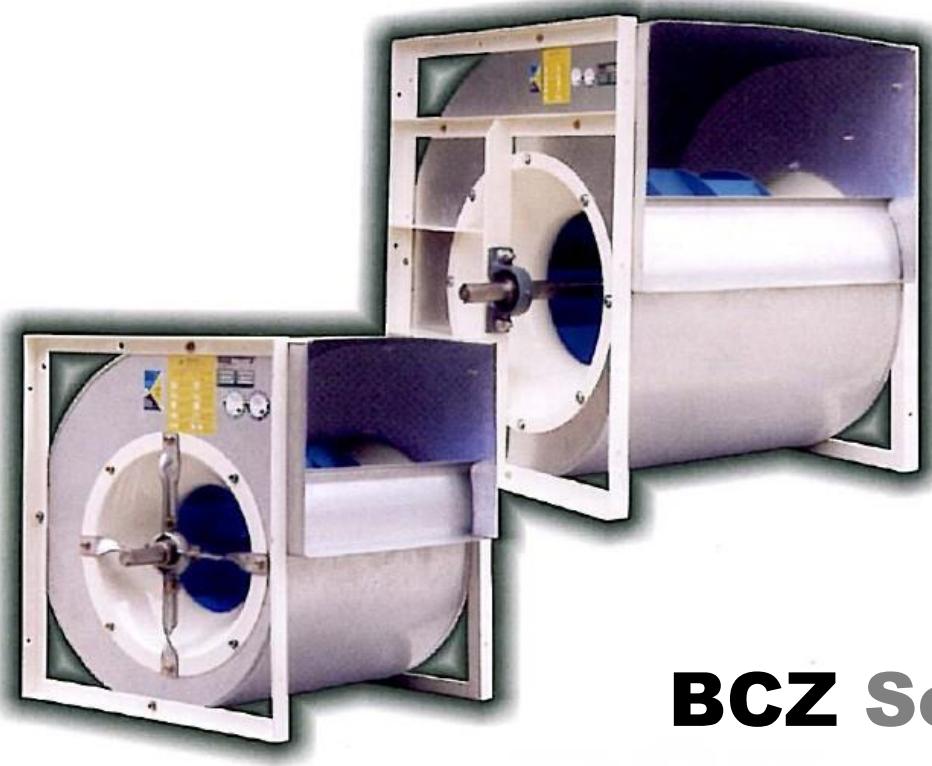

BCZ Series

風機顏色僅供參考



BCZ Series

BCZ Series Double Inlet Centrifugal Fans – Backward wheels

The BCZ series is DWDI centrifugal fans with high efficiency non-overloading backward curved impellers.

The fans are auditable for supply or extract applications in commercial, process and industrial HVAC systems.

Sizes of this are in accordance with AMCA 99, section 5, R20.

change to

AMCA 99, section 5, R20

Type / Operating Limit


	Model 250-450	Model 250-630	Model 710-2000
Type L	I		
Type M		I	
Type H		II	I
Type V		III	II
Type X			III

Each fan type has its maximum operation speed and power due to its mechanical design.

The operating limit of BCZ series – fan type is design to meet the requirement of class I, II and III limit as defined in AMCA 99 section 14, Figure 2.

The BCZ series is available in type L, M, H, V ,X as shown in Fig.1 :


*change to AMCA 99,
section 14, Figure 2.*



Type L This type is supplied with mounting feet and can be mounted in three different orientations. Inlet flange 'L' and outlet flange are supplied as standard.

Without outlet flange, with removable feet


Size : 250 to 450 Volume : 0.25 to 5.5 m3/s Total Pressure. : up to 2000Pa



Type M This type has a frame fitted on both sides of the fan which gives better strength and rigidity and allows mounting in four different orientations.

Without outlet flange, with welded rectangular frame.


Size : 250 to 630 Volume : 0.25 to 11 m3/s Total Pressure. : up to 2000Pa



Type H This type has a welded frame giving increased stiffness and rigidity required for higher operating performance.

Without outlet flange, with welded rectangular frame.

Size : 315 to 2000 Volume : 0.35 to 110 m3/s Total Pressure. : up to 2500Pa



Type V This type is similar to type H but utilizes enhanced bearings to support higher load necessary for the increased performance.

Without outlet flange, with welded rectangular frame.

Size : 315 to 2000 Volume : 0.35 to 160 m3/s Total Pressure. : up to 3000Pa

Fig.1


The type "X" is non-standard , for more information , please consult Flowtech co., Ltd



BCZ Series

Designation ,Formula signs

BCZ - 1000 - H

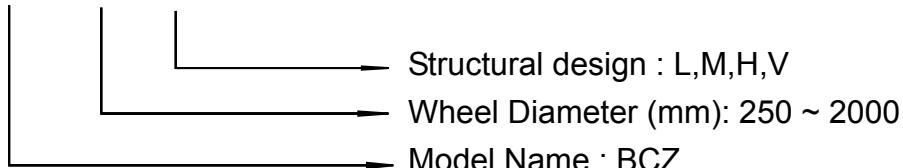

BCZ Twin Fan

BCZ series are also available in twin fan version, with two double inlet fans mounted on the same shaft.

To Select for twin fans, use the curve of single fan with the following factors :

Volume ----- x 2

Absorbed Power ----- x 2.15

Speed ----- x 1.05

Noise ----- + 3 dB

This series is available in type G₂ L (250-400), G₂ M (250-500), G₂ H (355-1000)

Performances of Twin fans are not AMCA licensed.

TECHNICAL SPECIFICATION



■ Wheel

The Wheel of BCZ series is made of mild steel backward curved blades with polyester powder coating finish and fully welded. The material of wheel also made of stainless steel or aluminum. All wheels are statically and dynamically balanced to ISO1940 and AMCA 204-G2.5 standards.



■ Shaped Inlets (Inletcone)

The aerodynamically shaped inlets are bolted in and guarantee a perfect inlet stream onto the impeller.

The inletcone is made of galvanized sheet metal or mild steel or aluminum.



BCZ Series

■ Housing

For all sizes except 1120 and above, the housing is manufactured in galvanized sheet steel with the housing fixed to the side plates in "Pittsburg lock" form system. Housings for 1250-2000 are manufactured in mild steel finished with polyester powder coating.

■ Frame

The frame is manufactured with galvanized angular bars for type "M". For type "H" and "V", They are manufactured with sections of steel and finished with polyester powder coating.

■ Shaft

Shafts are manufactured from C45 carbon steel using an automatic process for positioning and cutting of the keyways. All dimensional I tolerances of the shaft are fully checked to ensure a precision fit and then coated with an anti-corrosion varnish after assembly. Both shaft ends have as a standard feature diameters complying with ISO286. Shafts are sized to operate 20% or more below the first critical speed for each class of duty.

■ Bearings

Bearings used are either deep groove ball bearing type with an eccentric locking collar or an adapter sleeve, or spherical roller bearings type sealed at both sides for different duty application. Bearing are selected for continuous operation and ample size for best possible operating results. They are selected for a basic rating fatigue life (L-10) per AFBMA Standards in excess of 40,000 hours at maximum operating speed for each pressure class. L-10 is the life associated with 90% reliability of a bearing.,

Fan Type L , M 	For fan type "L" and "M" are use single row, deep groove, self-aligning ball bearings with an eccentric locking collar. They are mounted in a rubber housing and sealed at both sides for light duty application. (light Duty)
Fan Type H 	For fan type "H" use single row sealed ball bearings, locked on the shaft with conical sleeve and mounted inside cast-iron blocks ,with grease points, bolted to the side-frames.(Medium Duty)
Fan Type V 	For type "V", Bearings are mounted on cast iron supports with grease points. According to the fan duty and size, bearings use double-row ball type with conical sleeve inside split block housings.(Heavy Duty)

The bearings are lubricated for life and maintenance-free. If re-lubrication is necessary, it is recommended to use a lithium base grease suitable for all temperatures within the operational limits.



BCZ Series

■ **Balancing Quality**

All wheels are statically and dynamically balanced to ISO1940 and AMCA 204-G2.5 standards.

All fans after assembly are trim-balanced to ISO1940 and AMCA 204-G2.5 standard.

Clean room application fans with balancing grade of G1.0 are available upon request.

■ **Special paint & corrosion resistant coatings** : Consult Flowtech office.

OPTIONAL ACCESSORIES

■ **Casing Drain**


This option is available when using fans exposed to the atmosphere or operating in high humidity conditions.

■ **Outlet Flanges**

Outlet flanges are in accordance with DIN 24193 sheet 2 and available upon request.

■ **Guards**

Inlet guards, discharge guards and non-drive end shaft guards are available on request.

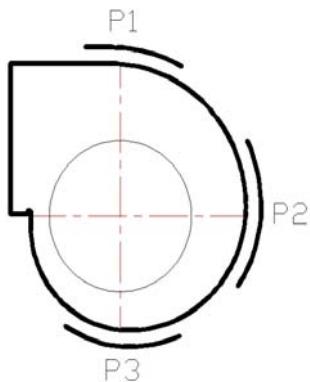

■ **Inspection Doors**

The inspection door can be supplied upon request.

It can be supplied in one of the three positions(P1, P2, & P3).

- **Stainless steel fan shafts** are available on fan sizes for applications where standard carbon steel shafts may exhibit excessive corrosion or heat stress.
- **Split housings.** Type H, V fan can be furnished with horizontal split housings to facilitate wheel removal at additional cost. Housing splits are caulked and bolted when fan is shipped assembled.

■ **Spring Isolation Bases and Spring Isolators**


Flowtech offers a complete line of spring isolation bases with free standing or housed spring isolators. Base are available with height saving brackets for minimal fan and base height. Inertia bases built to accept poured concrete are also available.

■ **Ignition protected versions**

Ignition protected versions can be built on request, with inletcones made of aluminum, copper or with copper rubbing stripes on the edge of the inletcones. Please contact Flowtech for selection and detail.



BCZ Series

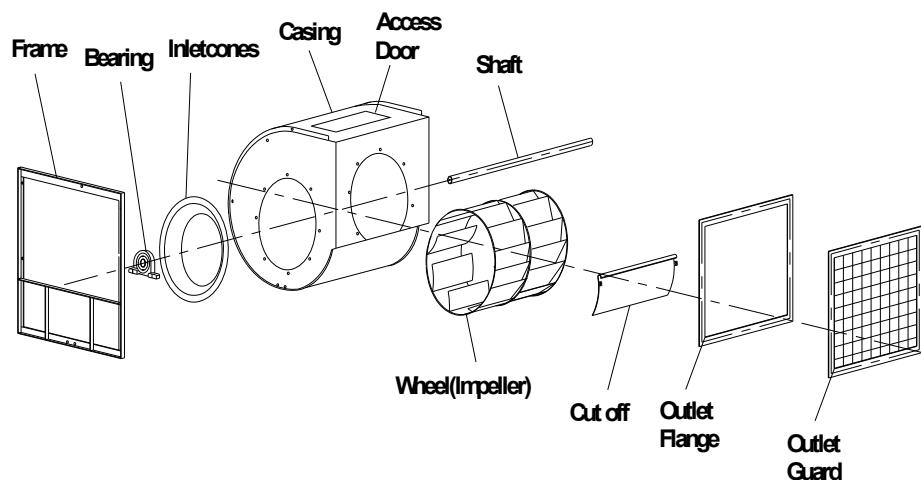

Fan layout drawing


Fan Rotation and Discharge

The rotation and discharge of the fan is in accordance with AMCA 99, section 11.


The direction of rotation is determined from the drive side of fan [refer Fig.2]: -

change to AMCA 99, section 11


CW -clockwise rotation :




CW90



CW180




CW270




CW360


CCW -counter-clockwise rotation :




CCW90



CCW180



CCW270




CCW360

Fig.2-Fan rotation and discharge



BCZ Series

Motor Position

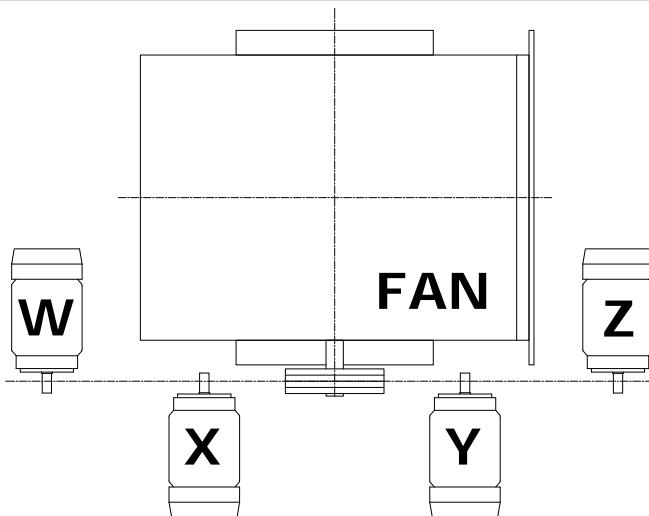

change to AMCA 99, section 12

Fig. 3 – Motor Position

The position of the motor for belt drive centrifugal fan is in accordance with **AMCA 99, section 12.**

Location of motor is determined by Facing the drive side of fan and Designating the position by letters W, X , Y or Z[refer Fig. 3]

Motor Selection

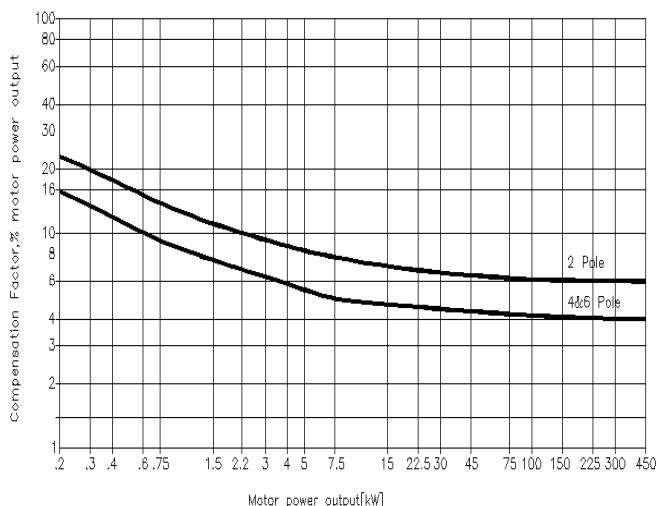


Fig.4-Recommended for motor compensation

The power curve shown on each Performance curve represents the Absorbed power at the shaft of the fan measured in kW.

To determine the power of the motor to be installed, a correction Factors as shown in Fig. 4 should be applied to compensate for transmission losses.

For conversion to horsepower (HP), use multiplying factor 1.34.



BCZ Series

Dynamic Pressure

The dynamic pressure and outlet air velocity shown on each curve are both calculated on the full air discharge area i.e. ducted outlet conditions.

With free outlet conditions the velocity pressure is higher. To determine this value multiply the velocity Pressure of the ducted outlet obtained from the fan curve by the following correction factor "K"
Fan performances calculated with this correction factors are not licensed by AMCA.

$$[K = 1.65]$$

Performance

The performance data show on each diagram has been tested and measured in accordance to AMCA Standard 210 – Fig. 12 – installation type B (free inlet and ducted outlet condition).

Ratings are referred to the standard air density with the total pressure as function of the air volume, using logarithmic scales.

It is essential that, the same installation type and test standards are used at all times, when comparing fan performances.

Noise

The noise level shown on each diagram refer to the sound power "A-weighted" and the data on the inlet side has been measured in accordance with AMCA Standard 300 Figure 2 – installation Type "B". The noise level of the fan determined as follows :

- Inlet Sound power level ("A" scale) : LwiA as catalogue [2005.4.12 新增]
 - Inlet Octave band spectrum : Lwi as catalogue [2005.4.12 新增]
 - Sound pressure level :
 - Free field : $L_p(A) = L_wA - (20\log_{10}d) - 11$
 - Room conditions : $L_p(A) = L_wA - (20\log_{10}d) - 7$
- Where d : distance between the fan and the microphone in m .

Sound power

Sound power data is charted for the full range of speed and percent of fan flow rate (%POF) for each unit size. The %POF is a convenient way to indicate the operating point (pressure and fan flow rate, cmm) for given fan speed. To calculate %POF for a given fan size, use the equation shown below. Because the constant K in the equation changes for each fan size, use the equation which is located on the specific performance page.

$$\%POF = \frac{CMM \times 3531.5}{RPM \times K}$$

Use the following to calculate sound power data for a specific Fan speed and %POF:

1. Determine the eight sound power levels for the specified %POF using the higher Fan RPM shown.
2. Determine the eight sound power levels for the specified %POF using lower Fan RPM shown.
3. Interpolate between the higher and lower sound power levels using the specified RPM.



BCZ Series

Minimum diameter recommended for the smallest transmission pulley.

	Size	355			400			450		
		L/M	H	V	L/M	H	V	L/M	H	V
Rating power	4	85								
	5.5	100	90		112			112		
	7.5	112	112	100	140	100		125	112	
	11		125	112		132		180	140	
	15			118		180	118		180	125
	18.5						140			140
	22						150			160
	30									212

	Size	500			560			630		
		M	H	V	M	H	V	M	H	V
Rating power	5.5	125								
	7.5	132	132		140			140		
	11	160	150		180	150		180	150	
	15		200	140	224	200		250	200	
	18.5			140		224	150		250	180
	22			150			160			180
	30			200			212			236
	37									280

	Size	710		800		900		1000	
		H	V	H	V	H	V	H	V
Rating power	11								
	15	224		200					
	18.5	250		250		160			
	22	315	180	280	180	180		180	
	30		224		212	250	212	236	212
	37		250		250		224	315	224
	45						224		224
	55						250		250
	75						280		280



BCZ Series



Operational Limits - "BCZ"

			250	280	315	355	400	450	500	560	630	710	800	900	1000	1120	1250	1400
Maximum Absorbed Power	L-M	kW	2.5	2.5	3	5	6	8	10	12.5	12.5							
	H	kW	5	6	8	10	12.5	15	20	25	30	20	25	30	30	50	60	60
	V	kW			10	12.5	15	20	25	30	40	40	50	60	80	100	125	150
	X	kW										50	80	80	100	150	200	200
Maximum Fan Speed	L-M	rpm	4200	3400	3200	3000	2700	2400	2150	1900	1600							
	H	rpm	5500	4900	4100	3900	3400	3100	2800	2500	2100	1450	1300	1150	1000	950	825	720
	V	rpm			4500	4150	3700	3300	3000	2650	2400	1850	1650	1500	1300	1200	1050	950
	X	rpm										2100	1900	1650	1500	1350	1200	1070
Air Temperature Min.-20° C	L-M	Max. °C	85	85	85	85	85	85	85	85	85							
	H-V	Max. °C	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100	100
Wheel	Diameter	mm	250	280	315	355	400	450	500	560	630	710	800	900	1000	1120	1250	1400
	Weight	kg	4.8	6	7.5	10.7	13.3	19.5	24.7	30	39	59	94	115	148	250	297	340
	J=PD ² /4	Kgm ²	0.051	0.08	0.129	0.231	0.501	0.676	1.056	1.61	2.63	5.05	10.2	15.9	25.2	52.1	72.1	110.4
Fan weight	L	kg	16	22	26	37	43	59	75	92	100	148						
	M	kg	20	24	28	41	49	65	83	104	120	166						
	H	kg	26	34	40	53	67	77	97	125	154	214	276	352	426	749	1002	1356
	V	kg								144	178	250	317	383	461	784	1030	1387



BCZ Series

'BCZ' OUTLET AREAS AND PAGE NUMBERS


Fan Size	Outlet Width mm	Outlet Height mm	Outlet Area (Inside area) m^2	PAGE NO.
250	300	250	0.0750	14
280	336	280	0.0941	15
315	378	315	0.1191	16
355	500	355	0.1775	17
400	560	400	0.2240	18
450	640	450	0.2880	19
500	700	500	0.3500	20
560	790	560	0.4424	21
630	890	630	0.5607	22
710	1000	710	0.7100	23
800	1130	800	0.9040	24
900	1270	900	1.1430	25
1000	1400	1000	1.4000	26
1120	1580	1120	1.7696	27
1250	1770	1250	2.2125	28
1400	1980	1400	2.7720	29
1600	2260	1600	3.6160	30
1800	2550	1800	4.5900	31
2000	2850	2000	5.7000	32



BCZ Series

FLOWTECH

Examples of selection

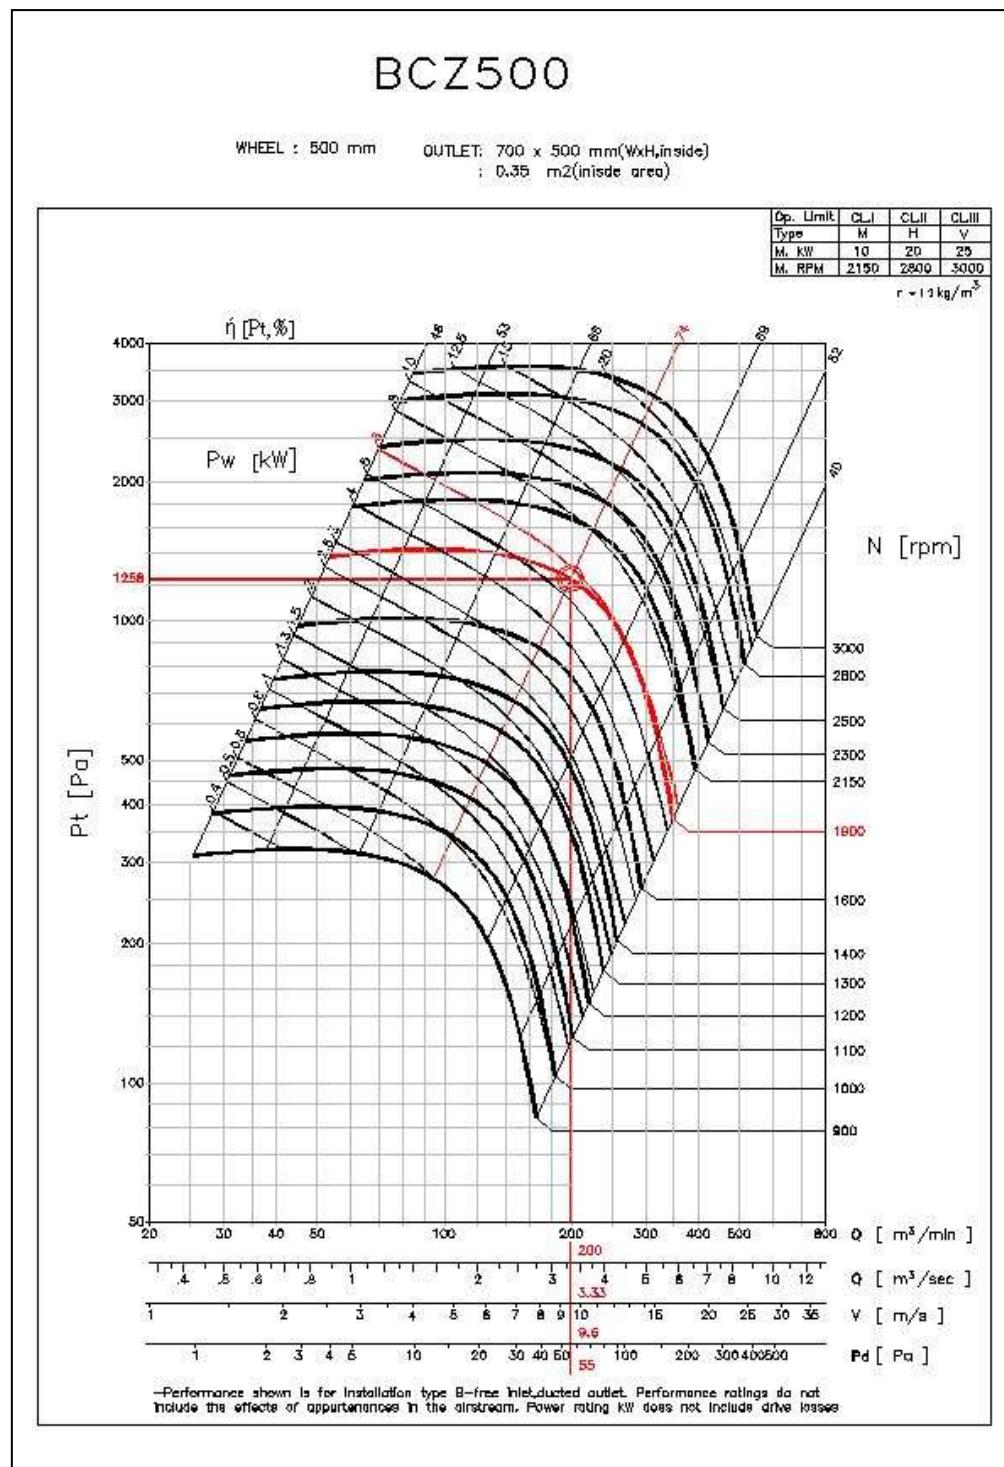

Air Volume

 $Q = 3.33 \text{ cms}$

Fan Speed

 $N = 1900 \text{ rpm}$

Outlet Velocity

 $V = 9.6 \text{ m/s}$

Absorbed Power

 $P_w = 6 \text{ kW}$ Dynamic Pressure $P_d = 55 \text{ Pa}$

Total Efficiency


 $\eta = 74 \%$

Total Pressure

 $P_t = 1258 \text{ Pa}$



BCZ250



WHEEL : 250 mm OUTLET: 300 x 250 mm(WxH,inside)
: 0.075 m²(inside area)


FLOWTECH

Type L-M Type H


Op. Limit	CL.I	CL.II
Type	L-M	H
M. kW	2.5	5
M. RPM	4200	5000

FEG:71

$r = 1.2 \text{ kg/m}^3$

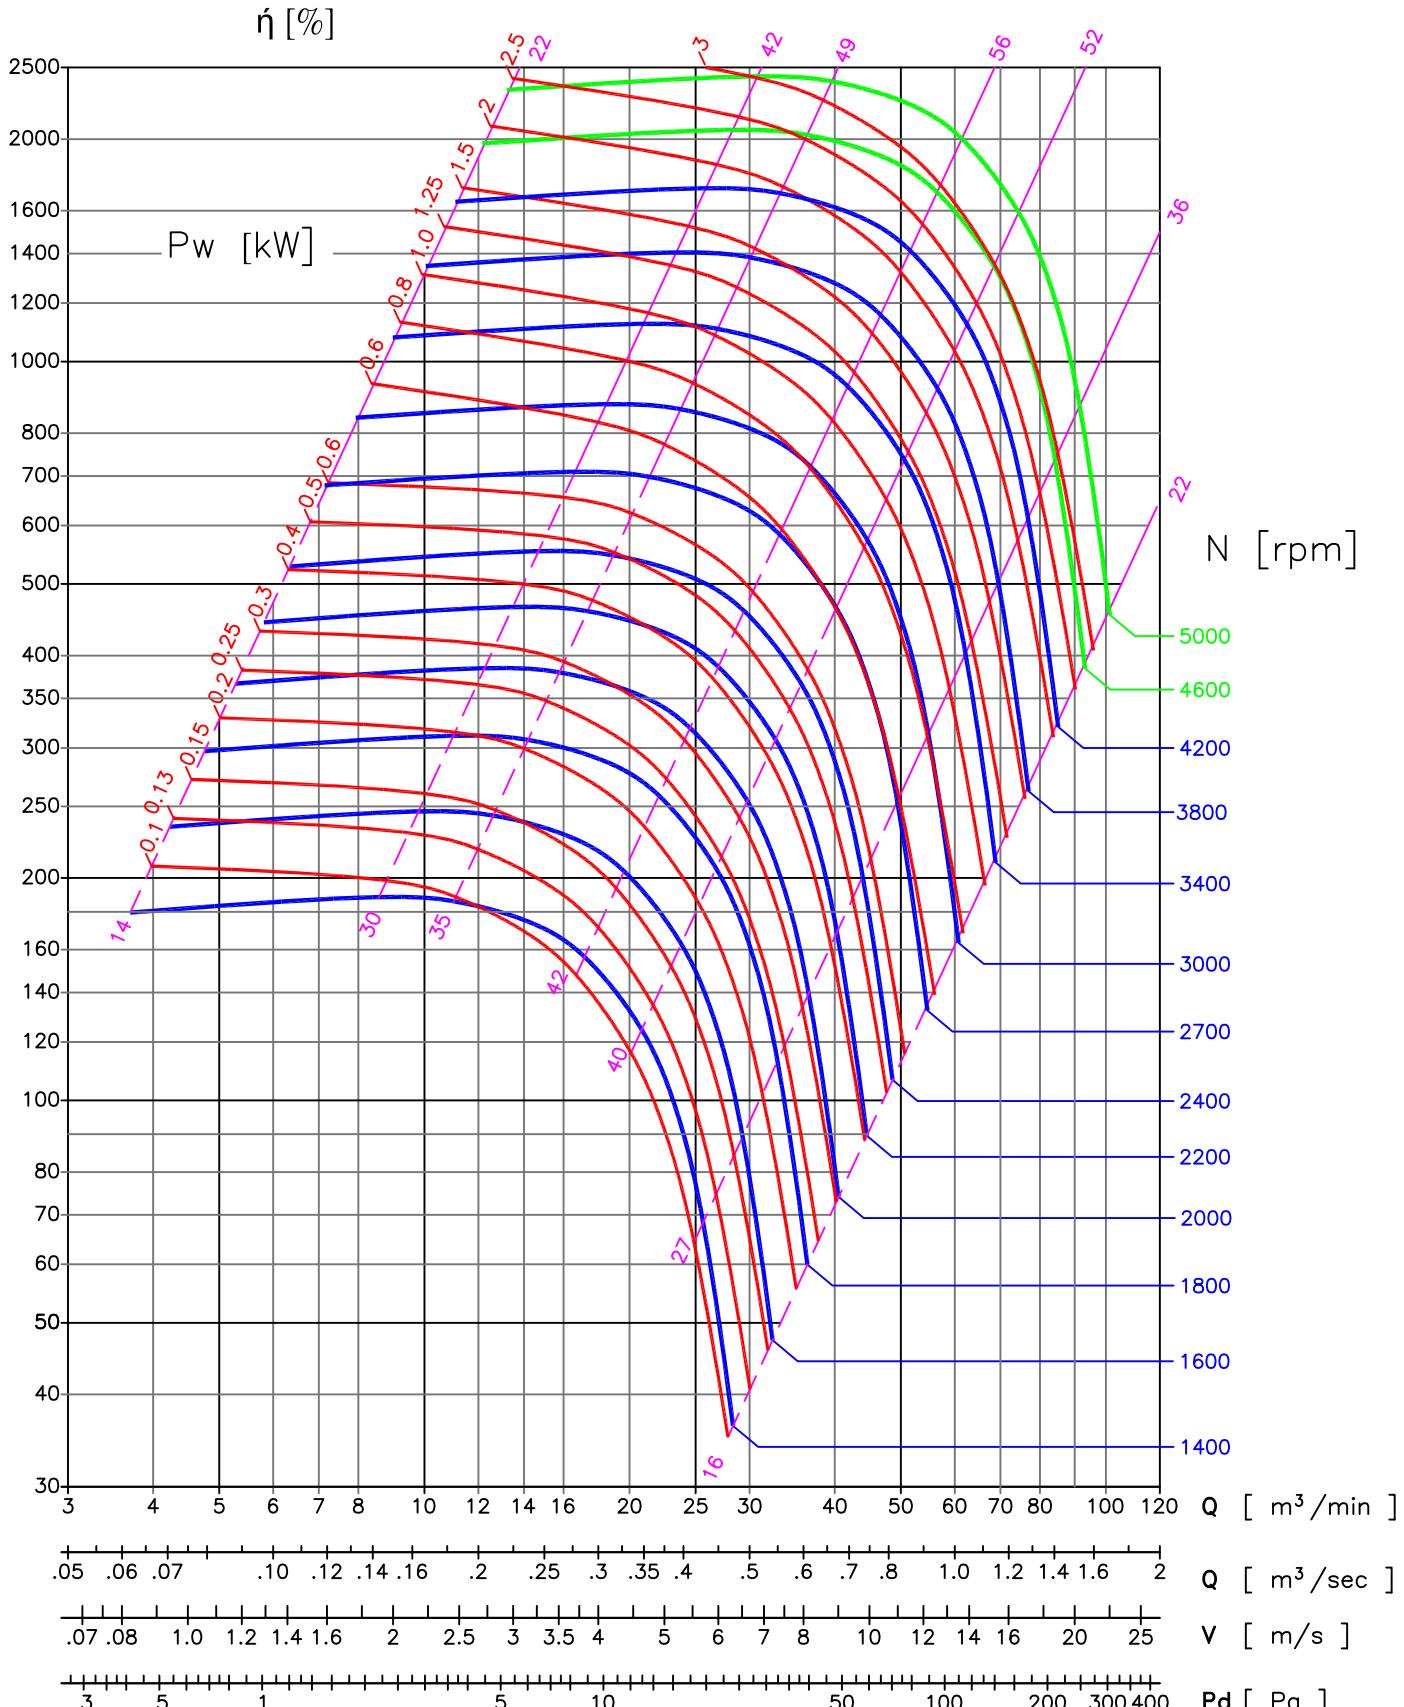

-Performance certified is for installation type B Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating kW does not include transmission losses.



BCZ280

FLOWTECH 


WHEEL : 280 mm OUTLET: 336 x 280 mm(WxH,inside)
: 0.0924 m²(inside area)

Type L-M Type H

Op. Limit	CL.I	CL.II
Type	L-M	H
M. kW	2.5	6
M. RPM	3400	4900

FEGR:67

r = 1.2 kg/m³

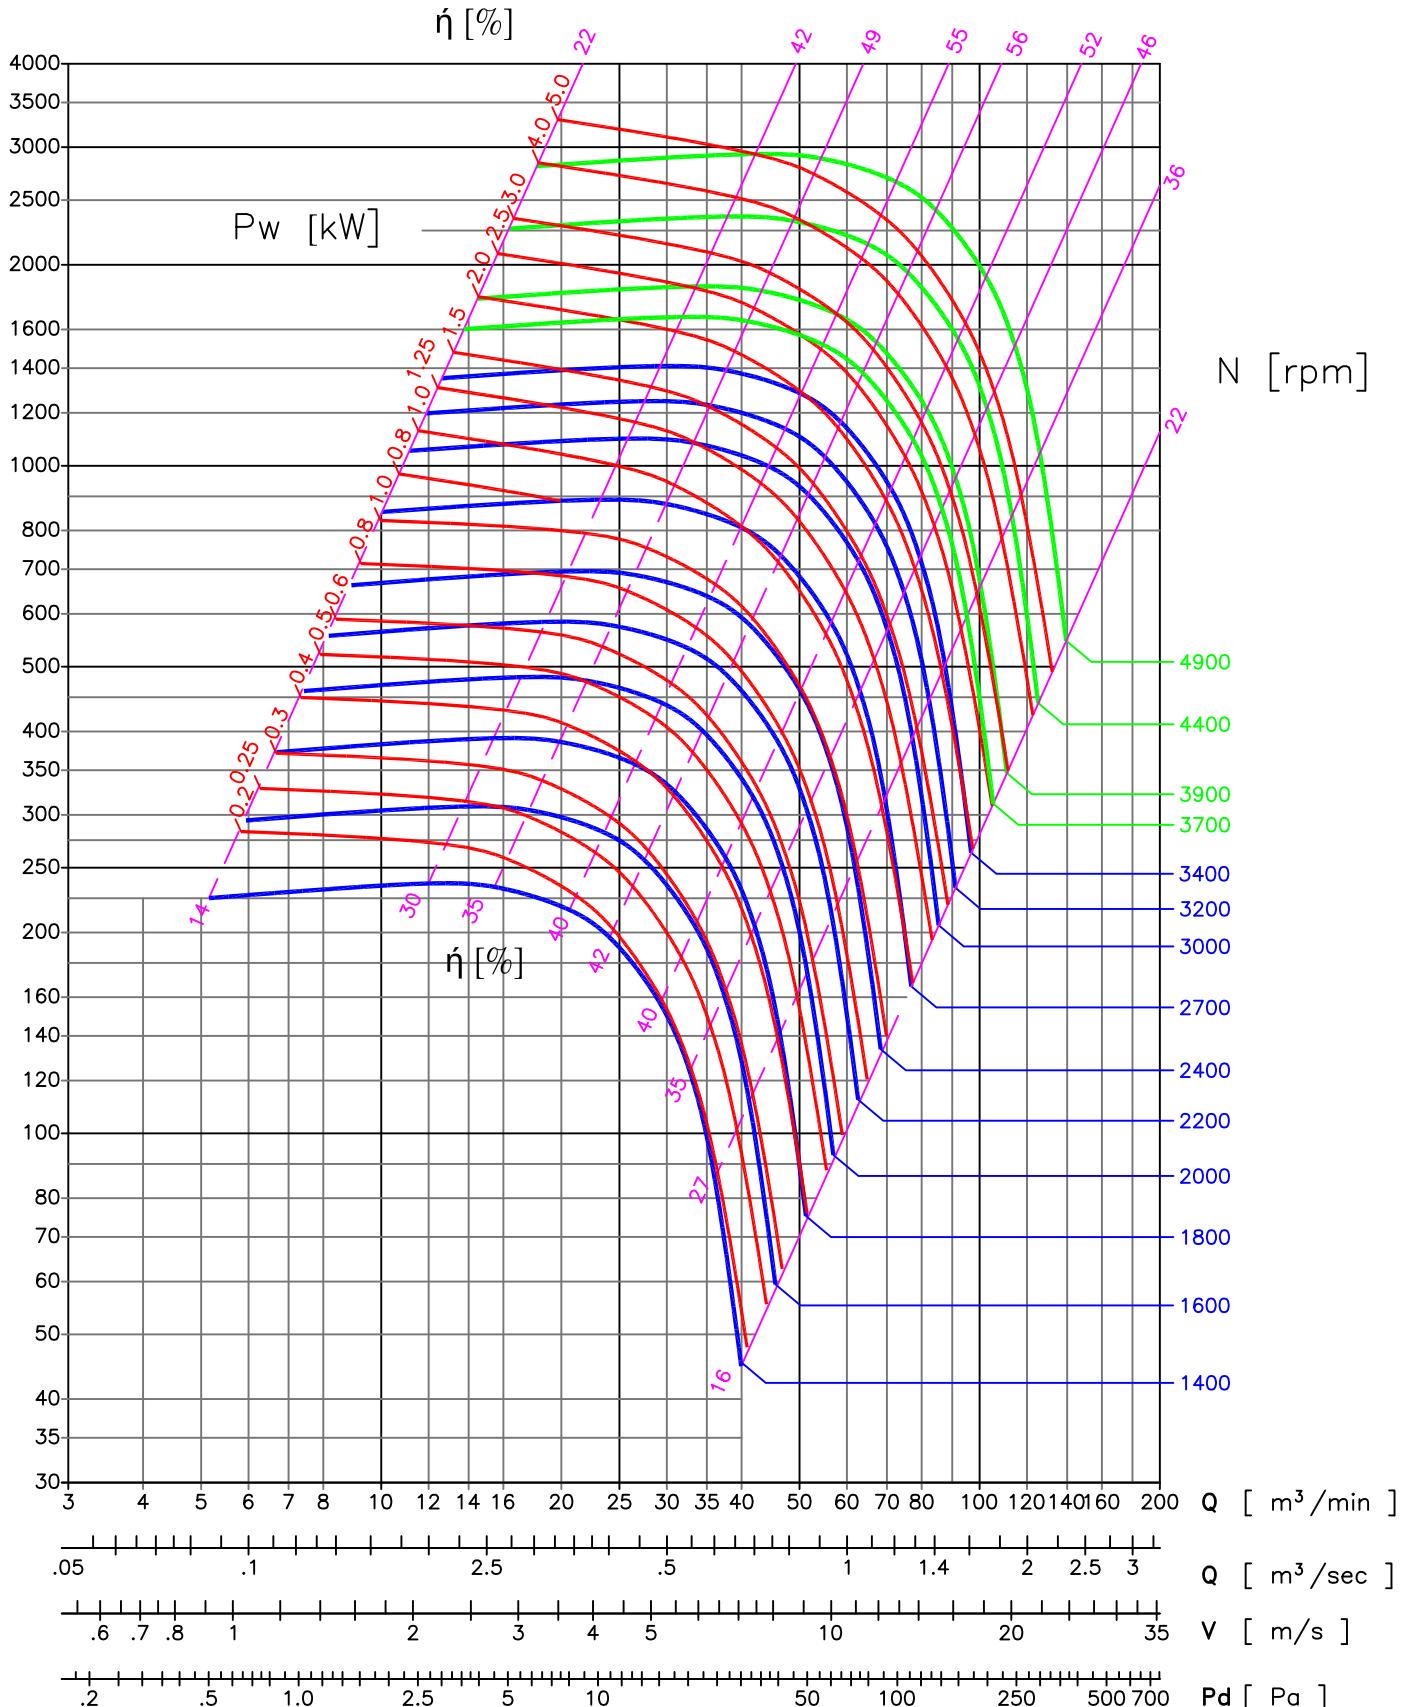

-Performance certified is for installation type B Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating kW does not include transmission losses.



BCZ315



WHEEL : 315 mm OUTLET: 378 x 315 mm(WxH,inside)
: 0.1166 m²(inside area)

FLOWTECH

M-T


H-T

V-T

Op. Limit	CL.I	CL.II	CL.III
Type	L-M	H	V
M. kW	3	8	10
M. RPM	3200	4100	4500

FEG:67

r = 1.2 kg/m³

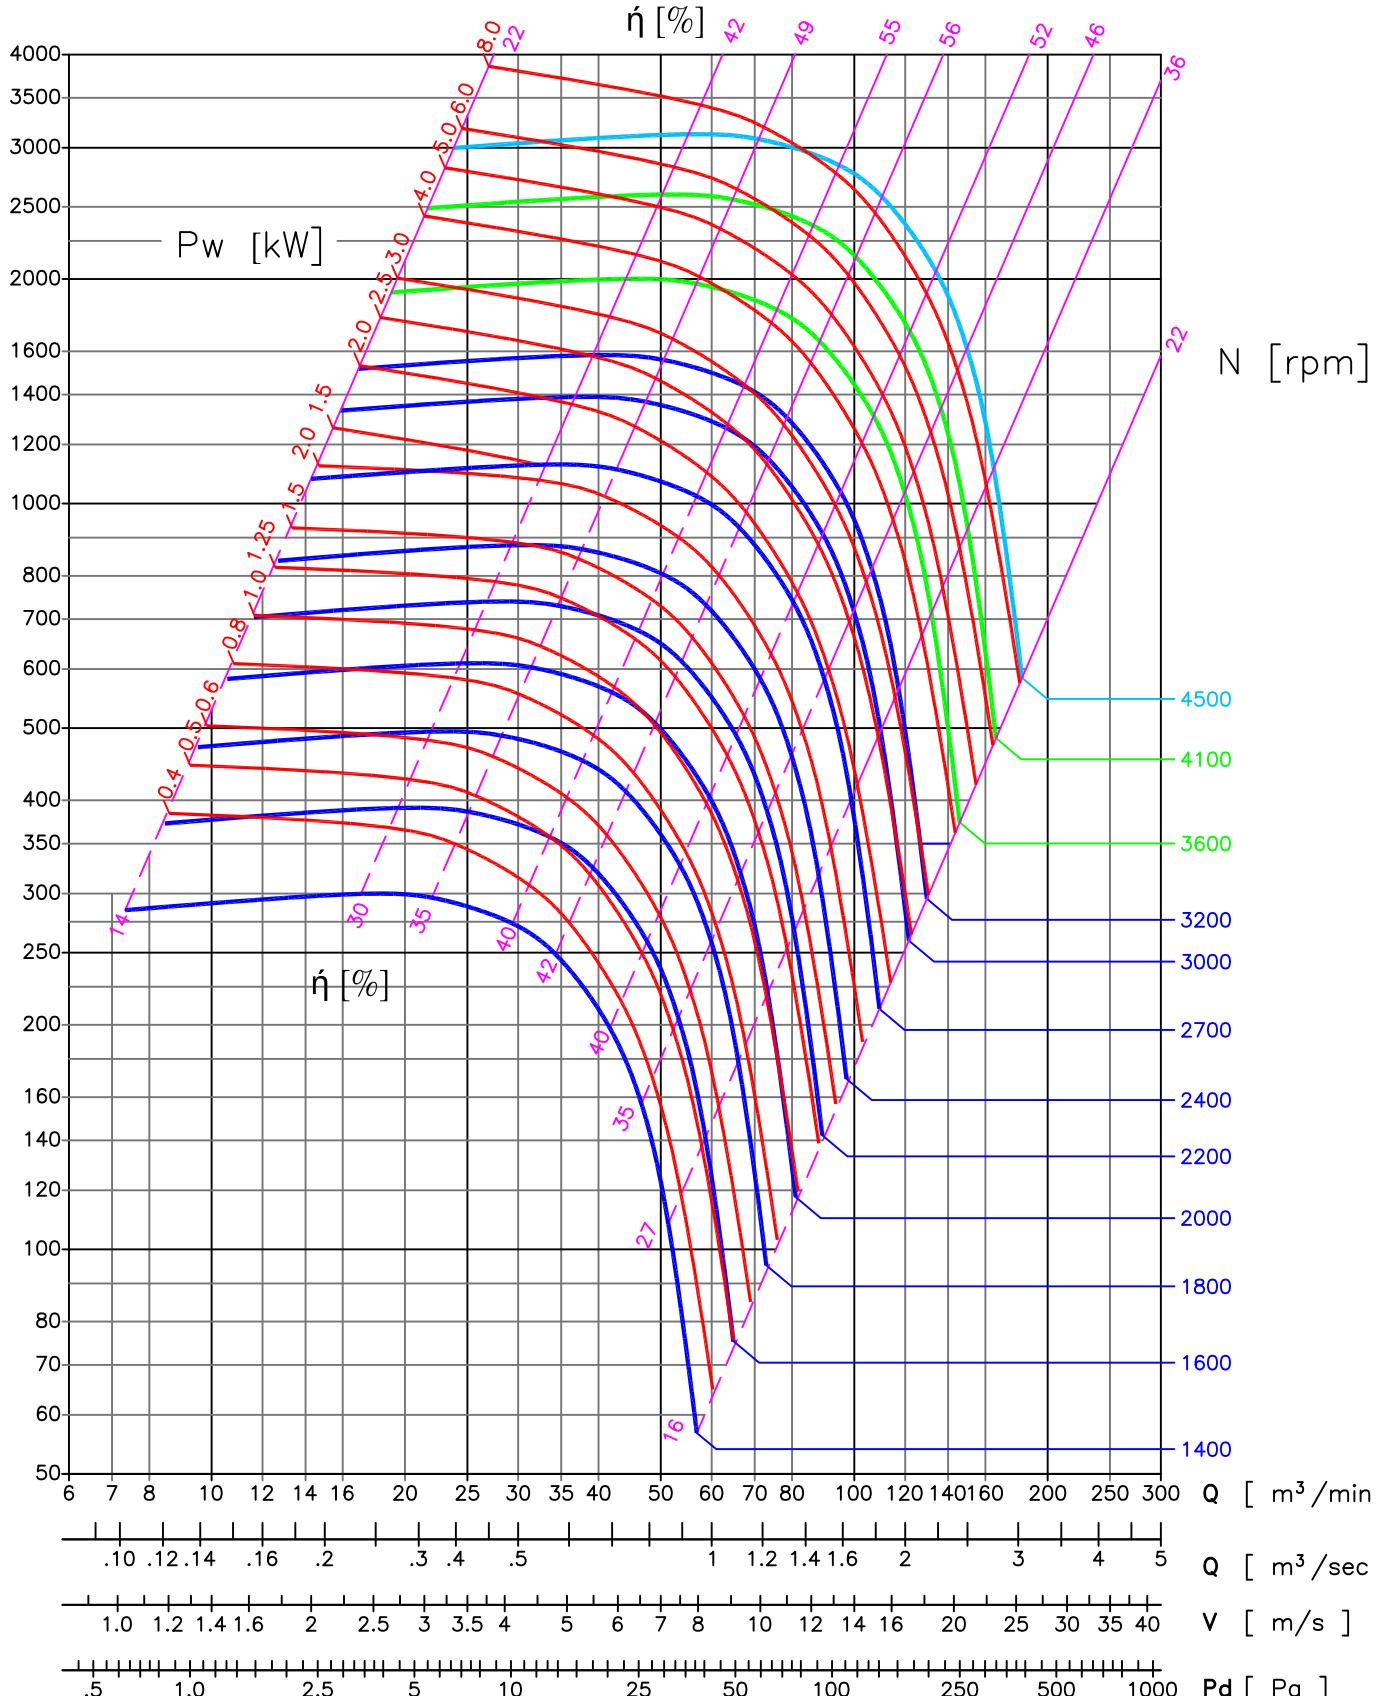

-Performance certified is for installation type B Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating kW does not include transmission losses.



BCZ355


WHEEL : 355 mm OUTLET: 500 x 355 mm(WxH,inside)
: 0.1775 m²(inside area)

FLOWTECH 

Op. Limit	CL.I	CL.II	CL.III
Type	L-M	H	V
M. kW	5	10	12.5
M. RPM	3000	3900	4150

FEG:85

$\rho = 1.2 \text{ kg/m}^3$

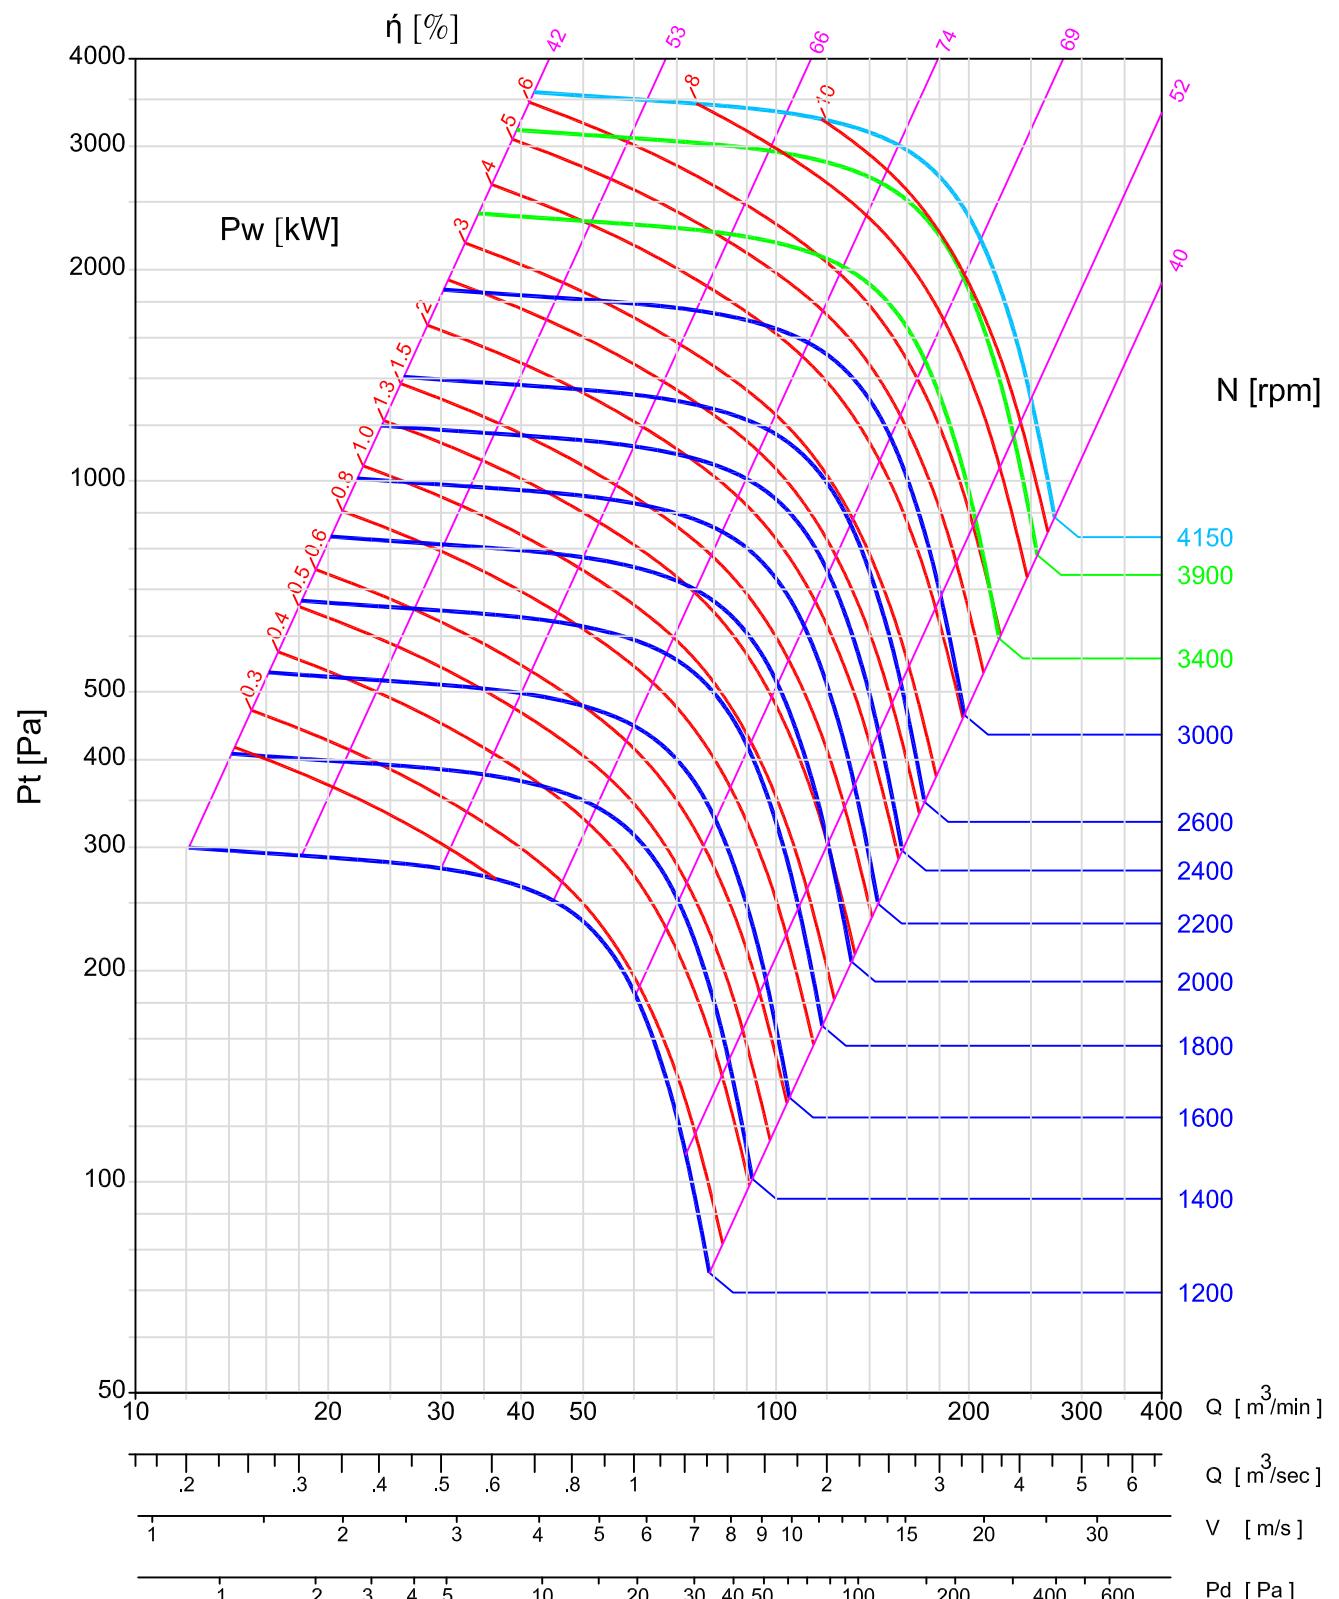

-Performance certified is for installation type B - Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating kW does not include transmission losses.




BCZ400

FLOWTECH 


WHEEL : 400 mm OUTLET: 560 x 400 mm(WxH,inside)
: 0.244 m²(inside area)

Op. Limit	CL.I	CL.II	CL.III
Type	L-M	H	V
M. KW	6	12.5	15
M. RPM	2700	3400	3700
FEG:80			$r = 1.2 \text{ kg/m}^3$

 M-T

 H-T

 V-T

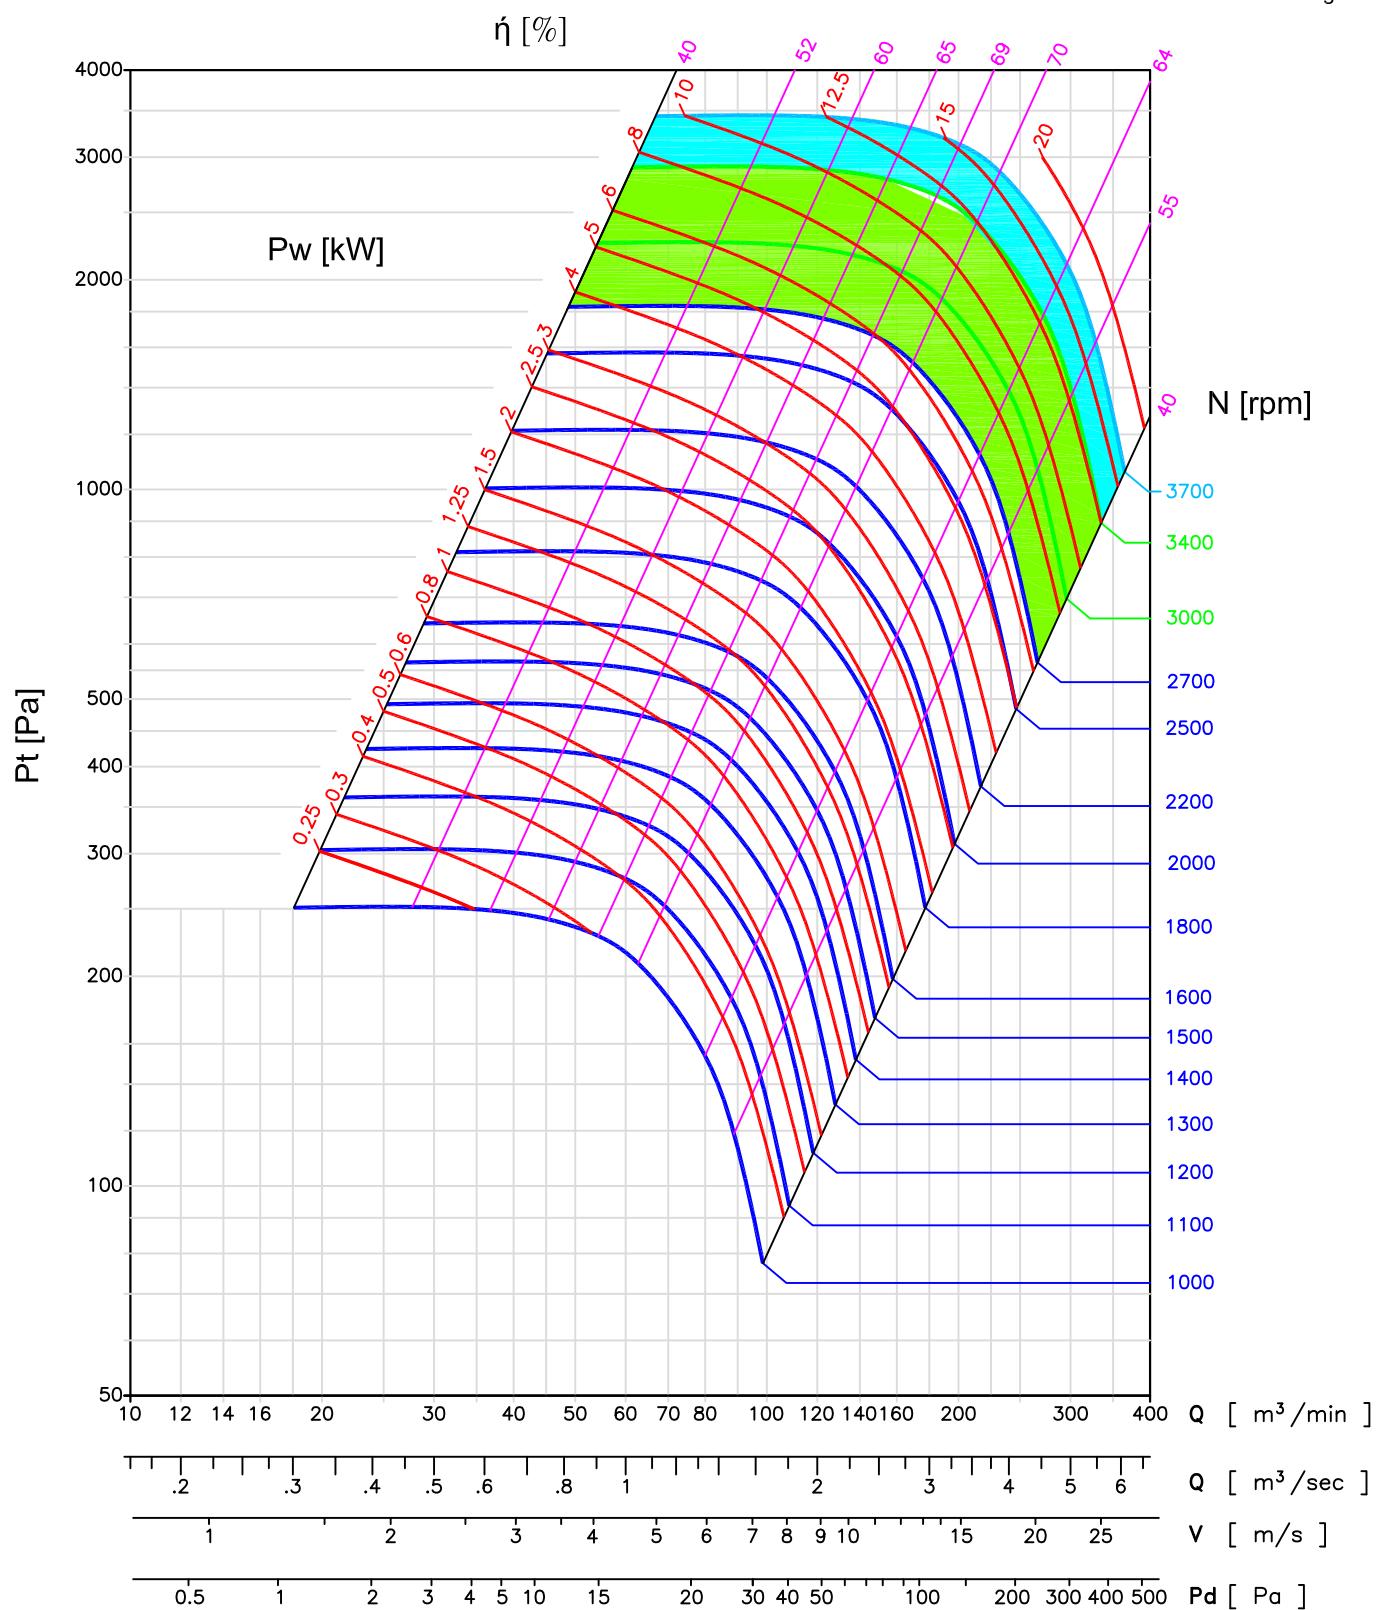


— Performance certified is for installation type B - free inlet, ducted outlet. Performance ratings do not include the effects of appurtenances(accessories). Power rating (kW) does not include transmission losses.



BCZ450


WHEEL : 450 mm OUTLET: 640 x 450 mm(WxH,inside)
: 0.288 m²(inside area)

FLOWTECH 

Op. Limit	CL.I	CL.II	CL.III
Type	L-M	H	V
M. kW	8	15	20
M. RPM	2400	3100	3300

FEG:80

$\rho = 1.2 \text{ kg/m}^3$

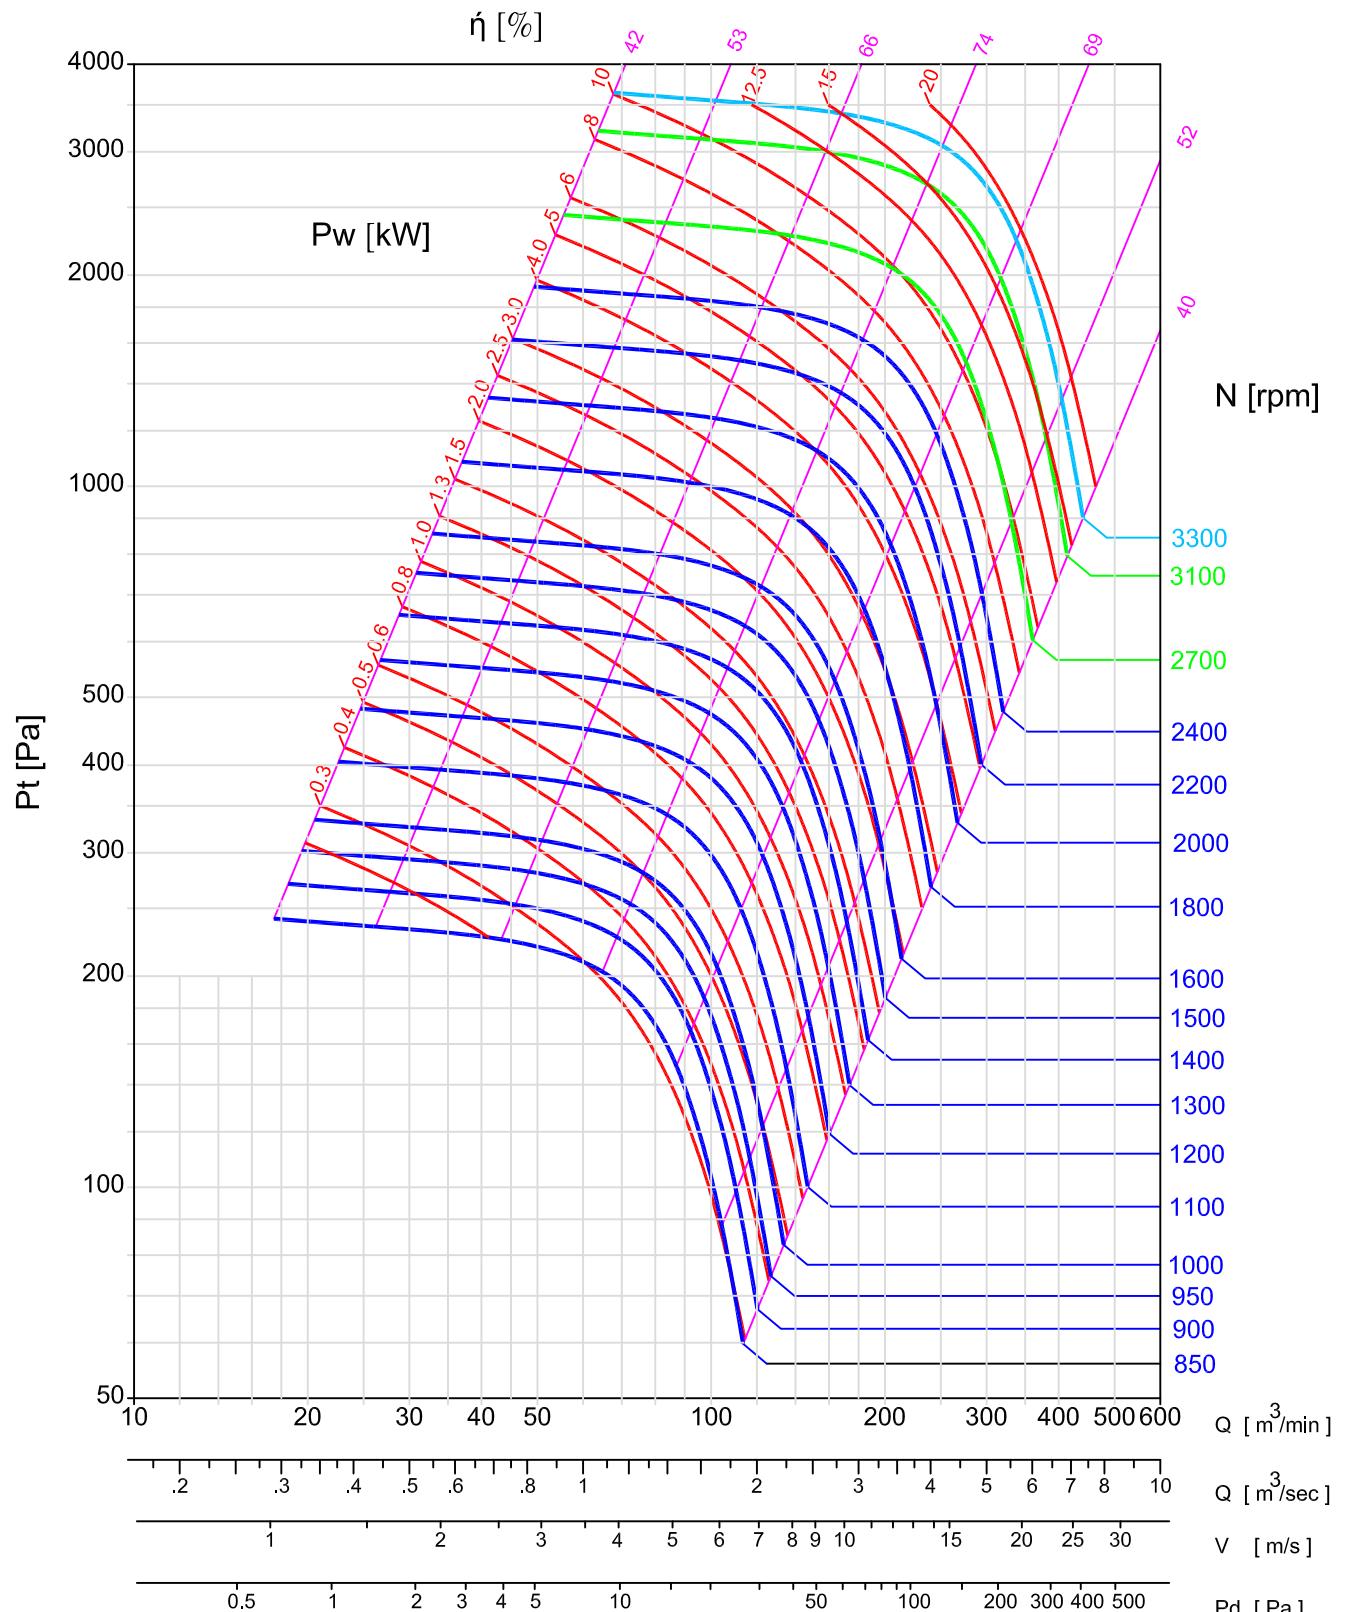

-Performance certified is for installation type B - Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating kW does not include transmission losses.



BCZ500

FLOWTECH®

WHEEL : 500 mm

OUTLET: 700 x 500 mm(WxH,inside)

: 0.35 m²(inside area)

M-T


H-T

V-T

Op. Limit	CL.I	CL.II	CL.III
Type	M-T	H-T	V-T
M. kW	10	20	25
M. RPM	2150	2800	3000

FEG: 80

r = 1.2 kg/m³

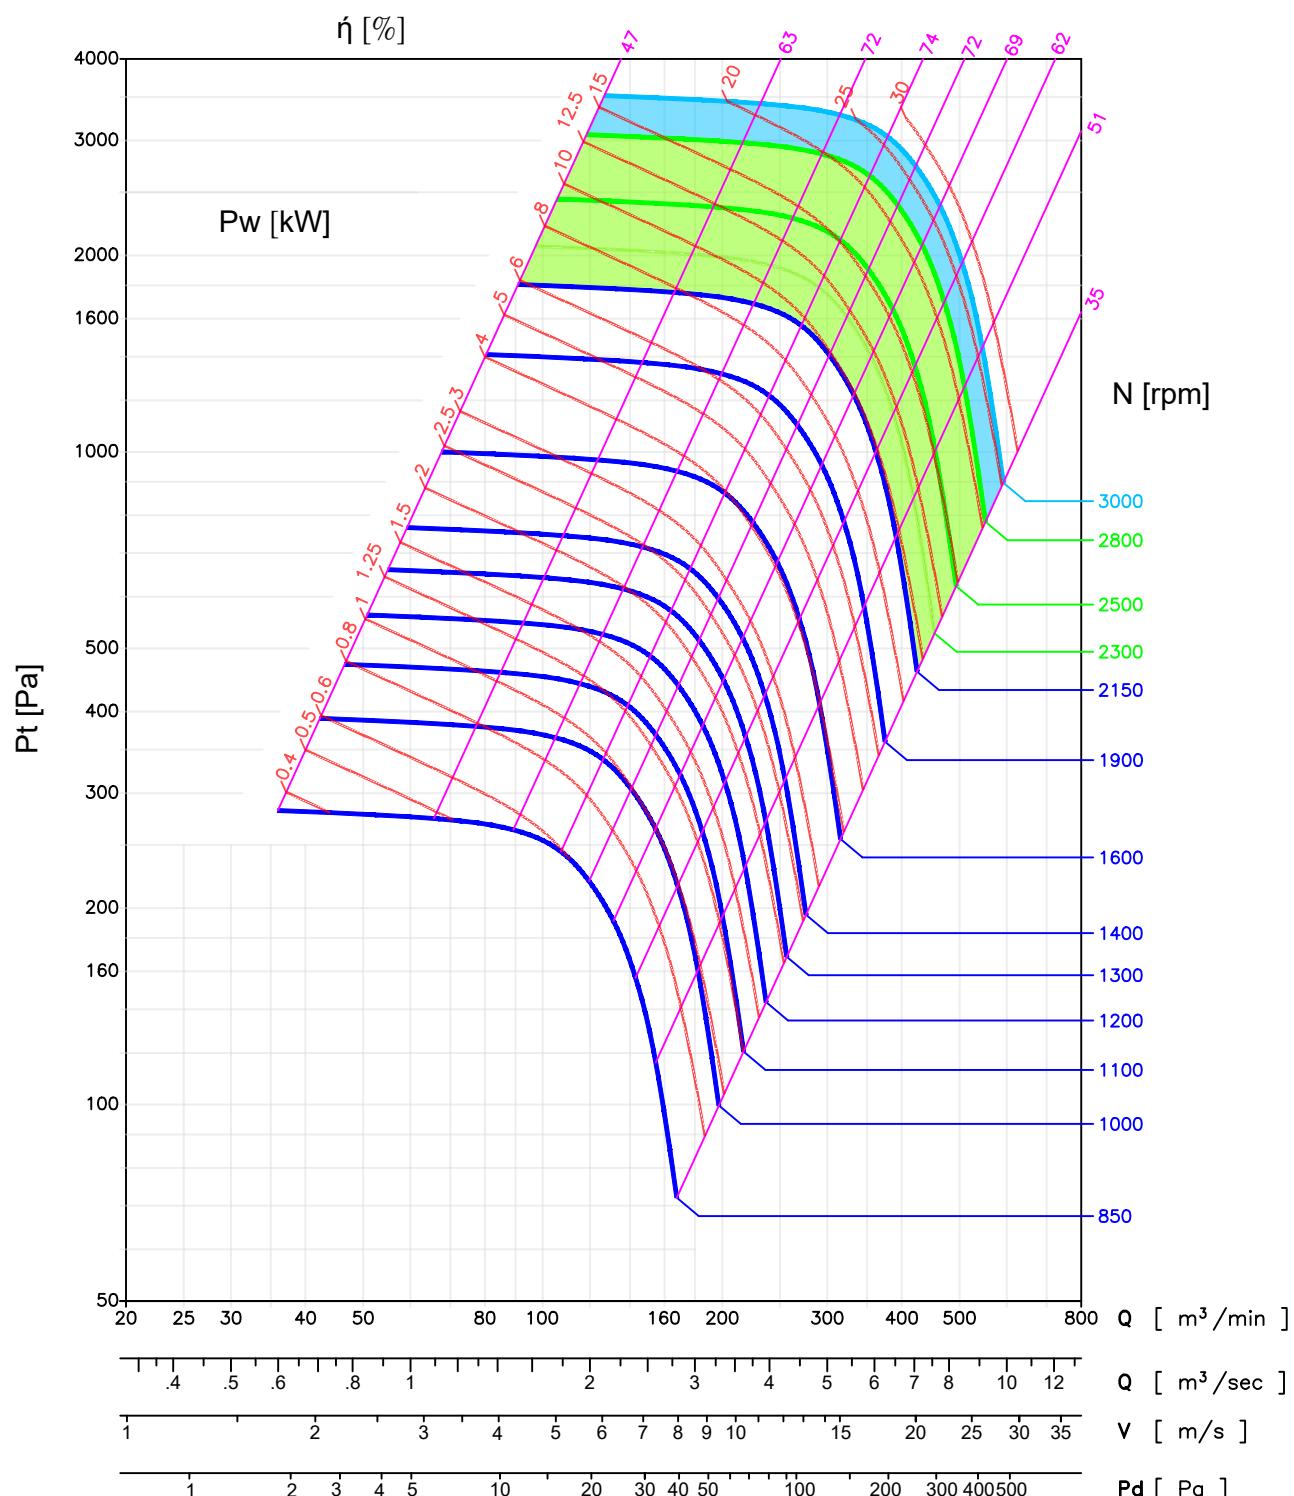

— Performance certified is for installation type B – free inlet, ducted outlet. Performance ratings do not include the effects of appurtenances(accessories). Power rating (kW) does not include transmission losses.



BCZ560



WHEEL : 560 mm OUTLET; 790 x 560 mm(WxH,inside)
: 0.4424 m²(inside area)

FLOWTECH

Type M


Type H

Type V

Op. Limit	CL.I	CL.II	CL.III
Type	M	H	V
M. kW	12.5	25	30
M. RPM	1900	2500	2650

FEGR:80

r = 1.2 kg/m³

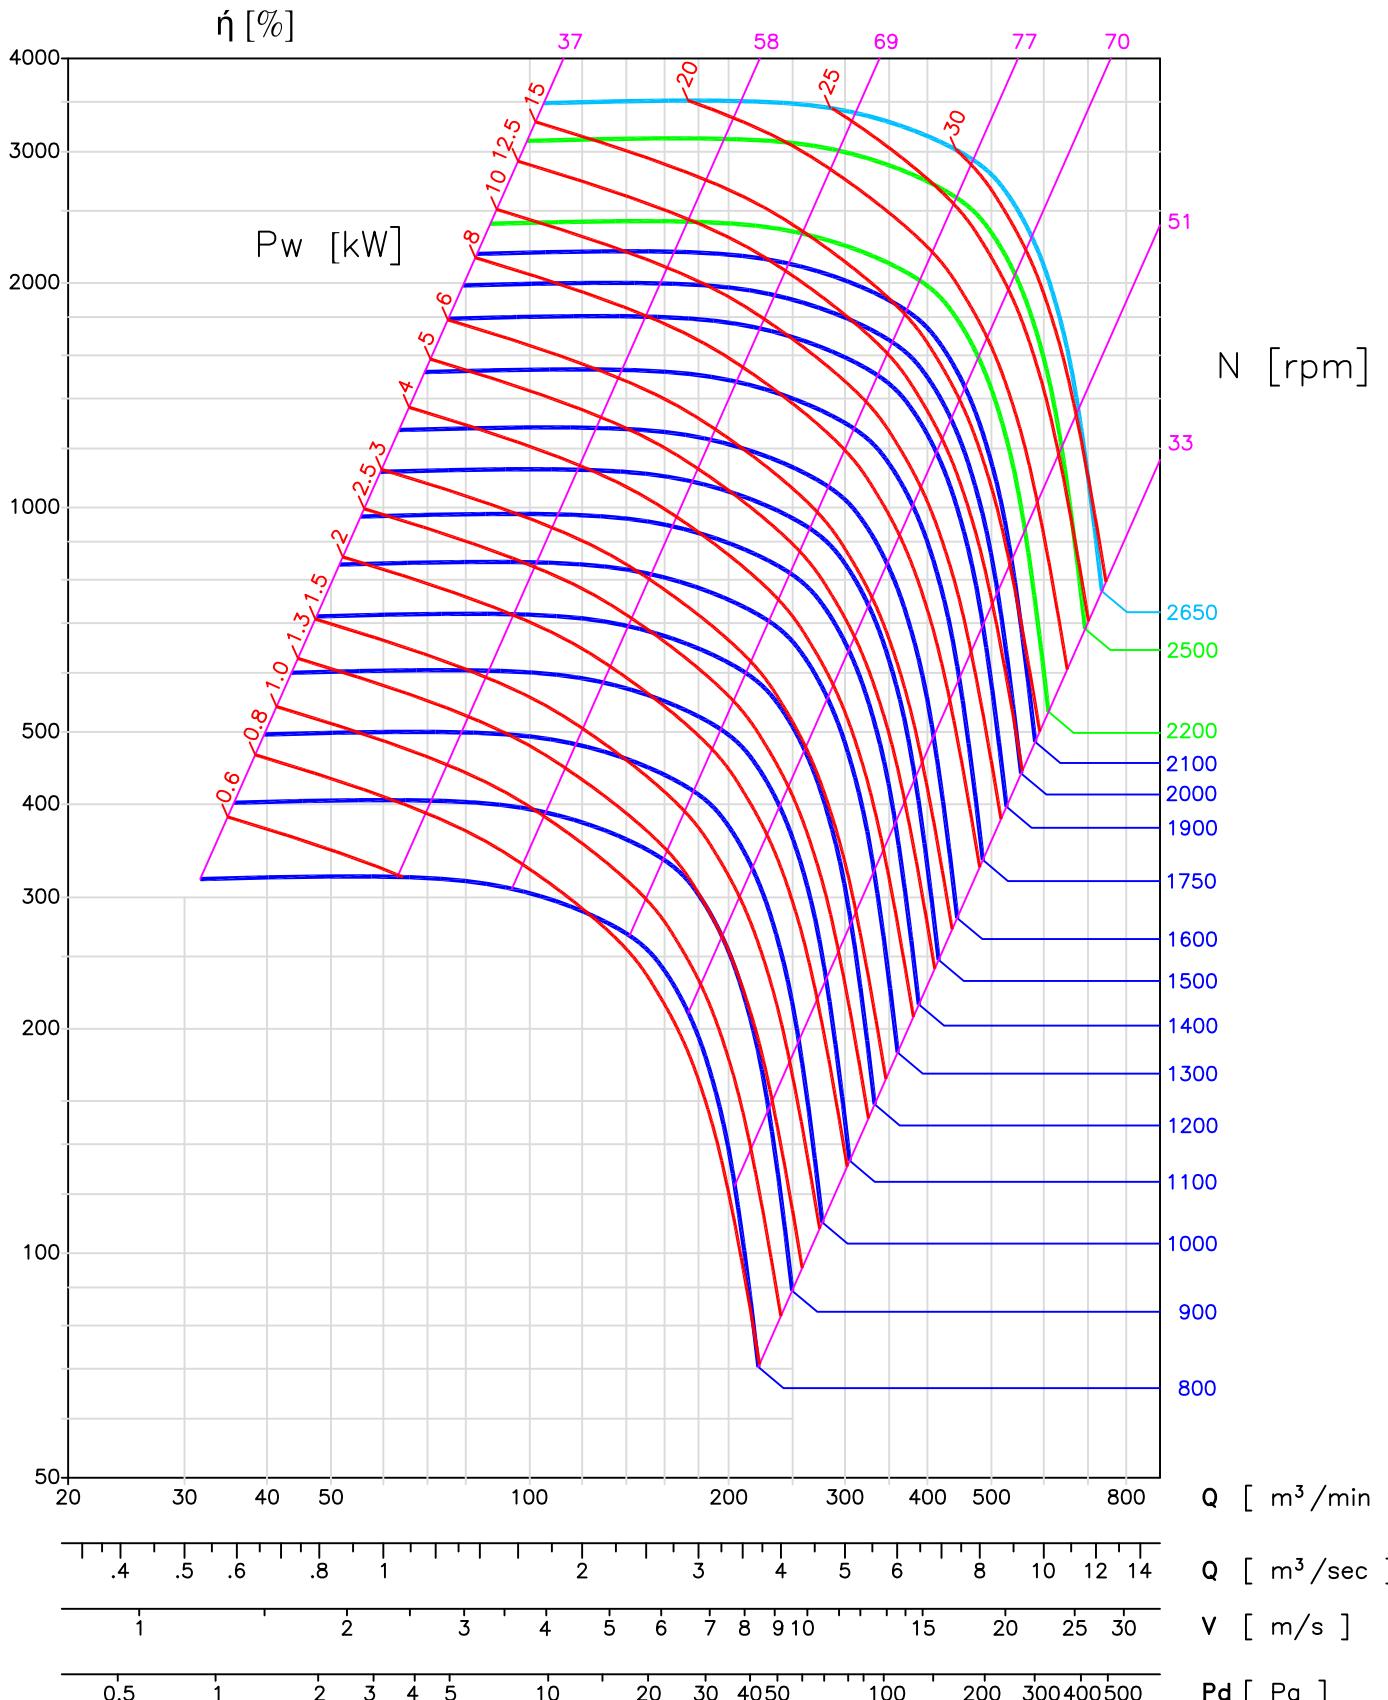

-Performance certified is for installation type B Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating kW does not include transmission losses.




BCZ630

FLOWTECH 

WHEEL : 630 mm OUTLET: 890 x 630 mm(WxH,inside)
: 0.5607 m²(inside area)

Op. Limit	CL.I	CL.II	CL.III
Type	M	H	V
M. kW	12.5	30	40
M. RPM	1600	2100	2400


FEG:80 r = 1.2 kg/m³

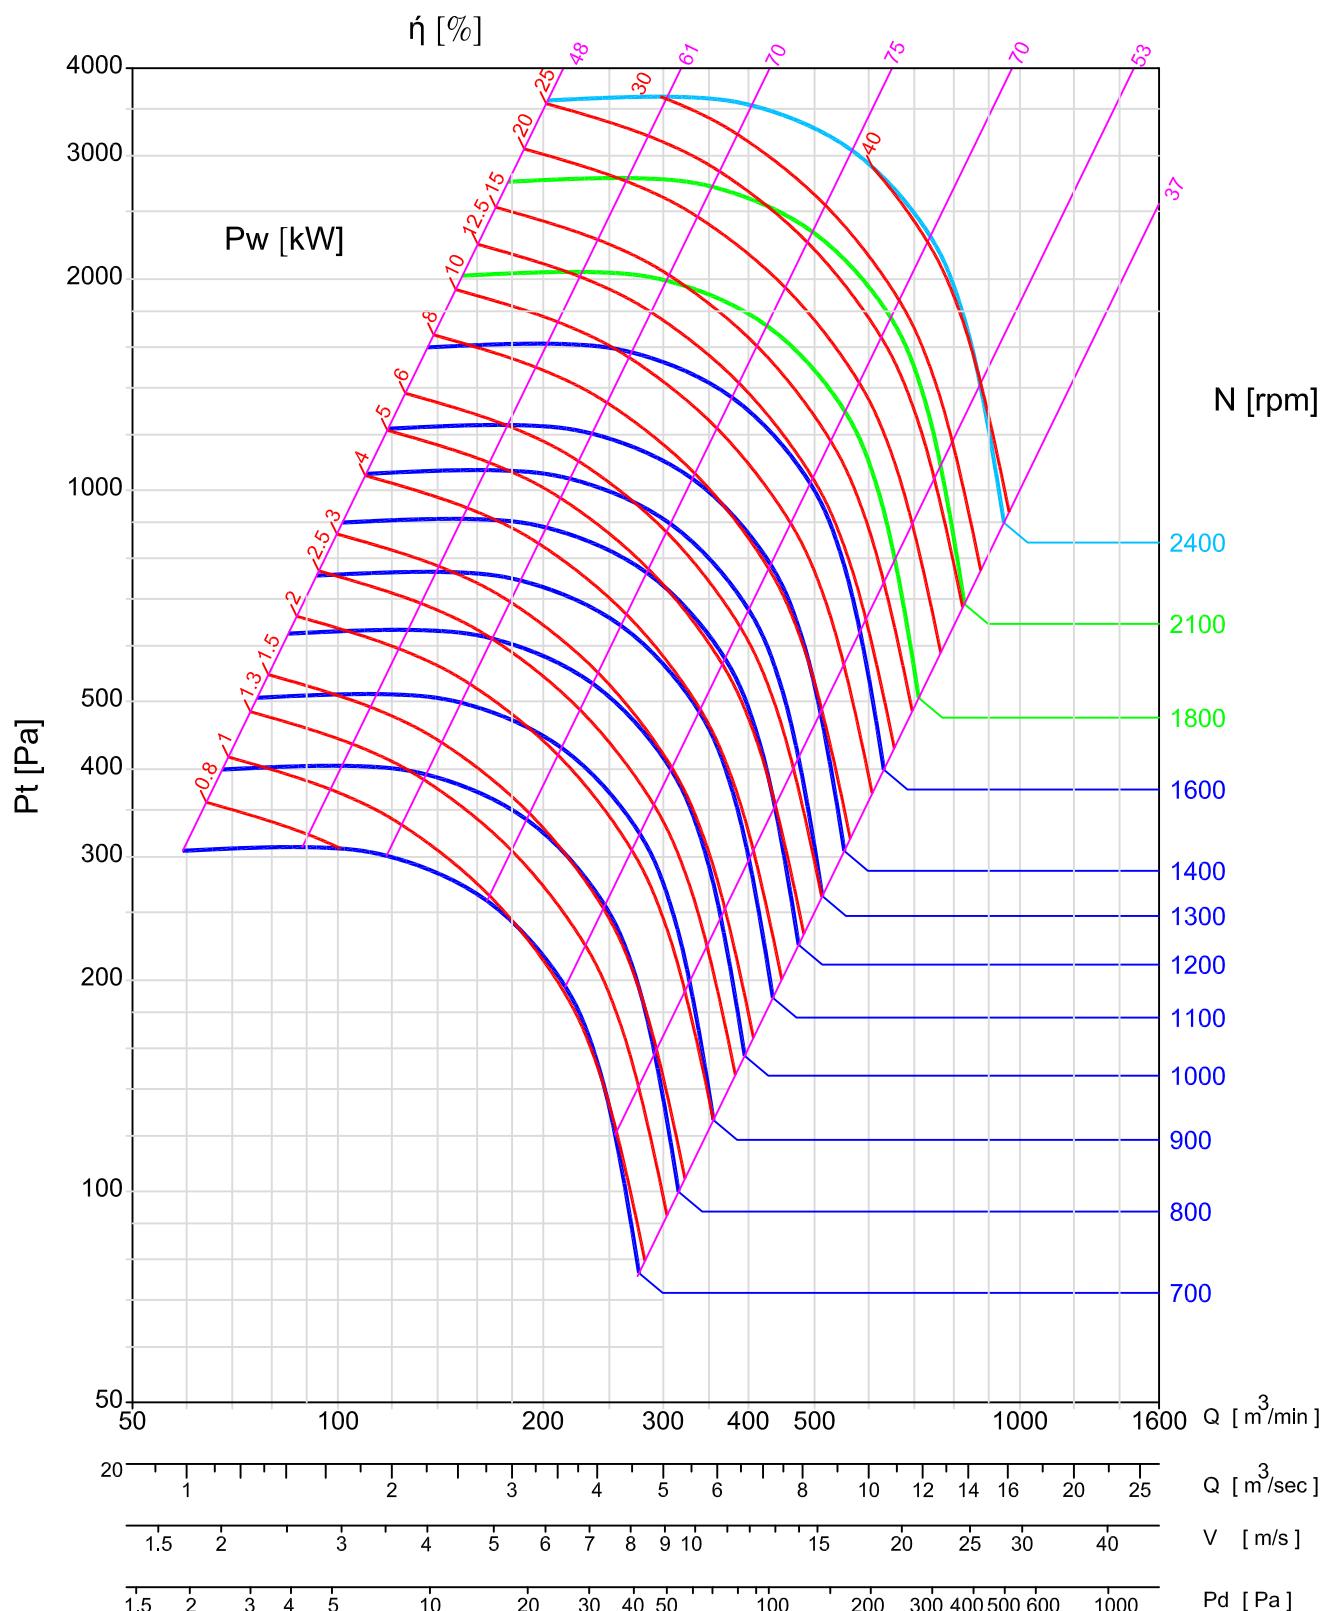

-Performance certified is for installation type B - Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating kW does not include transmission losses.



BCZ710


FLOWTECH 

WHEEL : 710 mm OUTLET: 1000 x 710 mm(WxH,inside)
: 0.71 m²(inside area)

Op. Limit	CL.I	CL.II	CL.III
Type	H	V	X
M. kW	20	40	50
M. RPM	1450	1850	2100

FEG:80

$r = 1.2 \text{ kg/m}^3$

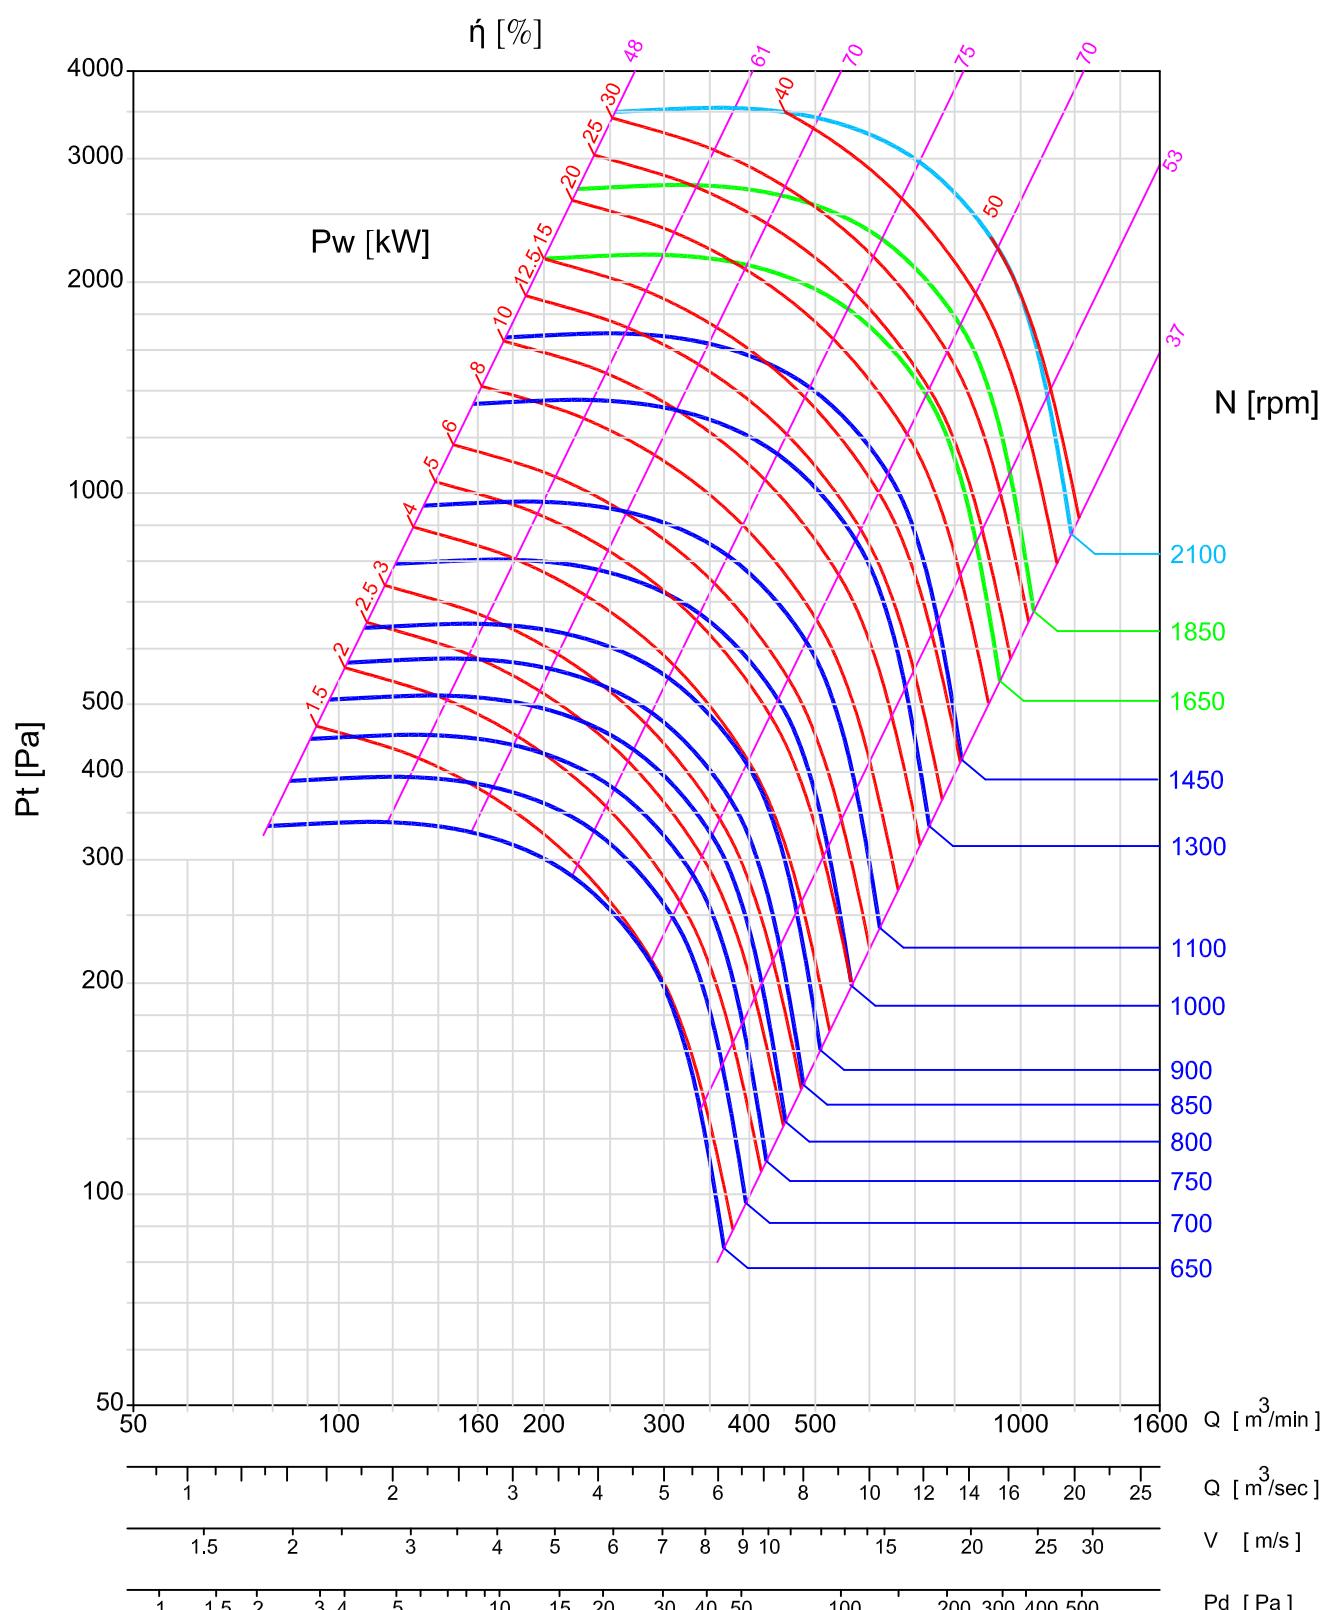


-Performance certified is for installation type B - Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating kW does not include transmission losses.



BCZ800


WHEEL : 800 mm OUTLET: 1130 x 800 mm(WxH,inside)
: 0.904 m²(inside area)

FLOWTECH 

Op. Limit	CL.I	CL.II	CL.III
Type	H	V	X
M. kW	25	50	80
M. RPM	1300	1650	1900

FEG:80

r = 1.2 kg/m³

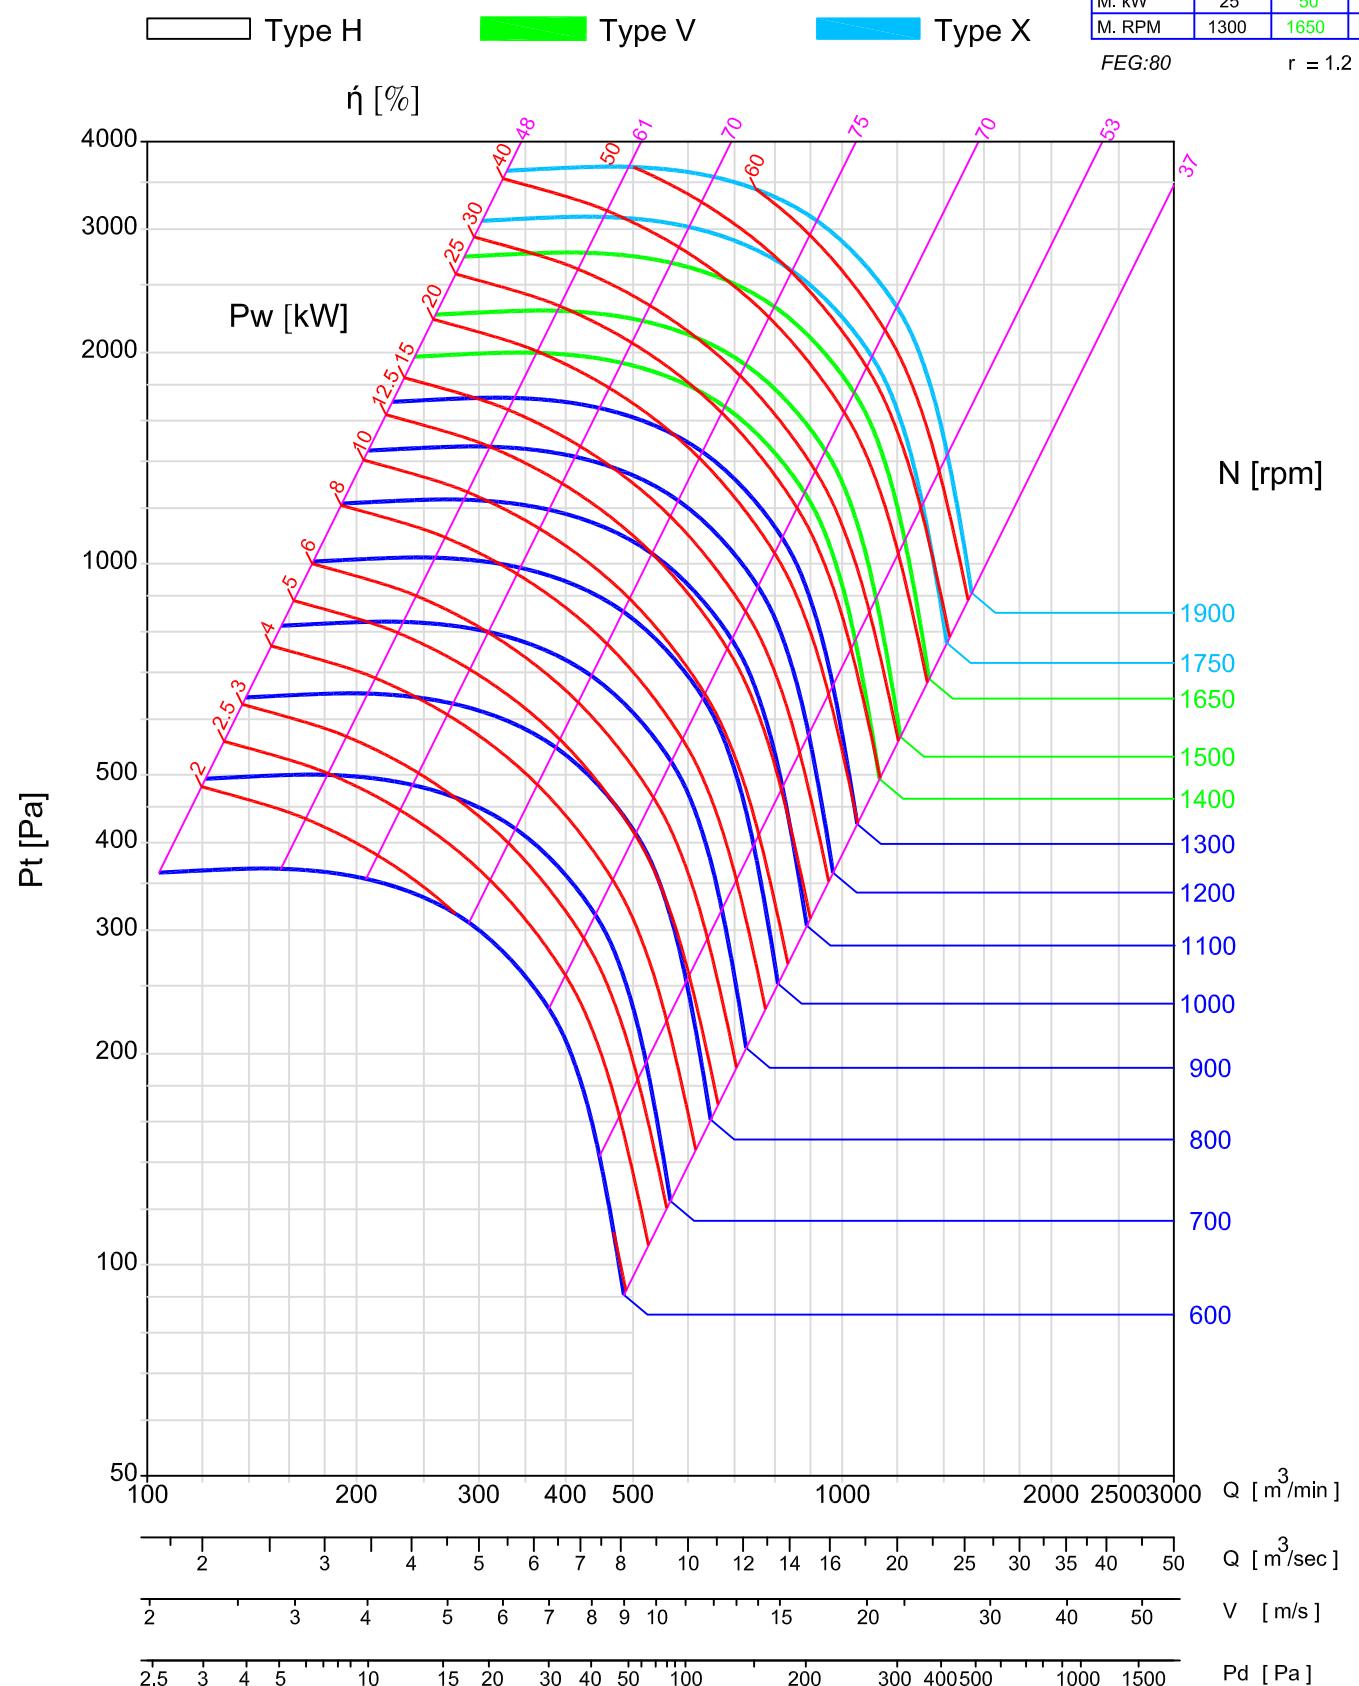

-Performance certified is for installation type B - Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating kW does not include transmission losses.



BCZ900


WHEEL : 900 mm OUTLET: 1270 x 900 mm(WxH,inside)
: 1.143 m²(inside area)

FLOWTECH®

Op. Limit	CL.I	CL.II	CL.III
Type	H	V	X
M, kW	30	60	80
M, RPM	1150	1500	1650

FEG:80

$$r = 1.2 \text{ kg/m}^3$$

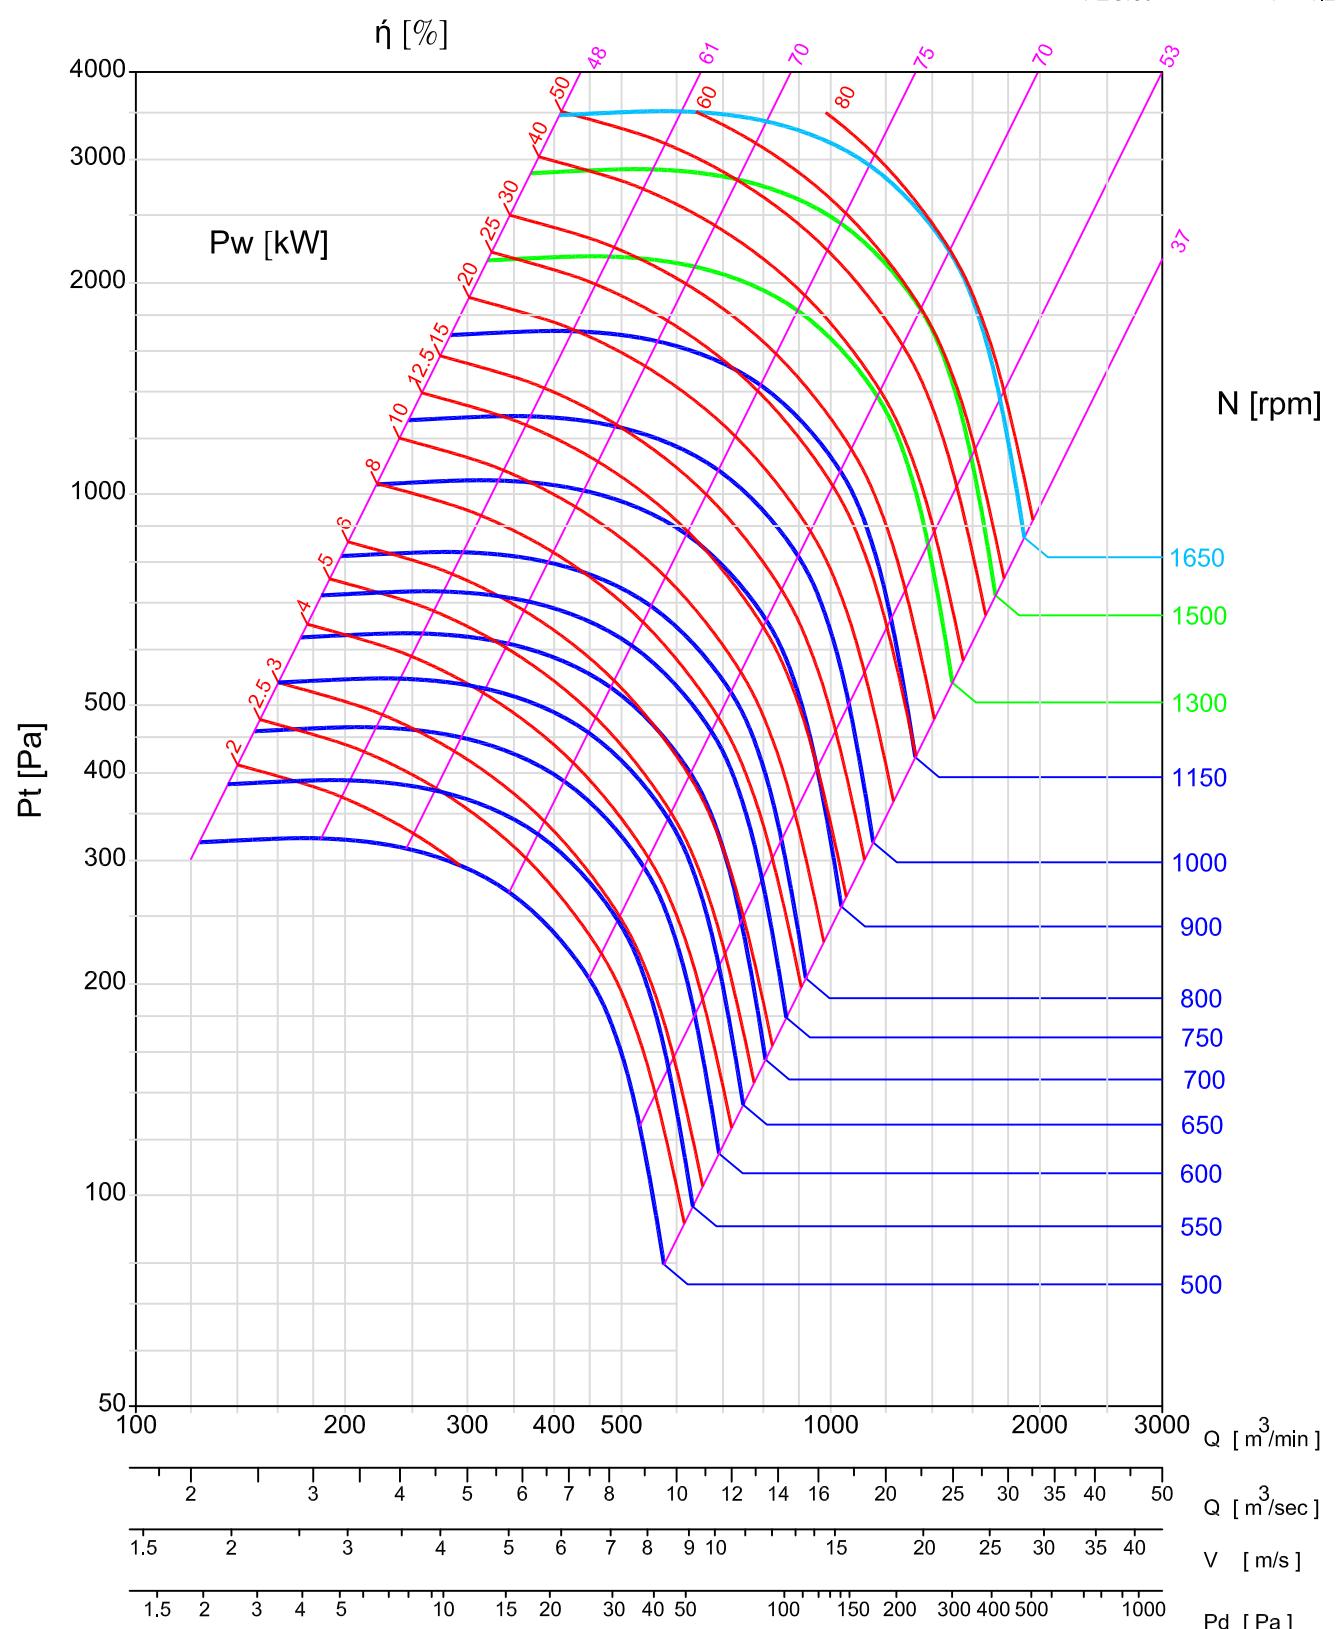

-Performance certified is for installation type B – Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating kW does not include transmission losses.



BCZ1000


WHEEL : 1000 mm OUTLET: 1400 x 1000 mm(WxH,inside)
: 1.4 m²(inside area)

FLOWTECH 

Op. Limit	CL.I	CL.II	CL.III
Type	H	V	X
M, kW	30	80	100
M. RPM	1000	1300	1500

FEG:80


$r = 1.2 \text{ kg/m}^3$

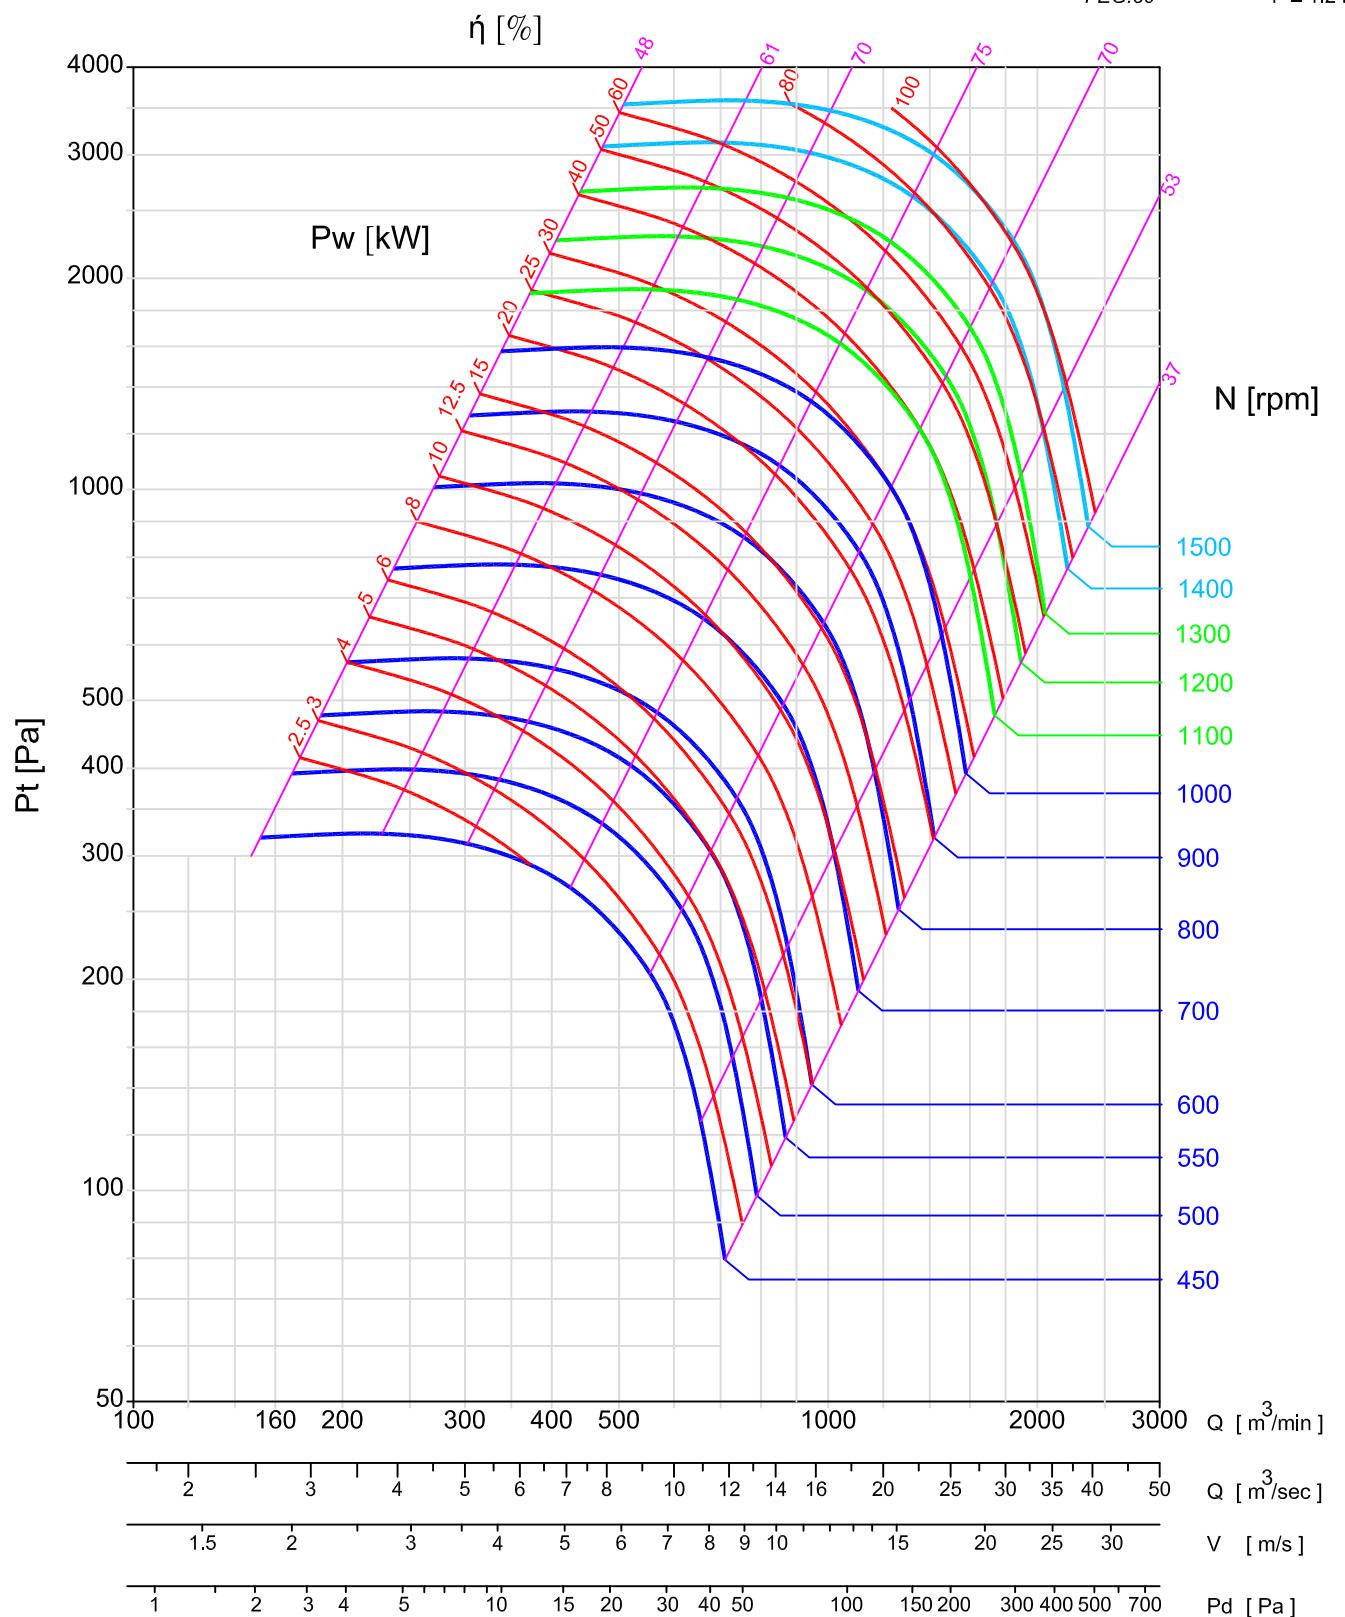

-Performance certified is for installation type B - Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating kW does not include transmission losses.



BCZ1120


FLOWTECH 

WHEEL : 1120 mm OUTLET: 1580 x 1120 mm(WxH,inside)
: 1.7696 m²(inside area)

Op. Limit	CL.I	CL.II	CL.III
Type	H	V	X
M. kW	50	100	150
M. RPM	950	1200	1350

FEG:80

r = 1.2 kg/m³

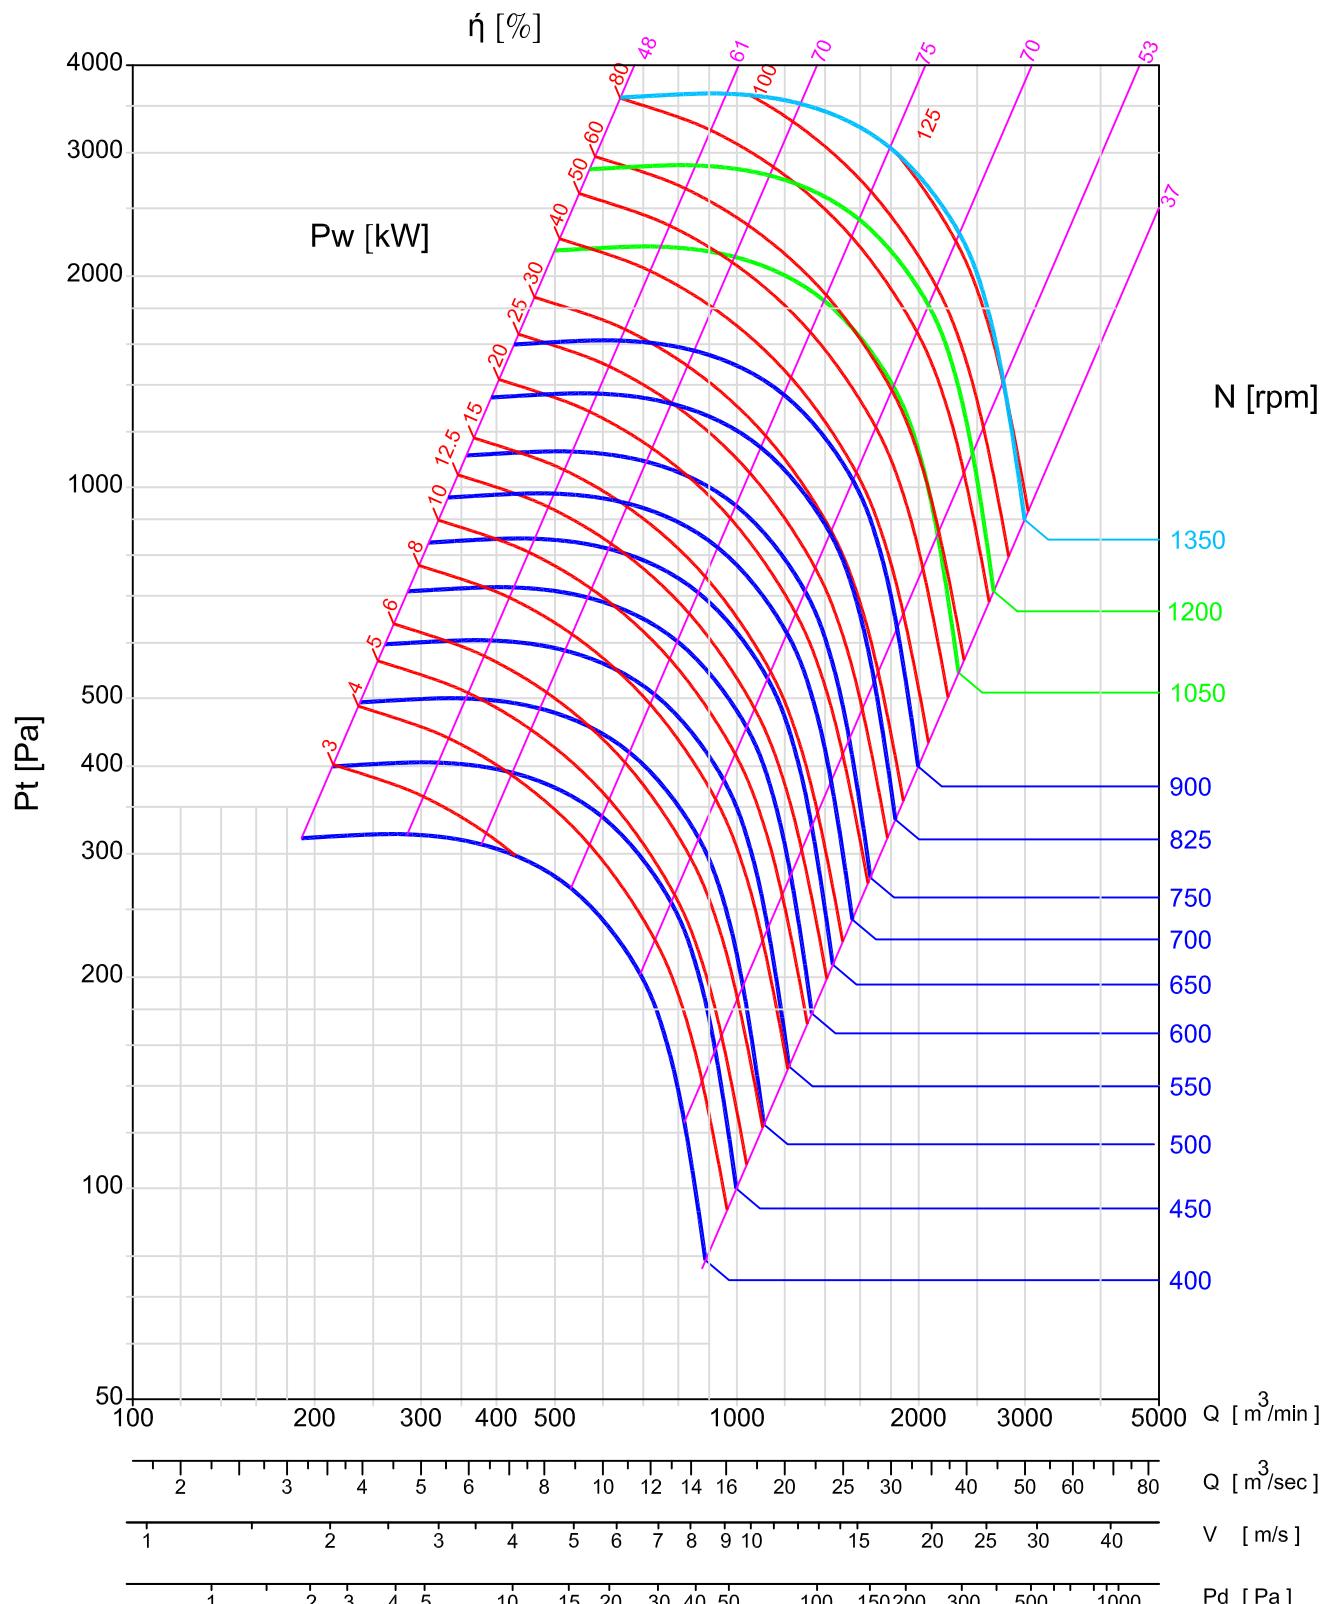


-Performance certified is for installation type B - Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating kW does not include transmission losses.



BCZ1250


WHEEL : 1250 mm OUTLET: 1770 x 1250 mm(WxH,inside)
: 2.2125 m²(inside area)

FLOWTECH 

Op. Limit	CL.I	CL.II	CL.III
Type	H	V	X
M. kW	60	125	200
M. RPM	825	1050	1200

FEG:80


$r = 1.2 \text{ kg/m}^3$

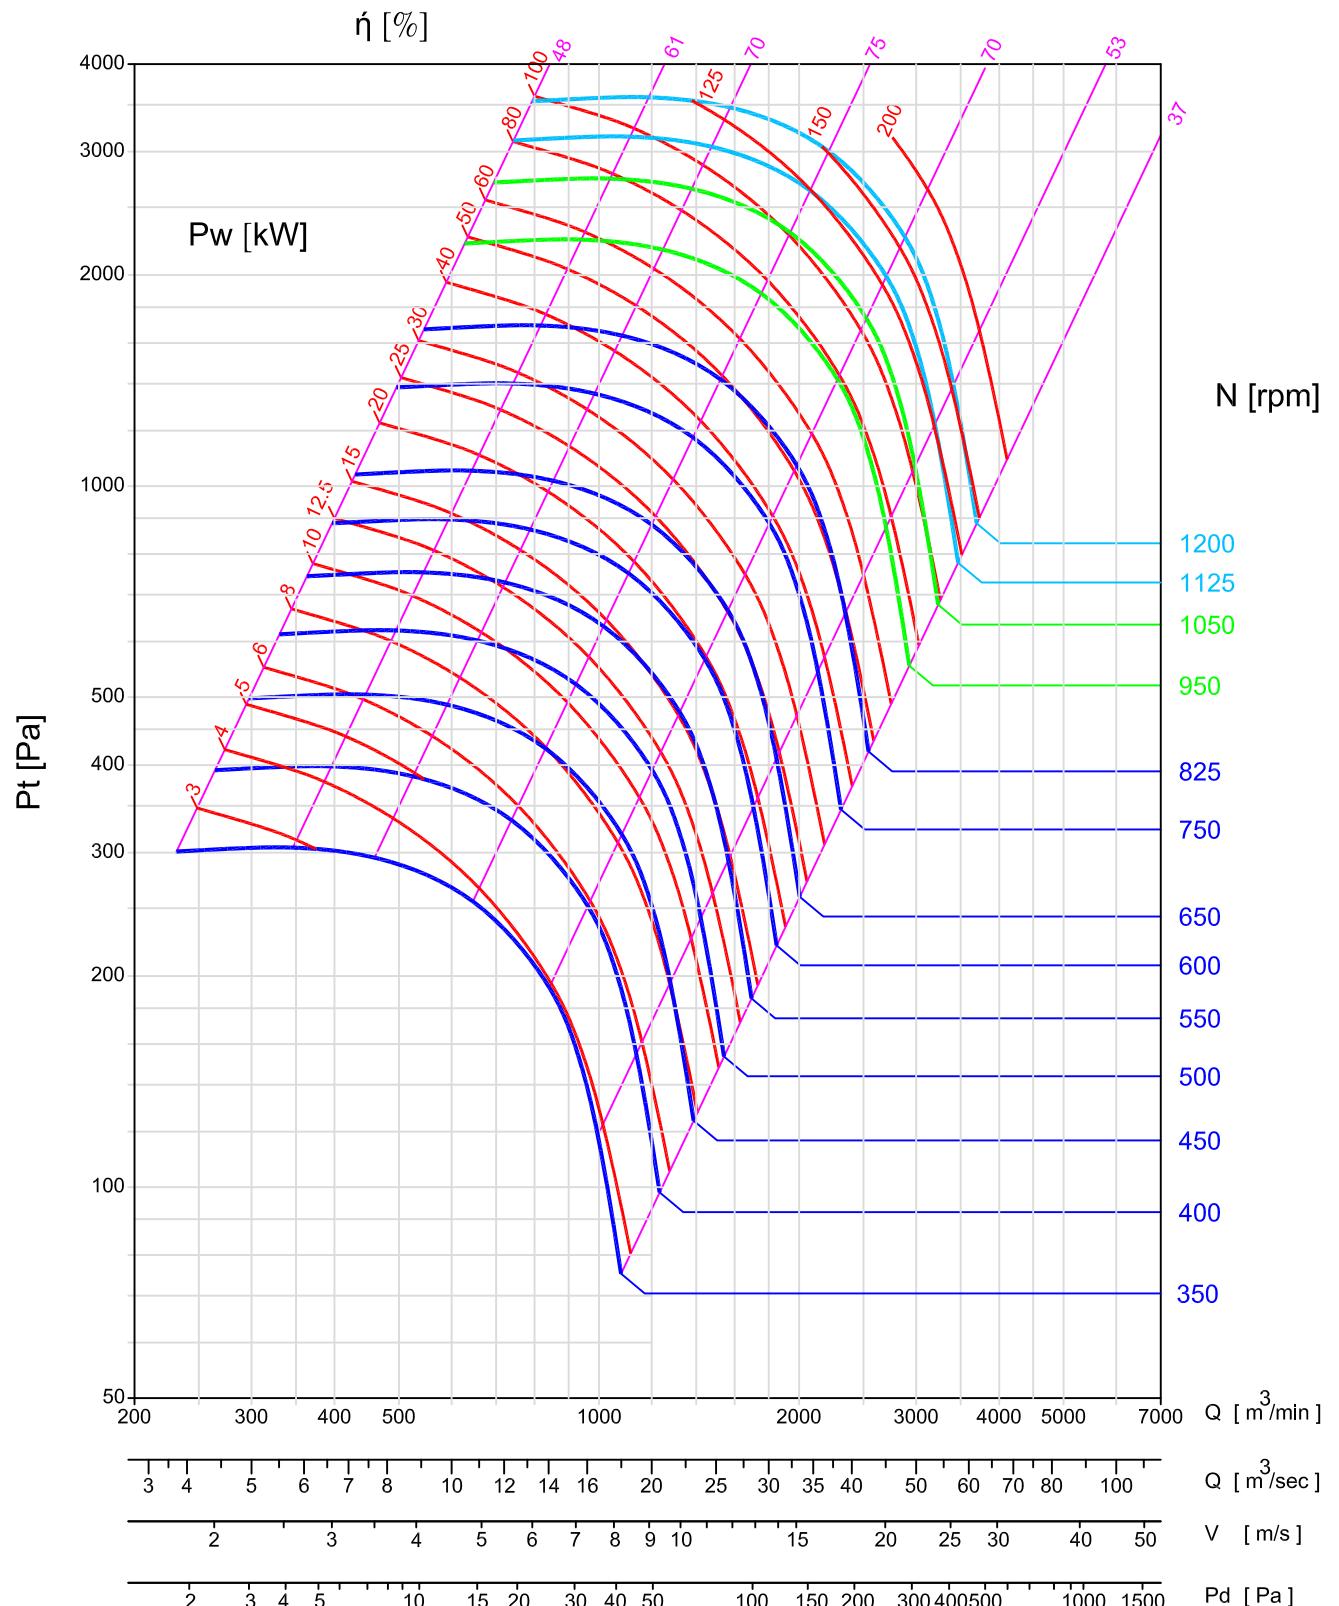

-Performance certified is for installation type B - Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating kW does not include transmission losses.



BCZ1400


FLOWTECH 

WHEEL : 1400 mm OUTLET: 1980 x 1400 mm(WxH,inside)
: 2.772 m²(inside area)

Op. Limit	CL.I	CL.II	CL.III
Type	H	V	X
M. kW	60	150	200
M. RPM	720	950	1070

FEG:80

$\rho = 1.2 \text{ kg/m}^3$

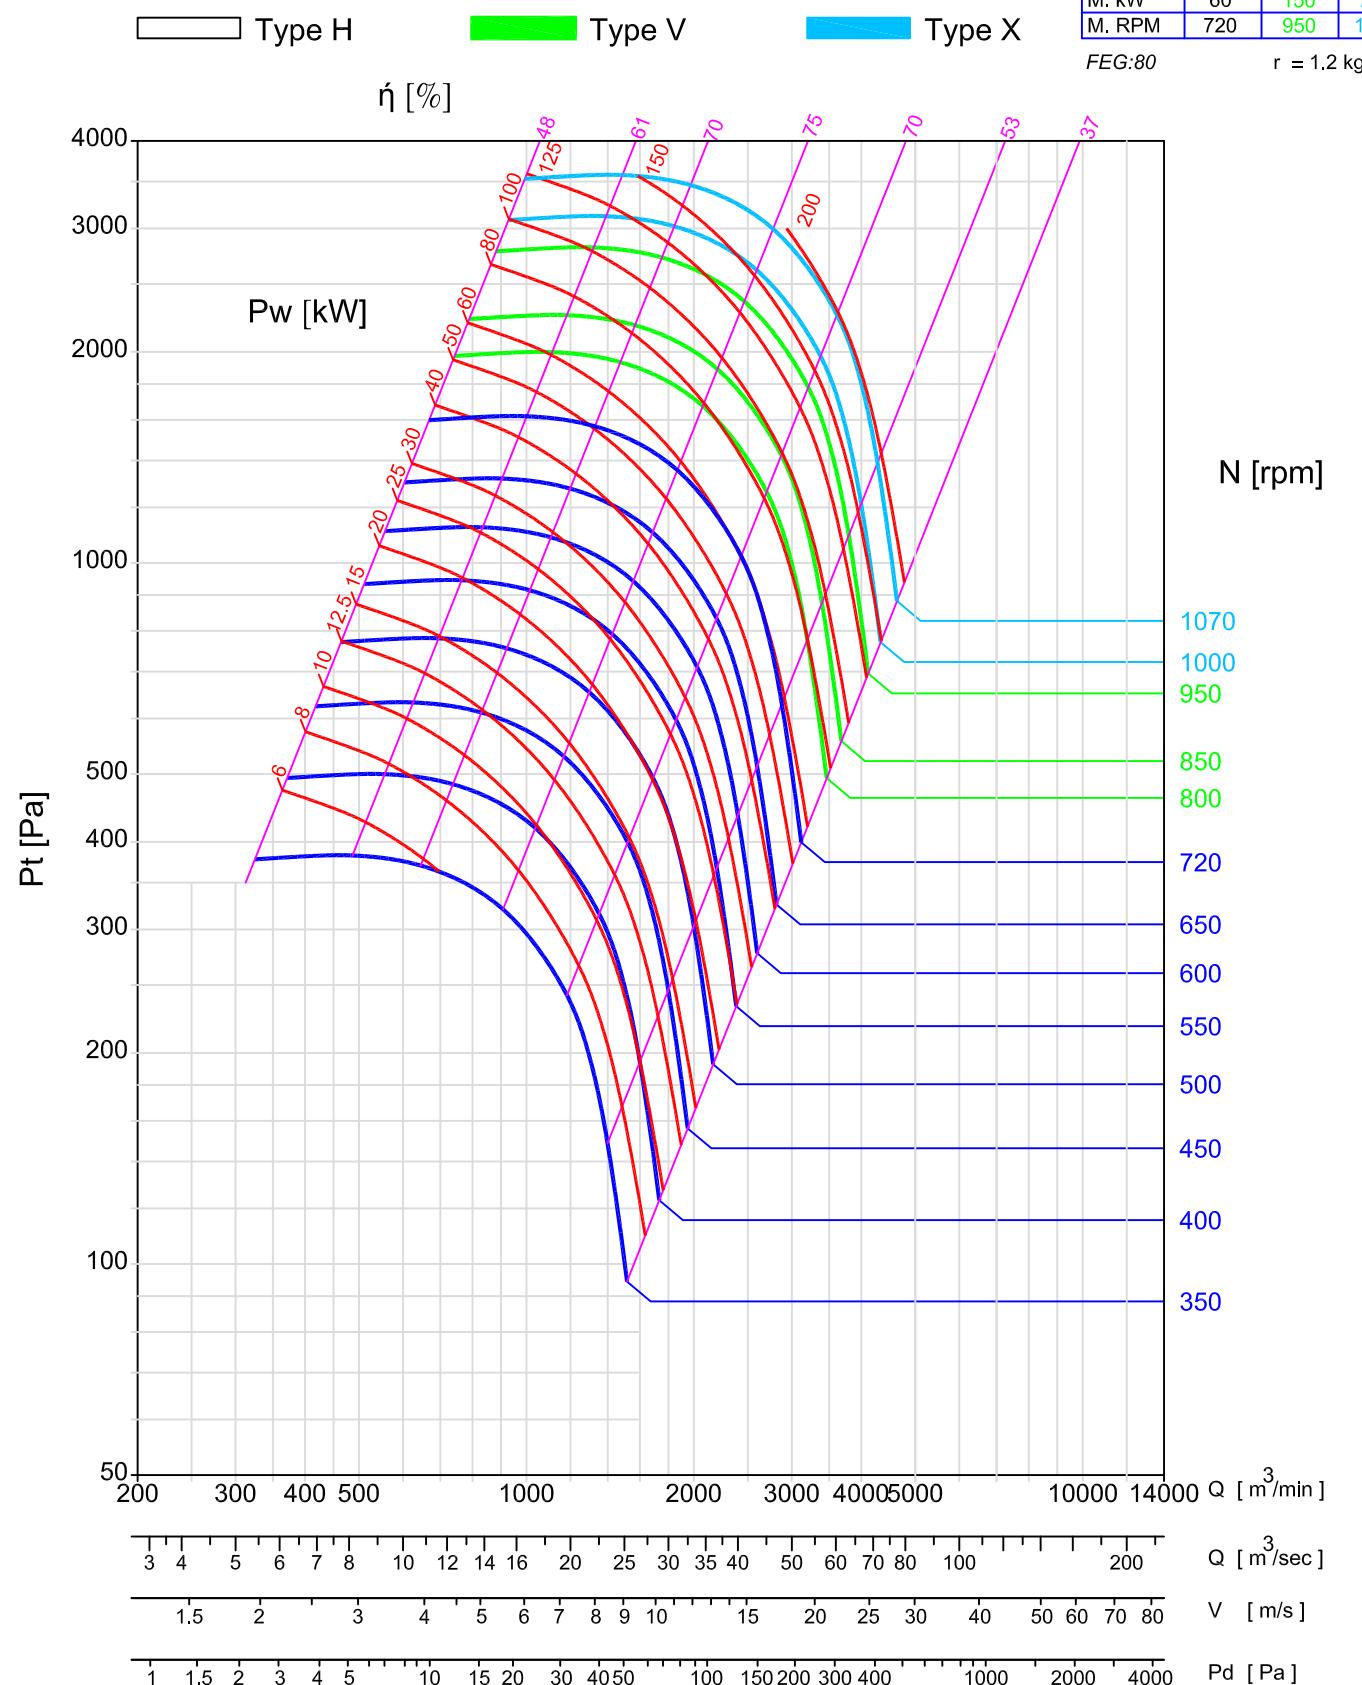

-Performance certified is for installation type B - Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating kW does not include transmission losses.



BCZ1600


FLOWTECH 

WHEEL : 1600 mm OUTLET: 2260 x 1600 mm(WxH,inside)
:3.616 m²(inside area)

Op. Limit	CL.I	CL.II	CL.III
Type	H	V	X
M. KW	80	200	300
M. RPM	625	825	935

FEG:80

$\rho = 1.2 \text{ kg/m}^3$

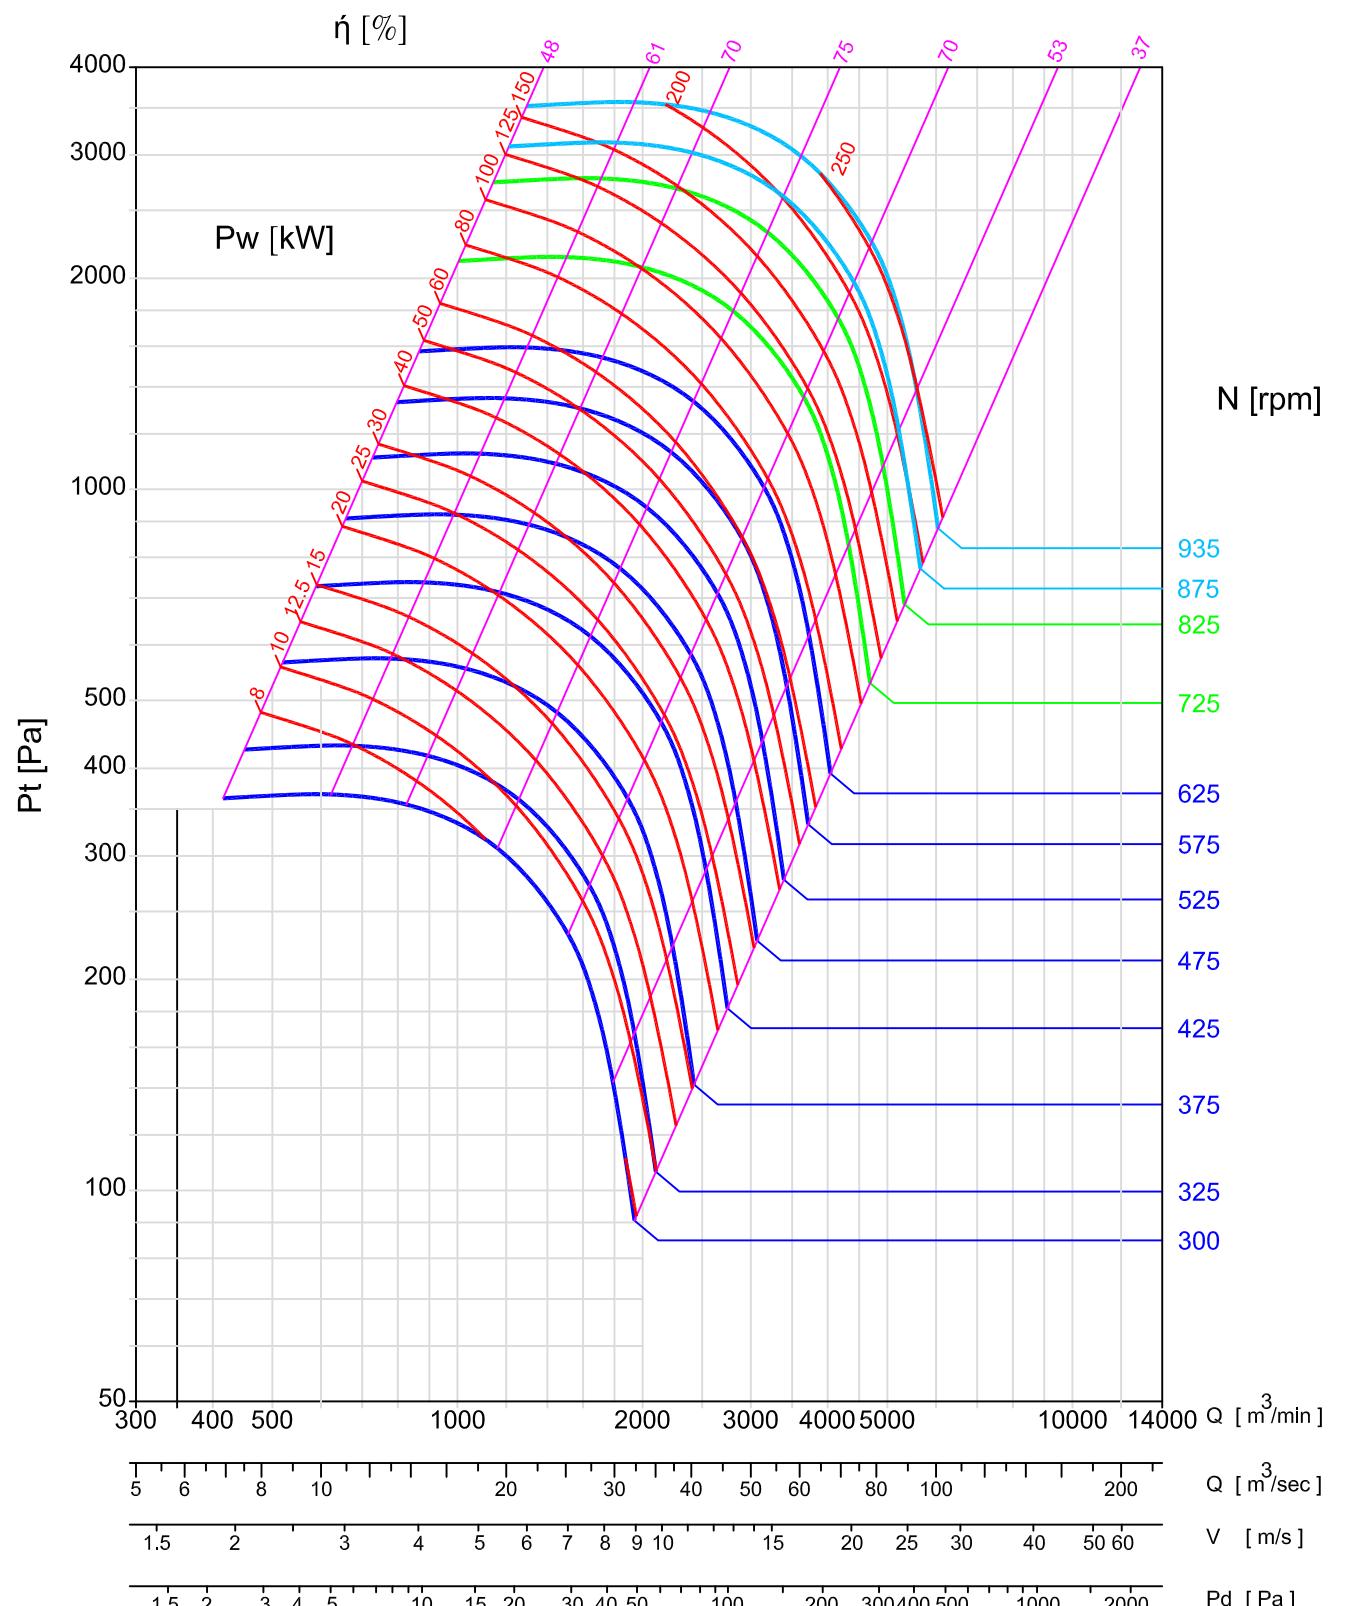

-Performance certified is for installation type B - Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating kW does not include transmission losses.



BCZ1800

FLOWTECH 


WHEEL : 1800 mm OUTLET: 2550 x 1800 mm(WxH,inside)
: 4.59 m²(inside area)

Op. Limit	CL.I	CL.II	CL.III
Type	H	V	X
M. kW	125	250	300
M. RPM	575	725	400

FEG:80

$r = 1.2 \text{ kg/m}^3$

Type H Type V Type X

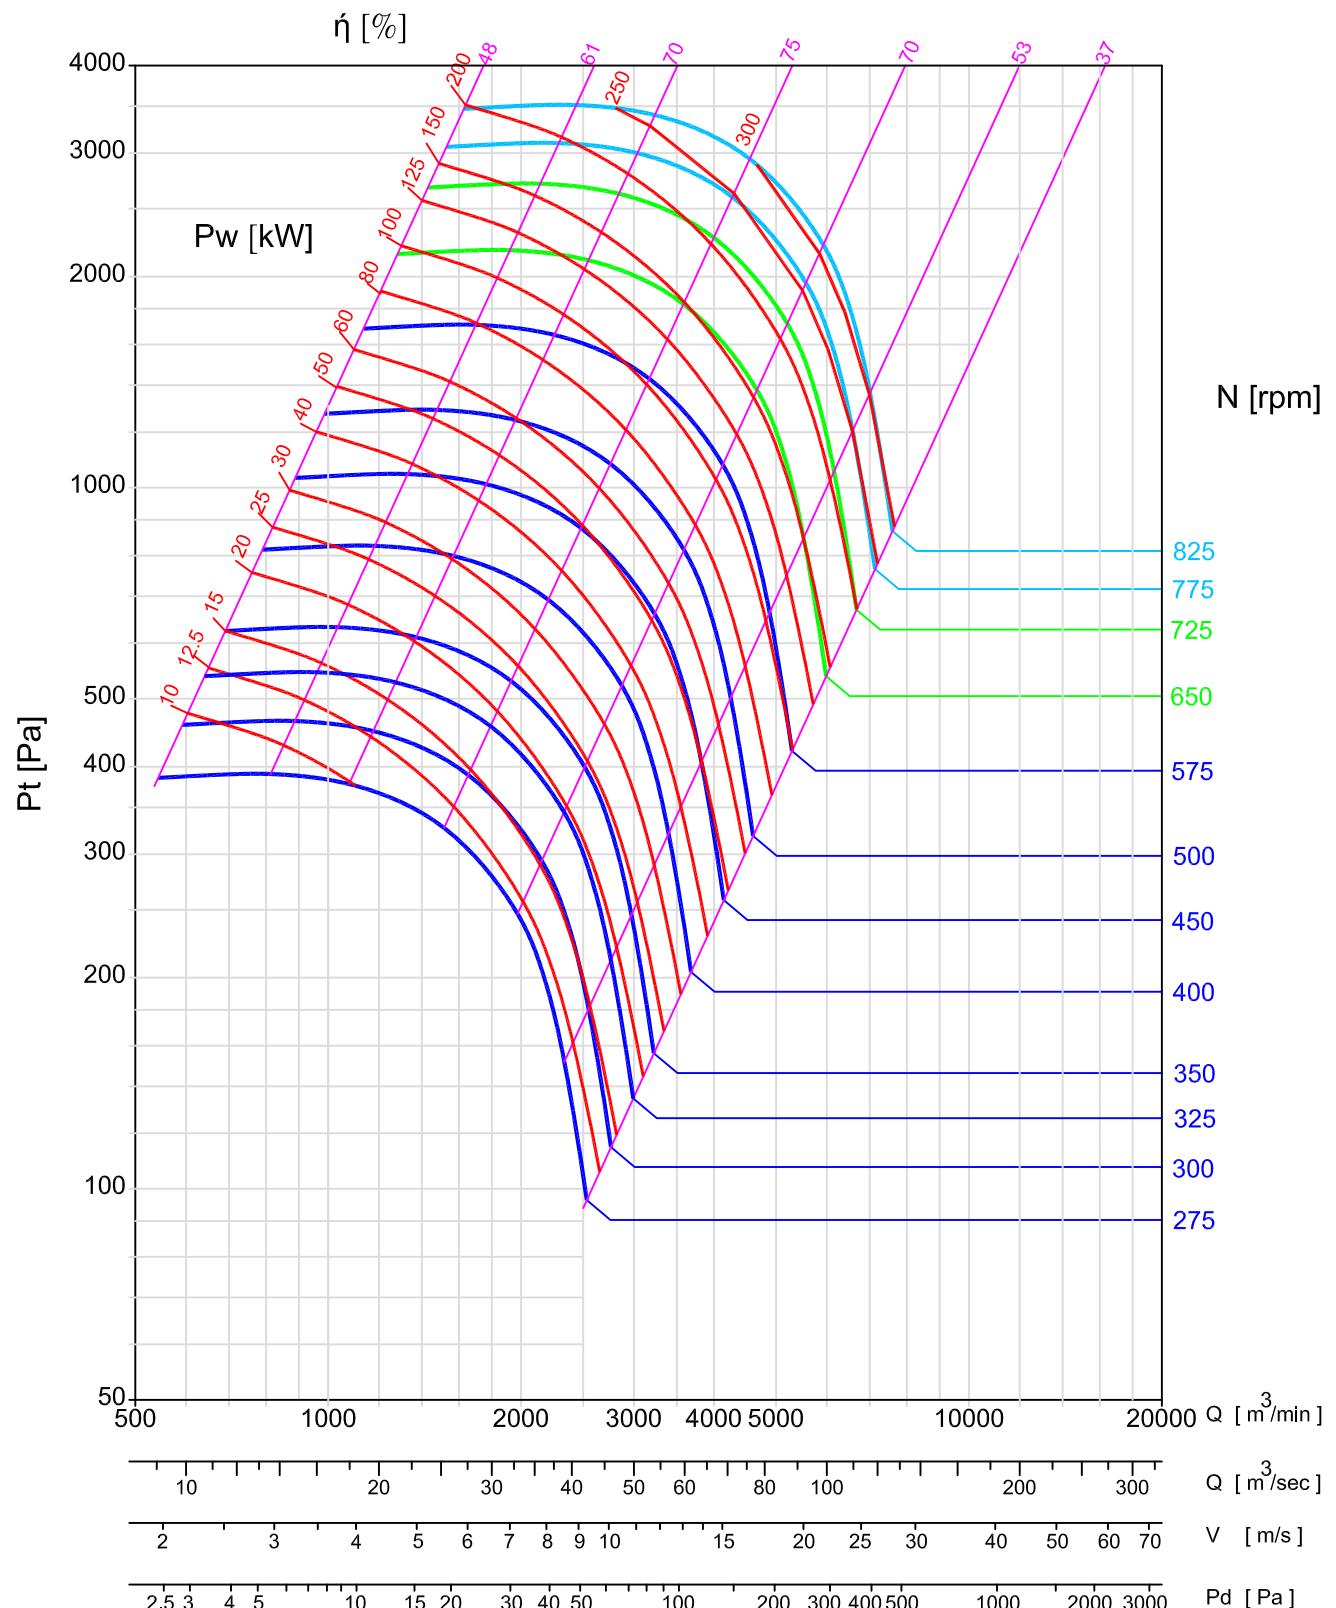


-Performance certified is for installation type B - Free inlet, Ducted outlet. Performance ratings do not include the effects of appurtenances (accessories). Power rating kW does not include transmission losses.



BCZ2000


WHEEL : 2000 mm OUTLET: 2850 x 2000 mm(WxH,inside)
: 5.7 m²(inside area)

FLOWTECH 

Op. Limit	CL.I	CL.II	CL.III
Type	H	V	X
M. kW	125	300	400
M. RPM	500	650	750

FEG:80

$\rho = 1.2 \text{ kg/m}^3$

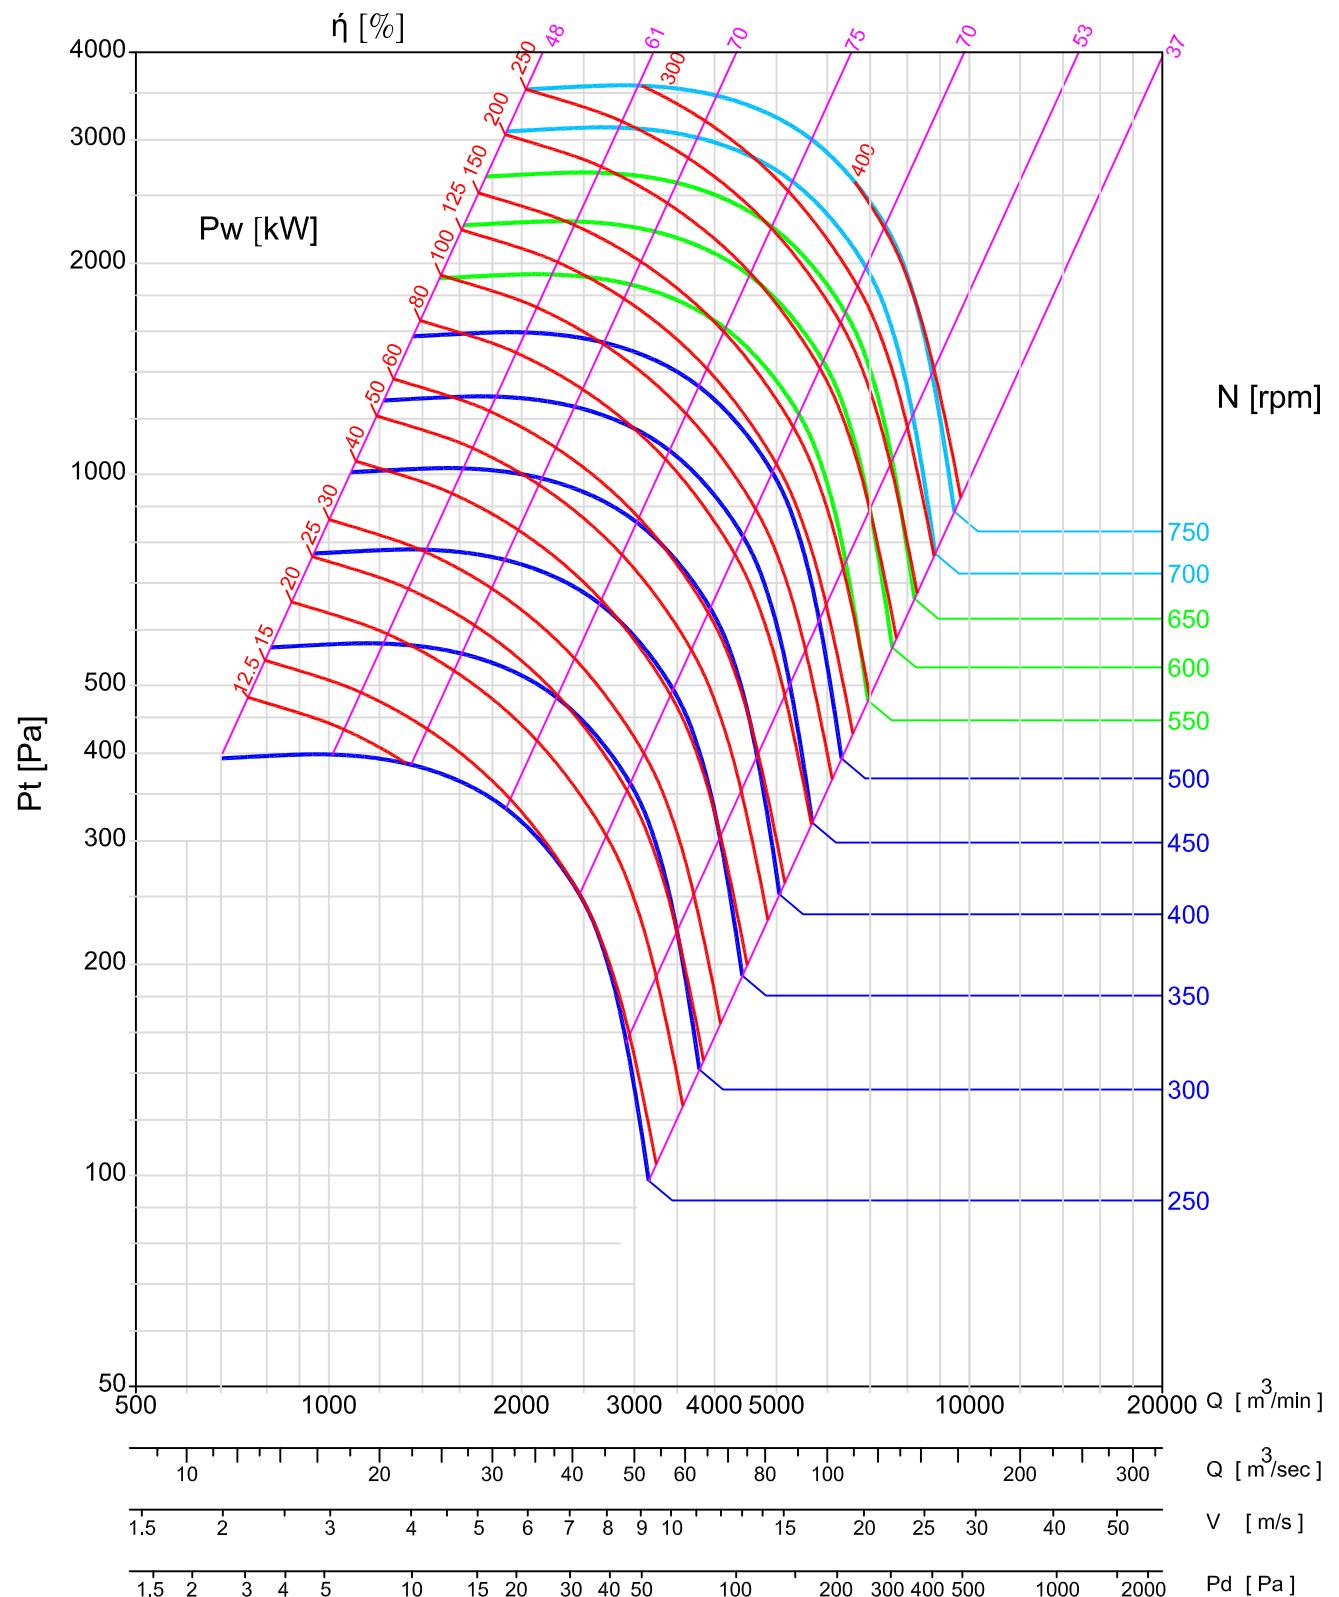



BCZ Series




Sound Data



BCZ Series

Sound Performance Data

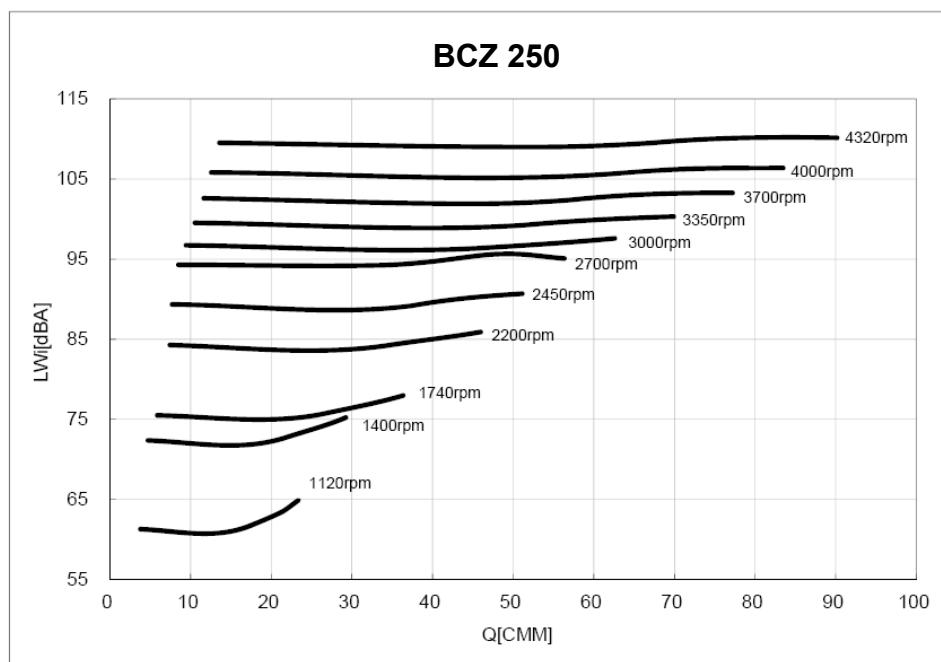

Sound Power [dB Ref 10-12 watts] %POF=(CMM*3531.5 / RPM x 0.74)

Inlet Sound Power, Lwi [Octave Band]

RPM	%POF	LwiA [dBA]								
		1 63	2 125	3 250	4 500	5 1k	6 2k	7 4k	8 8k	LwiA [dBA]
1120	100	73	68	68	63	58	53	48	41	65
	87	74	67	66	60	57	51	46	39	63
	58	74	67	64	58	53	48	44	39	61
	16	75	68	65	58	53	48	44	39	62
1740	100	86	84	81	76	70	66	61	55	78
	87	87	84	79	75	69	64	59	53	77
	58	87	84	77	73	66	61	56	52	75
	16	88	85	78	73	66	60	56	52	76
2450	100	109	98	90	89	82	76	71	66	91
	85	110	99	90	87	79	74	69	64	90
	60	108	99	89	85	76	71	66	62	89
	15	108	100	90	86	76	71	65	62	89
3000	100	117	104	97	96	88	82	77	72	98
	85	118	105	97	93	85	80	74	70	97
	60	117	105	97	92	83	77	72	68	96
	15	117	106	98	93	83	77	71	67	97
3700	100	121	111	106	100	94	87	83	78	103
	85	122	111	106	99	93	86	81	76	103
	60	121	109	106	97	91	83	78	73	102
	15	121	110	107	98	91	83	77	73	103
4320	100	124	122	112	105	100	93	87	82	110
	85	125	122	113	104	98	90	86	80	110
	60	124	120	113	103	97	88	82	78	109
	15	124	120	114	104	97	88	82	77	110

The sound power level ratings shown are in decibels, referred to 10^{-12} watts, calculated per AMCA International Standard 301. Values shown are for inlet Lwi, and inlet LwiA sound power levels for installation Type B: free inlet, ducted outlet. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.




BCZ Series

Sound Performance Data



BCZ 280

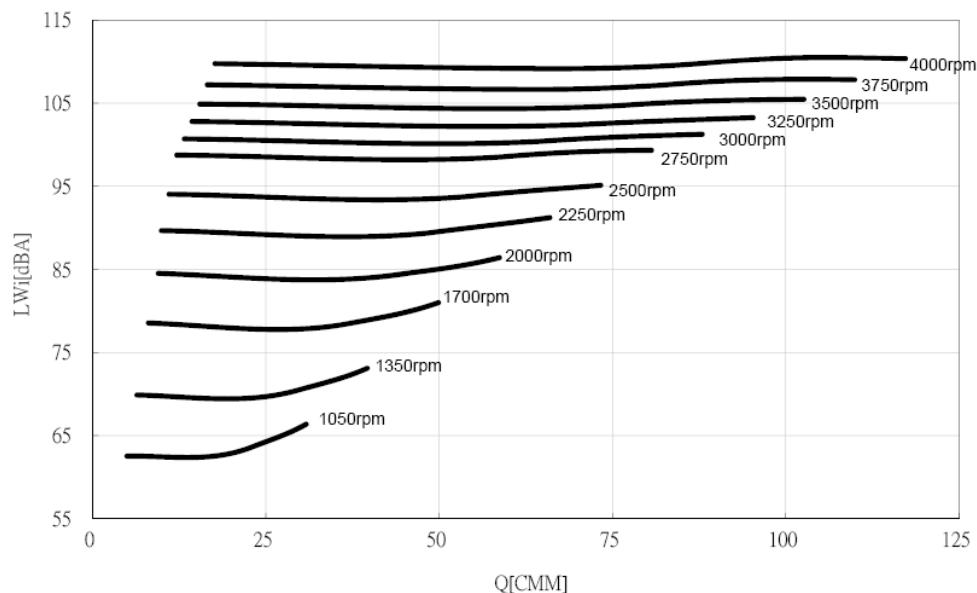

Sound Power [dB Ref 10-12 watts] %POF=(CMM*3531.5 / RPM x 1.03)

Inlet Sound Power, Lwi [Octave Band]


RPM	%POF	1	2	3	4	5	6	7	8	LwiA [dBA]
1050	100	75	71	69	64	60	55	49	42	67
	87	76	70	68	62	58	53	48	41	65
	58	76	69	66	59	55	50	46	41	63
	16	77	70	66	59	54	49	46	41	63
1700	100	90	87	84	79	73	69	64	57	81
	87	91	87	82	77	72	67	62	56	80
	58	91	87	80	75	69	64	59	55	78
	16	92	88	81	76	69	63	59	55	79
2250	100	108	98	92	90	82	77	72	67	91
	85	108	99	91	88	80	75	70	65	90
	60	107	99	90	86	77	72	67	63	89
	15	107	100	91	87	77	71	66	63	90
2750	100	120	107	97	97	89	83	77	73	99
	85	121	108	97	95	85	81	75	71	99
	60	120	108	97	93	83	78	73	69	98
	15	120	109	98	94	83	78	71	68	99
3250	100	123	110	104	101	93	87	82	78	103
	85	124	111	104	98	91	86	80	76	103
	60	123	111	104	97	90	83	77	73	102
	15	123	112	105	98	90	83	77	73	103
3750	100	126	117	110	104	98	91	87	82	108
	85	127	116	111	103	97	90	85	80	108
	60	126	114	111	101	95	87	82	77	107
	15	126	114	112	102	95	87	81	77	107

The sound power level ratings shown are in decibels, referred to 10^{-12} watts, calculated per AMCA International Standard 301. Values shown are for inlet Lwi, and inlet LwiA sound power levels for installation Type B: free inlet, ducted outlet. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.



BCZ Series

Sound Performance Data

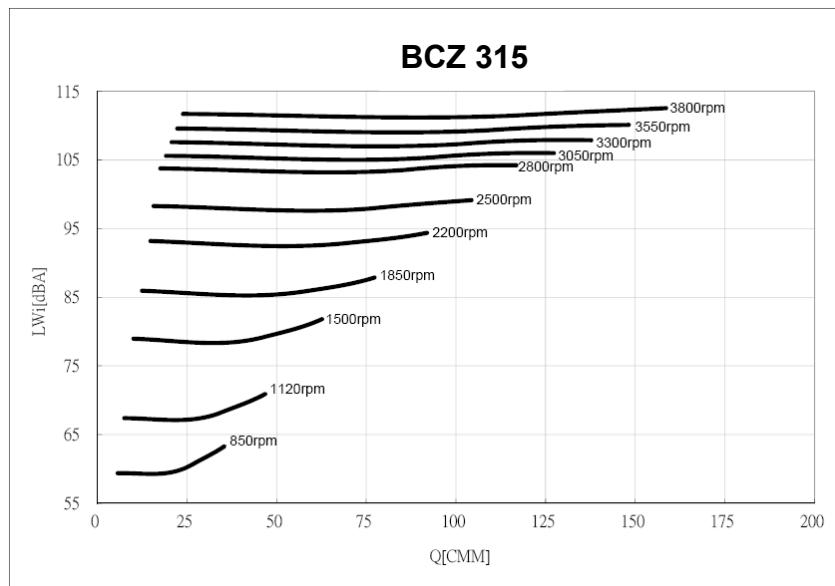**Sound Power [dB Ref 10-12 watts] %POF=(CMM*3531.5 / RPM x1.47)****Inlet Sound Power, Lwi [Octave Band]**


RPM	%POF	LwiA [dBA]								
		1	2	3	4	5	6	7	8	LwiA
850	100	71	69	65	61	57	53	46	39	64
	87	71	67	64	60	55	51	45	38	62
	58	71	66	62	57	52	48	43	38	60
	16	72	66	62	57	51	48	43	38	60
1500	100	93	86	86	79	74	69	64	57	82
	87	94	86	84	77	73	67	62	56	81
	58	94	86	82	75	69	64	59	55	79
	16	95	87	83	75	69	63	59	55	79
2200	100	111	102	95	93	85	80	75	70	95
	87	111	103	94	91	83	78	73	68	94
	58	110	103	94	89	80	75	70	66	93
	16	110	104	95	90	80	74	69	66	93
2800	100	125	112	102	102	93	87	82	78	104
	85	126	113	102	100	90	86	79	75	104
	60	125	113	102	98	88	82	77	73	103
	15	125	114	103	99	88	82	76	73	104
3300	100	128	115	109	105	97	91	86	82	108
	85	129	116	109	103	96	90	84	80	108
	60	128	116	109	101	94	87	81	77	107
	15	128	117	110	102	94	87	81	77	108
3800	100	130	122	115	109	102	95	91	86	113
	85	131	121	115	107	101	94	89	84	112
	60	130	120	115	106	99	91	86	81	111
	15	130	120	116	107	99	91	85	81	112

The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA International Standard 301. Values shown are for inlet Lwi, and inlet LwiA sound power levels for installation Type B: free inlet, ducted outlet. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.



BCZ Series

Sound Performance Data

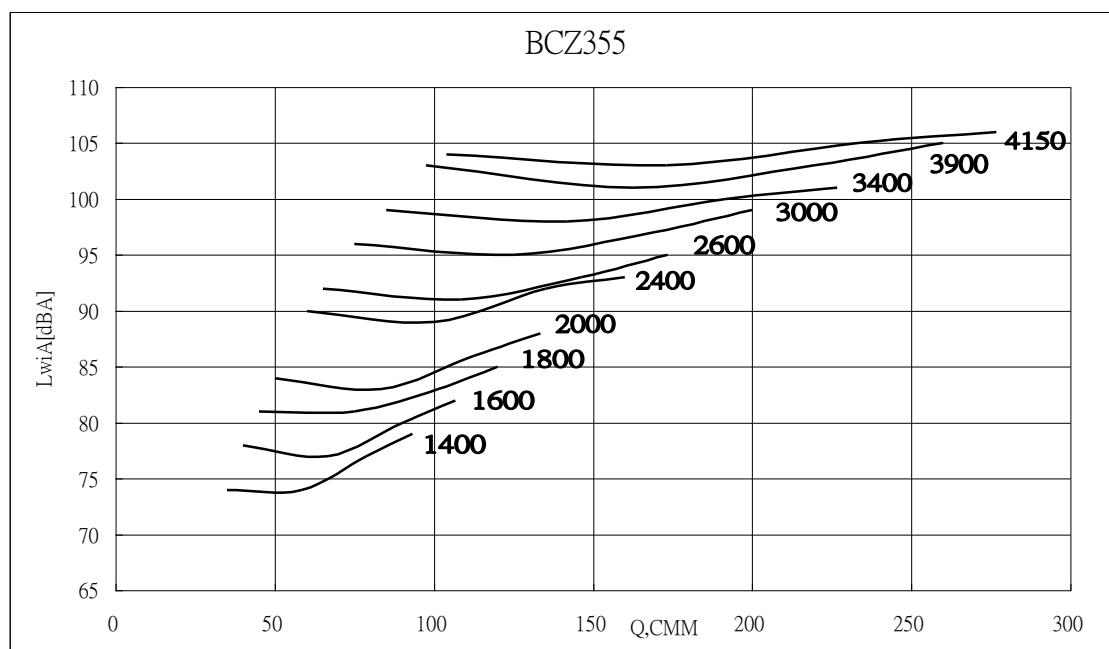Sound Power [dB Ref 10-12 watts] Inlet Sound Power, Lwi [Octave Band]

RPM	Q cmm	Ps Pa	LwiA [dB(A)]								
			1 63	2 125	3 250	4 500	5 1k	6 2k	7 4k	8 8k	LwiA [dB(A)]
1600	97.0	146.6	94	84	77	79	76	73	70	72	82
	88.9	220.8	93	84	78	78	76	73	69	70	82
	80.8	296.1	92	84	79	78	76	73	69	68	82
	72.7	362.4	91	84	80	77	75	73	69	66	81
2000	121.2	229.1	100	94	83	83	84	78	77	74	88
	111.1	345.0	99	93	84	83	83	78	76	73	88
	101.0	462.6	99	92	85	83	82	78	76	72	88
	90.9	566.3	98	91	85	83	81	79	75	71	87
2400	145.4	329.9	104	102	87	85	90	81	83	75	94
	133.3	496.8	104	100	88	86	88	82	82	75	93
	121.2	666.2	104	99	89	87	87	83	81	75	92
	109.1	815.4	99	93	84	83	83	78	76	73	88
3000	181.8	515.5	109	108	97	91	93	89	87	83	99
	166.6	776.3	109	107	97	91	92	89	87	82	98
	151.5	1040.9	109	105	97	92	91	89	86	82	98
	136.3	1274.1	109	104	97	93	91	89	86	82	98
3400	206.0	662.1	112	111	102	94	95	93	90	87	102
	188.9	997.1	112	110	102	95	95	93	90	86	102
	171.7	1337.0	112	109	101	95	94	92	90	86	101
	154.5	1636.5	112	108	101	96	94	92	90	85	101
4150	251.5	986.4	116	116	111	99	98	100	94	93	108
	230.5	1485.4	116	116	110	100	99	99	94	92	108
	209.6	1991.9	116	115	108	100	99	98	94	92	107
	188.6	2438.1	116	115	107	101	99	97	95	91	107

The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA International Standard 301. Values shown are for inlet Lwi, and inlet LwiA sound power levels for installation Type B: free inlet, ducted outlet. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.




BCZ Series

Sound Performance Data



BCZ400

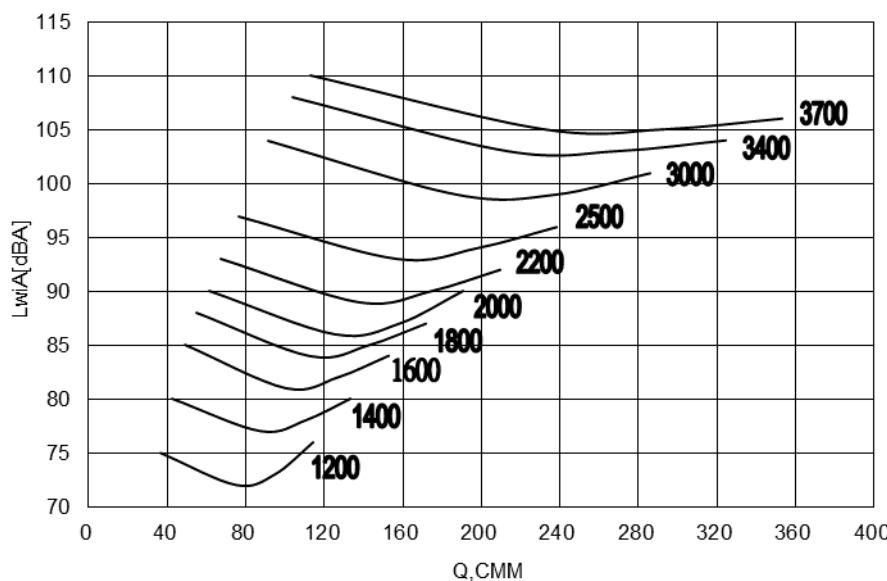

Sound Power [dB Ref 10-12 watts]

Inlet Sound Power, Lwi [Octave Band]


RPM	Q cmm	Ps Pa	Octave Band								LwiA [dBA]
			1 63	2 125	3 250	4 500	5 1k	6 2k	7 4k	8 8k	
1200	107.5	135.7	77	79	79	73	70	67	63	60	77
	97.1	195.6	76	79	79	71	68	65	60	54	75
	75.9	285.7	77	80	80	70	67	64	60	57	75
	65.4	316.7	81	83	83	71	66	62	59	57	77
1600	143.3	241.3	82	85	86	80	77	74	71	66	84
	129.5	347.7	81	84	86	79	76	73	69	63	83
	101.1	507.9	81	85	86	77	74	71	68	65	82
	87.3	563.0	85	88	89	79	74	70	67	64	84
2000	179.2	377.0	86	89	90	86	83	80	78	72	89
	161.8	543.2	85	88	90	85	82	79	76	70	88
	126.4	793.5	84	89	91	83	80	77	74	70	87
	109.1	879.7	87	92	93	84	80	76	73	70	88
2500	223.9	589.1	90	93	95	95	89	86	83	78	96
	202.3	848.8	89	91	94	95	87	84	82	76	95
	158.0	1239.9	89	93	96	96	85	82	79	76	95
	136.4	1374.6	92	95	98	98	86	82	79	75	97
3000	268.7	848.3	94	96	99	99	94	90	88	84	100
	242.7	1222.2	93	95	98	99	92	89	86	82	100
	189.6	1785.5	93	95	99	100	90	87	84	81	100
	163.6	1979.4	96	98	101	102	91	87	83	80	101
3700	331.4	1290.4	99	99	103	104	99	96	93	90	105
	299.4	1859.1	98	98	101	104	98	95	92	88	105
	233.9	2715.9	98	98	103	105	96	93	90	87	105
	201.8	3010.9	101	101	106	107	97	93	89	86	106

The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA International Standard 301. Values shown are for inlet Lwi, and inlet LwiA sound power levels for installation Type B: free inlet, ducted outlet. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.



BCZ Series

Sound Performance Data

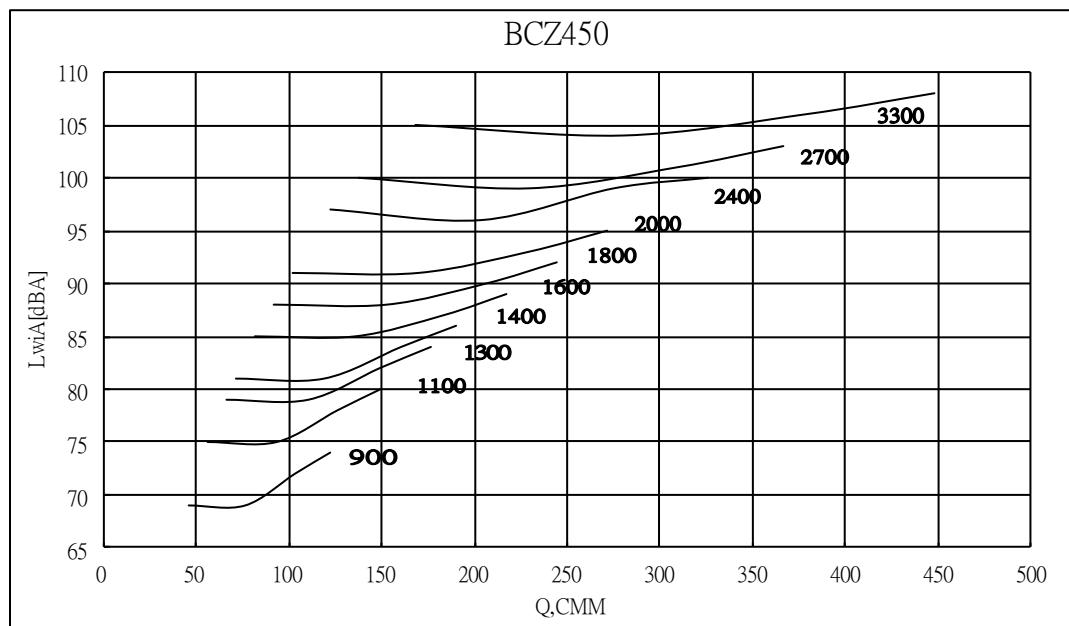**Sound Power [dB Ref 10-12 watts] Inlet Sound Power, Lwi [Octave Band]**


RPM	Q cmm	Ps Pa	Lwi [dBA]								
			1 63	2 125	3 250	4 500	5 1k	6 2k	7 4k	8 8k	
1100	135.8	112.1	91	77	76	79	72	72	65	77	82
	124.5	168.3	89	78	77	78	72	71	65	72	80
	113.1	225.4	88	79	77	76	73	70	65	68	79
	101.8	275.6	86	80	78	75	73	70	65	65	79
1300	160.5	156.6	96	83	79	83	76	76	70	78	85
	147.1	235.1	95	83	80	82	76	76	70	75	84
	133.7	314.8	93	84	81	80	77	75	70	71	83
	120.3	385.0	92	84	82	79	78	75	70	69	83
1600	160.5	156.6	102	92	84	87	83	80	77	81	90
	147.1	235.1	101	92	84	86	83	80	77	79	89
	133.7	314.8	100	92	85	86	83	80	77	78	89
	120.3	385.0	100	91	85	86	83	80	77	77	89
2000	246.9	370.5	107	101	90	90	91	85	84	81	95
	226.3	556.4	107	100	91	90	90	85	84	80	95
	205.7	745.0	106	99	92	90	89	86	83	79	95
	185.1	911.2	106	98	92	90	88	86	82	78	94
2700	333.3	675.3	114	112	99	95	99	92	92	86	103
	305.5	1014.0	114	111	100	96	98	93	92	86	103
	277.7	1357.9	114	109	100	97	96	93	91	86	102
	249.9	1660.7	114	108	101	98	95	94	91	86	102
3300	407.3	1008.8	119	117	108	100	102	99	96	93	108
	373.4	1514.7	119	116	108	101	101	99	96	93	108
	339.4	2028.4	119	115	108	102	101	99	96	92	108
	305.5	2480.8	119	115	107	103	100	98	96	92	108

The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA International Standard 301. Values shown are for inlet Lwi, and inlet LwiA sound power levels for installation Type B: free inlet, ducted outlet. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.



BCZ Series

Sound Performance Data

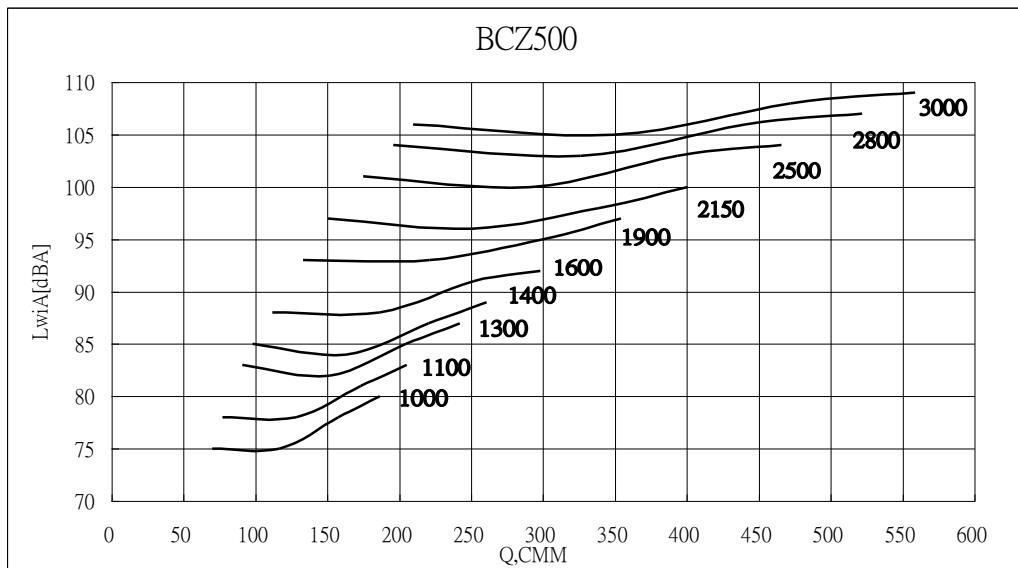
Sound Power [dB Ref 10-12 watts] Inlet Sound Power, Lwi [Octave Band]


RPM	Q cmm	Ps Pa	LwiA [dBA]								
			1 63	2 125	3 250	4 500	5 1k	6 2k	7 4k	8 8k	
1100	217.1	56.5	82	88	84	79	76	73	66	72	83
	201.6	141.7	81	88	83	77	75	71	65	64	81
	186.1	217.3	79	87	82	76	73	69	63	62	80
	170.6	282.6	78	85	80	75	72	67	61	56	78
1300	256.6	78.9	86	90	92	83	81	77	71	74	88
	238.3	198	85	90	91	82	79	75	70	68	87
	220	303.5	84	89	91	81	78	74	69	67	86
	201.6	394.8	83	86	89	80	76	72	66	64	84
1600	315.8	119.5	91	93	96	89	86	83	78	76	93
	293.3	299.9	91	92	96	88	84	81	76	73	92
	270.7	459.7	90	91	95	87	83	80	75	72	91
	248.1	598	90	89	93	86	82	78	72	69	89
2150	424.4	215.7	98	97	103	98	93	91	87	80	101
	394.1	541.5	98	95	102	97	92	89	85	79	99
	363.8	830.1	99	94	102	96	91	88	83	78	99
	333.5	1079.8	99	92	99	95	89	87	81	76	97
2500	493.5	291.7	102	100	105	106	97	95	91	85	106
	458.2	732.1	102	99	104	106	96	93	89	84	105
	423	1122.4	102	98	103	105	95	92	88	82	104
	387.7	1459.9	103	97	101	103	94	90	86	80	103
3000	592.2	420	106	105	107	110	103	99	96	91	110
	549.9	1054.3	106	104	106	110	102	98	94	89	110
	507.6	1616.2	106	103	105	109	100	96	93	88	108
	465.3	2102.3	107	103	103	107	99	95	91	86	107

The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA International Standard 301. Values shown are for inlet Lwi, and inlet LwiA sound power levels for installation Type B: free inlet, ducted outlet. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.



BCZ Series

Sound Performance Data

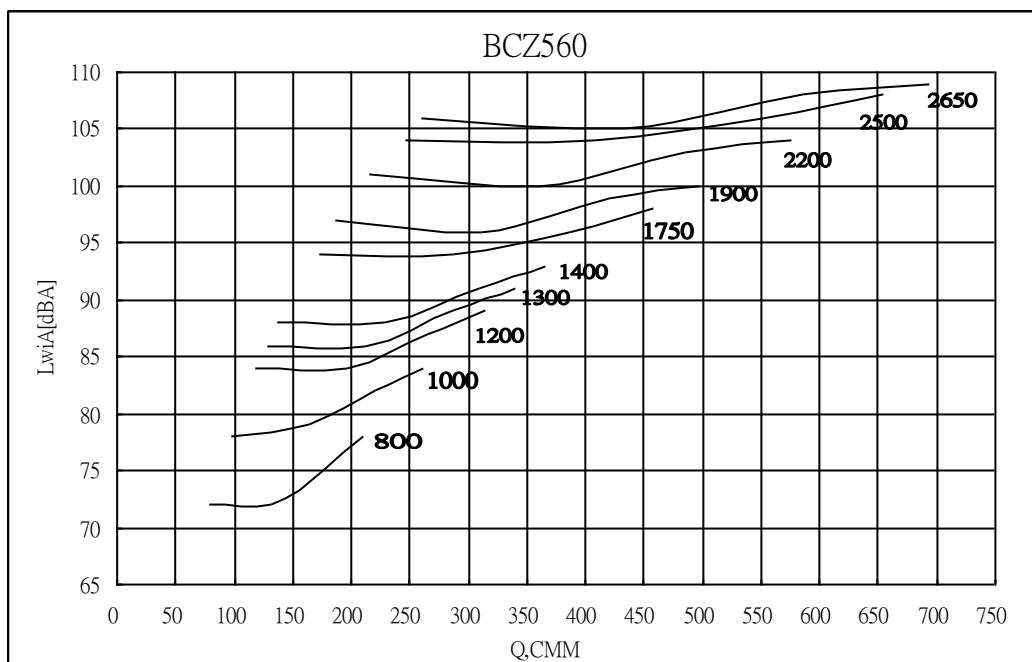
Sound Power [dB Ref 10-12 watts] Inlet Sound Power, Lwi [Octave Band]


RPM	%POF	LwiA [dBA]									
		1	2	3	4	5	6	7	8	LwiA	
1000	94	85	87	84	81	77	77	68	55	84	
	79	85	86	83	79	76	73	63	51	82	
	59	86	84	79	75	73	70	62	57	79	
	35	87	87	81	74	72	68	63	59	78	
1200	94	90	89	91	86	82	81	76	62	89	
	79	90	88	89	85	80	78	70	59	87	
	59	91	87	87	81	77	75	67	62	84	
	35	91	90	88	81	76	73	67	64	84	
1400	94	94	91	95	90	85	84	82	68	93	
	79	95	90	93	89	84	82	76	65	91	
	59	95	90	91	85	80	79	73	67	88	
	35	97	92	92	85	79	77	72	68	88	
1750	94	98	97	99	96	91	89	88	78	98	
	79	99	97	98	94	90	88	84	73	96	
	59	99	97	96	91	86	85	80	74	94	
	35	102	98	98	91	85	83	79	74	94	
2200	94	104	102	103	103	99	95	94	88	104	
	79	105	102	102	101	97	93	91	82	103	
	59	105	103	101	98	93	90	87	80	100	
	35	108	104	103	99	93	89	86	80	101	
2650	94	110	107	105	108	104	99	98	95	109	
	79	110	107	104	107	102	97	96	89	108	
	59	110	107	103	104	99	94	93	86	105	
	35	112	109	106	106	98	93	91	85	106	

The sound power level ratings shown are in decibels, referred to 10^{-12} watts, calculated per AMCA International Standard 301. Values shown are for inlet Lwi, and inlet LwiA sound power levels for installation Type B: free inlet, ducted outlet. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.



BCZ Series

Sound Performance Data

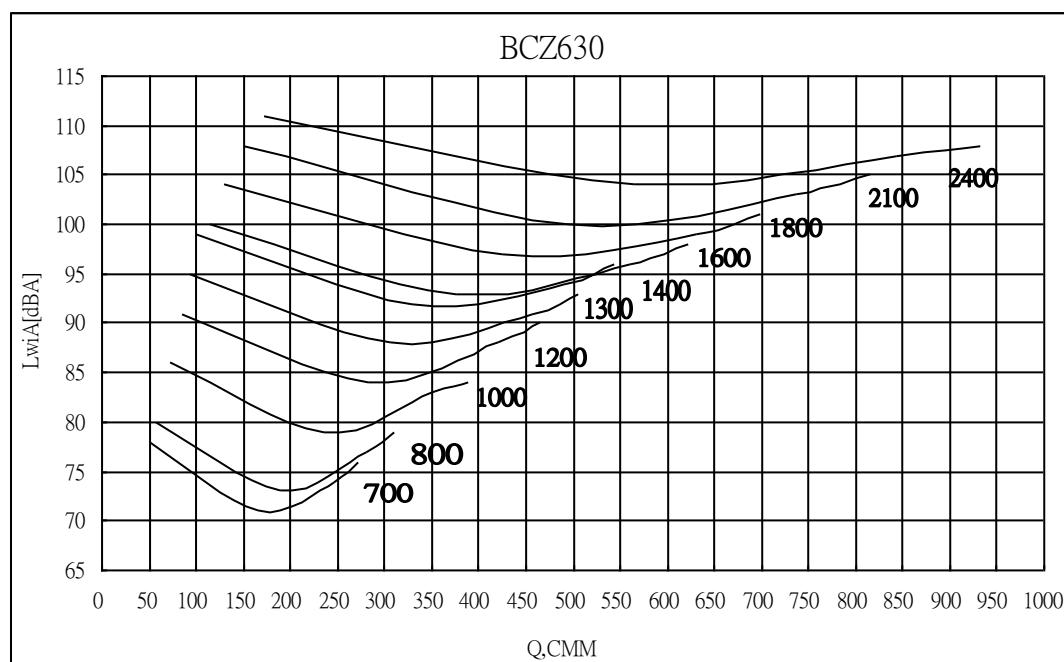

Sound Power [dB Ref 10-12 watts] Inlet Sound Power, Lwi [Octave Band]


RPM	%POF	LwiA								
		1	2	3	4	5	6	7	8	[dBA]
800	93	77	85	81	76	72	69	63	57	79
	84	75	84	79	74	70	66	61	57	77
	57	74	83	74	70	66	62	59	56	73
	17	86	90	83	75	71	66	61	56	80
1000	93	83	90	86	82	79	75	70	64	84
	84	81	88	85	80	77	72	68	64	83
	57	80	87	80	75	72	69	65	62	79
	17	91	95	89	81	78	73	67	63	86
1200	93	90	93	92	87	84	80	75	69	90
	84	87	92	91	86	82	77	73	69	88
	57	85	91	88	81	77	74	70	67	84
	17	95	100	96	88	82	78	73	68	91
1400	93	95	90	99	95	88	84	80	74	96
	84	93	88	98	93	86	82	77	73	94
	57	90	87	98	88	81	78	74	71	92
	17	100	98	105	98	86	83	77	72	99
1800	93	102	95	104	99	94	91	87	81	101
	84	100	93	103	98	93	89	84	80	99
	57	97	92	102	93	88	84	81	77	97
	17	106	103	110	102	93	90	85	79	104
2400	93	109	105	107	107	102	99	95	90	108
	84	107	103	106	106	101	97	92	88	107
	57	103	100	105	103	96	92	89	85	104
	17	112	111	114	111	103	98	93	88	111

The sound power level ratings shown are in decibels, referred to 10^{-12} watts, calculated per AMCA International Standard 301. Values shown are for inlet Lwi, and inlet LwiA sound power levels for installation Type B: free inlet, ducted outlet. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.



BCZ Series

Sound Performance Data

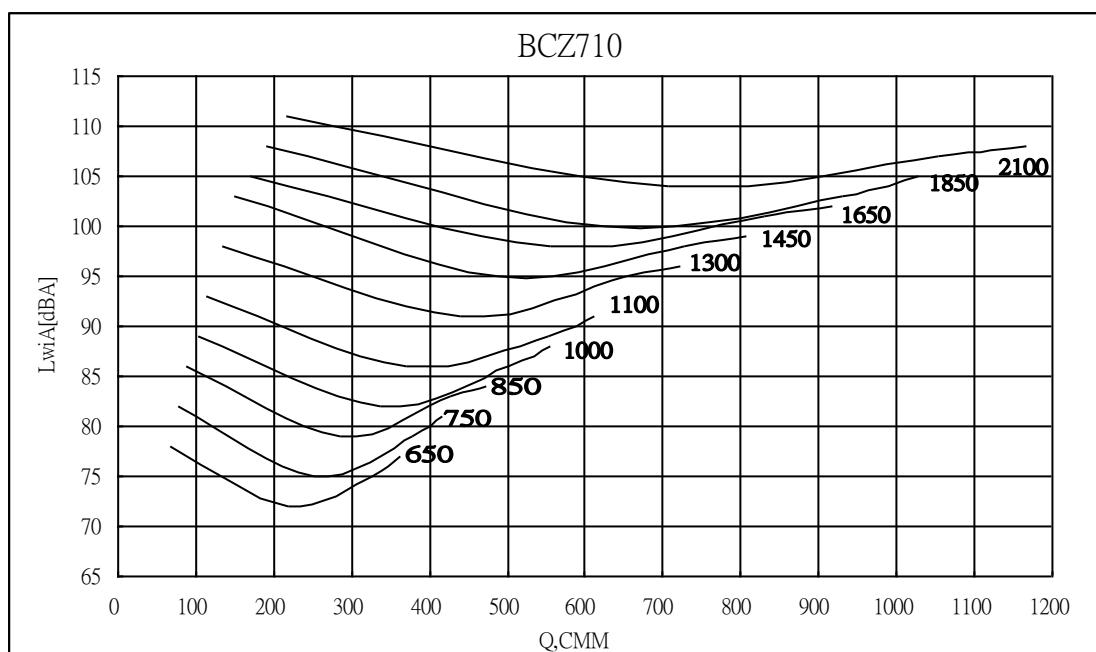**Sound Power [dB Ref 10⁻¹² watts] Inlet Sound Power, Lwi [Octave Band]**


RPM	%POF	LwiA							
		1	2	3	4	5	6	7	8
750	93	80	87	83	78	74	70	64	59
	84	78	86	82	76	72	68	63	59
	57	77	85	76	72	68	64	61	58
	17	88	93	86	77	73	68	63	58
850	93	82	91	87	81	78	74	68	63
	84	80	90	85	80	76	71	67	62
	57	79	90	80	75	71	68	64	61
	17	90	97	89	80	77	72	66	62
1000	93	87	93	90	85	82	78	73	68
	84	85	92	88	84	80	75	71	67
	57	83	91	84	79	76	72	69	66
	17	94	99	92	85	81	76	71	66
1300	93	96	95	99	94	89	85	81	75
	84	94	93	98	93	88	83	79	74
	57	92	92	97	88	83	79	76	72
	17	101	102	104	96	88	84	79	74
1650	93	104	97	105	101	95	92	88	82
	84	101	95	104	99	94	90	85	81
	57	98	94	103	94	89	86	82	78
	17	107	105	110	103	94	91	86	80
2100	93	110	104	110	107	101	99	95	90
	84	108	102	109	105	100	97	92	88
	57	104	100	109	101	95	92	89	85
	17	113	111	116	110	101	98	93	88

The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA International Standard 301. Values shown are for inlet Lwi, and inlet LwiA sound power levels for installation Type B: free inlet, ducted outlet. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.



BCZ Series

Sound Performance Data

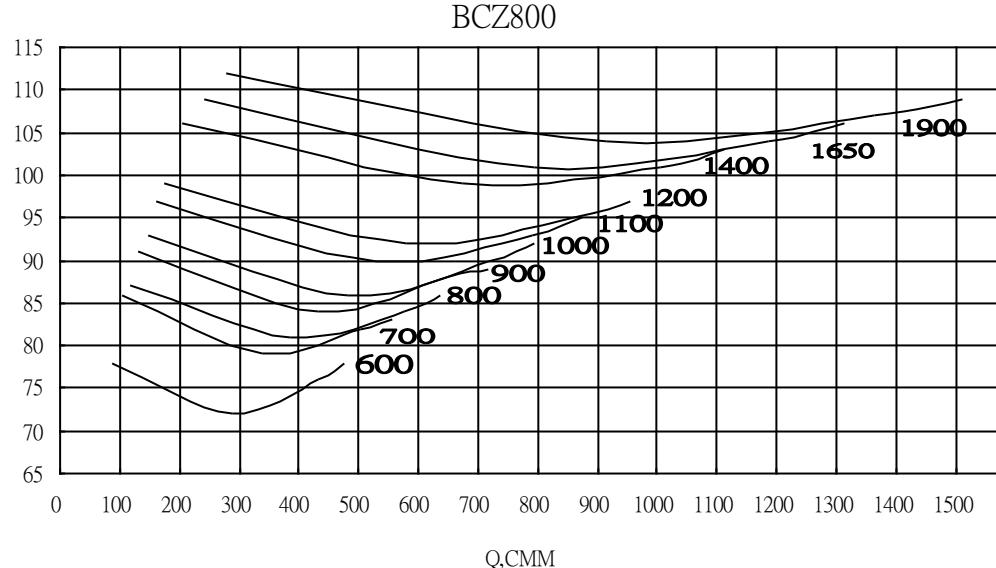FLOWTECH

Sound Power [dB Ref 10-12 watts] Inlet Sound Power, Lwi [Octave Band]


RPM	%POF	LwiA [dBA]								
		1	2	3	4	5	6	7	8	LwiA
63	125	250	500	1k	2k	4k	8k	[dBA]		
800	93	85	92	88	83	80	76	70	64	86
	84	83	91	86	82	78	73	68	64	84
	56	82	90	81	77	73	70	66	63	81
	17	93	98	90	82	79	73	68	64	87
1000	93	91	97	94	89	86	82	77	71	92
	84	89	96	92	87	84	79	75	71	90
	56	87	94	87	82	79	76	72	69	86
	17	98	102	96	88	85	80	75	70	93
1200	93	97	100	99	95	91	87	83	77	97
	84	95	99	98	93	89	84	80	76	95
	56	93	98	95	88	84	81	77	74	92
	17	103	107	103	95	90	85	80	75	99
1400	93	102	97	106	102	95	91	87	81	103
	84	100	96	106	100	93	89	85	80	101
	56	98	94	106	95	88	85	81	78	99
	17	107	105	112	105	94	90	85	79	106
1650	93	107	100	109	104	99	96	92	86	106
	84	105	98	108	102	98	94	89	84	104
	56	102	97	107	97	93	89	86	82	101
	17	111	109	114	107	98	95	89	84	109
1900	93	111	104	111	107	103	100	96	90	109
	84	109	102	110	106	101	98	93	89	107
	56	105	101	109	101	96	93	89	86	104
	17	114	112	117	110	102	99	94	88	112

The sound power level ratings shown are in decibels, referred to 10^{-12} watts, calculated per AMCA International Standard 301. Values shown are for inlet Lwi, and inlet LwiA sound power levels for installation Type B: free inlet, ducted outlet. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.



BCZ Series

Sound Performance Data

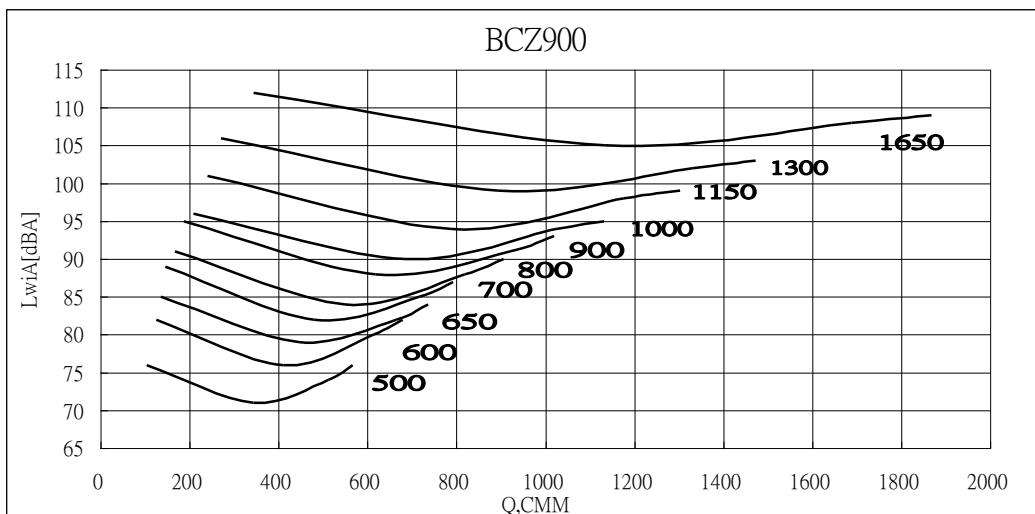FLOWTECH

Sound Power [dB Ref 10-12 watts] Inlet Sound Power, Lwi [Octave Band]


RPM	%POF	LwiA[dBA]									
		1	2	3	4	5	6	7	8	8k	[dBA]
600	93	88	88	83	79	75	71	65	59	59	82
	84	87	87	81	78	73	69	64	60	60	80
	57	87	84	76	73	69	66	63	59	59	76
	17	95	92	84	78	74	69	64	59	59	82
700	93	86	95	90	83	80	76	70	64	64	87
	84	84	94	88	82	77	73	68	64	64	85
	57	83	94	83	77	74	70	66	63	63	82
	17	94	101	93	82	78	73	68	63	63	89
800	93	88	96	92	87	83	79	74	68	68	90
	84	86	95	90	85	81	77	72	68	68	88
	57	85	94	85	81	77	73	70	67	67	84
	17	96	101	94	86	82	77	72	67	67	91
900	93	91	100	95	90	86	83	77	72	72	93
	84	89	99	93	88	85	80	75	71	71	91
	57	88	98	89	84	80	76	73	70	70	88
	17	99	105	98	89	85	80	75	71	71	95
1000	93	94	100	97	92	89	85	81	75	75	95
	84	92	99	95	91	88	83	79	74	74	94
	57	91	98	91	86	83	79	76	73	73	90
	17	102	106	100	92	88	84	78	74	74	96
1300	93	104	102	106	102	96	93	89	82	82	103
	84	101	100	105	100	95	90	86	81	81	102
	57	99	99	104	95	90	87	83	80	80	99
	17	109	109	111	104	95	91	86	81	81	106
1650	84	111	104	112	108	103	99	95	90	90	109
	57	109	102	111	106	101	97	93	88	88	108
	17	106	101	110	101	96	93	89	86	86	105
	93	115	112	118	110	102	98	93	88	88	112

The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA International Standard 301. Values shown are for inlet Lwi, and inlet LwiA sound power levels for installation Type B: free inlet, ducted outlet. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.



BCZ Series

Sound Performance Data

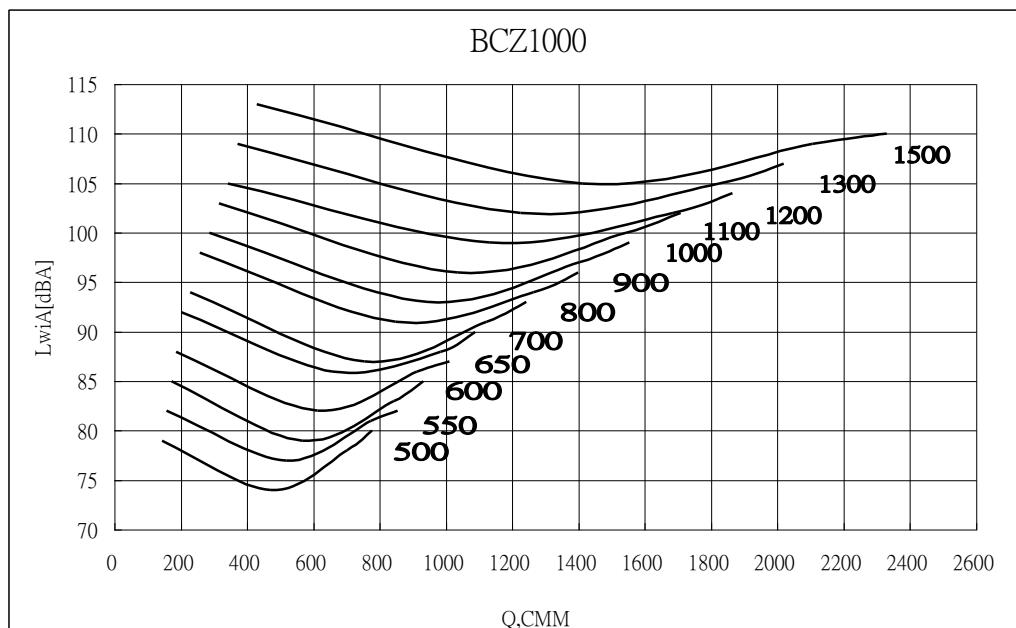

Sound Power [dB Ref 10-12 watts] %POF=(CMM*3531.5 / RPM x 58.59)

Inlet Sound Power, Lwi [Octave Band]


RPM	%POF	LwiA								
		1	2	3	4	5	6	7	8	[dBA]
500	93	89	85	80	78	74	69	63	57	80
	84	87	83	79	76	71	67	63	57	78
	57	86	79	74	71	67	64	61	57	74
	17	94	88	80	77	72	66	62	57	79
600	93	92	91	86	83	79	74	68	62	85
	84	91	90	85	81	76	72	68	63	83
	57	90	87	79	76	73	69	66	62	79
	17	98	95	87	81	77	72	67	62	85
800	93	91	99	95	90	86	83	77	71	93
	84	89	98	93	89	84	80	75	71	91
	57	89	97	88	84	80	76	73	70	87
	17	100	105	97	89	85	80	75	70	94
1000	93	98	104	100	96	93	89	84	78	99
	84	95	102	99	94	91	86	82	78	97
	57	94	101	94	89	86	83	79	76	93
	17	105	109	103	95	92	87	81	77	100
1200	93	104	107	106	101	98	94	89	83	104
	84	102	106	105	100	96	91	87	83	102
	57	99	105	102	95	91	88	84	81	99
	17	110	114	110	102	96	92	87	82	105
1500	93	111	105	113	109	103	100	96	90	110
	84	109	103	112	107	102	98	93	89	109
	57	106	102	111	102	97	94	90	86	105
	17	115	113	118	111	102	99	93	88	113

The sound power level ratings shown are in decibels, referred to 10^{-12} watts, calculated per AMCA International Standard 301. Values shown are for inlet Lwi, and inlet LwiA sound power levels for installation Type B: free inlet, ducted outlet. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.



BCZ Series

Sound Performance Data

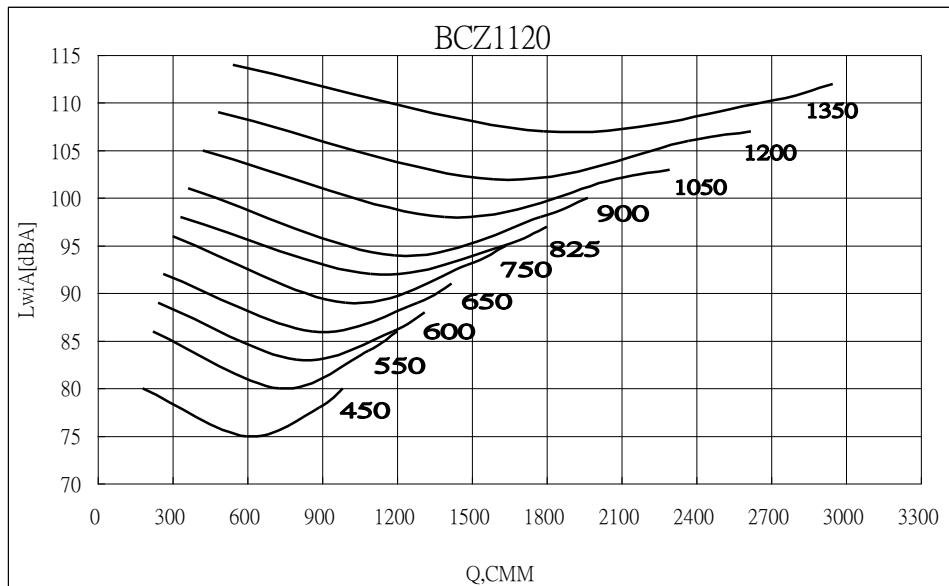

Sound Power [dB Ref 10-12 watts] %POF=(CMM*3531.5 / RPM x 82.32)

Inlet Sound Power, Lwi [Octave Band]


RPM	%POF	LwiA [dBA]								
		1	2	3	4	5	6	7	8	LwiA
450	93	92	87	81	78	74	69	63	57	80
	84	91	85	80	76	71	67	63	58	78
	56	90	80	75	72	68	64	62	57	75
	17	98	90	80	77	72	67	62	57	80
550	93	96	92	86	84	80	75	69	63	86
	84	95	91	85	82	77	73	69	64	84
	56	95	86	80	77	74	70	67	63	80
	17	102	96	86	83	78	73	68	63	86
650	93	93	98	93	88	84	80	74	68	91
	84	92	97	91	86	82	78	73	69	89
	56	91	96	86	82	78	75	71	68	86
	17	101	103	95	87	83	77	73	68	92
825	93	95	104	99	94	91	87	81	76	97
	84	93	103	98	93	89	84	80	75	95
	56	93	102	93	88	84	81	77	74	92
	17	104	109	102	93	90	84	79	75	98
1050	93	103	109	106	100	97	93	89	83	103
	84	100	108	104	99	96	91	87	82	102
	56	99	107	100	94	91	87	84	81	98
	17	109	115	108	100	96	92	86	82	105
1350	93	112	108	115	110	104	100	96	90	112
	84	109	106	114	108	102	98	94	89	110
	56	107	105	113	103	98	94	91	87	107
	17	116	116	120	113	103	99	94	89	114

The sound power level ratings shown are in decibels, referred to 10^{-12} watts, calculated per AMCA International Standard 301. Values shown are for inlet Lwi, and inlet LwiA sound power levels for installation Type B: free inlet, ducted outlet. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.



BCZ Series

Sound Performance Data

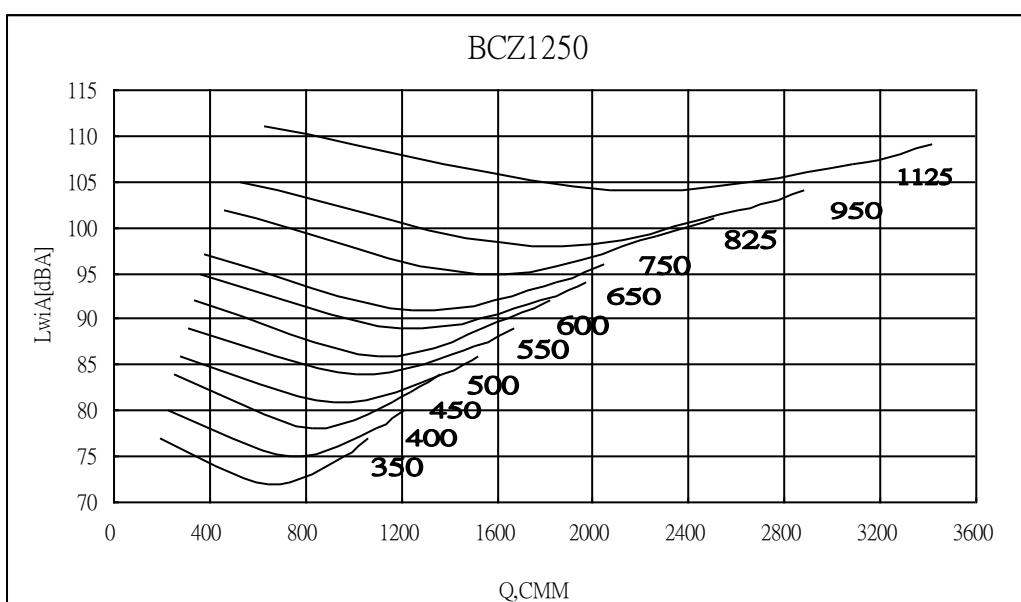

Sound Power [dB Ref 10-12 watts] %POF=(CMM*3531.5 / RPM x 114.44)

Inlet Sound Power, Lwi [Octave Band]


RPM	%POF	LwiA [dBA]								
		1	2	3	4	5	6	7	8	LwiA
400	93	91	87	82	78	74	68	63	57	80
	84	90	85	80	76	71	67	63	58	78
	56	89	80	75	72	68	65	62	58	75
	17	96	89	81	77	72	67	62	57	80
500	93	95	92	87	84	80	75	70	64	86
	84	94	90	86	83	78	74	69	64	84
	56	93	86	81	78	74	71	68	64	81
	17	101	94	87	83	78	73	69	63	86
600	93	98	98	93	89	85	81	75	69	92
	84	97	97	91	88	83	79	74	70	90
	56	97	94	86	83	79	76	73	69	86
	17	105	102	94	88	84	79	74	69	92
750	93	97	105	100	95	91	88	82	76	98
	84	95	103	99	94	89	85	80	76	96
	56	94	102	94	89	85	82	78	75	93
	17	105	110	103	94	90	85	80	75	99
950	93	103	109	106	101	98	94	89	83	104
	84	100	108	104	100	96	91	87	83	102
	56	99	107	99	95	92	88	84	81	98
	17	110	115	108	100	97	92	87	82	105
1125	93	108	115	111	105	103	99	94	88	109
	84	106	114	110	104	101	96	92	88	107
	56	104	115	106	99	96	93	89	86	104
	17	115	122	115	105	102	97	92	87	111

The sound power level ratings shown are in decibels, referred to 10^{-12} watts, calculated per AMCA International Standard 301. Values shown are for inlet Lwi, and inlet LwiA sound power levels for installation Type B: free inlet, ducted outlet. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.



BCZ Series

Sound Performance Data

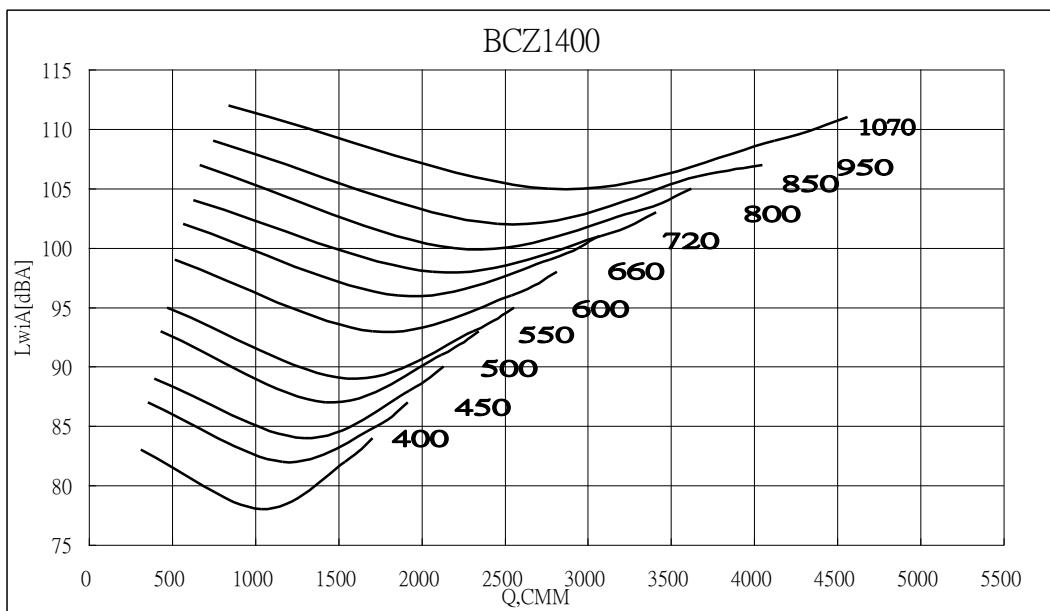FLOWTECH

Sound Power [dB Ref 10-12 watts] %POF=(CMM*3531.5 / RPM x 160.77)
Inlet Sound Power, Lwi [Octave Band]


RPM	%POF	1	2	3	4	5	6	7	8	LwiA
400	93	94	90	85	82	78	72	66	60	84
	84	93	88	84	80	75	70	66	61	82
	57	92	83	79	75	72	68	65	61	78
	17	100	92	84	81	75	70	66	60	83
500	93	99	95	91	88	84	79	73	67	90
	84	98	94	89	86	81	77	73	68	88
	57	97	89	84	81	78	74	71	67	84
	17	105	98	90	87	82	77	72	67	89
600	93	102	102	96	93	89	85	79	73	95
	84	101	100	95	91	86	82	78	73	93
	57	100	97	90	86	83	79	76	72	89
	17	109	105	97	92	87	82	77	72	95
800	93	102	109	105	100	97	93	87	81	103
	84	100	108	103	99	95	90	85	81	101
	57	99	107	98	94	90	87	83	80	98
	17	110	115	107	99	96	90	85	81	104
950	93	106	113	109	105	101	98	92	87	107
	84	104	112	108	103	99	95	91	86	106
	57	103	111	103	98	95	91	88	85	102
	17	114	119	112	104	100	95	90	86	109
1070	93	110	116	113	108	105	101	96	90	111
	84	108	115	111	106	103	98	94	90	109
	57	106	115	107	101	98	95	91	88	105
	17	117	122	116	107	104	99	94	89	112

The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA International Standard 301. Values shown are for inlet Lwi, and inlet LwiA sound power levels for installation Type B: free inlet, ducted outlet. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.



BCZ Series

Sound Performance Data

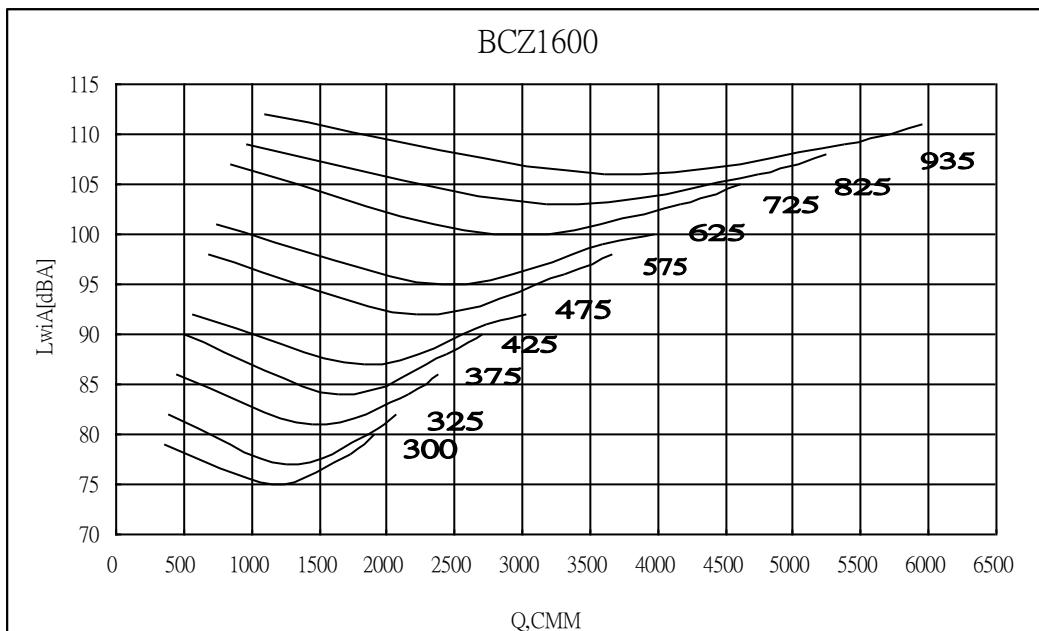

Sound Power [dB Ref 10-12 watts] %POF=(CMM*3531.5 / RPM x 239.99)

Inlet Sound Power, Lwi [Octave Band]


RPM	%POF	1	2	3	4	5	6	7	8	LwiA [dBA]
300	93	91	85	82	78	73	68	62	55	80
	84	89	84	80	75	71	67	62	57	78
	57	86	79	75	72	68	65	61	57	75
	17	94	86	81	76	71	66	61	56	79
375	93	97	93	88	84	80	74	68	62	86
	84	96	91	86	82	77	73	68	63	84
	57	95	86	81	78	74	71	67	63	81
	17	103	95	86	83	77	72	68	62	86
475	93	102	98	93	90	86	81	76	70	92
	84	101	96	92	89	84	79	75	70	91
	57	100	92	87	84	80	77	74	70	87
	17	108	101	93	89	84	79	75	69	92
575	93	107	105	99	96	92	87	81	75	98
	84	106	103	97	94	89	85	81	76	96
	57	106	99	92	89	86	82	79	75	92
	17	113	108	99	95	90	85	80	75	98
725	93	104	112	108	102	98	94	88	83	105
	84	102	111	106	100	96	92	87	83	103
	57	101	111	101	95	92	88	85	81	100
	17	112	118	110	101	97	91	86	82	107
825	93	106	115	110	105	102	98	92	86	108
	84	104	114	108	104	100	95	90	86	106
	57	103	113	103	99	95	92	88	85	103
	17	115	120	113	104	100	95	90	86	109

The sound power level ratings shown are in decibels, referred to 10^{-12} watts, calculated per AMCA International Standard 301. Values shown are for inlet Lwi, and inlet LwiA sound power levels for installation Type B: free inlet, ducted outlet. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.



BCZ Series

Sound Performance Data

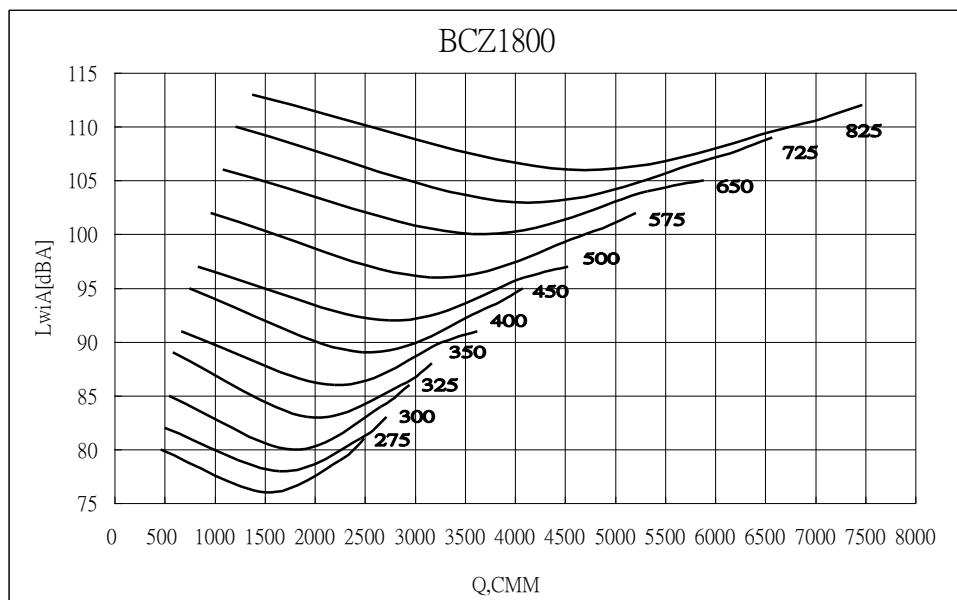FLOWTECH

Sound Power [dB Ref 10-12 watts] %POF=(CMM*3531.5 / RPM x 341.7)
Inlet Sound Power, Lwi [Octave Band]


RPM	%POF	LwiA [dBA]								
		1	2	3	4	5	6	7	8	LwiA
275	93	92	86	83	79	74	69	63	56	81
	84	90	84	81	76	72	68	63	58	79
	57	86	79	76	73	69	66	62	58	76
	17	95	85	82	77	72	67	62	57	80
325	93	97	92	87	84	79	73	68	61	86
	84	96	91	86	81	77	72	68	63	84
	57	95	86	81	78	74	71	67	63	80
	17	102	94	86	82	77	72	67	62	85
400	93	102	98	93	89	85	79	74	68	91
	84	101	96	91	87	83	78	74	69	90
	57	100	91	86	83	79	76	73	69	86
	17	107	100	92	88	83	78	73	68	91
575	93	110	108	102	99	95	91	85	79	102
	84	110	106	101	98	93	89	84	79	100
	57	109	103	96	93	89	86	83	79	96
	17	117	111	102	98	94	88	84	79	102
725	93	108	116	111	105	102	98	92	86	109
	84	106	115	109	104	99	95	90	86	107
	57	105	114	104	99	96	92	88	85	103
	17	116	121	114	104	100	95	90	85	110
825	93	110	118	114	109	105	101	96	90	112
	84	108	117	112	107	103	99	94	90	110
	57	107	116	107	102	99	95	92	89	106
	17	118	124	116	108	104	99	94	89	113

The sound power level ratings shown are in decibels, referred to 10^{-12} watts, calculated per AMCA International Standard 301. Values shown are for inlet Lwi, and inlet LwiA sound power levels for installation Type B: free inlet, ducted outlet. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.



BCZ Series

Sound Performance Data

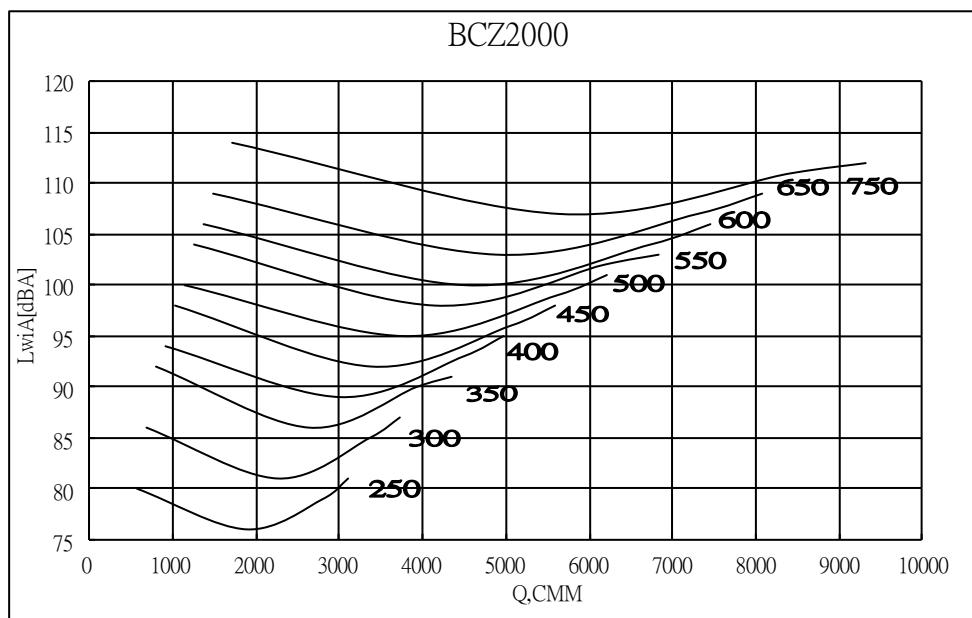FLOWTECH

Sound Power [dB Ref 10-12 watts] %POF=(CMM*3531.5 / RPM x 468.73)
Inlet Sound Power, Lwi [Octave Band]

RPM	%POF	1	2	3	4	5	6	7	8	LwiA
		63	125	250	500	1k	2k	4k	8k	[dBA]
250	93	91	87	84	80	75	69	63	57	81
	84	90	85	82	77	73	69	63	58	79
	57	85	80	77	73	70	67	63	59	76
	17	94	86	82	78	72	68	63	57	80
350	93	104	99	93	89	85	79	73	67	91
	84	103	98	91	87	82	78	73	68	90
	57	103	92	86	83	79	76	72	68	86
	17	110	102	91	88	82	77	72	67	92
450	93	109	104	99	96	92	86	81	75	98
	84	108	103	98	94	89	85	81	75	96
	57	108	98	93	89	86	82	79	75	92
	17	115	107	98	95	90	84	80	75	98
550	93	113	110	104	101	97	93	87	81	103
	84	113	108	102	100	95	91	86	81	102
	57	112	104	97	95	91	88	85	81	98
	17	120	113	104	100	95	90	86	80	104
650	93	111	116	111	106	102	98	92	86	109
	84	110	114	109	104	99	95	91	86	107
	57	109	113	104	99	96	92	89	85	103
	17	118	120	113	105	101	95	90	85	109
750	93	111	119	115	109	106	102	96	90	112
	84	109	118	113	108	104	99	95	90	111
	57	108	117	108	103	100	96	92	89	107
	17	119	124	117	108	105	99	94	90	114



The sound power level ratings shown are in decibels, referred to 10^{-12} watts, calculated per AMCA International Standard 301. Values shown are for inlet Lwi, and inlet LwiA sound power levels for installation Type B: free inlet, ducted outlet. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301.



BCZ Series



BCZ 250-450 'L'

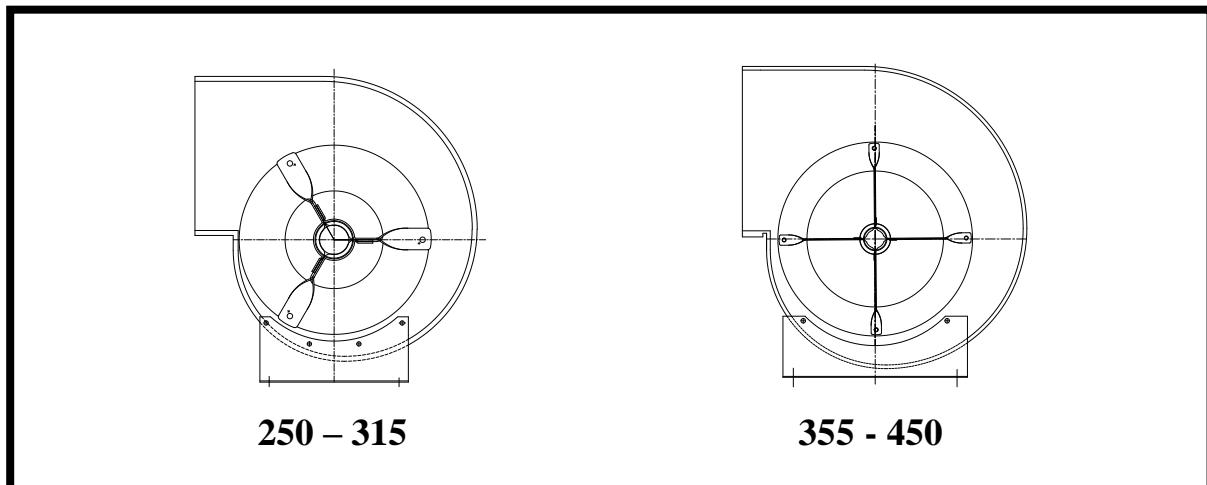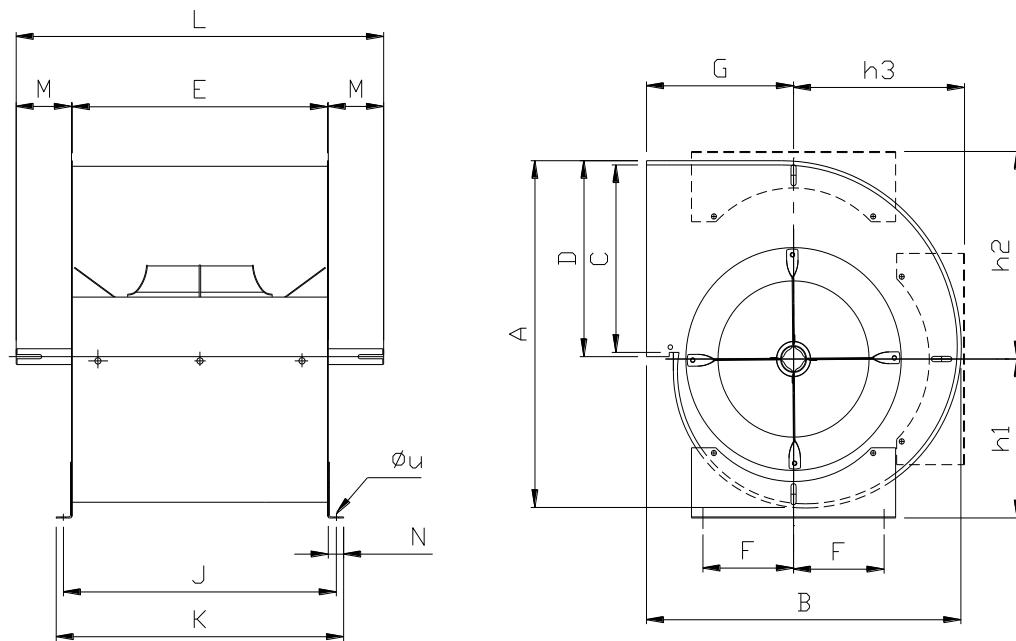

Model	A	B	C	D	E	F	G	H1	H2	H3	J	K	L	M	N	t	t1	W	Z	Φd	Φu
250	461	455	250	265	300	105	225	231	273	234	334	362	475	87	30	6	6	30	22.5	20	10
280	517	503	280	297	336	140	245	255	307	270	364	392	529	98	30	8	7	40	28	25	10
315	580	555	315	333	378	140	265	272	344	295	404	432	570	99	30	8	7	40	28	25	10
355	657	616	355	371	500	177.5	288	301	393	335	535	563	720	108	30	8	7	50	33	30	12
400	738	688	400	421	560	177.5	320	337	425	385	595	623	780	108	30	8	7	50	33	30	12
450	826	753	450	473	640	225	340	357	480	419	676	704	860	108	30	10	8	50	38	35	12



All dimensions in mm.




BCZ Series




BCZ 250-630 'M'

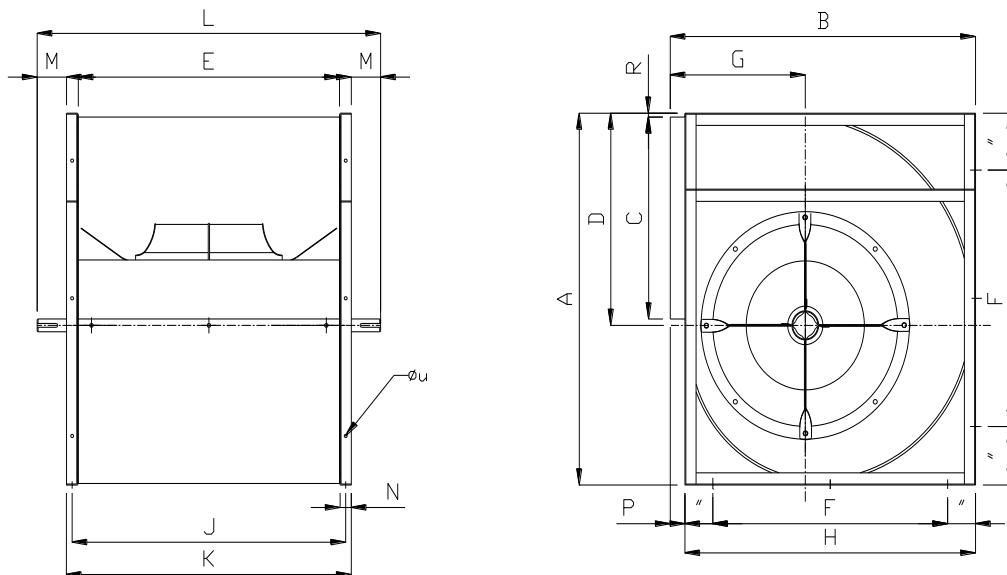

250 - 315



355 - 400



450 - 630

Model	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	t	T1	W	Z	Φd	Φu
250	474	460	250	271	300	250	225	425	327	352	475	62	25	35	6	6	35	22.5	20	10	
280	519	505	280	300	336	280	245	470	362	392	529	68	30	35	11	8	7	45	28	25	14
315	582	560	315	338	378	280	265	522	402	432	570	69	30	35	13	8	7	45	28	25	14
355	662	620	355	378	500	425	288	580	533	563	720	78	30	40	11	8	7	50	33	30	14
400	743	690	408	423	560	470	320	650	593	623	780	78	30	40	10	8	7	50	33	30	14
450	832	760	458	475	640	532	345	715	675	704	860	78	30	45	10	10	8	50	38	35	14
500	930	855	508	530	700	625	390	805	743	780	960	90	38	50	14	10	8	60	43	35	14
560	1031	945	586	568	790	700	430	895	833	870	1060	98	38	50	8	12	8	70	43	40	14
630	1160	1040	630	662	890	800	460	990	932	971	1170	100	38	50	12	12	8	70	43	40	14



All dimensions in mm.




BCZ Series



BCZ 250-1000 'H'

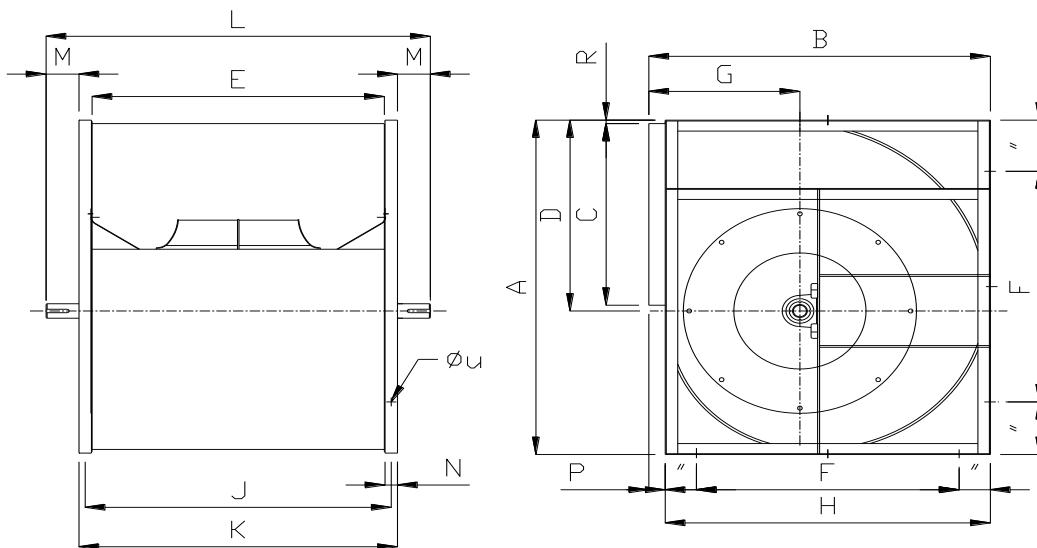

250 - 400



450 - 1000


Model	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	t	t1	W	Z	Φd	Φu
250	474	460	250	271	300	250	225	425	327	362	528	83	25	35	6	8	7	40	28	25	14
280	519	505	280	298	336	280	245	470	362	392	560	84	30	35	9	8	7	40	33	30	14
315	582	560	315	334	378	280	265	522	405	432	600	84	30	35	8.5	8	7	40	33	30	14
355	662	620	355	378	500	425	288	580	541	563	749	93	30	40	11	10	8	50	38	35	14
400	743	690	408	423	560	470	320	650	593	623	809	93	30	40	10	10	8	50	38	35	14
450	832	760	458	475	640	532	345	715	682	703	933	115	30	45	10	12	8	70	43	40	14
500	930	855	508	530	700	625	390	805	742	780	1018	119	38	50	14	14	8	70	48.5	45	14
560	1031	945	586	568	790	700	430	895	832	870	1136	133	38	50	8	14	9	90	53.5	50	14
630	1160	1040	630	662	890	800	460	990	932	970	1236	133	38	50	12	14	9	90	53.5	50	14
710	1300	1150	710	745	1000	940	502	1100	1054	1104	1386	141	50	50	12	18	11	90	53.5	60	18
800	1460	1300	800	835	1130	1080	565	1240	1189	1234	1516	141	50	60	10	18	11	90	64	60	18
900	1643	1395	900	943	1270	1230	635	1395	1327	1374	1710	168	50	60	13	18	11	110	64	65	18
1000	1815	1600	1000	1043	1400	1380	695	1540	1459	1504	1862	179	50	60	13	20	12	110	74.5	70	18

All dimensions in mm.



BCZ Series

BCZ 1120-2000 'H'

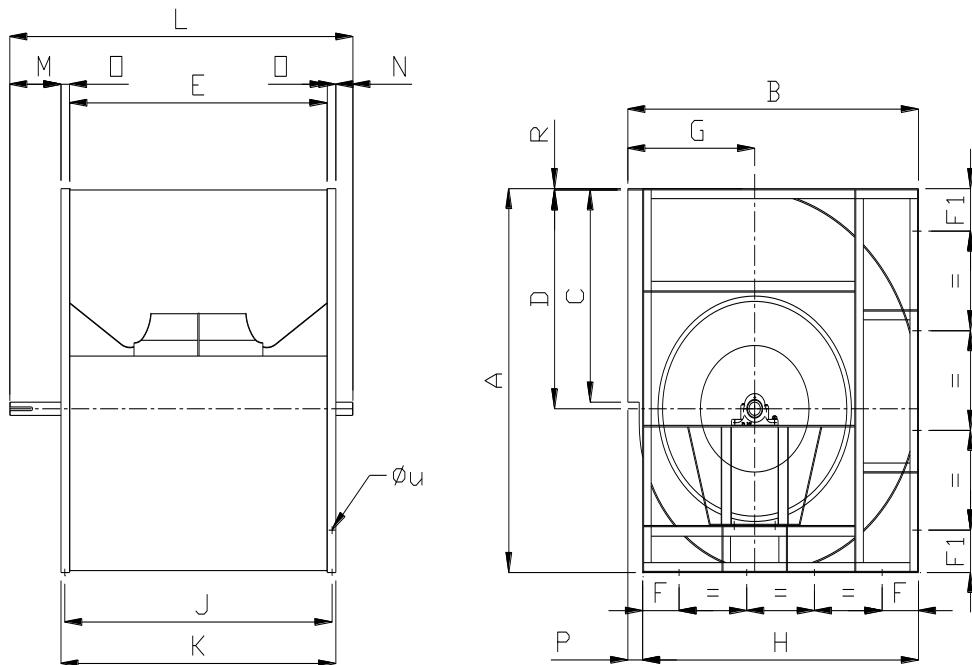

Model	A	B	C	D	E	F	F1	G	H	J	K	L	M	N	P	R	t	t1	W	Z	Φ_d	Φ_u
1120	2035	1822	1120	1170	1580	255	255	807	1727	1670	1736	2011	195	80	95	6	20	12	110	79.9	75	18
1250	2270	2025	1250	1305	1770	300	300	890	1932	1860	1926	2226	220	80	93	5	22	14	110	85	80	18
1400	2565	2313	1400	1470	1980	300	300	1040	2193	2070	2136	2468	230	102	120	9	22	14	110	85	80	18
1600	2895	2555	1600	1650	2260	320	320	1115	2425	2350	2416	2816	250	150	130	9	25	14	140	95	90	18
1800	3270	2935	1800	1860	2550	350	350	1300	2785	2656	2736	3171	300	135	150	10	25	14	180	95	90	18
2000	3625	3205	2000	2075	2850	350	350	1395	3055	2956	3036	3486	300	150	150	10	28	16	180	106	100	18


All dimensions in mm.



BCZ Series




BCZ 315-400 'V'

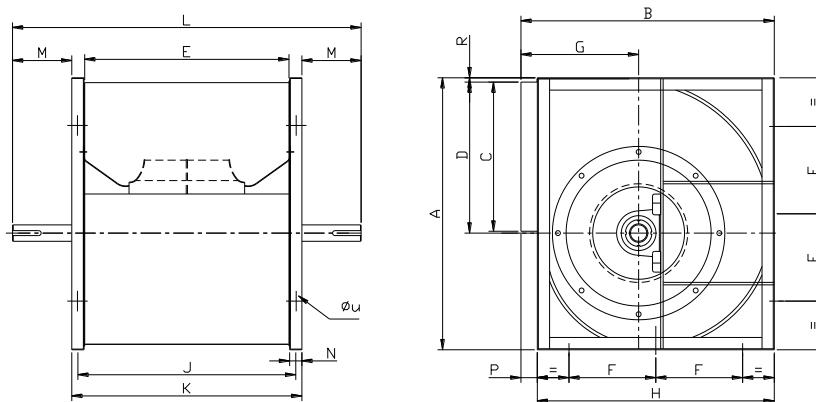

Model	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	t	t1	W	Z	Φd	Φu
315	582	557	315	334	378	140	265	522	405	432	672	120	30	35	8.5	10	8	50	38	35	14
355	662	620	355	378	500	425	288	580	533	563	853	145	30	40	11	12	8	70	43	40	14
400	743	690	400	423	560	235	320	650	593	623	913	145	30	40	10	12	8	70	43	40	14

BCZ 450 - 1000 'V'

All dimensions in mm.

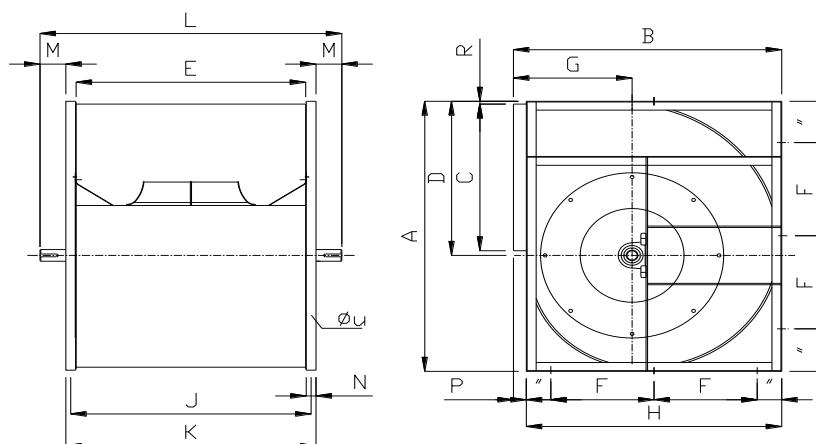


Model	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	t	t1	W	Z	Φd	Φu
450	832	760	450	475	640	266	345	715	673	703	1001	149	30	45	10	14	9	70	48.5	45	14
500	930	855	500	530	700	312.5	390	805	742	780	1128	174	38	50	14	14	9	90	53.5	50	14
560	1031	945	560	568	790	350	430	895	832	870	1192	162	38	50	8	16	10	90	59	55	14
630	1160	1040	630	662	890	400	460	990	932	970	1356	193	38	50	12	18	11	90	64	60	14
710	1300	1150	710	745	1000	470	502	1100	1054	1104	1496	196	50	50	12	18	11	110	69	65	18
800	1460	1300	800	835	1130	540	565	1240	1189	1234	1626	196	50	60	10	18	11	110	69	65	18
900	1643	1395	900	943	1270	615	635	1395	1327	1374	1804	215	50	60	13	20	12	110	74.5	70	18
1000	1815	1600	1000	1043	1400	690	695	1540	1459	1504	1984	240	50	60	13	22	14	110	85	80	18

All dimensions in mm.



BCZ Series


BCZ 1120-2000 'V'

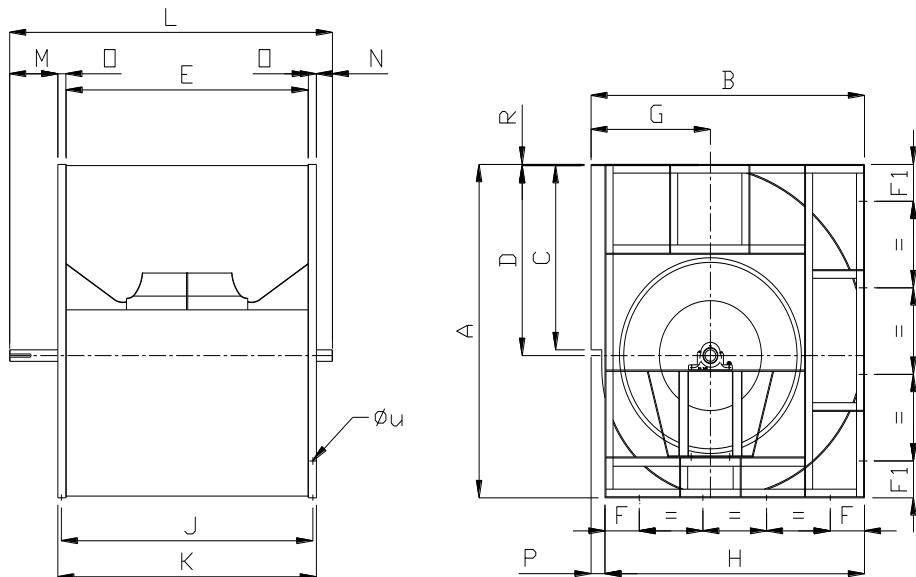

Model	A	B	C	D	E	F	F1	G	H	J	K	L	M	N	P	R	t	t1	W	Z	Φd	Φu
1120	2035	1822	1120	1170	1580	255	255	807	1727	1670	1736	2101	265	100	95	6	22	14	140	85	80	18
1250	2270	2025	1250	1305	1770	300	300	890	1932	1860	1926	2311	265	120	93	5	22	14	140	90	85	18
1400	2565	2313	1400	1470	1980	300	300	1040	2193	2061	2136	2521	265	120	120	9	25	14	140	95	90	18
1600	2895	2555	1600	1650	2260	320	320	1115	2425	2350	2416	2916	350	150	130	9	28	16	200	106	100	18
1800	3270	2935	1800	1860	2550	350	350	1300	2785	2656	2736	3231	360	135	150	10	28	16	250	106	100	18
2000	3625	3205	2000	2075	2850	350	350	1395	3055	2956	3036	3546	360	150	150	10	28	16	250	106	110	18

All dimensions in mm.



KEY WAY Dimensions.

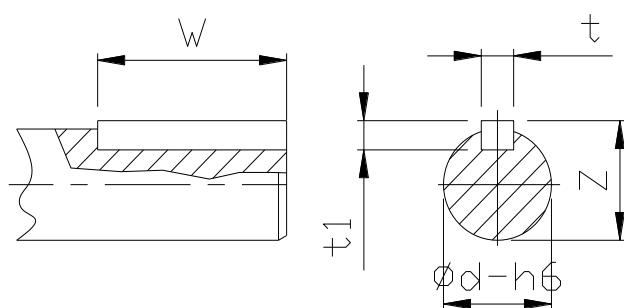



BCZ Series

BCZ 355-1000 'G₂ H'

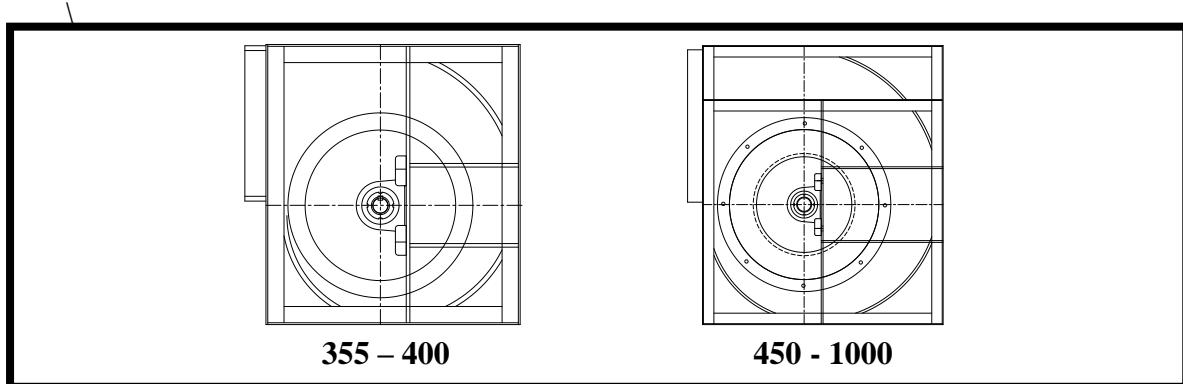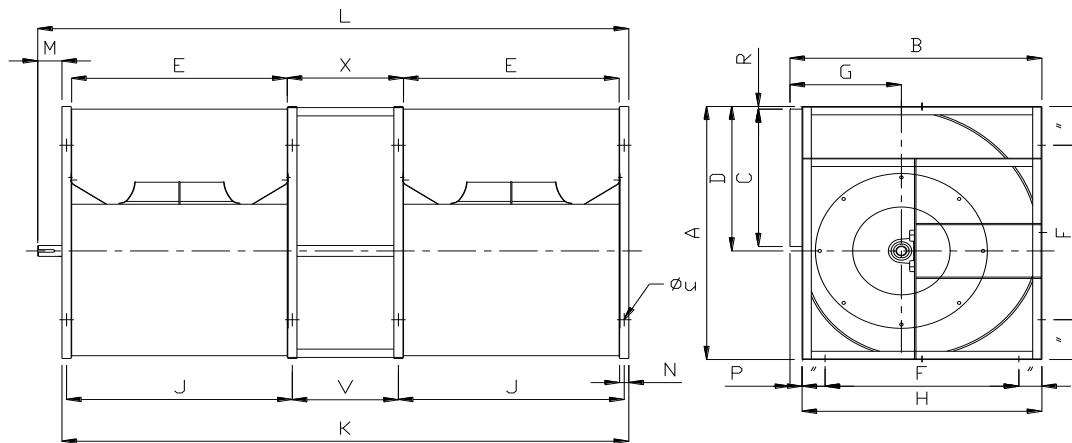

Model	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	V	X	t	t1	W	Z	Φd	Φu
355	662	620	355	378	500	425	288	580	541	1415	1525	110	30	40	11	385	355	12	8	70	43	40	14
400	743	690	400	423	560	470	320	650	593	1580	1715	135	30	40	10	430	400	14	9	90	48.5	45	14
450	832	760	450	475	640	532	345	715	682	1790	1925	135	30	45	10	485	450	14	9	90	53.5	50	14
500	930	855	500	530	700	625	390	805	742	1976	2111	135	38	50	14	538	500	16	10	90	59	55	14
560	1031	945	560	568	790	700	430	895	832	2216	2356	140	38	50	8	598	560	16	10	90	59	55	14
630	1160	1040	630	662	890	800	460	990	932	2486	2626	140	38	50	12	668	630	18	11	90	64	60	14
710	1300	1150	710	745	1000	940	502	1100	1054	2810	2960	150	50	50	12	760	710	18	11	90	64	60	18
800	1460	1300	800	835	1130	1080	565	1240	1189	3160	3310	150	50	60	10	850	800	18	11	90	64	60	18
900	1643	1395	900	943	1270	1230	635	1395	1327	3540	3690	150	50	60	13	950	900	18	11	90	64	60	18
1000	1815	1600	1000	1043	1400	1240	695	1540	1459	3900	4050	150	50	60	13	1050	1000	18	11	90	64	60	18

All dimensions in mm.




BCZ Series

Accessories

■ Outlet Flange

Model	A	B	C	D	E	F	G
250	300	329	357	250	277	305	28
280	336	359	387	280	307	335	28
315	378	399	427	315	342	370	28
355	500	529	557	355	387	425	28
400	560	589	617	400	432	470	28
450	640	669	697	450	482	520	28
500	700	729	757	500	532	570	28
560	790	819	847	560	592	630	28
630	890	920	960	630	662	700	35
710	1000	1030	1070	710	742	780	35
800	1130	1160	1200	800	832	870	35
900	1270	1300	1340	900	932	970	35
1000	1400	1430	1470	1000	1032	1070	35

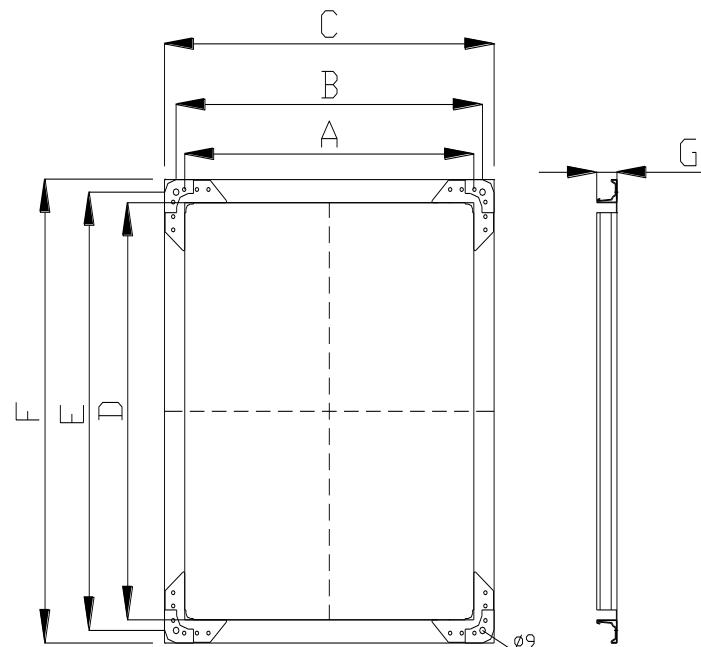

■ Pressure probes

On request, fan can be supplied fitted with "Q-meter" pressure probes on the inlet cones which, with appropriate calibration, allow easy flow-rate measurement on the operating fan. Please Flowtech for further information.

The characteristics of the fan stated in this catalogue, like dimensions, performances and so on, can be modified without previous notice, therefore the company reserves the right to make changes to the illustrated products. Certified dimension will be provided upon request.



BCZ Series



Centrifugal Fan Order Information

Fan Details			
<p>● Fan Type</p> <p>● Impeller Type</p>	<input type="checkbox"/> DWDI <input type="checkbox"/> SWSI <input type="checkbox"/> Forward Curved <input type="checkbox"/> Backward Curved <input type="checkbox"/> Others : _____		
<p>● Model & Size e.g. BCZ630-M</p> <p>● Drive type-Belt, Direct, Coupling(if differ from standard)</p>	<input type="checkbox"/> Model : _____ (If known) <input type="checkbox"/> Belt <input type="checkbox"/> Direct <input type="checkbox"/> Coupling <input type="checkbox"/> Others : _____ (Please state)		
<p>● Drive Arrangements</p> <p>● Rotation & Discharge e.g. CCW 90</p>	<input type="checkbox"/> Bare fan <input type="checkbox"/> Complete with drive system <input type="checkbox"/> CW <input type="checkbox"/> CCW <input type="checkbox"/> 90 <input type="checkbox"/> 180 <input type="checkbox"/> 270 <input type="checkbox"/> 360		
<p>● Motor Position (refer to Diagram) e.g. W</p>	<input type="checkbox"/> W <input type="checkbox"/> X <input type="checkbox"/> Y <input type="checkbox"/> Z		
<p>● Air Flow Rate</p>	Q : _____ <input type="checkbox"/> L/S <input type="checkbox"/> m³/h <input type="checkbox"/> m³/min <input type="checkbox"/> m³/s <input type="checkbox"/> cfm		
<p>● Pressure (static or total)</p>	Sp : _____ TP : _____ <input type="checkbox"/> Pa <input type="checkbox"/> mmH ² o <input type="checkbox"/> inWG		
<p>● Fan RPM (if specified)</p>	Max : _____ Min : _____		
<p>● Noise Level</p>	<input type="checkbox"/> dB <input type="checkbox"/> dBA Lw : _____ Lp : _____ at distance : _____ m <input type="checkbox"/> Free Field <input type="checkbox"/> room condition <input type="checkbox"/> corner / wall		
<p>● Ambient temperature</p>	Temp : _____ °C		
<p>● Air density, if differ from standard</p>	<input type="checkbox"/> Density : _____ kg/m ³ <input type="checkbox"/> Altitude : _____ m		
Motor Detail		Fittings Detail	
<p>● Power</p>	<input type="checkbox"/> kW : _____ <input type="checkbox"/> HP : _____	<p>● Accessories</p>	<input type="checkbox"/> Inspection door <input type="checkbox"/> Drain plug <input type="checkbox"/> Flexible duct
<p>● No. of Poles / Rpm</p>	<input type="checkbox"/> 2P <input type="checkbox"/> 4P <input type="checkbox"/> 6P <input type="checkbox"/> Others : _____ (please state RPM)	<p>Vibration Isolators:</p>	<input type="checkbox"/> Rubber <input type="checkbox"/> Spring <input type="checkbox"/> Floor-mount <input type="checkbox"/> Ceiling-hang
<p>● Voltage</p>	<input type="checkbox"/> 220V <input type="checkbox"/> 415 <input type="checkbox"/> 380V <input type="checkbox"/> 440V <input type="checkbox"/> 400V <input type="checkbox"/> Others : _____	<p>Silencers :</p>	<input type="checkbox"/> With pod <input type="checkbox"/> Without pod <input type="checkbox"/> Inlet <input type="checkbox"/> Outlet <input type="checkbox"/> Both inlet & Outlet
<p>● Phase</p>	<input type="checkbox"/> 1 <input type="checkbox"/> 3	<p>Counter-flanges :</p>	<input type="checkbox"/> Flat L-type <input type="checkbox"/> U-type <input type="checkbox"/> Inlet <input type="checkbox"/> Outlet
<p>● Frequency</p>	<input type="checkbox"/> 50Hz <input type="checkbox"/> 60Hz	Special Features	
<p>● Frame size</p>	<input type="checkbox"/> IEC: _____ <input type="checkbox"/> NEMA: _____ <input type="checkbox"/> Others : _____	<p>● Other Requirements</p>	<input type="checkbox"/> Painting <input type="checkbox"/> Powder coating <input type="checkbox"/> Hot-dipped galvanizing <input type="checkbox"/> Spark-resistant <input type="checkbox"/> Corrosion-resistant <input type="checkbox"/> Heat-resistant, temp. _____ °C <input type="checkbox"/> Smoke Spill, Max. temp. _____ °C for _____ Hr



THE FLOWTECH GROUP

● **TAIPEI Headquarters 台北總公司**

234 新北市永和區保生路一號 19 樓之 5

19F-5, No. 1, BaoSheng Rd., Yonghe dist, New Taipei City, Taiwan, 234

Tel : +886-2-2232-8066 Fax : +886-2-2231-0285~6

E-mail : flow.tech@msa.hinet.net

Website : www.flowtech.com.tw

CNo. CAT-BCZ RA6-March- 2022

● **Factory 冬山廠**

269 宜蘭縣冬山鄉得安村梅林路 658 號

No.658, Meilin Rd., De-an Village, Dongshan Township ,

Yilan County,Taiwan , 269

Tel : +886-39-612-449 Fax : +886-39-615-843

AGENT (經銷商) :

● **Lab 實驗室**

269宜蘭縣冬山鄉內湖一路102號

No.102, Neihu 1st Rd., Dongshan Township,

Yilan County,Taiwan , 269

Tel : +886-39-612-449 Fax : +886-39-615-843

www.flowtech.com.tw