


## 2SHE SERIES

Direct Drive Shutter Fan

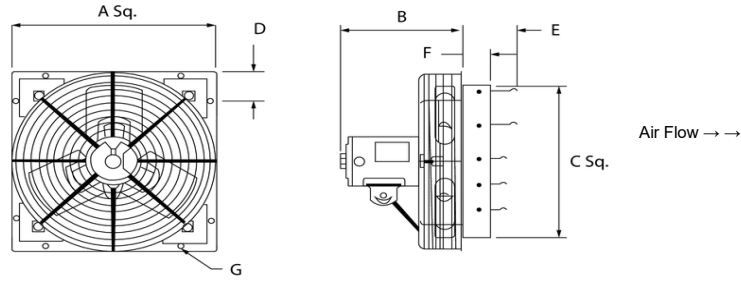

Model	A	B	C	D	E	F	G
2SHE 0721	11 1/8	4 15/16	8 1/2	3 9/16	5 3/4	3	1/4 x 1/2
2SHE 1021	13 1/8	5 7/16	10 1/2	10 1/2	5 3/4	3	1/4 x 1/2
2SHE 1221	15 1/8	6	13	3 9/16	5 3/4	3	1/4 x 1/2
2SHE 1621	19 1/8	6 13/16	17	10 1/2	5 3/4	3	1/4 x 1/2
2SHE 1871	21 1/8	8 1/2	18 1/2	3 9/16	5 3/4	3	1/4 x 1/2
2SHE 20B1W	23 1/8	10 3/4	21	10 1/2	5 3/4	3	1/4 x 1/2
2SHE 24B1W	27 1/8	9 3/4	25	3 9/16	5 3/4	3	1/4 x 1/2
2SHE 30C1	33 1/8	13 11/32	31	10 1/2	5 3/4	3	1/4 x 1/2
2SHE 36D1	39 1/8	13 1/8	37	10 1/2	5 3/4	3	1/4 x 1/2

Dimensions are in inches

### Specification data

Model	HP	Voltage/ Phase	Amperage full load	RPM	Bearing type	0.0" Ps	0.125" Ps	0.25" Ps	Sones @ 0.00"Ps	Shipping weight	Item #
2SHE 0721	1/30	120/1	1.4	1725	Sleeve	140	-	-	4.8	15	
2SHE 1021	1/30	120/1	1.4	1585	Sleeve	585	285	-	6.6	10	
2SHE 1221	1/30	120/1	1.4	1570	Sleeve	800	470	-	7.6	21	
2SHE 1621	1/20	120/1	1.5	1685	Sleeve	994	694	-	8.0	19	
2SHE 1871	1/15	120/1	1.2	1075	Sleeve	1860	850	-	8.4	22	
2SHE 20B1W	1/4	120/1	4.6	1150	Sleeve	2830	2250	1235	11.3	39	
2SHE 24B1W	1/4	120/1	3.7	1150	Ball	3240	2485	1110	11.4	39	
2SHE 30C1	1/3	120/1	4.4	850	Ball	6075	4195	2150	13.5	65	
2SHE 36D1	1/2	120/1	5.6	850	Ball	8225	6480	2935	14.7	75	

Performance shown is for installation type A: Free inlet, Free outlet. Speed (RPM) shown is nominal.

Performance ratings include the effects of shutter and guard.

The sound ratings shown are loudness values in fan sones at 1.5 m (5 ft) in a hemispherical free field calculated per AMCA International Standard 301.

Values shown are for Installation Type A: free inlet hemispherical sone levels.



Systemair Mfg. Inc. certifies that the 2SHE series shown herein is licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

Catalog series: 2SHE

Revision date: December 2019