



# GR1 SERIES BACKDRAFT DAMPER

## General Damper Description

The GR1 series are low leak galvanized steel backdraft or barometric relief dampers for the commercial heating and air conditioning industry. The GR1 series dampers are typically used in a commercial economizer application, and may or may not be built into the economizer itself. The dampers meet energy codes including California's Title 24, IECC 2015, and ASHRAE 90.1 requirements.

The GR1 dampers are low leak, and have been AMCA tested. See accompanying leakage statement on this page for details.

GR1 damper information can be found at [www.MicroMetl.com](http://www.MicroMetl.com)

## Damper Features


The GR1 backdraft dampers are parallel action type and integral blade axles ride in nylon bushing with snap-in fingers to ensure long lasting trouble free operation.

Blades and frame are constructed of galvanized steel, and damper frame includes gasket seal. Seam between blades also include a gasket seal for tight seal and quiet operation.

## Damper Sizes:

**Minimum damper width:** 10.5" (267mm)  
**Minimum damper height:** 8" (203mm)

**Maximum damper width:** 40" (1016mm)  
**Maximum damper height:** 23" (584mm)

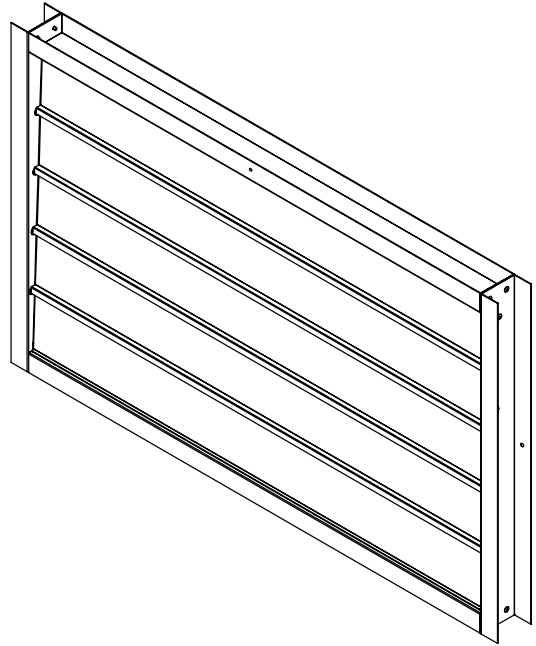

## GR1 Series Backdraft Damper

### GR1 Series Damper Leakage Data


Leakage testing conducted in accordance with AMCA Standard 500-D. Leakage for GR1 series is less than 20cfm per square foot at 1" w.g. Tested to AMCA Figure 5.4. Air leakage is based on operation between 0°C and 49°C (32°F and 120°F).



Grupo Collado certifies that the model GR1 shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with requirements of the AMCA Certified Ratings Programs. The AMCA Certified Ratings Seal applies to Air Leakage and Air Performance ratings.

## DAMPER PRESSURE DROP DATA

Pressure drop tests were conducted in accordance with AMCA Standard 500-D using Figure 5.5. All data has been corrected to represent standard air at a density of .075 lb/ft<sup>2</sup> (1,201 kg/m<sup>3</sup>)

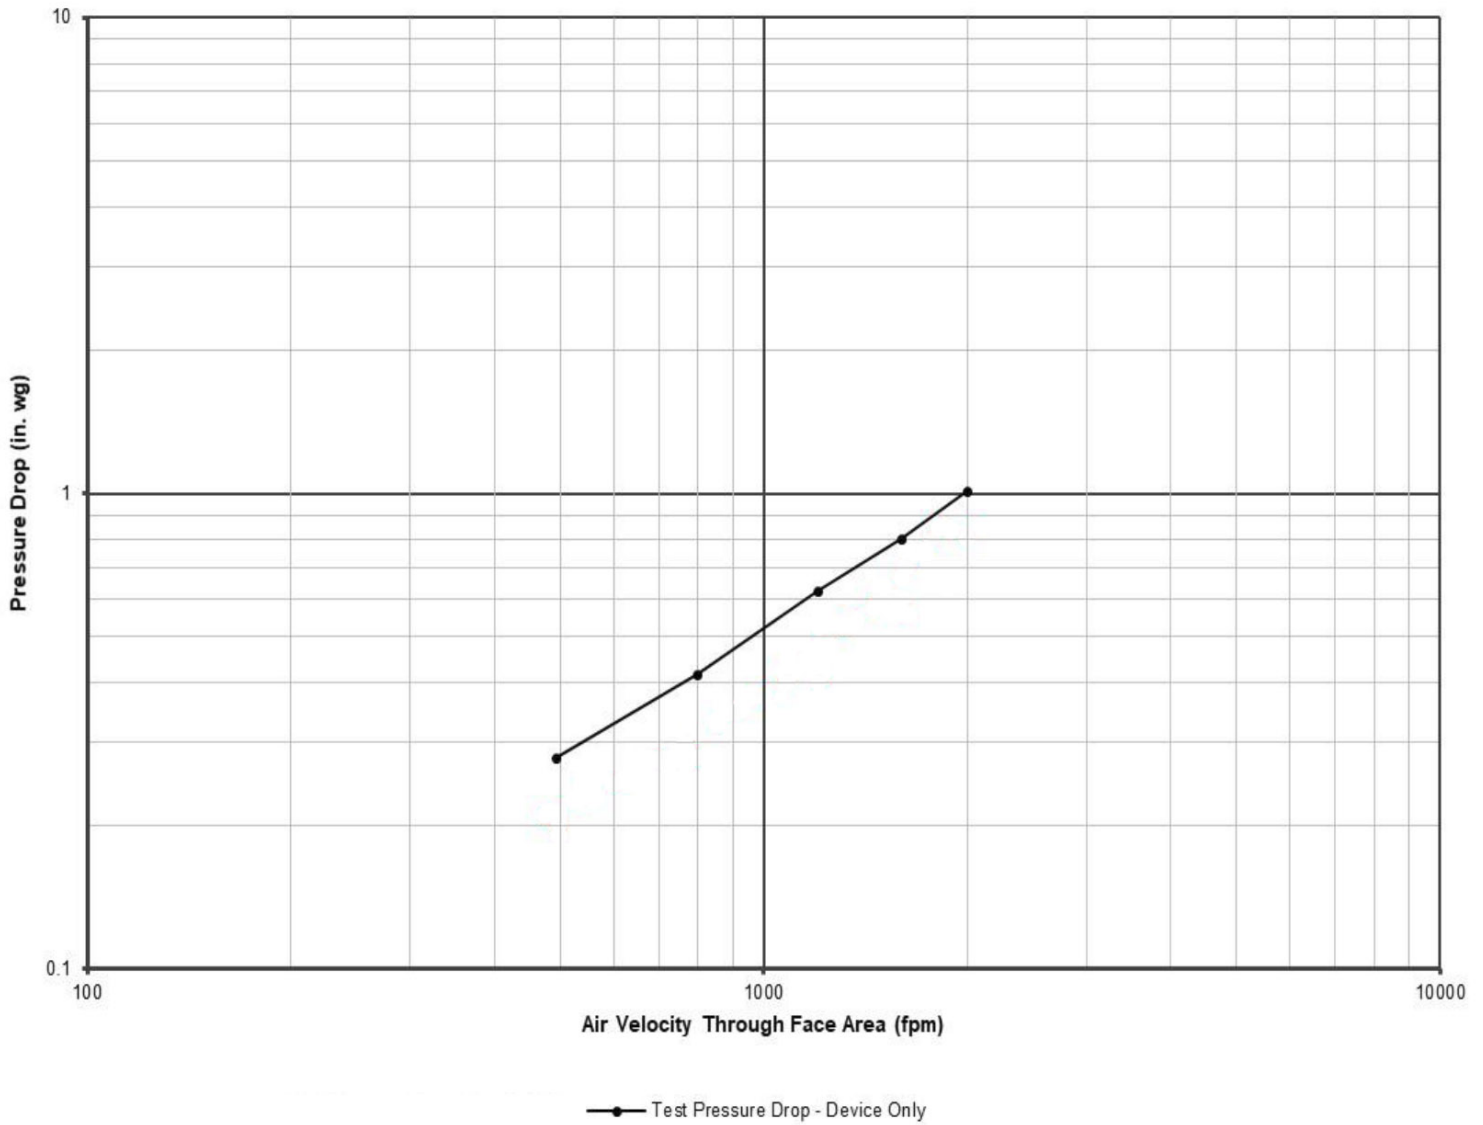

MicroMetl Indianapolis  
3035 N. Shadeland Ave., Suite 300  
Indianapolis, IN 46226

MicroMetl Longview  
201 Kodak Blvd.  
Longview, Texas 75602

MicroMetl West  
905 Southern Way  
Sparks, Nevada 89431