


EXTRUDED ALUMINUM, 4" DEEP, FIXED J TYPE BLADE

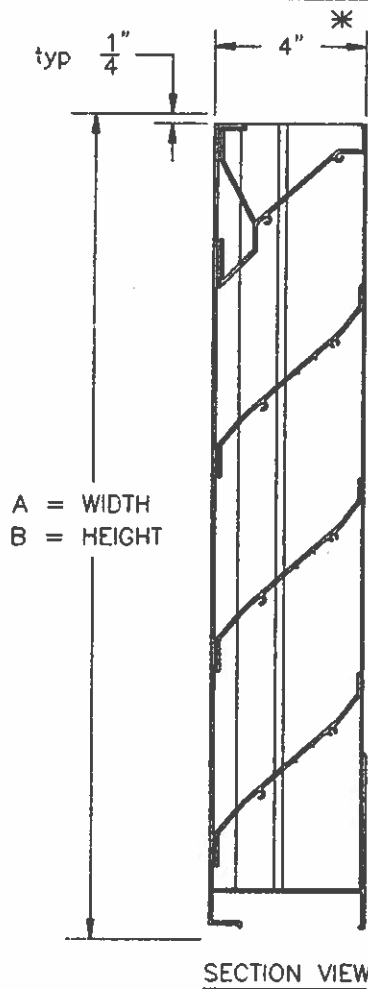

MODEL LE-47 STANDARD SPECIFICATIONS

FRAME: 4" DEEP CHANNEL, .081" THICK 6063-T5 EXTRUDED ALUMINUM ALLOY.

BLADES: .081" THICK 6063-T5 EXTRUDED ALUMINUM ALLOY.

FINISH: MILL.






SCREEN: $\frac{1}{2}$ " REMOVABLE EXPANDED ALUMINUM BIRD SCREEN, LOCATED ON INTERIOR.

MAXIMUM PANEL SIZE: 96" X 96".

MINIMUM PANEL SIZE: 12" X 12".

DIMENSIONS: "A" (WIDTH) "B" (HEIGHT) ARE OPENING SIZES. LOUVERS ARE MADE $\frac{1}{2}$ " UNDERSIZE.

* PANELS OVER 60" WIDE WILL BE 5- $\frac{1}{2}$ " DEEP DUE TO A VERTICAL INTERIOR BLADE SUPPORT ANGLE.

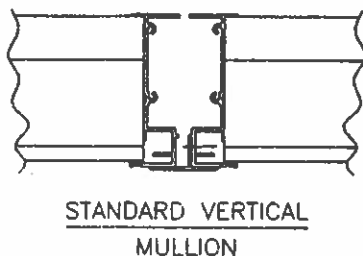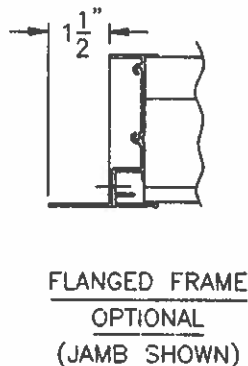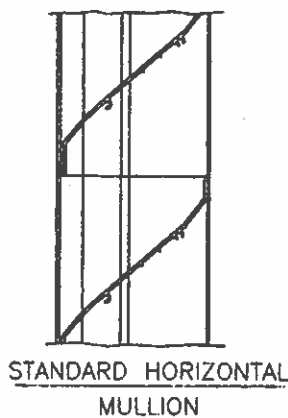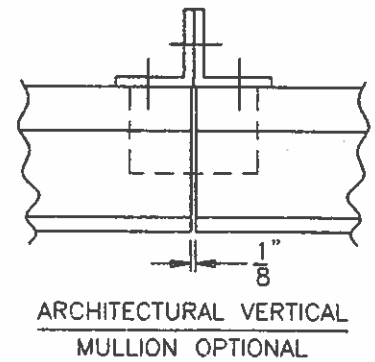

AWV certifies that the model LE-47 louver shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings and water penetration ratings.

awv american warming
and ventilating

A MESTEK COMPANY


7301 INTERNATIONAL DRIVE HOLLAND, OHIO
Phone (419) 865-5000 Fax (419) 865-1375

LE-47 STATIONARY LOUVER

DRN. BY ESS	DWG. NO. LE-47	REV.
DATE 12-19-00		

Water Penetration : .01 oz. (3.0 g.) at 822 fpm (4.17 m/s) recommended free area velocity
Pressure Drop : .18 in. wg. (44.6 Pa.) at 822 fpm (4.17 m/s) and 6748 SCFM (3.18 scm/s)
Free Area : 8.21 sq.ft. (0.762 sq. m.) = 51.3% for 48" x 48" (1.22 m x 1.22 m) test size

PRESSURE DROP

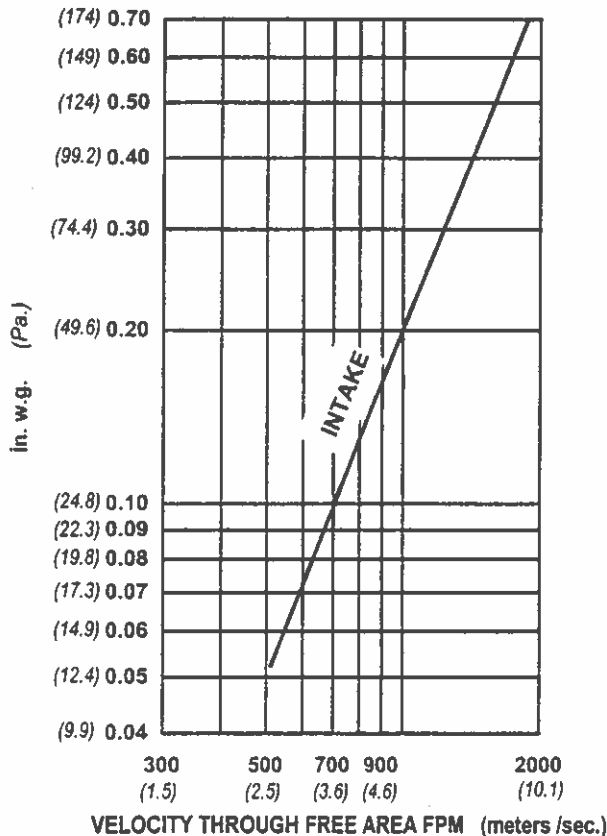


standard air - .075 lbs. per cu. ft.

Ratings do not include the effect of a bird screen

FREE AREA IN SQUARE FEET (sq. meters)

	WIDTH								
	in mm	12 304	24 609	36 914	48 1219	60 1524	72 1828	84 2133	96 2438
HEIGHT	12 304	0.29 0.03	0.66 0.06	1.04 0.10	1.41 0.13	1.79 0.17	2.12 0.20	2.49 0.23	2.87 0.27
	24 609	0.69 0.06	1.59 0.15	2.49 0.23	3.40 0.32	4.30 0.40	5.08 0.47	5.98 0.56	6.88 0.64
	36 914	1.18 0.11	2.70 0.25	4.22 0.39	5.75 0.53	7.27 0.68	8.61 0.80	10.13 0.94	11.66 1.08
	48 1219	1.68 0.16	3.85 0.36	6.03 0.56	8.21 0.76	10.38 0.96	12.29 1.14	14.47 1.34	16.64 1.55
	60 1524	2.08 0.19	4.77 0.44	7.47 0.69	10.16 0.94	12.85 1.19	15.21 1.41	17.90 1.66	20.60 1.91
	72 1828	2.57 0.24	5.90 0.55	9.24 0.86	12.57 1.17	15.91 1.48	18.82 1.75	22.16 2.06	25.49 2.37
	84 2133	2.97 0.28	6.83 0.63	10.69 0.99	14.55 1.35	18.41 1.71	21.79 2.02	25.65 2.38	29.51 2.74
	96 2438	3.46 0.32	7.94 0.74	12.42 1.15	16.91 1.57	21.39 1.99	25.31 2.35	29.80 2.77	34.28 3.18

WATER PENETRATION

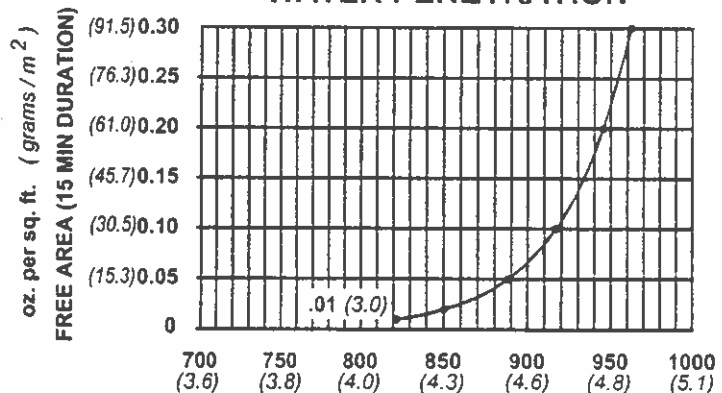

Both maximum recommended free area velocity and beginning of water penetration are 822 fpm at standard air - .075 lbs. per cu. ft. The above water penetration data is based on mill finish, 48" x 48" test size per AMCA Standard 511.

Openings that require multiple louver panels in both width and height will require internal structural supports. It is recommended that large openings be divided with structural members so that the louvers will span either width or height with a single panel. Unusually high wind loading may require structural supports on non-multiple wide and multiple high assemblies. Structural supports and mounting accessories are not supplied as a standard.

Example: Given 15,000 CFM design flow
Step #1:
 min. free area = $\frac{\text{Design CFM}}{\text{Max. Recommended Velocity}}$
 = $\frac{15,000}{822}$ = 18.25 sq. ft.

Step #2: From the free area table above the approximate louver size is 84" x 72" = (22.32 sq. ft.)



AWV certifies that the model LE-47 louver shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings and water penetration ratings.

LE-47

Below is an explanation of how to use the AMCA performance data for the recommended free area velocity of 822 fpm (4.17 m/s).

To determine minimum free area required for louver:

Step #1: Divide the required CFM flow by the maximum recommended free area velocity.

Step #2: Select the most desirable louver size, from the free area table, that meets the minimum free area requirement.

Step #3: Compare specified performance to the certified water penetration and pressure drop ratings.