




Sangmi

AIR TECH

BACK DRAFT DAMPER (AL TYPE): MODEL CD-4166

TUNNEL DAMPER (FAN & BLAST DAMPER): MODEL: SMSB-P20



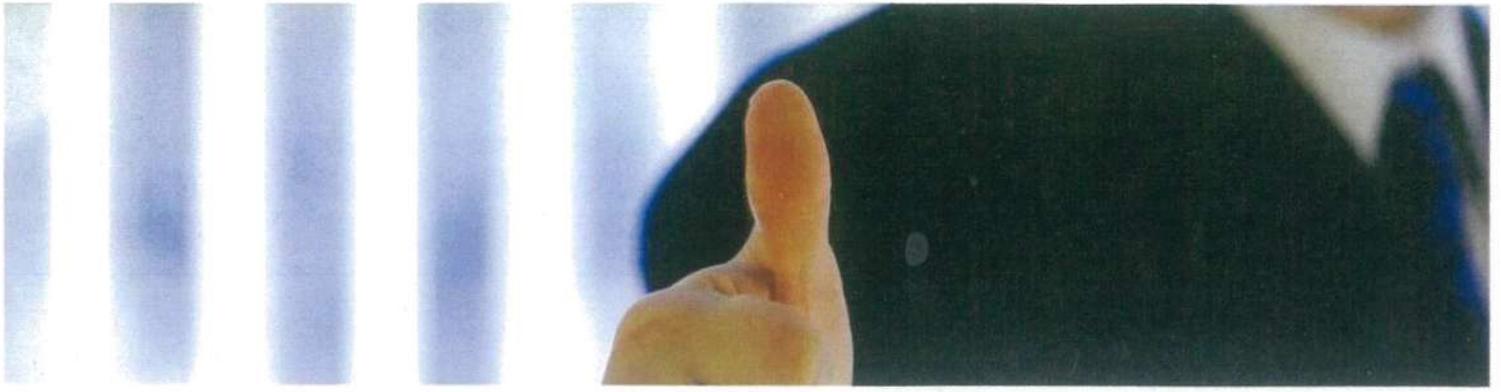


BACK DRAFT DAMPER (AL TYPE)


MODEL CD-4166



Sangmi Air Tech Co. Ltd. certifies that the CD4166 Back Draft Damper shown herein is licensed to bear the AMCA Seal. The Ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance only.

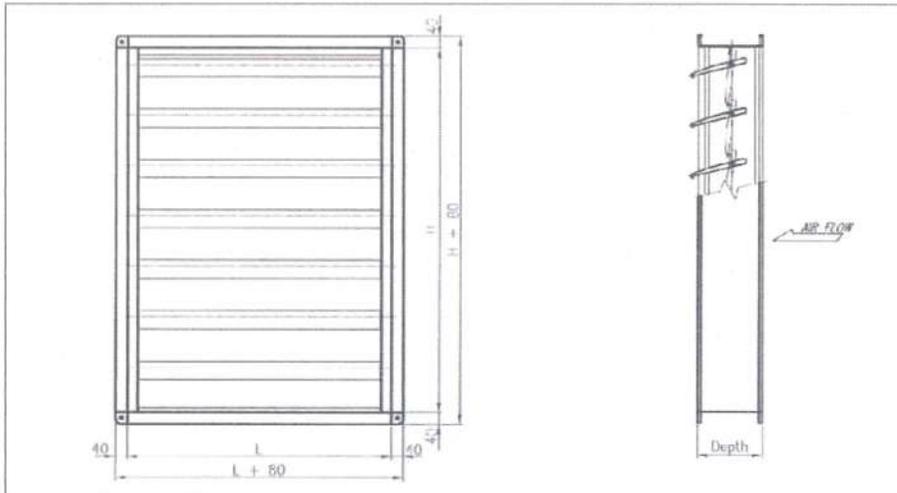

Back Draft Dampers are used where back draft air flow should be sealed. The parallel blades are automatically operated by positive air pressure with no need to have a separate actuator, free of maintenance. The light and sturdy aluminum enables the dampers to operate between 10mmAq to 150mmAq.

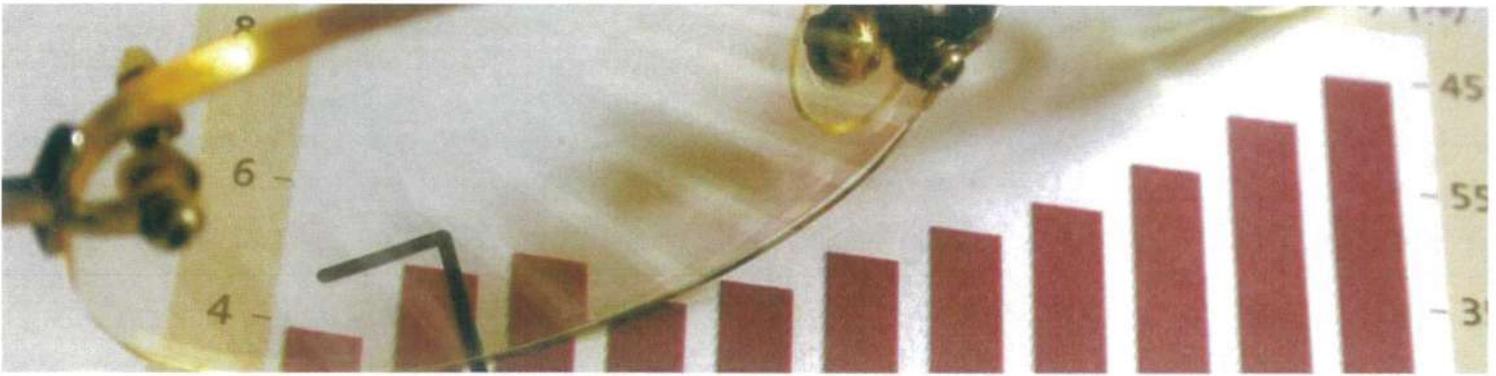

STANDARD SPECIFICATIONS

PARTS	MATERIAL	REMARK
FRAME	A6063S-T5	2.0TH channel aluminum press molding
BLADE	A6063S-T5	1.2TH airfoil type aluminum press molding
LINKAGE	SS400	3.0TH plated steel
AXILE	SM15C	Ø 12 plated round bar
SEAL	BLADE SEAL	EPDM rubber
	JAMB SEAL	STS304 0.15TH
BEARING	NYLON	Synthetic resin

FEATURES

- Has limited maximum air velocity; accurate data such air velocity and the air pressure should be checked before installation
- Airfoil type blades minimize air resistance
- Automatically operated by air pressure; maintenance free

CUSTOMIZATION

- Can be manufactured with GALVA or SUS
- Can be custom built to withstand high static pressure or high air velocity
- Variable sizes can be customized. Please contact our representative.

LEAKAGE PERFORMANCE CLASSIFICATION

Leakage ratings are obtained in accordance with AMCA Publication 500-D using Test Setup Apparatus Fig . 5.3-6.5/ Fig5.4-6.3

Pressure/Class	Leakage ft ³ /min/ ft ²		
	Required Ratings		
1	0.25kpa(1")	1.0kpa(4")	2.0kpa(8")
	4	8	11

1" in.wg PRESSURE DROP

Damper width (inch)	Damper Height (inch)			
	12	24	36	48
12	14.13			54.39
24		18.36		
36			49.09	
48	34.61			

The AMCA Certified Ratings Seal Does not apply to Air Leakage



TESTING INFORMATION



TEST FOR AIR PERFORMANCE IN ACCORDANCE WITH ANSI/AMCA STANDARD 500-D ,
FIGURE 5.5

PERFORMANCE DATA

AIR PERFORMANCE GRAPH FOR FULL OPEN POSITION: CD4166


CD4166 24X24

VELOCITY (ft/min)	STATIC PRESSURE (in.wg)	PRESSURE DROP (in.wg)	AIR LEAKAGE (ft/min)
2,998	1.055	1.48	18.15
2,495	2.110	1.14	26.43
2,002	3.166	0.86	32.15
1,271	4.221	0.55	37.07
518	5.276	0.29	41.36

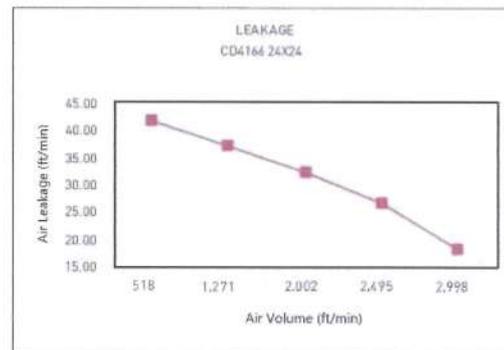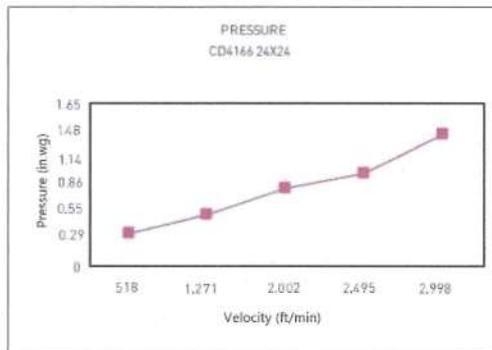

Air Leakage is based on operation between 10°C-40°C [50°F-104°F].

The AMCA Certified Ratings Seal Does not apply to Air Leakage

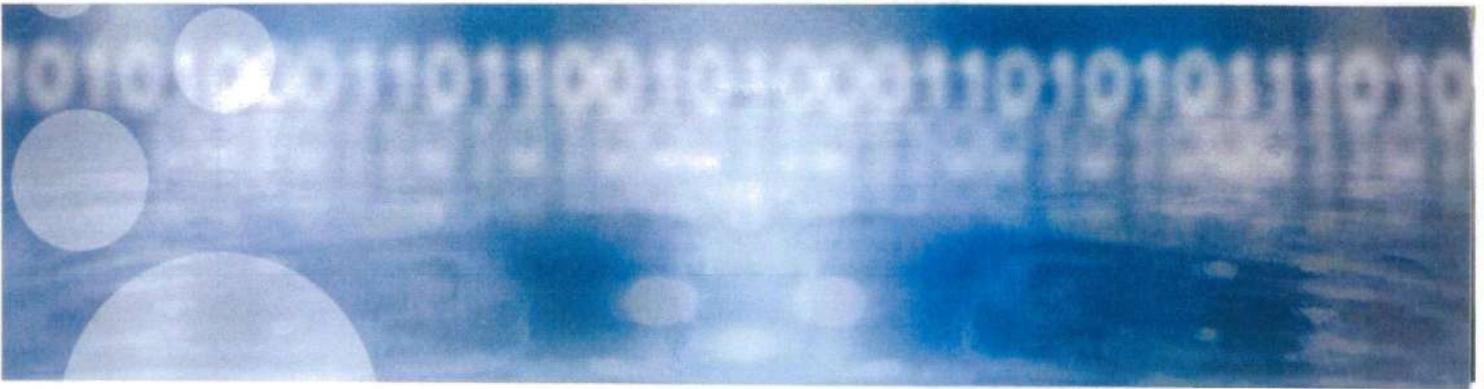

TUNNEL DAMPER (FAN & BLAST DAMPER)

MODEL: SMSB-P20



SANGMI AIR TECH CO. LTD. certifies that the SMSB-P20 Fan & Blast Damper shown herein is licensed to bear the AMCA Seal.

The Ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance only.




Less than 2% Air Leakage is Guaranteed!

SANGMI AIR TECH CO. LTD. Tunnel Dampers are specially manufactured for the basements, tunnels, and subway stations where a wide range of temperature variation and a high level of humidity are expected.

STANDARD SPECIFICATION


Standard Specification			
Parts	Types		Remarks
Frame	13GA Channel	Galvanized	250mm Depth, 50mm Flange
Blade	16GA 2.0mm	Galvanized A6063S-T5	Airfoil, Double Skin 215mm width
Mullion	13GA Channel	Galvanized	250mm Depth, 100mm Width
Jack Shaft	SS 400		
Blade Shaft	STS 304		13-25mm
Drive Shaft	STS 304		Minimum 25mm
Linkage	STS 304		
Bearing	STS 304		Sleeve Type, Steel Housing
Blade Seal	Silicon		
Jamb Seal	STS		0.25mm Thick
Bolts and Nuts	STS		

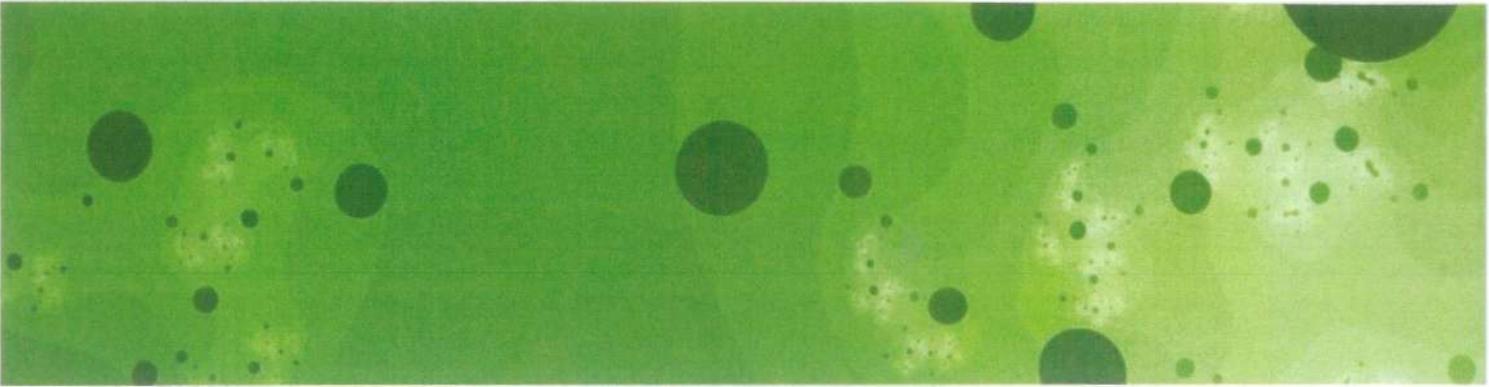

FABRICATED SIZES

Minimum: Parallel Action-150X150, Opposed Action- 150X300
 Maximum: Single Section-1500X2400, Complex Section-Unlimited

■ DIMENSION

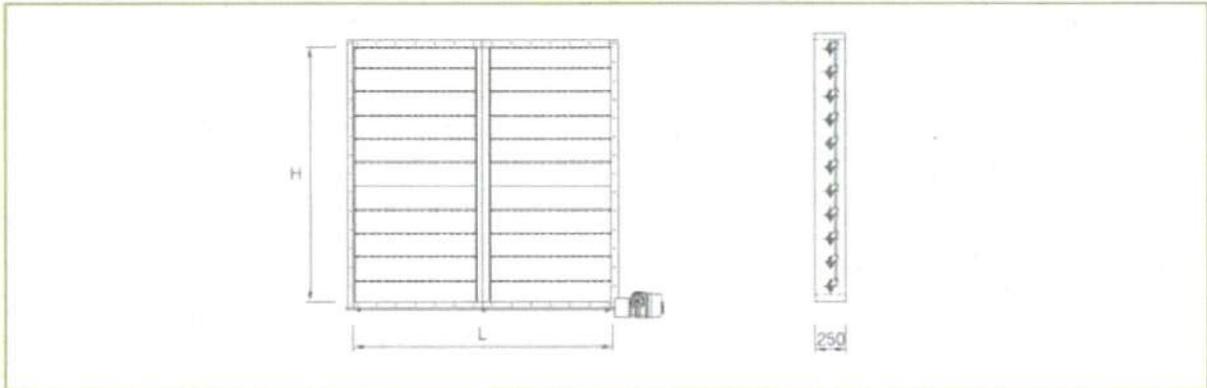

PERFORMANCE DATA

● LEAKAGE PERFORMANCE CLASSIFICATION

Leakage ratings are obtained in accordance with AMCA Publication 500-D using Test Setup Apparatus Fig. 5.5.

Pressure/Class	Leakage ft ³ /min/ ft ²			
	Required Ratings			
1A	0.25kpa(1")	1.0kpa(4")	2.0kpa(8")	3.0kpa(12")
	3	8	11	14

LEAKAGE CORRECTON FACTOR

DMPR. WIDTH (Inch)	STATIC PRESSURE (Inches Water Gage)												
	1	2	3	4	5	6	7	8	9	10	11	12	13
12"	1.0	1.5	1.8	2.1	2.4	2.6	2.8	2.8	2.8	2.9	2.9	3.2	3.7
24"	1.0	1.5	1.8	2.1	2.4	2.6	2.8	2.8	2.8	2.9	2.9	3.2	3.7
36"	1.0	1.5	1.8	2.1	2.4	2.6	2.8	2.8	2.8	2.9	2.9	3.2	3.7
48"	1.0	1.6	2.0	2.3	2.6	3.0	MAX DESIGN PRESSURE 6.5						
60"	1.0	1.5	2.5	MAX DESIGN PRESSURE 3.5									

The AMCA Certified Ratings Seal Does not apply to Air Leakage





TESTING INFORMATION

TEST FOR AIR PERFORMANCE IN ACCORDANCE WITH ANSI/AMCA STANDARD 500-D ,
FIGURE 5.3

AIR PERFORMANCE GRAPH FOR FULL OPEN POSITION : SMSB - P20

SMSB-P20 12X12

VELOCITY (ft/min)	STATIC PRESSURE (in.wg)	PRESSURE DROP (in.wg)	AIR LEAKAGE (ft/min)
1,968.5	4.155	0.57	5.09
1,771.6	5.194	0.46	5.51
1,574.8	6.232	0.36	5.89
1,377.9	7.271	0.28	6.59
1,181.1	8.310	0.21	7.23

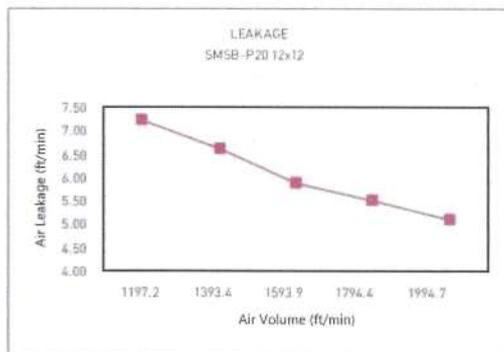
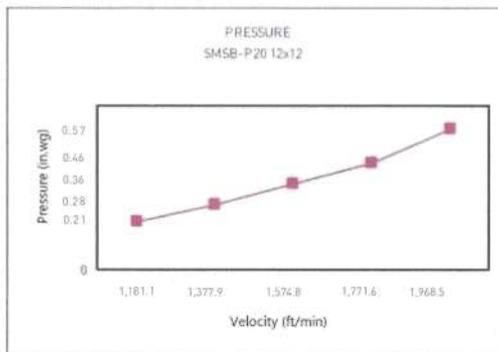


Air Leakage is based on operation between 10°C-40°C (50°F-104°F).

SMSB-P20 24X24

VELOCITY (ft/min)	STATIC PRESSURE (in.wg)	PRESSURE DROP (in.wg)	AIR LEAKAGE (ft/min)
7,373	5.201	0.81	115.29
6,335	6.241	0.41	124.54
5,395	7.281	0.21	132.78
2,510	8.321	0.04	139.71



The AMCA Certified Ratings Seal Does not apply to Air Leakage

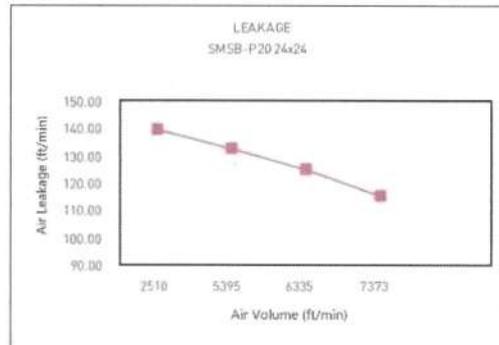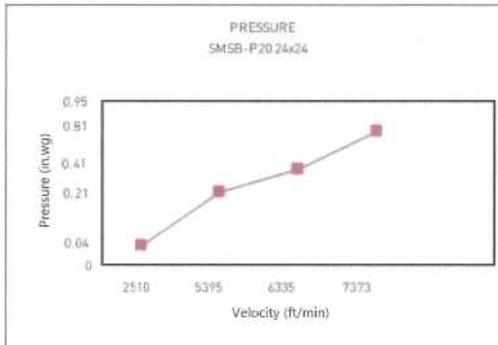

Air Leakage is based on operation between 10°C-40°C [50°F-104°F].

SMSB-P20 36X36

VELOCITY (ft/min)	STATIC PRESSURE (in.wg)	PRESSURE DROP (in.wg)	AIR LEAKAGE (ft/min)
4.000	1.081	0.98	602
2.979	0.594	0.53	998
1.970	0.256	0.23	1970
998	0.066	0.06	2979
602	0.023	0.02	4000


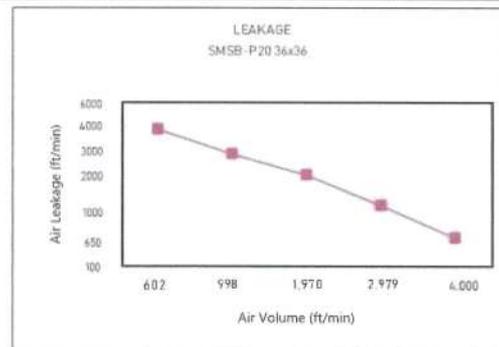
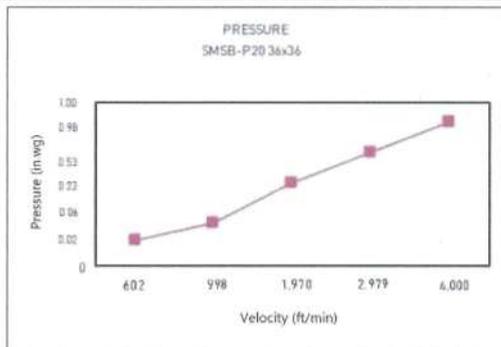


Air Leakage is based on operation between 10°C-40°C [50°F-104°F].

SMSB-P20 48X12

VELOCITY (ft/min)	STATIC PRESSURE (in.wg)	PRESSURE DROP (in.wg)	AIR LEAKAGE (ft/min)
2,038.7	4.161	0.10	13.08
1,895.8	5.201	0.09	19.92
1,598.4	6.241	0.06	37.24
1,363.4	7.281	0.05	57.07
694.3	8.321	0.02	75.41

The AMCA Certified Ratings Seal Does not apply to Air Leakage

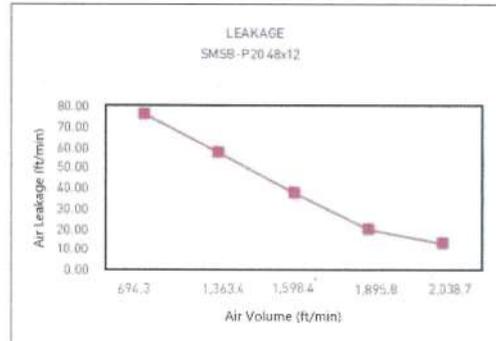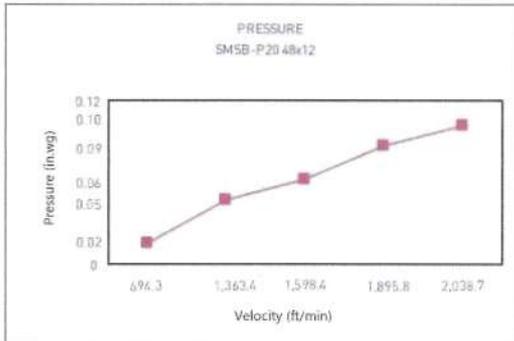
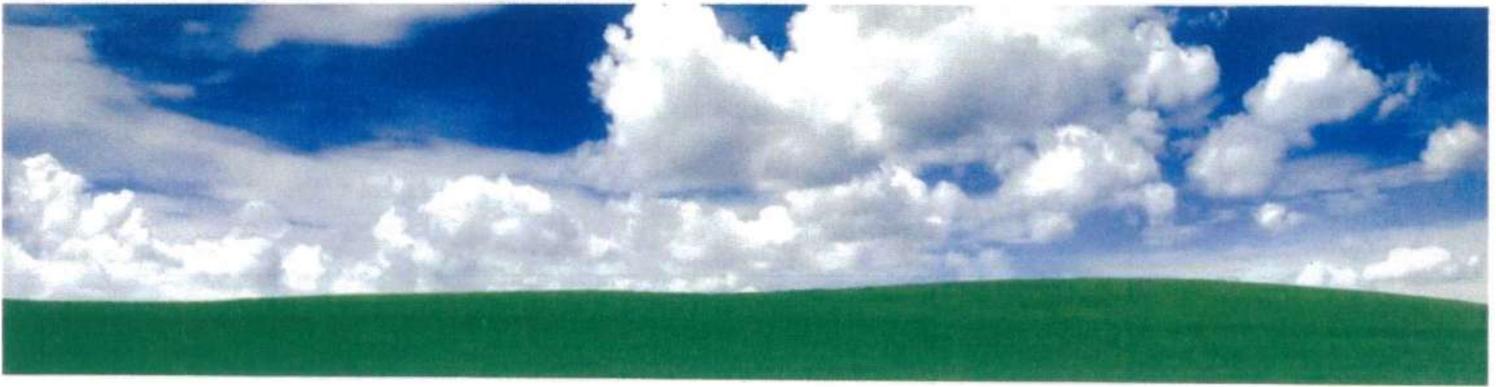


Air Leakage is based on operation between 10°C-40°C (50°F-104°F).

SMSB-P20 12X48

VELOCITY (ft/min)	STATIC PRESSURE (in.wg)	PRESSURE DROP (in.wg)	AIR LEAKAGE (ft/min)
2,071	4.161	0.04	65.65
1,872	5.201	0.03	70.34
1,578	6.241	0.02	73.92
1,329	7.281	0.02	77.31
584	8.321	0.003	81.99

Air Leakage is based on operation between 10°C-40°C (50°F-104°F).

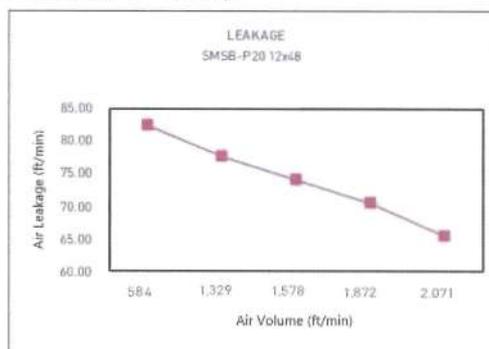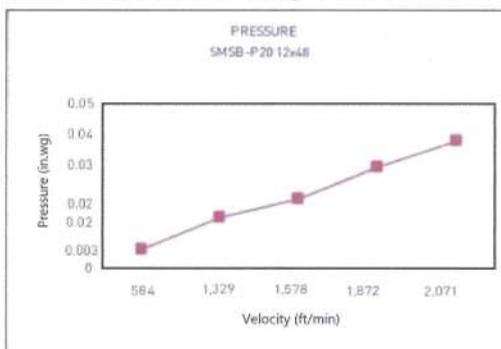

Air Leakage is based on operation between 10°C-40°C (50°F-104°F).

● CLOSING TORQUE

SIZE	TORQUE
12x12	28.64 in. lbs
24x24	57.3 in. lbs
36x36	85.6 in. lbs
12x48	97.21 in. lbs
48x12	45.13 in. lbs

The AMCA Certified Ratings Seal Does not apply to Air Leakage

SANGMI AIR TECH

- Air Tight Damper
- General Damper
- Linear Control Damper
- Anti Freezing Damper
- Back Draft Damper
- Gear Damper
- Fan & Blast Damper
- Isolation Damper
- Fire Damper
- Industrial Damper
- Tunnel Damper
- Louver Ass'y
- Sound Louver Ass'y [LV-110]
- Supply Grille Ass'y
- Hepa Filter Unit
- Eliminator Ass'y
- Relief Damper



sangmi air tech co., ltd.

**CATALOG SD06
(October . 2025)**

Sangmi Air Tech.,Ltd.

**Namdong-gu,Gojan-dong 626-5 (58B / 6L)
Incheon,Korea**

Tel. 82-32-816-3291 Fax. 82-32-816-3295

E-Mail : Sangmi3291@naver.com