


Sangmi

AIR TECH

BACK DRAFT DAMPER (AL TYPE): MODEL CD-4166

TUNNEL DAMPER (FAN & BLAST DAMPER): MODEL: SMSB-P20



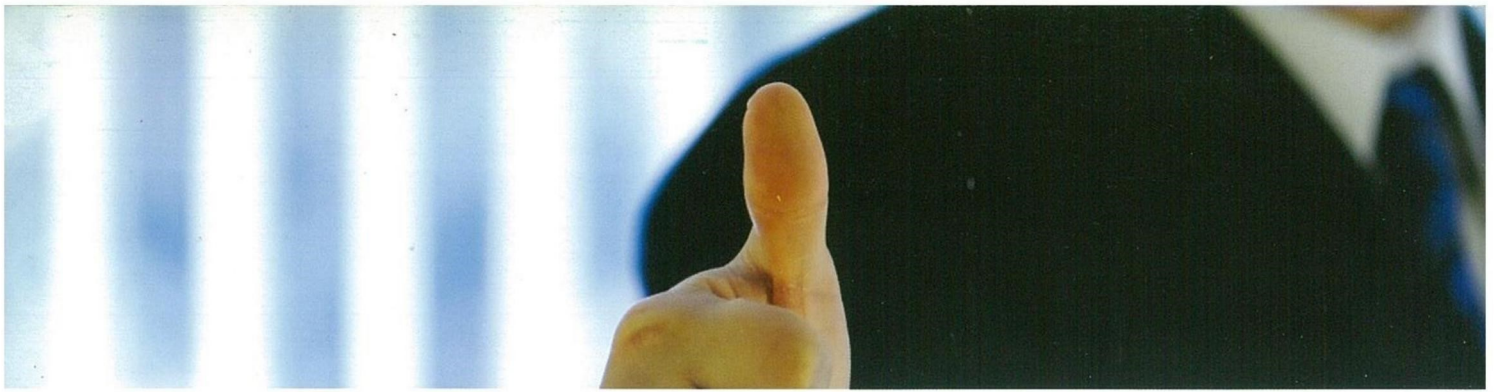


BACK DRAFT DAMPER (AL TYPE)

MODEL CD-4166




Sangmi Air Tech Co. Ltd. certifies that the CD4166 Back Draft Damper shown herein is licensed to bear the AMCA Seal.

The Ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance only.

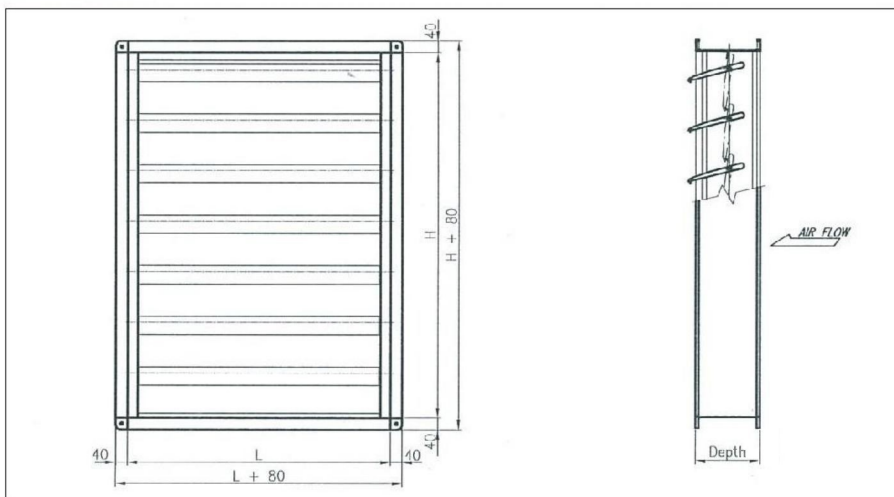

Back Draft Dampers are used where back draft air flow should be sealed. The parallel blades are automatically operated by positive air pressure with no need to have a separate actuator, free of maintenance. The light and sturdy aluminum enables the dampers to operate between 10mmAq to 150mmAq.

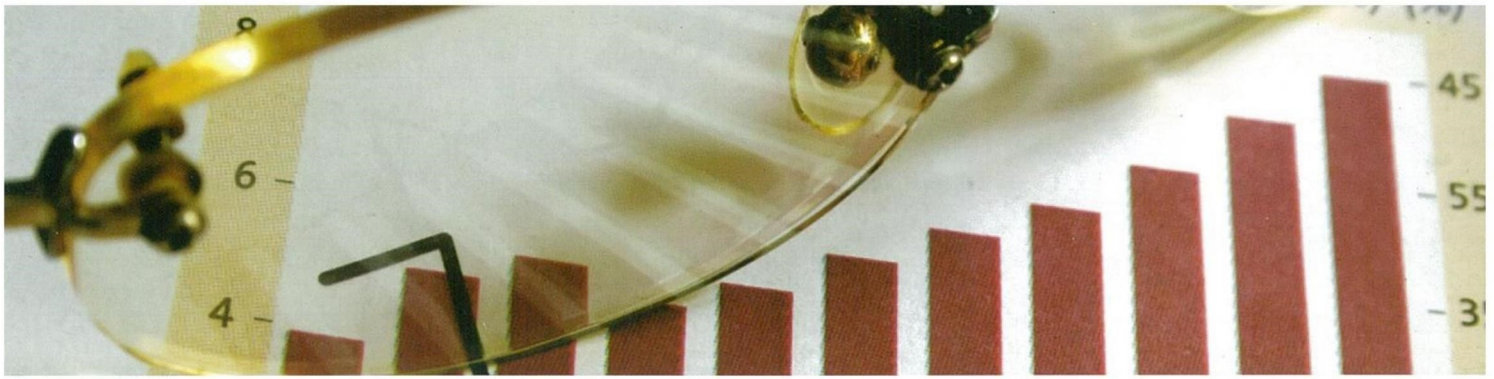

STANDARD SPECIFICATIONS

PARTS	MATERIAL	REMARK
FRAME	A6063S-T5	2.0TH channel aluminum press molding
BLADE	A6063S-T5	1.2TH airfoil type aluminum press molding
LINKAGE	SS400	3.0TH plated steel
AXILE	SM15C	Ø 12 plated round bar
SEAL	BLADE SEAL	EPDM rubber
	JAMB SEAL	STS304 0.15TH
BEARING	NYLON	Synthetic resin

FEATURES

- Has limited maximum air velocity; accurate data such air velocity and the air pressure should be checked before installation
- Airfoil type blades minimize air resistance
- Automatically operated by air pressure; maintenance free

CUSTOMIZATION

- Can be manufactured with GALVA or SUS
- Can be custom built to withstand high static pressure or high air velocity
- Variable sizes can be customized. Please contact our representative.

LEAKAGE PERFORMANCE CLASSIFICATION


Leakage ratings are obtained in accordance with AMCA Publication 500-D using Test Setup Apparatus Fig . 5.3-6.5/Fig5.4-6.3

Pressure/Class	Leakage ft ³ /min/ ft ²		
	Required Ratings		
1	0.25kpa(1")	1.0kpa(4")	2.0kpa(8")
	4	8	11

1" in.wg PRESSURE DROP

Damper width (inch)	Damper Height (inch)			
	12	24	36	48
12	14.13			54.39
24		18.36		
36			49.09	
48	34.61			

The AMCA Certified Ratings Seal Does not apply to Air Leakage

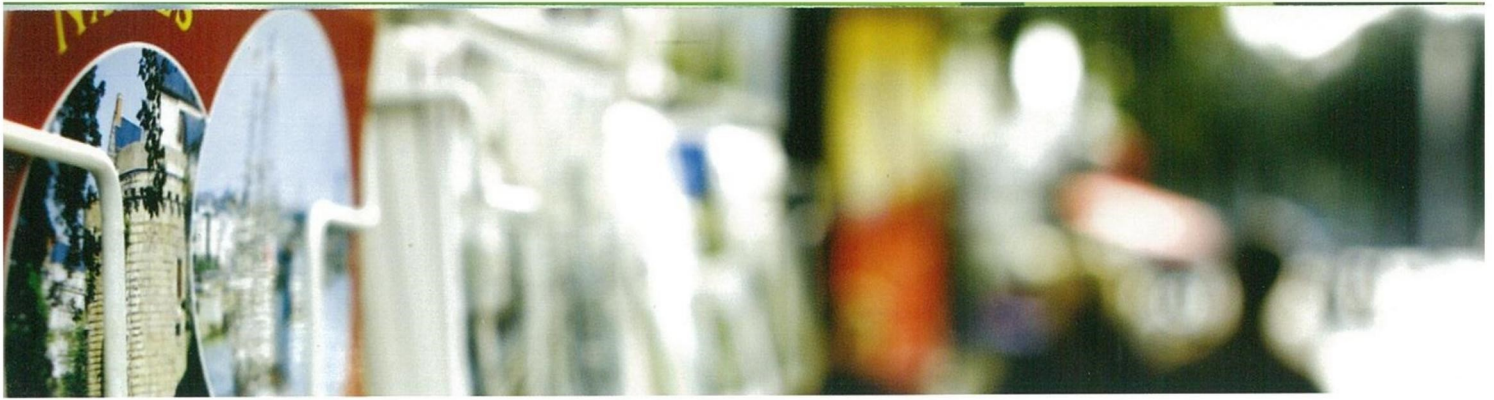

TESTING INFORMATION



TEST FOR AIR PERFORMANCE IN ACCORDANCE WITH ANSI/AMCA STANDARD 500-D ,
FIGURE 5.3

PERFORMANCE DATA

AIR PERFORMANCE GRAPH FOR FULL OPEN POSITION: CD4166

CD4166 12X12

VELOCITY (ft/min)	STATIC PRESSURE (in.wg)	PRESSURE DROP (in.wg)	AIR LEAKAGE (ft/min)
1,339.6	1.055	0.829	14.09
1,196.7	2.110	0.672	20.01
998.6	3.166	0.515	22.88
798.0	4.221	0.410	25.92
603.3	5.276	0.331	28.23

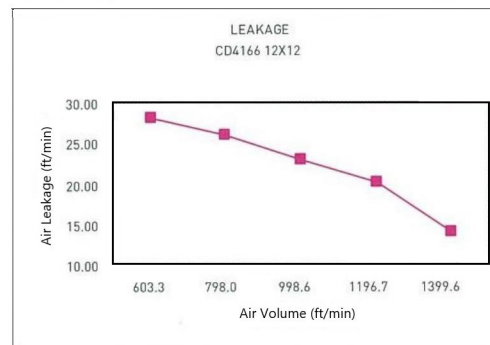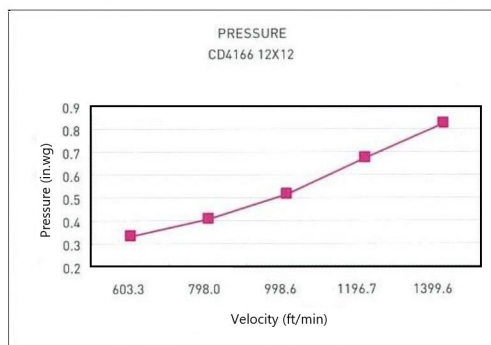



Air Leakage is based on operation between 10°C-40°C (50°F-104°F).

The AMCA Certified Ratings Seal Does not apply to Air Leakage



CD4166 24X24



VELOCITY (ft/min)	STATIC PRESSURE (in.wg)	PRESSURE DROP (in.wg)	AIR LEAKAGE (ft/min)
5,917.4	1.055	0.980	18.15
4,962.3	2.110	0.682	26.43
4,102.1	3.166	0.571	32.15
3,115.9	4.221	0.371	37.07
1,959.4	5.276	0.238	41.36

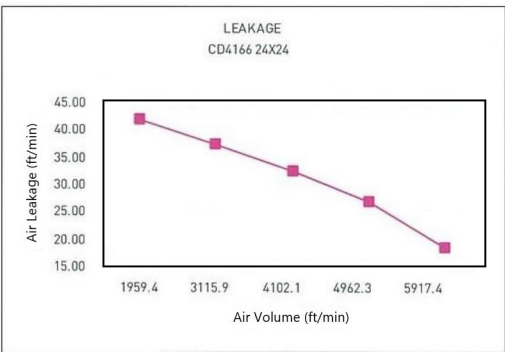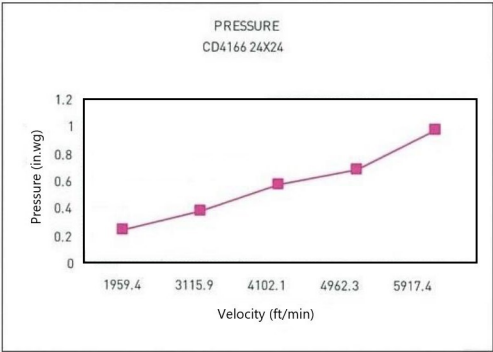

Air Leakage is based on operation between 10°C-40°C (50°F-104°F).

CD4166 36X36

VELOCITY (ft/min)	STATIC PRESSURE (in.wg)	PRESSURE DROP (in.wg)	AIR LEAKAGE (ft/min)
13,336.2	1.038	0.555	48.24
10,663.4	2.077	0.366	66.29
10,135.6	3.115	0.335	79.99
5,897.3	4.153	0.110	91.60
5,102.6	5.194	0.081	107.80

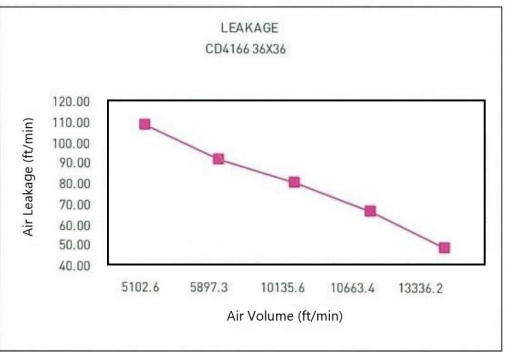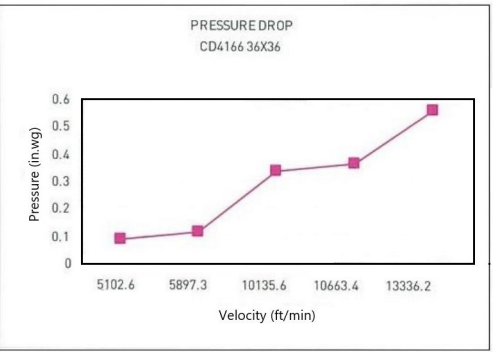



Air Leakage is based on operation between 10°C-40°C (50°F-104°F).

The AMCA Certified Ratings Seal Does not apply to Air Leakage



CD4166 48X12



VELOCITY (ft/min)	STATIC PRESSURE (in.wg)	PRESSURE DROP (in.wg)	AIR LEAKAGE (ft/min)
6,066.3	1.037	0.411	53.43
4,975.1	2.075	0.276	81.10
4,167.2	3.112	0.193	120.46
2,973.6	4.149	0.098	155.93
1,954.8	5.186	0.039	189.15

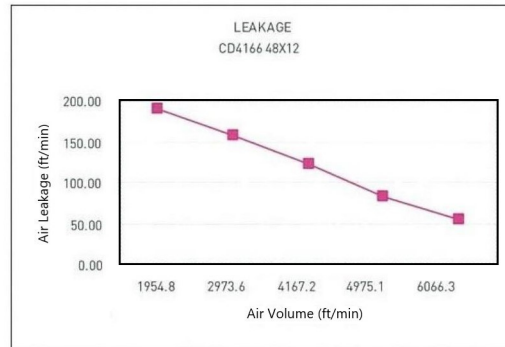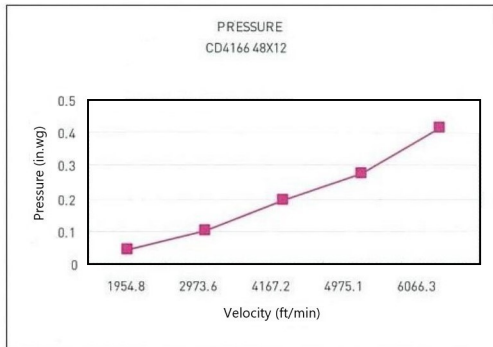

Air Leakage is based on operation between 10°C-40°C [50°F-104°F].


CD4166 12X48

VELOCITY (ft/min)	STATIC PRESSURE (in.wg)	PRESSURE DROP (in.wg)	AIR LEAKAGE (ft/min)
6,014.6	1.037	1.910	34.73
4,981.1	2.074	1.330	48.75
4,134.5	3.112	1.078	61.03
3,095.0	4.149	0.618	70.37
2,047.4	5.186	0.336	78.21

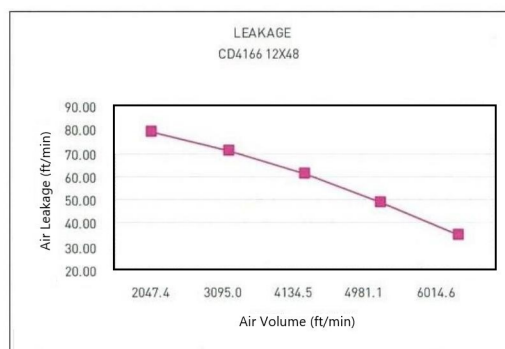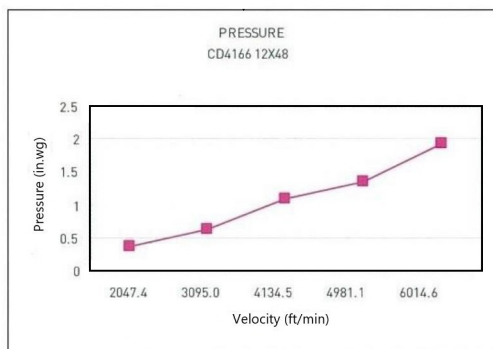

Air Leakage is based on operation between 10°C-40°C [50°F-104°F].

The AMCA Certified Ratings Seal Does not apply to Air Leakage

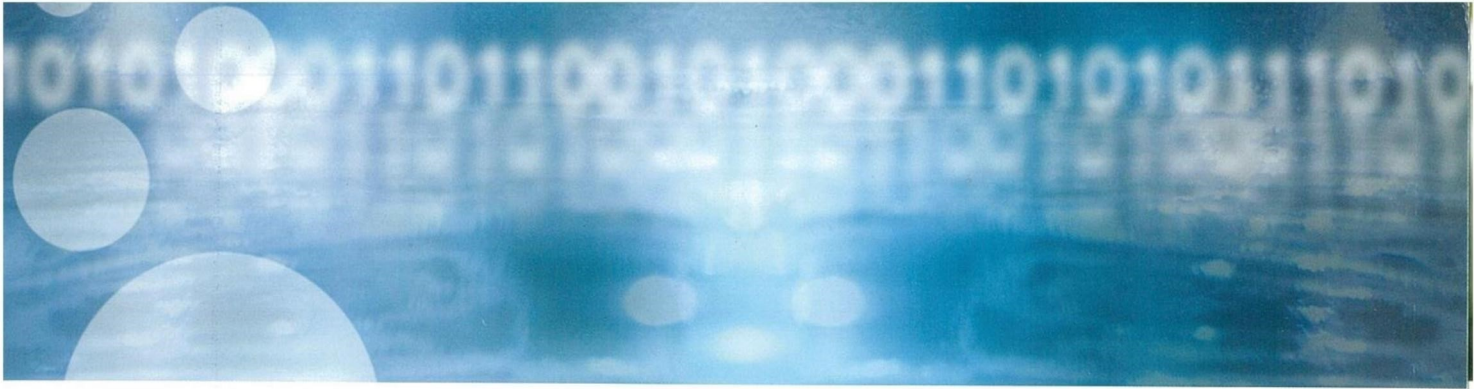

TUNNEL DAMPER (FAN& BLAST DAMPER)

MODEL: SMSB-P20



SANGMI AIR TECH CO. LTD. certifies that the SMSB-P20 Fan & Blast Damper shown herein is licensed to bear the AMCA Seal.

The Ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to air performance only.



Less than 2% Air Leakage is Guaranteed!

SANGMI AIR TECH CO. LTD. Tunnel Dampers are specially manufactured for the basements, tunnels, and subway stations where a wide range of temperature variation and a high level of humidity are expected.

STANDARD SPECIFICATION


Standard Specification		
Parts	Types	Remarks
Frame	13GA Galvanized Channel	250mm Depth, 50mm Flange
Blade	16GA Galvanized 2.0mm A6063S-T5	Airfoil, Double Skin 215mm width
Mullion	13GA Galvanized Channel	250mm Depth, 100mm Width
Jack Shaft	SS 400	
Blade Shaft	STS 304	13-25mm
Drive Shaft	STS 304	Minimum 25mm
Linkage	STS 304	
Bearing	STS 304	Sleeve Type, Steel Housing
Blade Seal	Silicon	
Jamb Seal	STS	0.25mm Thick
Bolts and Nuts	STS	

FABRICATED SIZES

Minimum: Parallel Action-150X150, Opposed Action- 150X300

Maximum: Single Section-1500X2400, Complex Section-Unlimited

DIMENSION

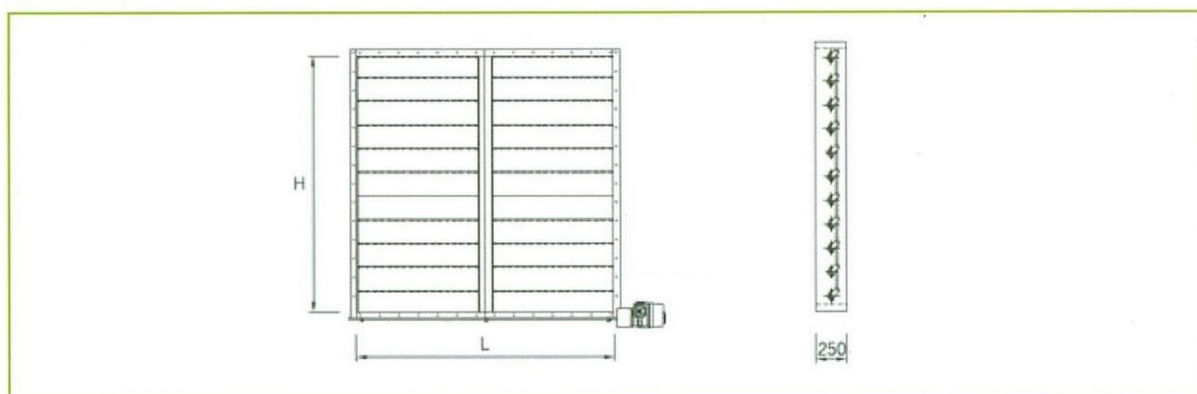

PERFORMANCE DATA

LEAKAGE PERFORMANCE CLASSIFICATION

Leakage ratings are obtained in accordance with AMCA Publication 500-D using Test Setup Apparatus Fig. 5.5.

Pressure/Class	Leakage ft ³ /min/ ft ²			
	Required Ratings			
1A	0.25kpa(1")	1.0kpa(4")	2.0kpa(8")	3.0kpa(12")
	3	8	11	14

LEAKAGE CORRECTION FACTOR

DMPR. WIDTH (Inch)	STATIC PRESSURE (Inches Water Gage)												
	1	2	3	4	5	6	7	8	9	10	11	12	13
12"	1.0	1.5	1.8	2.1	2.4	2.6	2.8	2.8	2.8	2.9	2.9	3.2	3.7
24"	1.0	1.5	1.8	2.1	2.4	2.6	2.8	2.8	2.8	2.9	2.9	3.2	3.7
36"	1.0	1.5	1.8	2.1	2.4	2.6	2.8	2.8	2.8	2.9	2.9	3.2	3.7
48"	1.0	1.6	2.0	2.3	2.6	3.0	MAX DESIGN PRESSURE 6.5						
60"	1.0	1.5	2.5	MAX DESIGN PRESSURE 3.5									

The AMCA Certified Ratings Seal Does not apply to Air Leakage





TESTING INFORMATION

TEST FOR AIR PERFORMANCE IN ACCORDANCE WITH ANSI/AMCA STANDARD 500-D ,
FIGURE 5.3

AIR PERFORMANCE GRAPH FOR FULL OPEN POSITION : SMSB – P20

SMSB-P20 12X12

VELOCITY (ft/min)	STATIC PRESSURE (in.wg)	PRESSURE DROP (in.wg)	AIR LEAKAGE (ft/min)
1,994.7	4.155	0.137	5.09
1,794.4	5.194	0.105	5.51
1,593.9	6.232	0.084	5.89
1,393.4	7.271	0.063	6.59
1,197.2	8.310	0.047	7.23


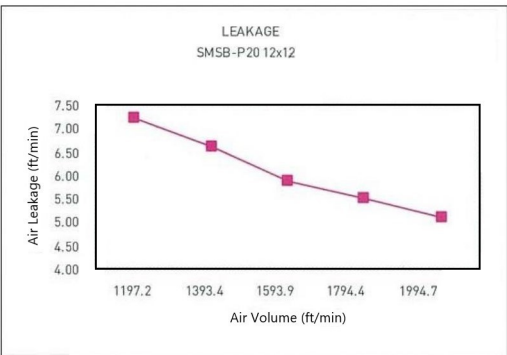
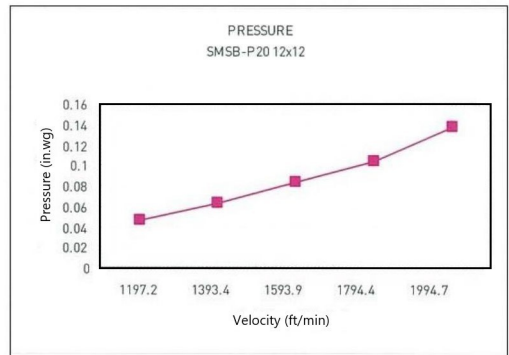


Air Leakage is based on operation between 10°C-40°C (50°F-104°F).

SMSB-P20 24X24

VELOCITY (ft/min)	STATIC PRESSURE (in.wg)	PRESSURE DROP (in.wg)	AIR LEAKAGE (ft/min)
8,183.0	4.161	0.064	102.94
7,510.2	5.201	0.057	115.29
6,332.1	6.241	0.041	124.54
5,400.9	7.281	0.031	132.78
2,750.4	8.321	0.008	139.71



The AMCA Certified Ratings Seal Does not apply to Air Leakage

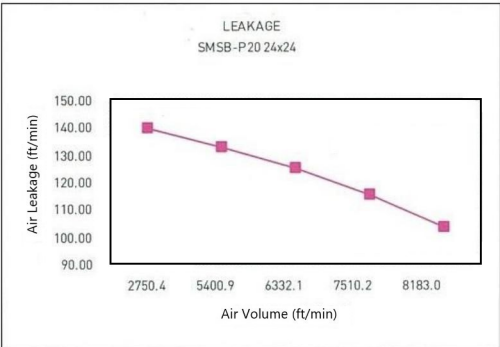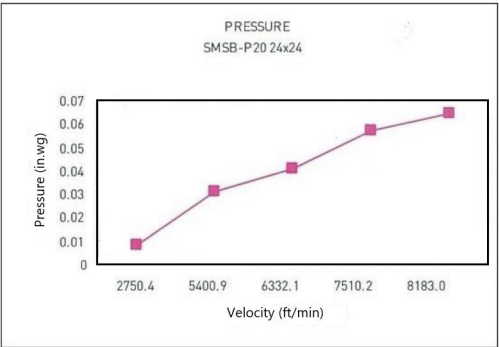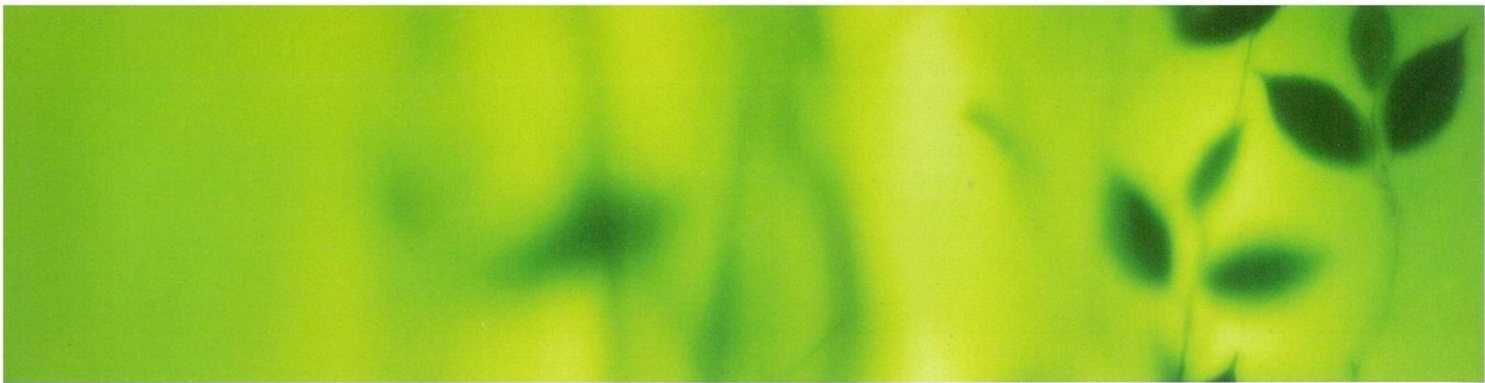

Air Leakage is based on operation between 10°C-40°C (50°F-104°F).

SMSB-P20 36X36

VELOCITY (ft/min)	STATIC PRESSURE (in.wg)	PRESSURE DROP (in.wg)	AIR LEAKAGE (ft/min)
36,000.0	1.081	0.985	602
26,814.0	0.594	0.536	998
17,726.0	0.256	0.232	1,970
8,979.0	0.066	0.061	2,979
5,421.0	0.023	0.021	4,000


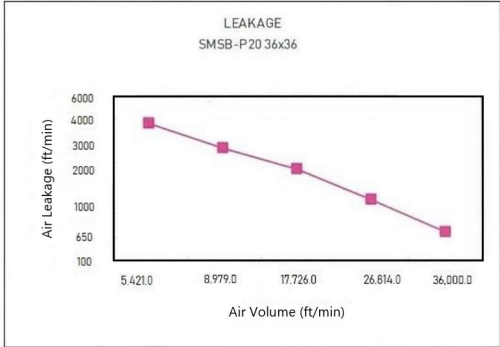
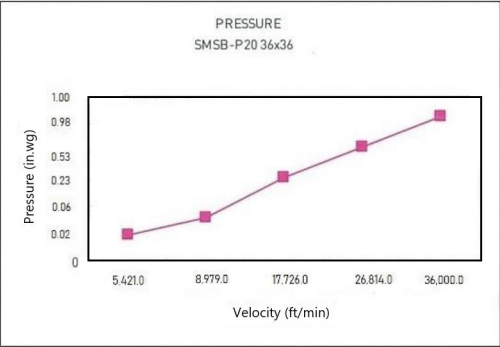


Air Leakage is based on operation between 10°C-40°C (50°F-104°F).

SMSB-P20 48X12

VELOCITY (ft/min)	STATIC PRESSURE (in.wg)	PRESSURE DROP (in.wg)	AIR LEAKAGE (ft/min)
8,323.0	4.161	0.103	13.08
7,498.5	5.201	0.088	19.92
6,392.0	6.241	0.063	37.24
5,367.0	7.281	0.047	57.07
2,598.6	8.321	0.015	75.41

The AMCA Certified Ratings Seal Does not apply to Air Leakage

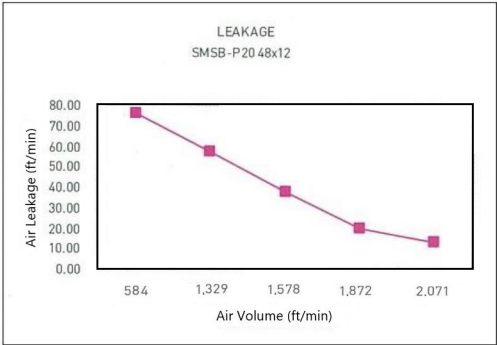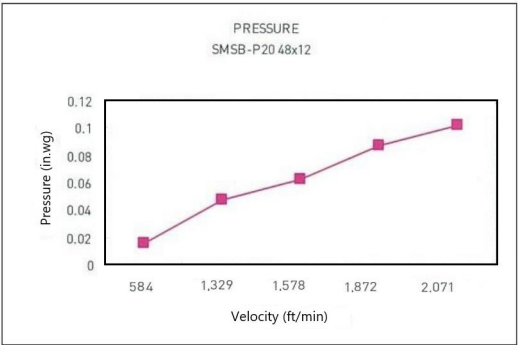
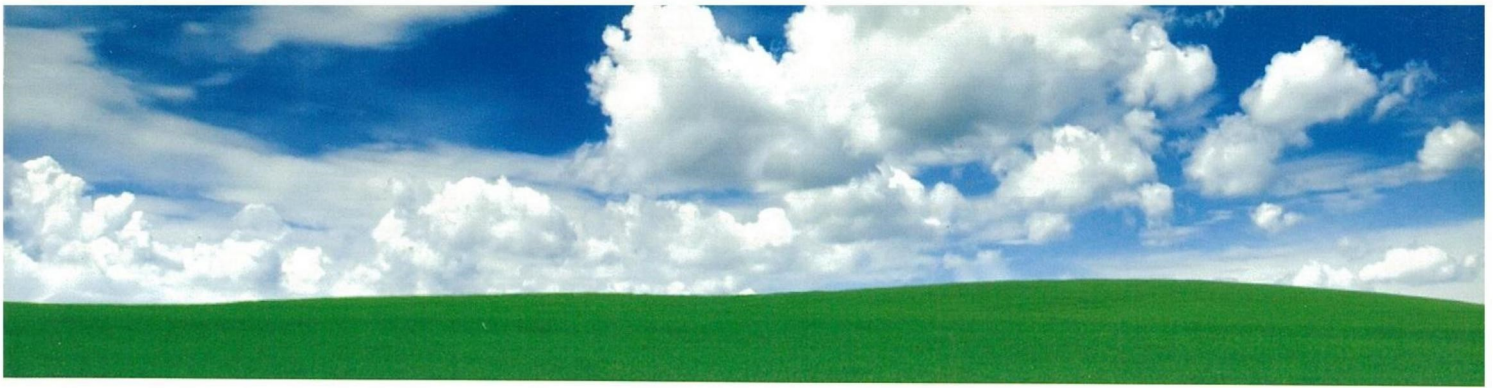


Air Leakage is based on operation between 10°C-40°C (50°F-104°F).

SMSB-P20 12X48

VELOCITY (ft/min)	STATIC PRESSURE (in.wg)	PRESSURE DROP (in.wg)	AIR LEAKAGE (ft/min)
2,071	4.161	0.038	65.65
1,872	5.201	0.032	70.34
1,578	6.241	0.021	73.92
1,329	7.281	0.015	77.31
584	8.321	0.003	81.99

Air Leakage is based on operation between 10°C-40°C (50°F-104°F).

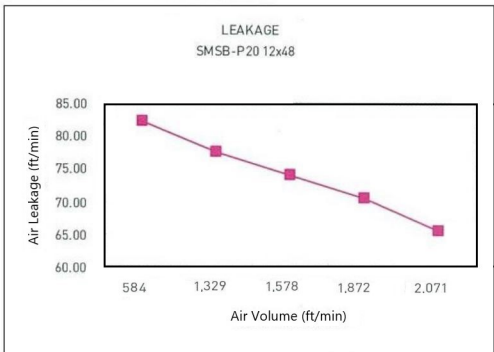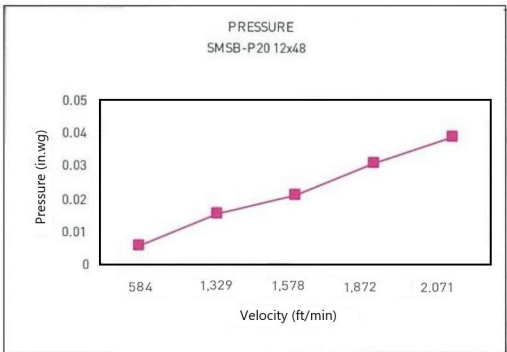

Air Leakage is based on operation between 10°C-40°C (50°F-104°F).

● CLOSING TORQUE

SIZE	TORQUE
12x12	28.64 in. lbs
24x24	57.3 in. lbs
36x36	85.6 in. lbs
12x48	97.21 in. lbs
48x12	45.13 in. lbs

The AMCA Certified Ratings Seal Does not apply to Air Leakage

SANGMI AIR TECH

- Air Tight Damper
- General Damper
- Linear Control Damper
- Anti Freezing Damper
- Back Draft Damper
- Gear Damper
- Fan & Blast Damper
- Isolation Damper
- Fire Damper
- Industrial Damper
- Tunnel Damper
- Louver Ass'y
- Sound Louver Ass'y (LV-110)
- Supply Grille Ass'y
- Hepa Filter Unit
- Eliminator Ass'y
- Relief Damper



sangmi air tech co., ltd.

**CATALOG SD06
(July 2022)**

Sangmi Air Tech.,Ltd.

Namdong-gu,Gojan-dong 626-5 (58B / 6L)

Incheon,Korea

Tel. 82-32-816-3291 Fax. 82-32-816-3295

E-Mail : Sangmi3291@naver.com