



EXTRUDED ALUMINUM STATIONARY LOUVER
FLORIDA PRODUCT APPROVED
HIGH VELOCITY WIND-DRIVEN RAIN RESISTANT
5" (127) DEEP • VERTICAL BLADE
MODEL: 1605WDVF






QUALIFICATIONS:

- Florida Product Approval.
- ETL Listed Product: 106225.
- Tested in accordance with: TAS-201 (Large Missile Impact Test), TAS-202 (Uniform Static Air Pressure Test), TAS-203 (Cyclic Wind Pressure Loading Test).
- AMCA 500-L (Wind-Driven Rain, Water Penetration, Airflow).
- AMCA 540 (Wind-Borne Debris Impact Test [Enhanced "Level E" Protection]).
- AMCA 550 (High Velocity Wind-Driven Rain Resistance Test).
- Wind load rating up to +/- 130 PSF (dependent on size and configuration).

STANDARD CONSTRUCTION:

- FRAME:** 5" (127) deep, Type 6063-T6 extruded aluminum, .080" (2.03) nominal wall thickness. Integral downspouts and caulking slot provided.
- BLADES:** Type 6063-T6 extruded aluminum, .060" (1.52) nominal wall thickness, with reinforcing bosses.
- BLADE ANGLE:** Fixed at 45 degrees.
- BLADE SPACING:** Approximately 1 1/2" (38) on centers.
- BLADE SUPPORT:** 2.5" (64) strap every 60" (1524) or less in height.
- SCREEN:** 5/8" x .050 (16 x 1.3) expanded, flattened aluminum bird screen in removable frame, inside (rear) mount (adds approximately 3/8" [10] to louver depth).
- FINISH:** Mill.
- MINIMUM SIZE:** 12" W x 12" H (305 x 305).
- MAX. SINGLE SECTION SIZE:** 72" W x 120" H (1829 x 3048) or 120" W x 72" H (3048 x 1829). 63 sq. ft. (5.9 m²). Larger louvers will require field assembly of smaller sections.

- OVERALL MAX. SIZE:** Unlimited Width x 120" H (3048).
- APPROXIMATE SHIPPING WEIGHT:** 5 lbs. per ft² (24.4 Kg per m²).

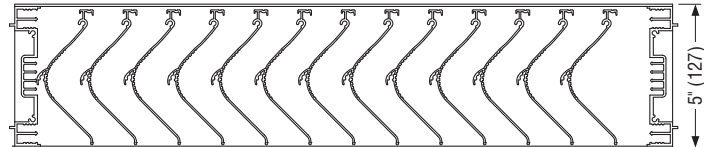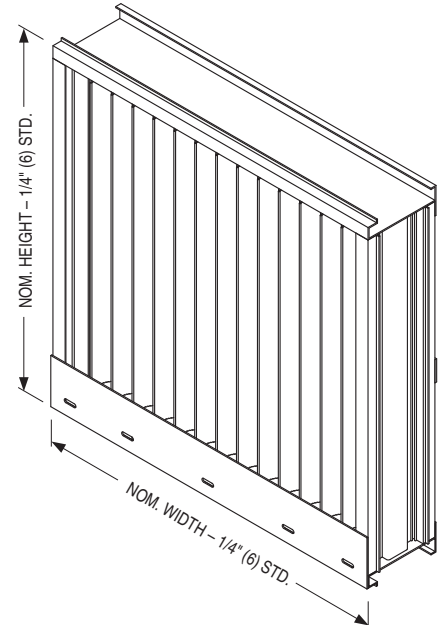

FLANGED FRAME (FL)
(OPTIONAL)



HIGH VELOCITY RAIN
RESISTANT WITH BLADES
FULLY OPEN AND
IMPACT RESISTANT LOUVER
Enhanced Protection Level E
See www.AMCA.org for all certified or listed products

This label does not signify
AMCA airflow performance
certification.



CYCLE TESTED
PER AMCA 540
See www.AMCA.org for all certified or listed products

This label does not signify
AMCA airflow performance
certification.

OPTIONS:

- ☐ **BSSS** Type 304 S.S. Bird Screen.
- ☐ **BSN** No Bird Screen.
- ☐ **ISA** Aluminum Insect Screen.
- ☐ **ISSS** Type 304 S.S. Insect Screen.
- ☐ **FL** Flanged Frame.
- ☐ **ESI** Extended Sill.
- ☐ **Other:** _____.

OPTIONAL FINISHES:

- ☐ **PC3** Powder Coat AAMA 2603. Color: _____.
- ☐ **PC4** High Performance Powder Coat AAMA 2604 (Equivalent to 50% Kynar®). Color: _____.
- ☐ **PC5** Fluoropolymer Powder Coat AAMA 2605 (Equivalent to 70% Kynar®). Color: _____.

- ☐ **PCC** Prime Coat.
- ☐ **AN04** Clear Anodized 204-R1.
- ☐ **AN15** Clear Anodized 215-R1.
- ☐ **ANLB** Light Bronze.
- ☐ **ANMB** Medium Bronze.
- ☐ **ANDB** Dark Bronze.
- ☐ **ANBK** Black.

For Installation Instructions, see
IOM-LOUVERINSTFPA

SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Page 1 of 3
Dimensions are in inches (mm).

DATE	B SERIES	SUPERSEDES	DRAWING NO.
1 - 22 - 18	1600F	NEW	1605WDVF

AIRFLOW/WATER PENETRATION DATA
for 48" x 48" (1219 x 1219) Louver Size

Free Area %	55%
Free Area sq. ft. (sq. m.)	8.77 (0.82)
Free Area Velocity at Point of Beginning Water Penetration at .01 oz./sq. ft. (3 ml/sq. m) (15 min. test duration)	1250 fpm (381 m/min.)
Air Volume at 1250 fpm	10,963 cfm (5174 l/s)
Free Area Velocity	
Pressure Drop @ 1000 fpm	.18 in. w.g. (45 Pa)

NOTE: To minimize water penetration when sizing intake louvers, select a Free Area Velocity that is **below** the point of beginning water penetration.*Maximum Free Area Velocity tested is 1250 fpm. Beginning point of water penetration for this model is above 1250 fpm.

WIND DRIVEN RAIN PERFORMANCE

Core Ventilation Rate in fpm (m/s)	0 (0.00)	110 (0.56)	196 (1.00)	280 (1.42)	399 (2.02)	499 (2.53)	590 (3.00)	703 (3.57)	783 (3.98)	894 (4.54)	984 (5.00)
Free Area Ventilation Rate in fpm (m/s)	0 (0.00)	200 (1.02)	356 (1.81)	509 (2.59)	725 (3.68)	907 (4.61)	1073 (5.45)	1278 (6.49)	1424 (7.23)	1625 (8.26)	1789 (9.09)
Effectiveness Ratio (%)	100	100	100	100	100	100	100	100	100	100	100
Penetration Class	A	A	A	A	A	A	A	A	A	A	A


Test was based on a 39.375" x 39.375" (1.0 m x 1.0 m) core area louver tested at a rainfall rate of 3" per hour (76 mm/hour) with a wind velocity of **29 mph (13 m/s)**.

DISCHARGE LOSS COEFFICIENT CLASS (INTAKE): 2. (Discharge Loss Coefficient Classification is as follows: 1=0.4 and above, 2=0.3 to 0.399, 3 = 0.2 to 0.299, 4 = 0.199 and below.)

Core Ventilation Rate in fpm (m/s)	0 (0.00)	88 (0.45)	199 (1.01)	300 (1.52)	399 (2.02)	484 (2.46)	589 (2.99)	686 (3.48)	786 (3.99)	882 (4.48)	987 (5.01)
Free Area Ventilation Rate in fpm (m/s)	0 (0.00)	160 (0.81)	362 (1.84)	545 (2.77)	725 (3.68)	880 (4.47)	1071 (5.44)	1247 (6.33)	1429 (7.26)	1604 (8.15)	1795 (9.12)
Effectiveness Ratio (%)	100	100	100	100	100	100	100	100	100	100	100
Penetration Class	A	A	A	A	A	A	A	A	A	A	A


Test was based on a 39.375" x 39.375" (1.0 m x 1.0 m) core area louver tested at a rainfall rate of 8" per hour (203 mm/hour) with a wind velocity of **50 mph (22 m/s)**.

DISCHARGE LOSS COEFFICIENT CLASS (INTAKE): 2. (Discharge Loss Coefficient Classification is as follows: 1=0.4 and above, 2=0.3 to 0.399, 3 = 0.2 to 0.299, 4 = 0.199 and below.)



Nailor Industries Inc. certifies the Model 1605WDVF shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. Seal applies to air performance, water penetration and wind driven rain performance ratings.

PRESSURE DROP

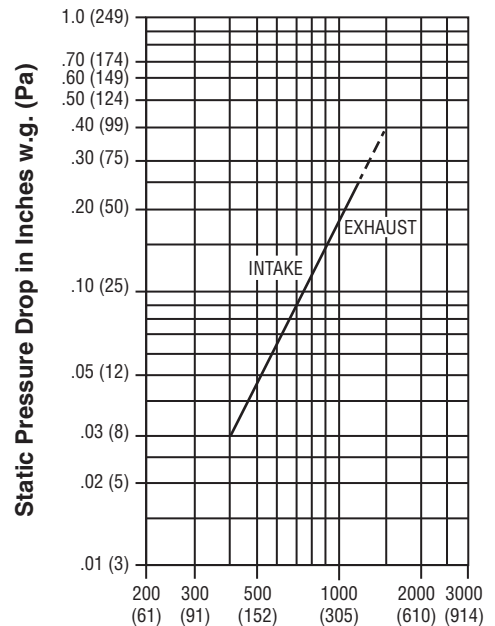

Air Velocity in Feet (Meters) Per Minute Through Free Area

Louver test size: 48" x 48" (1219 x 1219 mm).
Standard air density @ 0.075 lbs/ft³.
Tested to AMCA Fig. 5.5 – 6.5.



CYCLE TESTED
PER AMCA 540

See www.AMCA.org for all certified or listed products

This label does not signify AMCA airflow performance certification.



HIGH VELOCITY RAIN RESISTANT WITH BLADES FULLY OPEN AND IMPACT RESISTANT LOUVER
Enhanced Protection Level E

See www.AMCA.org for all certified or listed products

This label does not signify AMCA airflow performance certification.

Nailor Industries Inc. certifies that the 1605WDVF shown herein is approved to bear the AMCA Listing Label. The ratings shown are based on tests and procedures performed in accordance with AMCA publications and comply with the requirements of the AMCA Listing Label Program. The AMCA Listing Label applies to Wind Borne Debris Impact Resistant Louvers. The AMCA Listing Label applies to High Velocity Wind Driven Rain Resistant Louvers.

SCHEDULE TYPE:

PROJECT:

ENGINEER:

CONTRACTOR:

Page 2 of 3
Dimensions are in inches (mm).

DATE

B SERIES

SUPERSEDES

DRAWING NO.

1 - 22 - 18


1600F

NEW

1605WDVF

FREE AREA in Square Feet and Square Meters

		Width in Inches and Meters																			
		12 0.30	18 0.46	24 0.61	30 0.76	36 0.91	42 1.07	48 1.22	54 1.37	60 1.52	66 1.68	72 1.83	78 1.98	84 2.13	90 2.29	96 2.44	102 2.59	108 2.74	114 2.90	120 3.05	
Height in Inches and Meters	12 0.30	0.25 0.02	0.46 0.04	0.67 0.06	0.88 0.08	1.09 0.10	1.30 0.12	1.51 0.14	1.72 0.16	1.93 0.18	2.14 0.20	2.35 0.22	2.56 0.24	2.77 0.26	2.98 0.28	3.19 0.30	3.40 0.32	3.61 0.34	3.82 0.35	4.03 0.37	
	18 0.46	0.44 0.04	0.82 0.08	1.20 0.11	1.58 0.15	1.96 0.18	2.33 0.22	2.71 0.25	3.09 0.29	3.47 0.32	3.85 0.36	4.22 0.39	4.60 0.43	4.98 0.46	5.36 0.50	5.74 0.53	6.11 0.57	6.49 0.60	6.87 0.64	7.25 0.67	
	24 0.61	0.64 0.06	1.19 0.11	1.73 0.16	2.28 0.21	2.83 0.26	3.37 0.31	3.92 0.36	4.46 0.41	5.01 0.47	5.56 0.52	6.10 0.57	6.65 0.62	7.19 0.67	7.74 0.72	8.29 0.77	8.83 0.82	9.38 0.87	9.92 7.00	10.47 0.97	
	30 0.76	0.84 0.08	1.55 0.14	2.27 0.21	2.98 0.28	3.70 0.34	4.41 0.41	5.12 0.48	5.84 0.54	6.55 0.61	7.27 0.68	7.98 0.74	8.69 0.81	9.41 0.87	10.12 0.94	10.84 1.01	11.55 1.07	12.26 1.14	12.98 1.21	13.69 1.27	
	36 0.91	1.04 0.10	1.92 0.18	2.80 0.26	3.68 0.34	4.57 0.42	5.45 0.51	6.33 0.59	7.21 0.67	8.09 0.75	8.98 0.83	9.86 0.92	10.74 1.00	11.62 1.08	12.50 1.16	13.39 1.24	14.27 1.33	15.15 1.41	16.03 1.49	16.91 1.57	
	42 1.07	1.24 0.11	2.29 0.21	3.34 0.31	4.39 0.41	5.44 0.50	6.49 0.60	7.54 0.70	8.59 0.80	9.64 0.90	10.69 0.99	11.74 1.09	12.79 1.19	13.84 1.29	14.89 1.38	15.94 1.48	16.99 1.58	18.04 1.68	19.09 1.77	20.14 1.87	
	48 1.22	1.43 0.13	2.65 0.25	3.87 0.36	5.09 0.47	6.31 0.59	7.52 0.70	8.77 0.81	9.96 0.93	11.18 1.04	12.40 1.15	13.61 1.26	14.83 1.38	16.05 1.49	17.27 1.60	18.49 1.72	19.70 1.83	20.92 1.94	22.14 2.06	23.36 2.17	
	54 1.37	1.63 0.15	3.02 0.28	4.40 0.41	5.79 0.54	7.17 0.67	8.56 0.80	9.95 0.92	11.33 1.05	12.72 1.18	14.10 1.31	15.49 1.44	16.88 1.57	18.26 1.70	19.65 1.83	21.03 1.95	22.42 2.08	23.81 2.21	25.19 2.34	26.58 2.47	
	60 1.52	1.83 0.17	3.38 0.31	4.94 0.46	6.49 0.60	8.04 0.75	9.60 0.89	11.15 1.04	12.71 1.18	14.26 1.32	15.81 1.47	17.37 1.61	18.92 1.76	20.48 1.90	22.03 2.05	23.58 2.19	25.14 2.34	26.69 2.48	28.25 2.62	29.80 2.77	
	66 1.68	2.03 0.19	3.75 0.35	5.47 0.51	7.19 0.67	8.91 0.83	10.64 0.99	12.36 1.15	14.08 1.31	15.80 1.47	17.52 1.63	19.25 1.79	20.97 1.95	22.69 2.11	24.41 2.27	26.13 2.43	27.86 2.59	29.58 2.75	31.30 2.91	33.02 3.07	
	72 1.83	2.22 0.21	4.11 0.38	6.00 0.56	7.89 0.73	9.78 0.91	11.67 1.08	13.56 1.26	15.45 1.44	17.34 1.61	19.23 1.79	21.12 1.96	23.01 2.14	24.90 2.31	26.79 2.49	28.68 2.66	30.57 2.84	32.46 3.02	34.35 3.19	36.24 3.37	
	78 1.98	2.42 0.22	4.48 0.42	6.54 0.61	8.60 0.80	10.65 0.99	12.71 1.18	14.77 1.37	16.83 1.56	18.89 1.75	20.94 1.95	23.00 2.14									
	84 2.13	2.62 0.24	4.85 0.45	7.07 0.66	9.30 0.86	11.52 1.07	13.75 1.28	15.98 1.48	18.20 1.69	20.43 1.90	22.65 2.10	24.88 2.31									
	90 2.29	2.82 0.26	5.21 0.48	7.60 0.71	10.00 0.93	12.39 1.15	14.79 1.37	17.18 1.60	19.57 1.82	21.97 2.04	24.36 2.26	26.76 2.49									
	96 2.44	3.01 0.28	5.58 0.52	8.14 0.76	10.70 0.99	13.26 1.23	15.82 1.47	18.39 1.71	20.95 1.95	23.51 2.18	26.07 2.42	28.63 2.66									
	102 2.59	3.21 0.30	5.94 0.55	8.67 0.81	11.40 1.06	14.13 1.31	16.86 1.57	19.59 1.82	22.32 2.07	25.05 2.33	27.78 2.58	30.51 2.83									
	108 2.74	3.41 0.32	6.31 0.59	9.21 0.86	12.10 1.12	15.00 1.39	17.90 1.66	20.80 1.93	23.70 2.20	26.59 2.47	29.49 2.74	32.39 3.01									
	114 2.90	3.61 0.34	6.67 0.62	9.74 0.90	12.81 1.19	15.87 1.47	18.94 1.76	22.00 2.04	25.07 2.33	28.14 2.61	31.20 2.90	34.27 3.18									
	120 3.05	3.81 0.35	7.04 0.65	10.27 0.95	13.51 1.25	16.74 1.56	19.98 1.86	23.21 2.16	26.44 2.46	29.68 2.76	32.91 3.06	36.15 3.36									

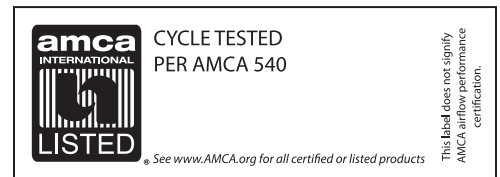
SCHEDULE TYPE:
PROJECT:
ENGINEER:
CONTRACTOR:

Page 3 of 3
Dimensions are in inches (mm).

DATE
B SERIES
SUPERSEDES
DRAWING NO.
1 - 22 - 18
1600F
NEW
1605WDVF