

# SCH501X

## Standard Construction

|                                    |                                                                                                                                                                    |
|------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Mounting</b>                    | Continuous aluminum angles along the head, sill, and jambs                                                                                                         |
| <b>Frame</b>                       | Heavy gauge extruded 6063-T5 aluminum, 5 in. (127 mm) x 0.081 in. (2 mm) nominal wall thickness                                                                    |
| <b>Blades</b>                      | Horizontal rain resistant design, heavy gauge extruded 6063-T5 aluminum, 0.081 in. (2mm) nominal wall thickness, positioned on approximately 2 in. (51 mm) centers |
| <b>Louver Depth</b>                | 5 in. (127 mm)                                                                                                                                                     |
| <b>Construction</b>                | Mechanically fastened                                                                                                                                              |
| <b>Finish</b>                      | Mill                                                                                                                                                               |
| <b>Minimum Size</b>                | 12 in. W x 7 in. H (305 mm W x 178 mm H)                                                                                                                           |
| <b>Maximum Single Section Size</b> | 84 in. W x 144 in. H or 120 in. W x 84 in. H (2134 mm W x 3658 mm H) or (3084 mm W x 2134 mm H)                                                                    |
| <b>Wind Load</b>                   | Up to +/- 200 PSF (9.6 kPa)                                                                                                                                        |

## Performance Ratings



Airolite certifies that the SCH501X louvers shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to \*Water Penetration, Air Performance, and \*Wind-Driven Rain ratings. Louvers were tested in accordance with AMCA Standard 500-L. \*Ratings include the effect of a sill pan.

Louvers were tested in accordance with AMCA Standard 500-L.



**IMPACT RESISTANT LOUVER**  
*Enhanced Protection Level E*

See [www.amca.org](http://www.amca.org) for all certified or listed products

This label does not signify AMCA airflow performance certification.


Airolite certifies that the SCH501X louver shown herein is approved to bear the AMCA Listing Label. The ratings shown are based on tests and procedures performed in accordance with AMCA Publications and comply with the requirements of the AMCA Listing Label Program. The AMCA Listing Label applies to Wind Borne Debris Impact Resistant louvers rated for Enhanced Protection with a minimum blade span of less than 12 in. (305 mm) and a maximum unsupported blade span of 46 in. (1168 mm).

### Performance of 48 in. x 48 in. (1219 mm x 1219 mm) Louver

|                                                                |                                    |
|----------------------------------------------------------------|------------------------------------|
| <b>Free Area</b>                                               |                                    |
| Area                                                           | 6.80 sq. ft. (0.632 sq. m)         |
| Percent                                                        | 42.5%                              |
| <b>Performance at Beginning Point of Water Penetration</b>     |                                    |
| Free Area Velocity                                             | above 1250 fpm (6.350 m/s)         |
| Max Intake Volume                                              | 8500 cfm (4.012 m <sup>3</sup> /s) |
| <b>Performance at 6,000 CFM (2.832 m<sup>3</sup>/s) Intake</b> |                                    |
| Pressure Drop                                                  | 0.112 in. wg (0.028 kPa)           |

AMCA 540\* Listed Hurricane Louver  
Florida Product Approved  
Extruded Aluminum | Storm Class

\*AMCA 540 when selected as an option  
Florida Product Approval No.: FL7708, FL35290  
UL Classified: R26078



## Options and Accessories

- [Bird Screen](#)
- [Blank Off Panels](#)
- [Filter Rack/Filter](#)
- [Flange Frame](#)
- Impact Qualified
- [Insect Screen](#)
- [Mounting Angles](#)
- [Security Bars](#)
- [Variety of Architectural Finishes](#)
- Welded Construction

## Product Details

[SCH501X Standard Details](#)

[SCH501X \(#475585 IOM\)](#)

Structural reinforcing members August be required to adequately support and install multiple louver sections within a large opening. Structural reinforcing members along with any associated installation hardware is not provided by Airolite unless indicated otherwise by Airolite. Options and accessories including, but not limited to, screens, filter racks, louver doors, and blank off panels are not subject to structural analysis unless indicated otherwise by Airolite.

**AIROLITE®**  
The look that works.™

# SCH501X

AMCA 540\* Listed Hurricane Louver  
Florida Product Approved  
Extruded Aluminum | Storm Class

\*AMCA 540 when selected as an option

## Free Area Chart

Free Area Chart shows free area in square feet and square meters.

| Louver Height Inches (Meters) | Louver Width in Inches (Meters) |      |       |       |       |       |       |       |       |       |       |       |       |                                                                                                                                                                                                                                                                                        |       |       |       |       |       |
|-------------------------------|---------------------------------|------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|-------|-------|-------|-------|
|                               | 12                              | 18   | 24    | 30    | 36    | 42    | 48    | 54    | 60    | 66    | 72    | 78    | 84    | 90                                                                                                                                                                                                                                                                                     | 96    | 102   | 108   | 114   | 120   |
|                               | 0.30                            | 0.46 | 0.61  | 0.76  | 0.91  | 1.07  | 1.22  | 1.37  | 1.52  | 1.68  | 1.83  | 1.98  | 2.13  | 2.29                                                                                                                                                                                                                                                                                   | 2.44  | 2.59  | 2.74  | 2.90  | 3.05  |
| 7<br>0.18                     | 0.06                            | 0.11 | 0.15  | 0.19  | 0.23  | 0.27  | 0.31  | 0.34  | 0.38  | 0.42  | 0.46  | 0.50  | 0.54  | 0.58                                                                                                                                                                                                                                                                                   | 0.62  | 0.65  | 0.69  | 0.73  | 0.77  |
| 12<br>0.30                    | 0.20                            | 0.33 | 0.45  | 0.58  | 0.71  | 0.83  | 0.96  | 1.05  | 1.18  | 1.30  | 1.43  | 1.56  | 1.68  | 1.81                                                                                                                                                                                                                                                                                   | 1.93  | 2.03  | 2.16  | 2.28  | 2.41  |
| 18<br>0.46                    | 0.41                            | 0.66 | 0.91  | 1.17  | 1.42  | 1.68  | 1.93  | 2.12  | 2.38  | 2.63  | 2.89  | 3.14  | 3.39  | 3.65                                                                                                                                                                                                                                                                                   | 3.90  | 4.09  | 4.35  | 4.60  | 4.86  |
| 24<br>0.61                    | 0.61                            | 0.99 | 1.38  | 1.76  | 2.14  | 2.52  | 2.91  | 3.19  | 3.58  | 3.96  | 4.34  | 4.72  | 5.11  | 5.49                                                                                                                                                                                                                                                                                   | 5.87  | 6.16  | 6.54  | 6.92  | 7.31  |
| 30<br>0.76                    | 0.81                            | 1.33 | 1.84  | 2.35  | 2.86  | 3.37  | 3.88  | 4.26  | 4.77  | 5.29  | 5.80  | 6.31  | 6.82  | 7.33                                                                                                                                                                                                                                                                                   | 7.84  | 8.22  | 8.73  | 9.25  | 9.76  |
| 36<br>0.91                    | 1.02                            | 1.66 | 2.30  | 2.94  | 3.58  | 4.22  | 4.85  | 5.33  | 5.97  | 6.61  | 7.25  | 7.89  | 8.53  | 9.17                                                                                                                                                                                                                                                                                   | 9.81  | 10.29 | 10.93 | 11.57 | 12.21 |
| 42<br>1.07                    | 1.22                            | 1.99 | 2.76  | 3.53  | 4.29  | 5.06  | 5.83  | 6.40  | 7.17  | 7.94  | 8.71  | 9.47  | 10.24 | 11.01                                                                                                                                                                                                                                                                                  | 11.78 | 12.35 | 13.12 | 13.89 | 14.66 |
| 48<br>1.22                    | 1.43                            | 2.32 | 3.22  | 4.12  | 5.01  | 5.91  | 6.80  | 7.47  | 8.37  | 9.27  | 10.16 | 11.06 | 11.95 | 12.85                                                                                                                                                                                                                                                                                  | 13.75 | 14.42 | 15.31 | 16.21 | 17.10 |
| 54<br>1.37                    | 1.63                            | 2.66 | 3.68  | 4.70  | 5.73  | 6.75  | 7.78  | 8.54  | 9.57  | 10.59 | 11.62 | 12.64 | 13.67 | 14.69                                                                                                                                                                                                                                                                                  | 15.71 | 16.48 | 17.51 | 18.53 | 19.55 |
| 60<br>1.52                    | 1.84                            | 2.99 | 4.14  | 5.29  | 6.45  | 7.60  | 8.75  | 9.62  | 10.77 | 11.92 | 13.07 | 14.22 | 15.38 | 16.53                                                                                                                                                                                                                                                                                  | 17.68 | 18.55 | 19.70 | 20.85 | 22.00 |
| 66<br>1.68                    | 2.04                            | 3.32 | 4.60  | 5.88  | 7.16  | 8.44  | 9.73  | 10.69 | 11.97 | 13.25 | 14.53 | 15.81 | 17.09 | 18.37                                                                                                                                                                                                                                                                                  | 19.65 | 20.61 | 21.89 | 23.17 | 24.45 |
| 72<br>1.83                    | 2.25                            | 3.65 | 5.06  | 6.47  | 7.88  | 9.29  | 10.70 | 11.76 | 13.17 | 14.57 | 15.98 | 17.39 | 18.80 | 20.21                                                                                                                                                                                                                                                                                  | 21.62 | 22.68 | 24.08 | 25.49 | 26.90 |
| 78<br>1.98                    | 2.45                            | 3.99 | 5.52  | 7.06  | 8.60  | 10.14 | 11.67 | 12.83 | 14.36 | 15.90 | 17.44 | 18.98 | 20.51 | 22.05                                                                                                                                                                                                                                                                                  | 23.59 | 24.74 | 26.28 | 27.81 | 29.35 |
| 84<br>2.13                    | 2.65                            | 4.32 | 5.99  | 7.65  | 9.32  | 10.98 | 12.65 | 13.90 | 15.56 | 17.23 | 18.89 | 20.56 | 22.22 | 23.89                                                                                                                                                                                                                                                                                  | 25.56 | 26.80 | 28.47 | 30.14 | 31.80 |
| 90<br>2.29                    | 2.86                            | 4.65 | 6.45  | 8.24  | 10.03 | 11.83 | 13.62 | 14.97 | 16.76 | 18.55 | 20.35 | 22.14 | 23.94 | <div>Document Links</div> <div><a href="#">SCH501X Specification</a></div> <div><a href="#">Architectural Louvers Catalog</a></div> <div><a href="#">Finishes &amp; Colors</a></div> <div><a href="#">Qwik Ship Guide</a></div> <div><a href="#">Airolite Warranty Statement</a></div> |       |       |       |       |       |
| 96<br>2.44                    | 3.06                            | 4.99 | 6.91  | 8.83  | 10.75 | 12.67 | 14.60 | 16.04 | 17.96 | 19.88 | 21.80 | 23.73 | 25.65 |                                                                                                                                                                                                                                                                                        |       |       |       |       |       |
| 102<br>2.59                   | 3.27                            | 5.32 | 7.37  | 9.42  | 11.47 | 13.52 | 15.57 | 17.11 | 19.16 | 21.21 | 23.26 | 25.31 | 27.36 |                                                                                                                                                                                                                                                                                        |       |       |       |       |       |
| 108<br>2.74                   | 3.47                            | 5.65 | 7.83  | 10.01 | 12.19 | 14.37 | 16.54 | 18.18 | 20.36 | 22.54 | 24.71 | 26.89 | 29.07 |                                                                                                                                                                                                                                                                                        |       |       |       |       |       |
| 114<br>2.90                   | 3.68                            | 5.98 | 8.29  | 10.60 | 12.90 | 15.21 | 17.52 | 19.25 | 21.56 | 23.86 | 26.17 | 28.48 | 30.78 |                                                                                                                                                                                                                                                                                        |       |       |       |       |       |
| 120<br>3.05                   | 3.88                            | 6.32 | 8.75  | 11.19 | 13.62 | 16.06 | 18.49 | 20.32 | 22.75 | 25.19 | 27.63 | 30.06 | 32.50 |                                                                                                                                                                                                                                                                                        |       |       |       |       |       |
| 126<br>3.05                   | 4.09                            | 6.65 | 9.21  | 11.78 | 14.34 | 16.90 | 19.47 | 21.39 | 23.95 | 26.52 | 29.08 | 31.64 | 34.21 |                                                                                                                                                                                                                                                                                        |       |       |       |       |       |
| 132<br>3.35                   | 4.29                            | 6.98 | 9.67  | 12.37 | 15.06 | 17.75 | 20.44 | 22.46 | 25.15 | 27.84 | 30.54 | 33.23 | 35.92 |                                                                                                                                                                                                                                                                                        |       |       |       |       |       |
| 138<br>3.51                   | 4.49                            | 7.31 | 10.13 | 12.95 | 15.78 | 18.60 | 21.42 | 23.53 | 26.35 | 29.17 | 31.99 | 34.81 | 37.63 |                                                                                                                                                                                                                                                                                        |       |       |       |       |       |
| 144<br>3.66                   | 4.70                            | 7.65 | 10.60 | 13.54 | 16.49 | 19.44 | 22.39 | 24.60 | 27.55 | 30.50 | 33.45 | 36.39 | 39.34 |                                                                                                                                                                                                                                                                                        |       |       |       |       |       |



The look that works

## Document Links

[SCH501X Specification](#)

[Architectural Louvers Catalog](#)

[Finishes & Colors](#)

[Qwik Ship Guide](#)

[Aiolite Warranty Statement](#)

**AIROLITE®**  
The look that works.™

# SCH501X

AMCA 540\* Listed Hurricane Louver

Florida Product Approved

Extruded Aluminum | Storm Class

\*AMCA 540 when selected as an option

## Core Area Chart

Core Area Chart shows core area in square feet and square meters.

| Louver Height Inches (Meters) | Louver Width in Inches (Meters) |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |       |  |  |  |  |
|-------------------------------|---------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|--|--|--|
|                               | 12                              | 18    | 24    | 30    | 36    | 42    | 48    | 54    | 60    | 66    | 72    | 78    | 84    | 90    | 96    | 102   | 108   | 114   | 120   |  |  |  |  |
|                               | 0.30                            | 0.46  | 0.61  | 0.76  | 0.91  | 1.07  | 1.22  | 1.37  | 1.52  | 1.68  | 1.83  | 1.98  | 2.13  | 2.29  | 2.44  | 2.59  | 2.74  | 2.90  | 3.05  |  |  |  |  |
| 7                             | 0.18                            | 0.30  | 0.41  | 0.53  | 0.64  | 0.76  | 0.87  | 0.99  | 1.10  | 1.22  | 1.33  | 1.44  | 1.56  | 1.67  | 1.79  | 1.90  | 2.02  | 2.13  | 2.25  |  |  |  |  |
| 0.18                          | 0.02                            | 0.03  | 0.04  | 0.05  | 0.06  | 0.07  | 0.08  | 0.09  | 0.10  | 0.11  | 0.12  | 0.13  | 0.14  | 0.16  | 0.17  | 0.18  | 0.19  | 0.20  | 0.21  |  |  |  |  |
| 12                            | 0.52                            | 0.84  | 1.16  | 1.49  | 1.81  | 2.13  | 2.46  | 2.78  | 3.10  | 3.42  | 3.75  | 4.07  | 4.39  | 4.72  | 5.04  | 5.36  | 5.68  | 6.01  | 6.33  |  |  |  |  |
| 0.30                          | 0.05                            | 0.08  | 0.11  | 0.14  | 0.17  | 0.20  | 0.23  | 0.26  | 0.29  | 0.32  | 0.35  | 0.38  | 0.41  | 0.44  | 0.47  | 0.50  | 0.53  | 0.56  | 0.59  |  |  |  |  |
| 18                            | 0.92                            | 1.49  | 2.06  | 2.64  | 3.21  | 3.78  | 4.36  | 4.93  | 5.50  | 6.08  | 6.65  | 7.22  | 7.79  | 8.37  | 8.94  | 9.51  | 10.09 | 10.66 | 11.23 |  |  |  |  |
| 0.46                          | 0.09                            | 0.14  | 0.19  | 0.25  | 0.30  | 0.35  | 0.41  | 0.46  | 0.51  | 0.56  | 0.62  | 0.67  | 0.72  | 0.78  | 0.83  | 0.88  | 0.94  | 0.99  | 1.04  |  |  |  |  |
| 24                            | 1.32                            | 2.14  | 2.97  | 3.79  | 4.61  | 5.43  | 6.26  | 7.08  | 7.90  | 8.73  | 9.55  | 10.37 | 11.20 | 12.02 | 12.84 | 13.66 | 14.49 | 15.31 | 16.13 |  |  |  |  |
| 0.61                          | 0.12                            | 0.20  | 0.28  | 0.35  | 0.43  | 0.50  | 0.58  | 0.66  | 0.73  | 0.81  | 0.89  | 0.96  | 1.04  | 1.12  | 1.19  | 1.27  | 1.35  | 1.42  | 1.50  |  |  |  |  |
| 30                            | 1.72                            | 2.79  | 3.87  | 4.94  | 6.01  | 7.09  | 8.16  | 9.23  | 10.30 | 11.38 | 12.45 | 13.52 | 14.60 | 15.67 | 16.74 | 17.81 | 18.89 | 19.96 | 21.03 |  |  |  |  |
| 0.76                          | 0.16                            | 0.26  | 0.36  | 0.46  | 0.56  | 0.66  | 0.76  | 0.86  | 0.96  | 1.06  | 1.16  | 1.26  | 1.36  | 1.46  | 1.56  | 1.65  | 1.75  | 1.85  | 1.95  |  |  |  |  |
| 36                            | 2.12                            | 3.45  | 4.77  | 6.09  | 7.41  | 8.74  | 10.06 | 11.38 | 12.71 | 14.03 | 15.35 | 16.67 | 18.00 | 19.32 | 20.64 | 21.97 | 23.29 | 24.61 | 25.93 |  |  |  |  |
| 0.91                          | 0.20                            | 0.32  | 0.44  | 0.57  | 0.69  | 0.81  | 0.93  | 1.06  | 1.18  | 1.30  | 1.43  | 1.55  | 1.67  | 1.79  | 1.92  | 2.04  | 2.16  | 2.29  | 2.41  |  |  |  |  |
| 42                            | 2.52                            | 4.10  | 5.67  | 7.24  | 8.81  | 10.39 | 11.96 | 13.53 | 15.11 | 16.68 | 18.25 | 19.83 | 21.40 | 22.97 | 24.54 | 26.12 | 27.69 | 29.26 | 30.84 |  |  |  |  |
| 1.07                          | 0.23                            | 0.38  | 0.53  | 0.67  | 0.82  | 0.97  | 1.11  | 1.26  | 1.40  | 1.55  | 1.70  | 1.84  | 1.99  | 2.13  | 2.28  | 2.43  | 2.57  | 2.72  | 2.87  |  |  |  |  |
| 48                            | 2.92                            | 4.75  | 6.57  | 8.39  | 10.22 | 12.04 | 13.86 | 15.68 | 17.51 | 19.33 | 21.15 | 22.98 | 24.80 | 26.62 | 28.45 | 30.27 | 32.09 | 33.91 | 35.74 |  |  |  |  |
| 1.22                          | 0.27                            | 0.44  | 0.61  | 0.78  | 0.95  | 1.12  | 1.29  | 1.46  | 1.63  | 1.80  | 1.96  | 2.13  | 2.30  | 2.47  | 2.64  | 2.81  | 2.98  | 3.15  | 3.32  |  |  |  |  |
| 54                            | 3.33                            | 5.40  | 7.47  | 9.54  | 11.62 | 13.69 | 15.76 | 17.84 | 19.91 | 21.98 | 24.05 | 26.13 | 28.20 | 30.27 | 32.35 | 34.42 | 36.49 | 38.56 | 40.64 |  |  |  |  |
| 1.37                          | 0.31                            | 0.50  | 0.69  | 0.89  | 1.08  | 1.27  | 1.46  | 1.66  | 1.85  | 2.04  | 2.23  | 2.43  | 2.62  | 2.81  | 3.01  | 3.20  | 3.39  | 3.58  | 3.78  |  |  |  |  |
| 60                            | 3.73                            | 6.05  | 8.37  | 10.70 | 13.02 | 15.34 | 17.66 | 19.99 | 22.31 | 24.63 | 26.96 | 29.28 | 31.60 | 33.92 | 36.25 | 38.57 | 40.89 | 43.22 | 45.54 |  |  |  |  |
| 1.52                          | 0.35                            | 0.56  | 0.78  | 0.99  | 1.21  | 1.43  | 1.64  | 1.86  | 2.07  | 2.29  | 2.50  | 2.72  | 2.94  | 3.15  | 3.37  | 3.58  | 3.80  | 4.02  | 4.23  |  |  |  |  |
| 66                            | 4.13                            | 6.70  | 9.27  | 11.85 | 14.42 | 16.99 | 19.56 | 22.14 | 24.71 | 27.28 | 29.86 | 32.43 | 35.00 | 37.58 | 40.15 | 42.72 | 45.29 | 47.87 | 50.44 |  |  |  |  |
| 1.68                          | 0.38                            | 0.62  | 0.86  | 1.10  | 1.34  | 1.58  | 1.82  | 2.06  | 2.30  | 2.53  | 2.77  | 3.01  | 3.25  | 3.49  | 3.73  | 3.97  | 4.21  | 4.45  | 4.69  |  |  |  |  |
| 72                            | 4.53                            | 7.35  | 10.17 | 13.00 | 15.82 | 18.64 | 21.47 | 24.29 | 27.11 | 29.93 | 32.76 | 35.58 | 38.40 | 41.23 | 44.05 | 46.87 | 49.70 | 52.52 | 55.34 |  |  |  |  |
| 1.83                          | 0.42                            | 0.68  | 0.94  | 1.21  | 1.47  | 1.73  | 1.99  | 2.26  | 2.52  | 2.78  | 3.04  | 3.31  | 3.57  | 3.83  | 4.09  | 4.35  | 4.62  | 4.88  | 5.14  |  |  |  |  |
| 78                            | 4.93                            | 8.00  | 11.08 | 14.15 | 17.22 | 20.29 | 23.37 | 26.44 | 29.51 | 32.59 | 35.66 | 38.73 | 41.80 | 44.88 | 47.95 | 51.02 | 54.10 | 57.17 | 60.24 |  |  |  |  |
| 1.98                          | 0.46                            | 0.74  | 1.03  | 1.31  | 1.60  | 1.89  | 2.17  | 2.46  | 2.74  | 3.03  | 3.31  | 3.60  | 3.88  | 4.17  | 4.45  | 4.74  | 5.03  | 5.31  | 5.60  |  |  |  |  |
| 84                            | 5.33                            | 8.65  | 11.98 | 15.30 | 18.62 | 21.95 | 25.27 | 28.59 | 31.91 | 35.24 | 38.56 | 41.88 | 45.21 | 48.53 | 51.85 | 55.17 | 58.50 | 61.82 | 65.14 |  |  |  |  |
| 2.13                          | 0.50                            | 0.80  | 1.11  | 1.42  | 1.73  | 2.04  | 2.35  | 2.66  | 2.96  | 3.27  | 3.58  | 3.89  | 4.20  | 4.51  | 4.82  | 5.13  | 5.43  | 5.74  | 6.05  |  |  |  |  |
| 90                            | 5.73                            | 9.30  | 12.88 | 16.45 | 20.02 | 23.60 | 27.17 | 30.74 | 34.31 | 37.89 | 41.46 | 45.03 | 48.61 |       |       |       |       |       |       |  |  |  |  |
| 2.29                          | 0.53                            | 0.86  | 1.20  | 1.53  | 1.86  | 2.19  | 2.52  | 2.86  | 3.19  | 3.52  | 3.85  | 4.18  | 4.52  |       |       |       |       |       |       |  |  |  |  |
| 96                            | 6.13                            | 9.96  | 13.78 | 17.60 | 21.42 | 25.25 | 29.07 | 32.89 | 36.72 | 40.54 | 44.36 | 48.18 | 52.01 |       |       |       |       |       |       |  |  |  |  |
| 2.44                          | 0.57                            | 0.93  | 1.28  | 1.64  | 1.99  | 2.35  | 2.70  | 3.06  | 3.41  | 3.77  | 4.12  | 4.48  | 4.83  |       |       |       |       |       |       |  |  |  |  |
| 102                           | 6.53                            | 10.61 | 14.68 | 18.75 | 22.83 | 26.90 | 30.97 | 35.04 | 39.12 | 43.19 | 47.26 | 51.34 | 55.41 |       |       |       |       |       |       |  |  |  |  |
| 2.59                          | 0.61                            | 0.99  | 1.36  | 1.74  | 2.12  | 2.50  | 2.88  | 3.26  | 3.63  | 4.01  | 4.39  | 4.77  | 5.15  |       |       |       |       |       |       |  |  |  |  |
| 108                           | 6.93                            | 11.26 | 15.58 | 19.90 | 24.23 | 28.55 | 32.87 | 37.20 | 41.52 | 45.84 | 50.16 | 54.49 | 58.81 |       |       |       |       |       |       |  |  |  |  |
| 2.74                          | 0.64                            | 1.05  | 1.45  | 1.85  | 2.25  | 2.65  | 3.05  | 3.46  | 3.86  | 4.26  | 4.66  | 5.06  | 5.46  |       |       |       |       |       |       |  |  |  |  |
| 114                           | 7.34                            | 11.91 | 16.48 | 21.05 | 25.63 | 30.20 | 34.77 | 39.35 | 43.92 | 48.49 | 53.06 | 57.64 | 62.21 |       |       |       |       |       |       |  |  |  |  |
| 2.90                          | 0.68                            | 1.11  | 1.53  | 1.96  | 2.38  | 2.81  | 3.23  | 3.66  | 4.08  | 4.50  | 4.93  | 5.35  | 5.78  |       |       |       |       |       |       |  |  |  |  |
| 120                           | 7.74                            | 12.56 | 17.38 | 22.21 | 27.03 | 31.85 | 36.67 | 41.50 | 46.32 | 51.14 | 55.97 | 60.79 | 65.61 |       |       |       |       |       |       |  |  |  |  |
| 3.05                          | 0.72                            | 1.17  | 1.61  | 2.06  | 2.51  | 2.96  | 3.41  | 3.86  | 4.30  | 4.75  | 5.20  | 5.65  | 6.10  |       |       |       |       |       |       |  |  |  |  |
| 126                           | 8.14                            | 13.21 | 18.28 | 23.36 | 28.43 | 33.50 | 38.58 | 43.65 | 48.72 | 53.79 | 58.87 | 63.94 | 69.01 |       |       |       |       |       |       |  |  |  |  |
| 3.05                          | 0.72                            | 1.17  | 1.61  | 2.06  | 2.51  | 2.96  | 3.41  | 3.86  | 4.30  | 4.75  | 5.20  | 5.65  | 6.10  |       |       |       |       |       |       |  |  |  |  |
| 132                           | 8.54                            | 13.86 | 19.18 | 24.51 | 29.83 | 35.15 | 40.48 | 45.80 | 51.12 | 56.45 | 61.77 | 67.09 | 72.41 |       |       |       |       |       |       |  |  |  |  |
| 3.35                          | 0.79                            | 1.29  | 1.78  | 2.28  | 2.77  | 3.27  | 3.76  | 4.25  | 4.75  | 5.24  | 5.74  | 6.23  | 6.73  |       |       |       |       |       |       |  |  |  |  |
| 138                           | 8.94                            | 14.51 | 20.09 | 25.66 | 31.23 | 36.80 | 42.38 | 47.95 | 53.52 | 59.10 | 64.67 | 70.24 | 75.81 |       |       |       |       |       |       |  |  |  |  |
| 3.51                          | 0.83                            | 1.35  | 1.87  | 2.38  | 2.90  | 3.42  | 3.94  | 4.45  | 4.97  | 5.49  | 6.01  | 6.53  | 7.04  |       |       |       |       |       |       |  |  |  |  |
| 144                           | 9.34                            | 15.16 | 20.99 | 26.81 | 32.63 | 38.46 | 44.28 | 50.10 | 55.92 | 61.75 | 67.57 | 73.39 | 79.22 |       |       |       |       |       |       |  |  |  |  |
| 3.66                          | 0.87                            | 1.41  | 1.95  | 2.49  | 3.03  | 3.57  | 4.11  | 4.65  | 5.20  | 5.74  | 6.28  | 6.82  | 7.36  |       |       |       |       |       |       |  |  |  |  |

The look that works.

 **AIROLITE**  
The look that works.™


# SCH501X

AMCA 540\* Listed Hurricane Louver  
Florida Product Approved  
Extruded Aluminum | Storm Class  
\*AMCA 540 when selected as an option

## Airflow Resistance

Standard Air - 0.075 lb/ft<sup>3</sup> (1.2 kg/m<sup>3</sup>)

Test size 48 in. x 48 in. (1219 mm x 1219 mm)

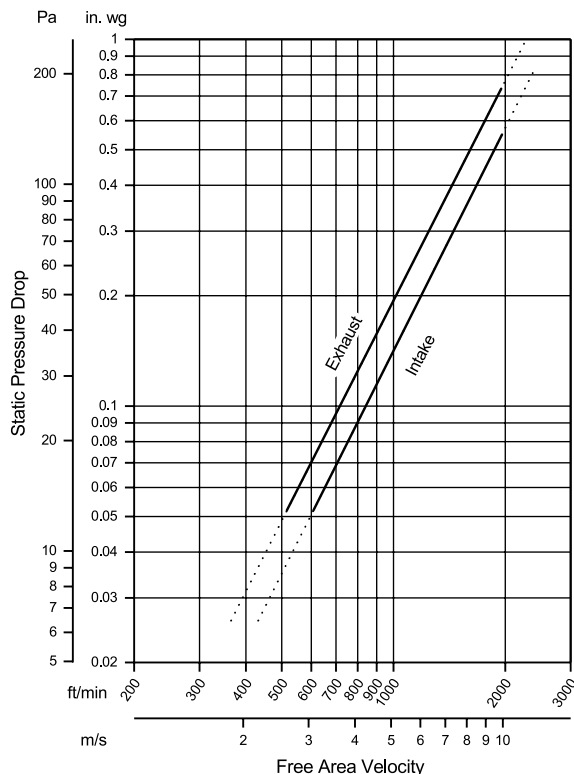


Model SCH501X resistance to airflow (pressure drop) varies depending on louver application (air intake or air exhaust). Free area velocities (shown) are higher than average velocity through the overall louver size. See louver selection information. (Test Figure 5.5-6.5)

## Water Penetration

Standard Air - 0.075 lb/ft<sup>3</sup> (1.2 kg/m<sup>3</sup>)

Test size 48 in. x 48 in. (1219 mm x 1219 mm)

Test duration of 15 min.

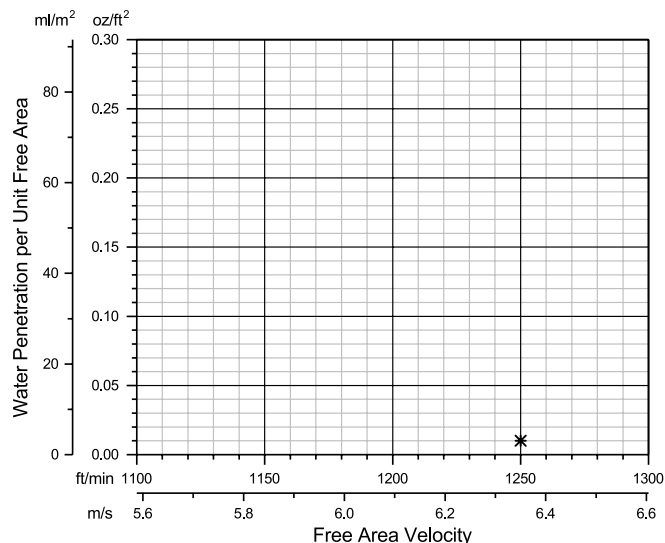

The AMCA Water Penetration Test provides a method for comparing various louver models and designs as to their efficiency in resisting the penetration of rainfall under specific laboratory test conditions. The beginning point of water penetration is defined as that velocity where the water penetration curve projects through 0.01 oz. (3 g) of water (penetration) per sq. ft. (m<sup>2</sup>) of louver free area.

**\*The beginning point of water penetration for Model SCH501X is above 1250 fpm (6.350 m/s) free area velocity.** These performance ratings do not guarantee a louver to be weatherproof or stormproof and should be used in combination with other factors including good engineering judgement in selecting louvers.

## Wind-Driven Rain Performance

| 3 in./hr. (75 mm/hr.) Rainfall Rate & 29 mph (13 m/s) Wind Velocity |                                              |                                   |                                  | 8 in./hr. (203 mm/hr.) Rainfall Rate & 50 mph (22.4 m/s) Wind Velocity |                                              |                                   |                                  |
|---------------------------------------------------------------------|----------------------------------------------|-----------------------------------|----------------------------------|------------------------------------------------------------------------|----------------------------------------------|-----------------------------------|----------------------------------|
| Ventilation Air Core Velocity fpm (m/s)                             | Ventilation Air Free Area Velocity fpm (m/s) | Water Penetration Effectiveness % | Water Penetration Classification | Ventilation Air Core Velocity fpm (m/s)                                | Ventilation Air Free Area Velocity fpm (m/s) | Water Penetration Effectiveness % | Water Penetration Classification |
| 0 (0.0)                                                             | 0 (0.0)                                      |                                   | A                                | 0 (0.0)                                                                | 0 (0.0)                                      |                                   | A                                |
| 98 (0.5)                                                            | 193 (1.0)                                    |                                   | A                                | 98 (0.5)                                                               | 193 (1.0)                                    |                                   | A                                |
| 197 (1.0)                                                           | 387 (2.0)                                    |                                   | A                                | 197 (1.0)                                                              | 387 (2.0)                                    |                                   | A                                |
| 295 (1.5)                                                           | 580 (2.9)                                    |                                   | A                                | 295 (1.5)                                                              | 580 (2.9)                                    |                                   | A                                |
| 394 (2.0)                                                           | 774 (3.9)                                    |                                   | A                                | 394 (2.0)                                                              | 774 (3.9)                                    |                                   | A                                |
| 492 (2.5)                                                           | 967 (4.9)                                    |                                   | A                                | 498 (2.5)                                                              | 979 (5.0)                                    | 99.1                              | A                                |
| 591 (3.0)                                                           | 1162 (5.9)                                   | 99.7                              | A                                | 569 (2.9)                                                              | 1118 (5.7)                                   | 99.2                              | A                                |
| 689 (3.5)                                                           | 1354 (6.9)                                   | 99.4                              | A                                | 683 (3.5)                                                              | 1343 (6.8)                                   | 99.2                              | A                                |
| 776 (3.9)                                                           | 1525 (7.7)                                   | 99.1                              | A                                | 782 (4.0)                                                              | 1537 (7.8)                                   | 98.9                              | B                                |
| 858 (4.4)                                                           | 1687 (8.6)                                   | 98.7                              | B                                | 867 (4.4)                                                              | 1704 (8.7)                                   | 98.1                              | B                                |
| 974 (4.9)                                                           | 1915 (9.7)                                   | 97.9                              | B                                | 965 (4.9)                                                              | 1897 (9.6)                                   | 94.4                              | C                                |

Louvers shall be classified by their ability to reject simulated rain. The table shows different classifications based on the maximum simulated rain penetration of the louver. Water penetration rating at a given core or free area velocity is determined by the water penetration while the louver is subjected to a selected simulated rainfall rate and wind velocity.

| Wind-Driven Rain Penetration Classes |               |
|--------------------------------------|---------------|
| Class                                | Effectiveness |
| A                                    | 1 to 0.99     |
| B                                    | 0.989 to 0.95 |
| C                                    | 0.949 to 0.80 |
| D                                    | Below 0.80    |

**AIROLITE**  
The look that works.™