

# K6746MD

## Standard Construction

AMCA 540 and 550\* Listed Hurricane Louver  
Miami-Dade and Florida Product Approved  
Extruded Aluminum | Drainable Blade

\*AMCA 550 with VCD-40 Damper

Florida Product Approval No. : FL 10093

Miami-Dade, FL NOA No.: 24-0930.05 EXP. 12/6/2029

### Mounting

Continuous aluminum angle along the jamps

### Frame

Heavy gauge extruded 6063-T5 aluminum,  
6 in. (152 mm) x 0.125 in. (3 mm) nominal wall thickness

### Blades

Drainable style design, heavy gauge extruded 6063-T5 aluminum, 0.081 in. (2 mm) nominal wall thickness if RO height is  $\leq$  96.5 in. (2451 mm) or 0.125 in. (3 mm) if RO height is  $>$  96.5 in. (2451 mm), flange/sleeve frame switches to thicker blade at  $>$  96.25 in. (2445 mm), positioned at 37° angles on approximately 4 in. (102 mm) centers

**Louver Depth** 6 in. (152 mm)

**Construction** Welded and mechanically fastened

**Finish** Mill


### Minimum Rough Opening Size

12 in. W x 12 in. H (305 mm W x 305 mm H)

### Maximum Single Section Rough Opening Size

72.75 in. W x 144.5 in. H (1848 mm W x 3670 mm H)

**Wind Load** Varies



Channel Frame



## Options and Accessories

[Bird Screen](#)

• [Blank Off Panels](#)

• [Filter Rack/Filter](#)

• [Channel Frame w/Flange Frame](#)

• [Insect Screen](#)


• [Security Bars](#)

• [Sleeve Frame w/Flange Frame](#)

• [Variety of Architectural Finishes](#)

• Welded Construction

• 0.125 in. (3 mm) Nominal Blade Thickness

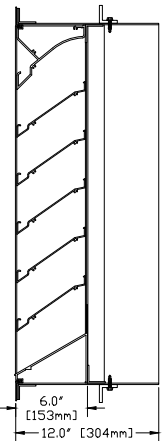

Flange/Sleeve Frame

Wind Load Table	
Design Pressure Rating	Maximum Single Section Size
+/- 150 PSF (7.2 kPa)	43 in. W x 144 in. H (1092 mm W x 3658 mm H)
+/- 130 (6.2 kPa)	49.5 in. W x 144 in. H (1257 mm W x 3658 mm H)
+/- 105 (5.0 kPa)	61.5 in. W x 144 in. H (1562 mm W x 3658 mm H)
+/- 90 (4.3 kPa)	72 in. W x 144 in. H (1829 mm W x 3658 mm H)

## Performance Ratings



Airolite certifies that the K6746MD channel frame and flange/sleeve frame louvers shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in

accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to Water Penetration and Air Performance ratings. Louvers were tested in accordance with AMCA Standard 500-L.

### Performance of 48 in. x 48 in. (1219 mm x 1219 mm) Louver (channel frame and flange/sleeve frame)

<b>Free Area</b>	Area	9.41 sq. ft. (0.874 sq. m)
	Percent	58.8%

### Performance at Beginning Point of Water Penetration

Free Area Velocity Above 1250 fpm (6.350 m/s)

Max Intake Volume 11,763 cfm (5.551 m<sup>3</sup>/s)

### Performance at 6,000 CFM (2.832 m<sup>3</sup>/s) Intake

Pressure Drop 0.061 in. wg (0.015 kPa)

## Standard Details

[K6746MD Standard Channel Frame Details](#)

[K6746MD Optional Flange/Sleeve Frame Details](#)

[Channel Installation \(#487077 IOM\)](#)

[Channel Installation with VCD-40 Damper \(#487078 IOM\)](#)

[Flange/Sleeve Installation \(#487079 IOM\)](#)

[Flange/Sleeve Installation with VCD-40 Damper \(#487080 IOM\)](#)

[Miami-Dade County, FL Notice of Acceptance](#)

Structural reinforcing members may be required to adequately support and install multiple louver sections within a large opening. Structural reinforcing members along with any associated installation hardware is not provided by Airolite unless indicated otherwise by Airolite. Options and accessories including, but not limited to, screens, filter racks, louver doors, and blank off panels are not subject to structural analysis unless indicated otherwise by Airolite.



# K6746MD

AMCA 540 and 550\* Listed Hurricane Louver  
 Miami-Dade and Florida Product Approved  
 Extruded Aluminum | Drainable Blade  
 \*AMCA 550 with VCD-40 Damper

## Free Area Chart

Free Area Chart shows free area in square feet and square meters.  
 (channel frame and flange/sleeve frame)

Louver Height Inches (Meters)	Louver Width in Inches (Meters)										
	12	18	24	30	36	42	48	54	60	66	72
0.30	0.30	0.46	0.61	0.76	0.91	1.07	1.22	1.37	1.52	1.68	1.83
12	0.19	0.32	0.44	0.57	0.69	0.82	0.94	1.04	1.16	1.29	1.41
0.30	0.02	0.03	0.04	0.05	0.06	0.08	0.09	0.10	0.11	0.12	0.13
18	0.48	0.80	1.11	1.42	1.74	2.05	2.36	2.60	2.91	3.22	3.54
0.46	0.04	0.07	0.10	0.13	0.16	0.19	0.22	0.24	0.27	0.30	0.33
24	0.77	1.27	1.77	2.27	2.77	3.27	3.76	4.14	4.64	5.14	5.64
0.61	0.07	0.12	0.16	0.21	0.26	0.30	0.35	0.38	0.43	0.48	0.52
30	1.05	1.73	2.41	3.09	3.77	4.45	5.13	5.64	6.32	7.01	7.69
0.76	0.10	0.16	0.22	0.29	0.35	0.41	0.48	0.52	0.59	0.65	0.71
36	1.35	2.22	3.09	3.97	4.84	5.71	6.59	7.24	8.11	8.99	9.86
0.91	0.13	0.21	0.29	0.37	0.45	0.53	0.61	0.67	0.75	0.84	0.92
42	1.62	2.67	3.71	4.76	5.81	6.86	7.91	8.69	9.74	10.79	11.84
1.07	0.15	0.25	0.34	0.44	0.54	0.64	0.73	0.81	0.90	1.00	1.10
48	1.92	3.17	4.42	5.67	6.91	8.16	9.41	10.34	11.59	12.84	14.09
1.22	0.18	0.29	0.41	0.53	0.64	0.76	0.87	0.96	1.08	1.19	1.31
54	2.18	3.60	5.02	6.44	7.85	9.27	10.69	11.75	13.17	14.58	16.00
1.37	0.20	0.33	0.47	0.60	0.73	0.86	0.99	1.09	1.22	1.35	1.49
60	2.49	4.10	5.71	7.32	8.94	10.55	12.16	13.37	14.98	16.59	18.21
1.52	0.23	0.38	0.53	0.68	0.83	0.98	1.13	1.24	1.39	1.54	1.69
66	2.75	4.53	6.32	8.10	9.88	11.67	13.45	14.79	16.57	18.36	20.14
1.68	0.26	0.42	0.59	0.75	0.92	1.08	1.25	1.37	1.54	1.71	1.87
72	3.05	5.03	7.01	8.99	10.97	12.95	14.93	16.41	18.39	20.37	22.35
1.83	0.28	0.47	0.65	0.84	1.02	1.20	1.39	1.52	1.71	1.89	2.08
78	3.31	5.46	7.61	9.76	11.91	14.06	16.21	17.83	19.98	22.13	24.28
1.98	0.31	0.51	0.71	0.91	1.11	1.31	1.51	1.66	1.86	2.06	2.26
84	3.62	5.96	8.31	10.66	13.00	15.35	17.69	19.45	21.80	24.15	26.49
2.13	0.34	0.55	0.77	0.99	1.21	1.43	1.64	1.81	2.03	2.24	2.46
90	3.88	6.40	8.91	11.43	13.95	16.46	18.98	20.87	23.38	25.90	28.42
2.29	0.36	0.59	0.83	1.06	1.30	1.53	1.76	1.94	2.17	2.41	2.64
96	4.18	6.90	9.61	12.32	15.04	17.75	20.46	22.50	25.21	27.92	30.64
2.44	0.39	0.64	0.89	1.14	1.40	1.65	1.90	2.09	2.34	2.59	2.85
102	4.44	7.33	10.21	13.09	15.98	18.86	21.74	23.90	26.79	29.67	32.55
2.59	0.41	0.68	0.95	1.22	1.48	1.75	2.02	2.22	2.49	2.76	3.02
108	4.75	7.83	10.91	13.99	17.07	20.15	23.23	25.54	28.62	31.70	34.78
2.74	0.44	0.73	1.01	1.30	1.59	1.87	2.16	2.37	2.66	2.95	3.23
114	5.01	8.26	11.51	14.76	18.01	21.26	24.51	26.95	30.20	33.45	36.70
2.90	0.47	0.77	1.07	1.37	1.67	1.98	2.28	2.50	2.81	3.11	3.41
120	5.31	8.76	12.21	15.66	19.10	22.55	26.00	28.58	32.03	35.48	38.92
3.05	0.49	0.81	1.13	1.45	1.77	2.09	2.42	2.66	2.98	3.30	3.62
126	5.58	9.19	12.81	16.43	20.04	23.66	27.28	29.99	33.61	37.22	40.84
3.20	0.52	0.85	1.19	1.53	1.86	2.20	2.53	2.79	3.12	3.46	3.79
132	5.88	9.69	13.51	17.32	21.14	24.95	28.77	31.63	35.44	39.25	43.07
3.35	0.57	0.94	1.31	1.68	2.06	2.43	2.80	3.07	3.44	3.82	4.19
138	6.15	10.14	14.14	18.13	22.12	26.11	30.10	33.09	37.08	41.07	45.07
3.51	0.57	0.94	1.31	1.68	2.06	2.43	2.80	3.07	3.44	3.82	4.19
144	6.45	10.63	14.81	18.99	23.17	27.35	31.54	34.67	38.85	43.03	47.22
3.66	0.60	0.99	1.38	1.76	2.15	2.54	2.93	3.22	3.61	4.00	4.39



# K6746MD

AMCA 540 and 550\* Listed Hurricane Louver  
Miami-Dade and Florida Product Approved  
Extruded Aluminum | Drainable Blade  
\*AMCA 550 with VCD-40 Damper



IMPACT  
RESISTANT  
LOUVER  
*Enhanced Protection Level E*

See [www.AMCA.org](http://www.AMCA.org) for all certified or listed products

This label does not signify  
AMCA airflow performance  
certification.

With 0.125 in. (3 mm) blade and frame material



IMPACT  
RESISTANT  
LOUVER  
*Basic Protection Level D*

See [www.AMCA.org](http://www.AMCA.org) for all certified or listed products

This label does not signify  
AMCA airflow performance  
certification.

With 0.081 in. (2 mm) blade and frame material.



HIGH VELOCITY RAIN  
RESISTANT WITH BLADES  
FULLY CLOSED AND  
IMPACT RESISTANT LOUVER  
*Enhanced Protection Level E*

See [www.AMCA.org](http://www.AMCA.org) for all certified or listed products

This label does not signify  
AMCA airflow performance  
certification.

With 0.125 in. (3 mm) blade and frame material  
and with factory attached VCD-40 damper in the  
fully closed position.



HIGH VELOCITY RAIN  
RESISTANT WITH BLADES  
FULLY CLOSED AND  
IMPACT RESISTANT LOUVER  
*Basic Protection Level D*

See [www.AMCA.org](http://www.AMCA.org) for all certified or listed products

This label does not signify  
AMCA airflow performance  
certification.

With 0.081 in. (2 mm) blade and frame material  
and with factory attached VCD-40 damper in the  
fully closed position.

Airolite certifies that the K6746MD channel frame and flange/sleeve frame louvers shown herein are approved to bear the AMCA Listing Label. The ratings shown are based on tests and procedures performed in accordance with AMCA Publications and comply with the requirements of the AMCA Listing Label Program. With 0.081 in. (2 mm) thick blades, the AMCA Listing Label applies to Impact Resistant louvers rated for Basic Protection with a minimum blade span of less than 12 in. (305 mm) and a maximum unsupported blade span of 46 in. (1168 mm). With 0.125 in. (3 mm) thick blades, the AMCA Listing Label applies to Impact Resistant louvers rated for Enhanced Protection with a minimum blade span of less than 12 in. (305 mm) and a maximum unsupported blade span of 46 in. (1168 mm). For louvers with the VCD-40 Damper, the AMCA Listing Label also applies to High Velocity Wind Driven Rain Resistant Louver-Damper combinations tested in the fully closed position that stops airflow through the louver.



# K6746MD


AMCA 540 and 550\* Listed Hurricane Louver  
Miami-Dade and Florida Product Approved  
Extruded Aluminum | Drainable Blade  
\*AMCA 550 with VCD-40 Damper

## Airflow Resistance

(channel frame and flange/sleeve frame)

Standard Air - 0.075 lb/ft<sup>3</sup> (1.2 kg/m<sup>3</sup>)

Test size 48 in. x 48 in. (1219 mm x 1219 mm)

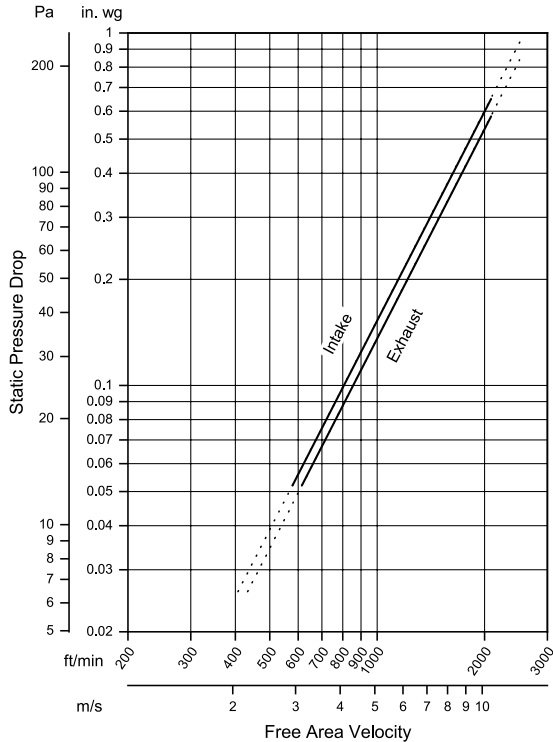

Model K6746MD resistance to airflow (pressure drop) varies depending on louver application (air intake or air exhaust). Free area velocities (shown) are higher than average velocity through the overall louver size. See louver selection information. (Test Figure 5.5-6.5)


## Water Penetration

(channel frame and flange/sleeve frame)

Standard Air - 0.075 lb/ft<sup>3</sup> (1.2 kg/m<sup>3</sup>)

Test size 48 in. x 48 in. (1219 mm x 1219 mm)

Test duration of 15 min.

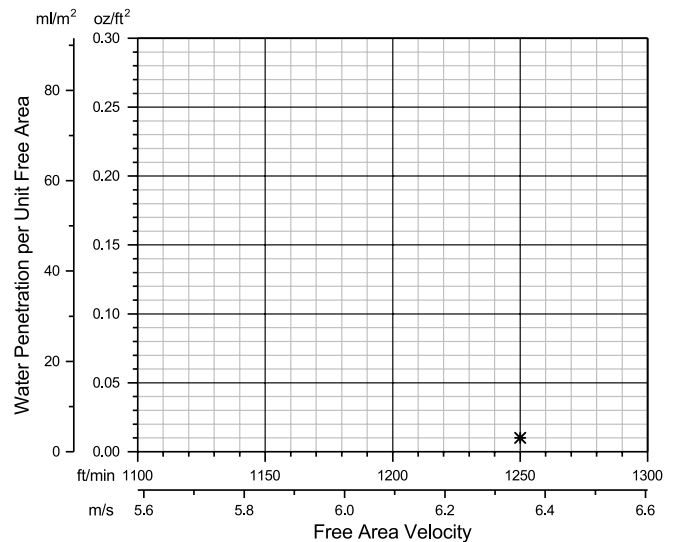

The AMCA Water Penetration Test provides a method for comparing various louver models and designs as to their efficiency in resisting the penetration of rainfall under specific laboratory test conditions. The beginning point of water penetration is defined as that velocity where the water penetration curve projects through 0.01 oz. (3 g) of water (penetration) per sq. ft. (m<sup>2</sup>) of louver free area. **\*The beginning point of water penetration for Model K6746MD (channel frame and flange/sleeve frame) is above 1250 fpm (6.350 m/s) free area velocity.** These performance ratings do not guarantee a louver to be weather-proof or stormproof and should be used in combination with other factors including good engineering judgement in selecting louvers.

