
# • SPECIFICATIONS

	Voltage	Frequency		C	FM / SONE AT STATIC	Pressure (ps-inches	of H <sub>2</sub> O)		DDM	Watts*	Watts**
Model	[V]	[Hz]	Inches of H <sub>2</sub> O	0	0.1	0.125	0.25	0.375	RPM		
	220	/0	CFM	44	32	29	_	_	111	10	10
FV 17CH0	220	60	Sones	0.3	0.5	0.6	. –	-	664		10
FV-17CU9	0.40	Ε0	CFM	51	43	40	-	_	700	10	0.5
	240	50	Sones	0.3	0.4	0.5	-	-	728		9.5
	000	40	CFM	83	73	68	46		585	13	10.5
EV 2/0110	220	60	Sones	0.4	0.5	0.6	1.3	_			13.5
FV-24CU9	0.70	го	CFM	89	77	75	51		/1/	10	10
	240	50	Sones	0.5	0.7	0.7	1.4	_	614	13	12
	000	/0	CFM	109	99	96	75	48	701	0.0	00.5
EV 2/CHO	220	60	Sones	1.0	0.9	1.0	1.3	2.2	791	22	20.5
FV-24CH9	0.40	F0	CFM	117	109	96	73	33	0.74	04	40.5
	240	50	Sones	1.2	1.2	1.2	1.3	1.8	861	21	19.5

Performance certified is for installation type B: Free inlet, Ducted outlet. Performance ratings include the effects of an inlet grille and backdraft shutter. Speed (RPM) shown is nominal. Performance is based on actual speed of test. The sound ratings shown are loudness values in fan sones at 5 ft. (1.5m) in a hemispherical free field calculated per AMCA International Standard 301. Values shown are for installation type B: Free inlet hemispherical sone levels.

# Panasonic

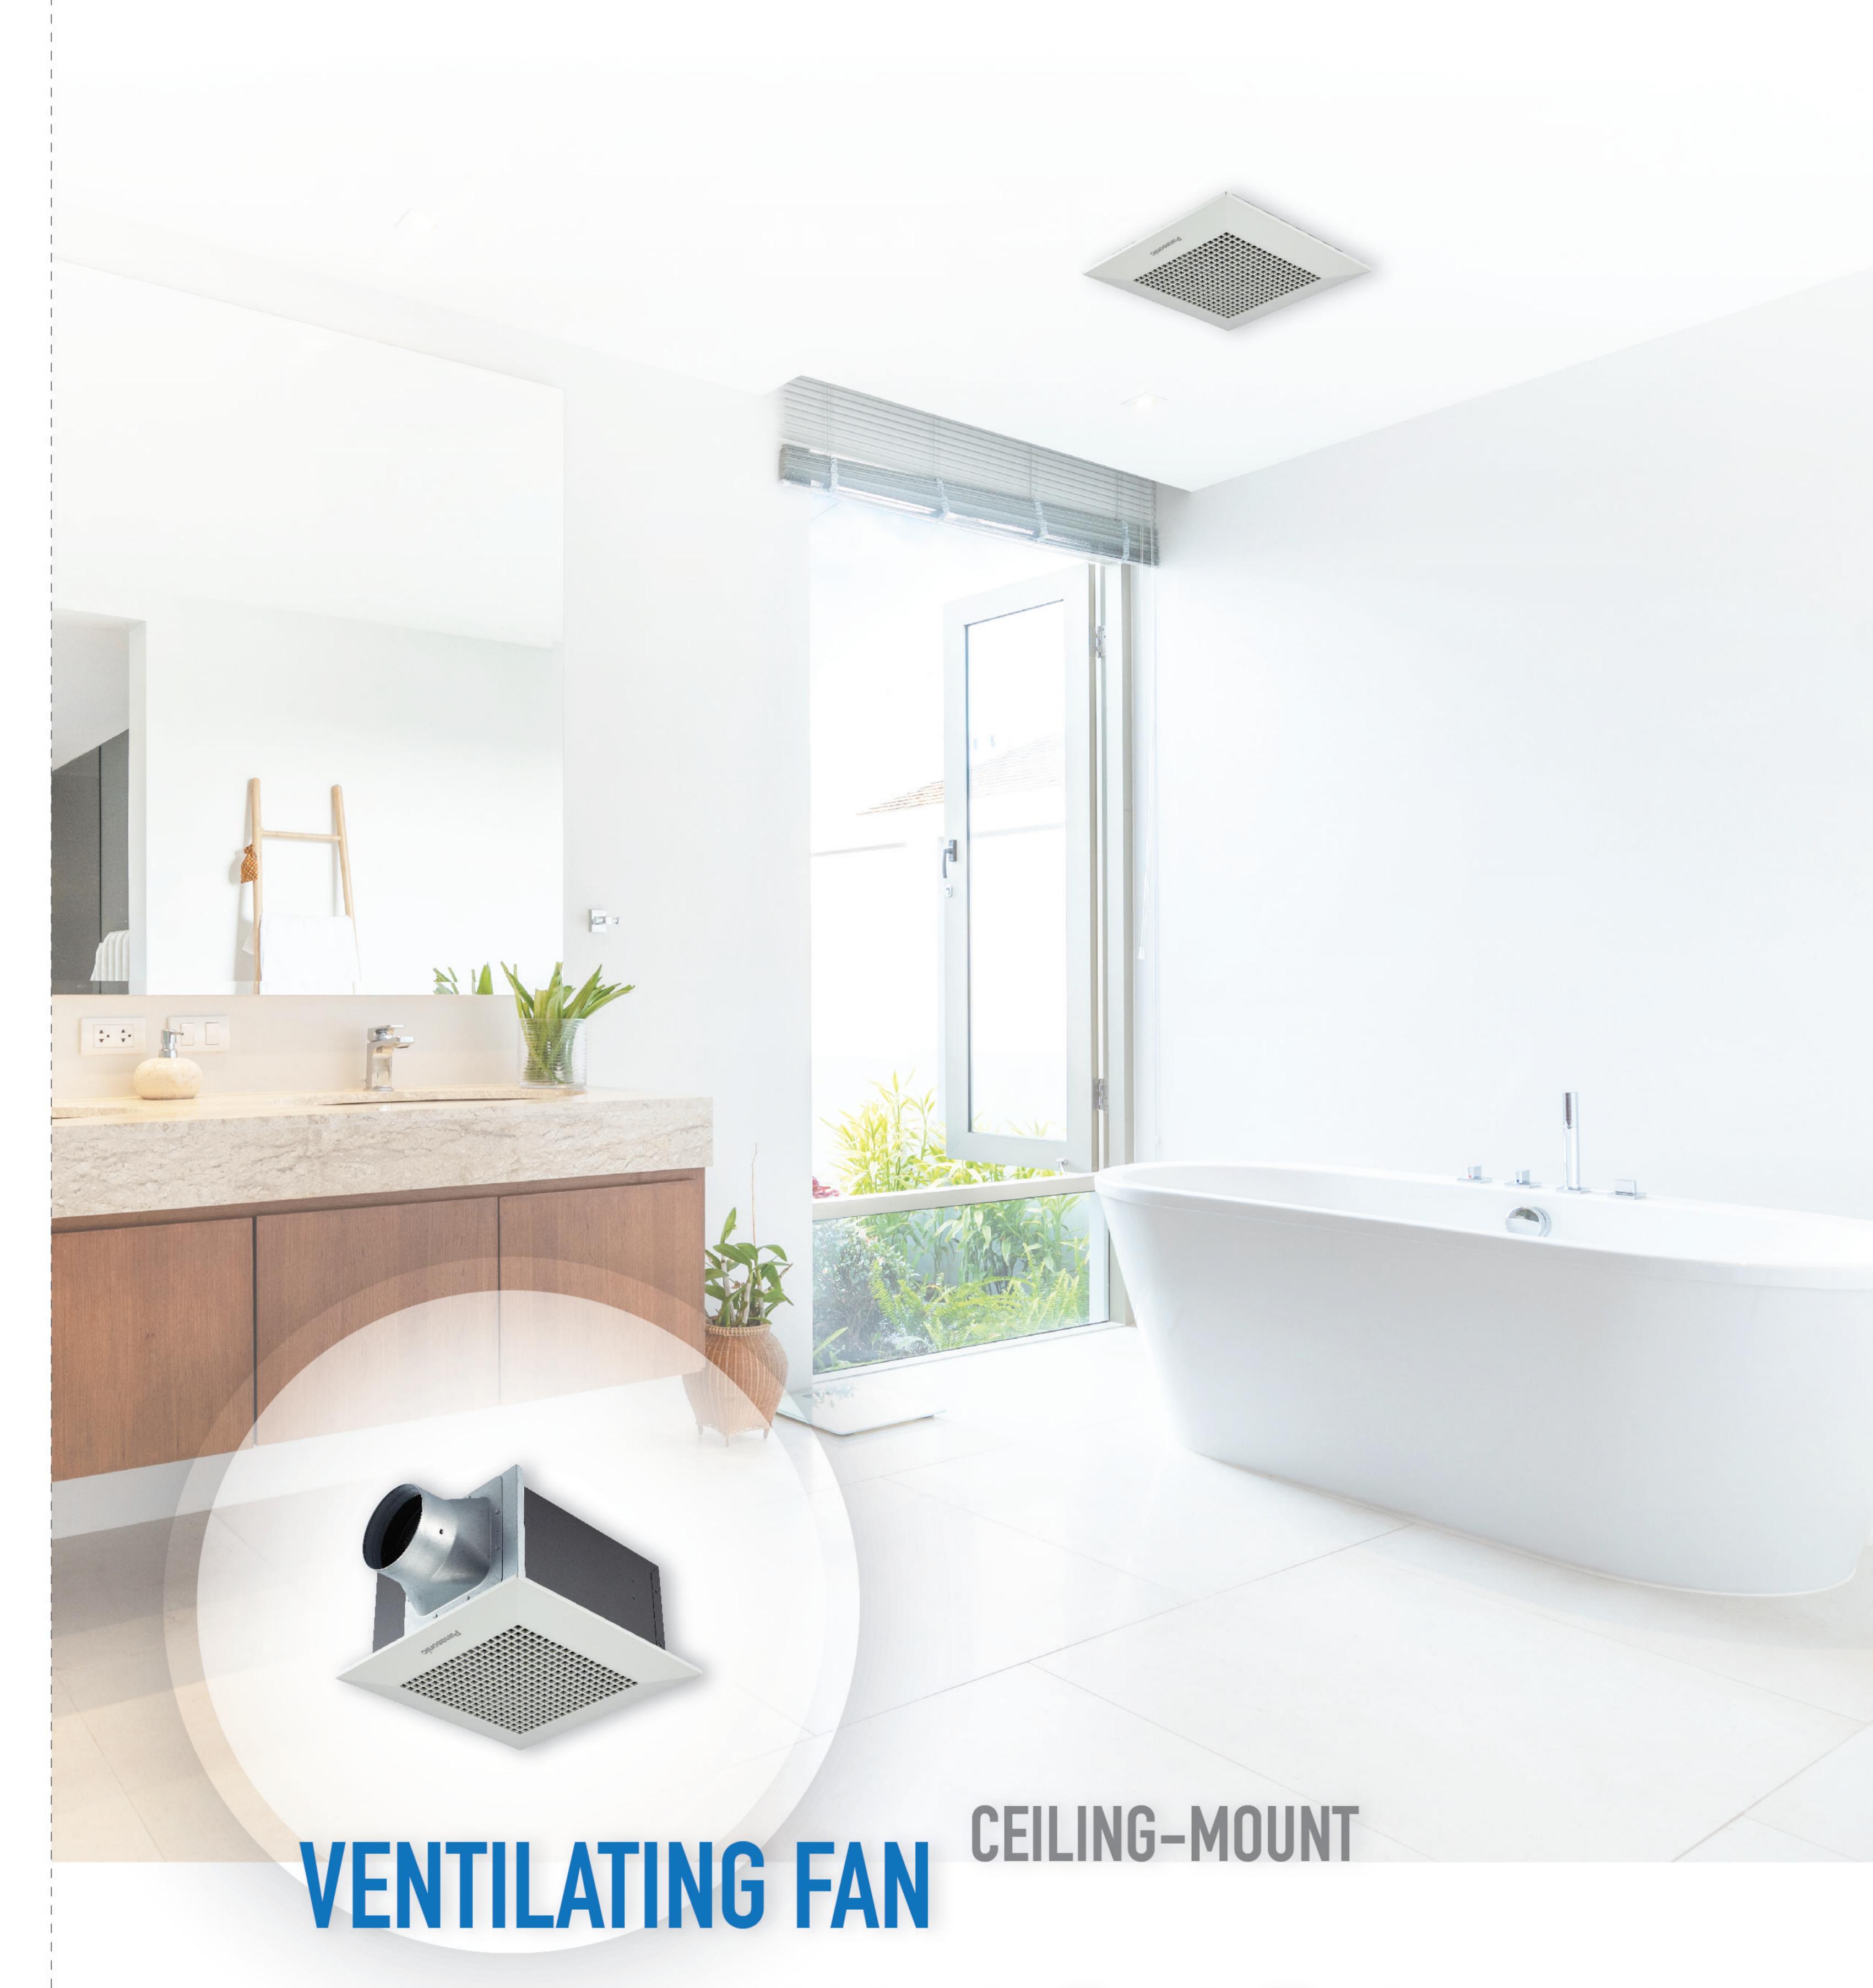

Living in Fresh Environment



 Actual colors may vary slightly from shown. - Specifications are subject to change without prior notice.

> CATALOG NO: P-AMCA004 December 2022

<sup>\*</sup> the Watts rating is for AMCA test method and it is at the static pressure of 0 inch of H<sub>2</sub>O.

\*\* the Watts rating is only for IEC test method and the AMCA Certified Rating Seal does not apply to IEC test method watts.


### • GENERAL FEATURE




#### • SUPER QUIET SERIES



							Unit: mm
Α	В	С	D	E	F	G	Duct Size
214	194	84	164	170	230	13	Ø100

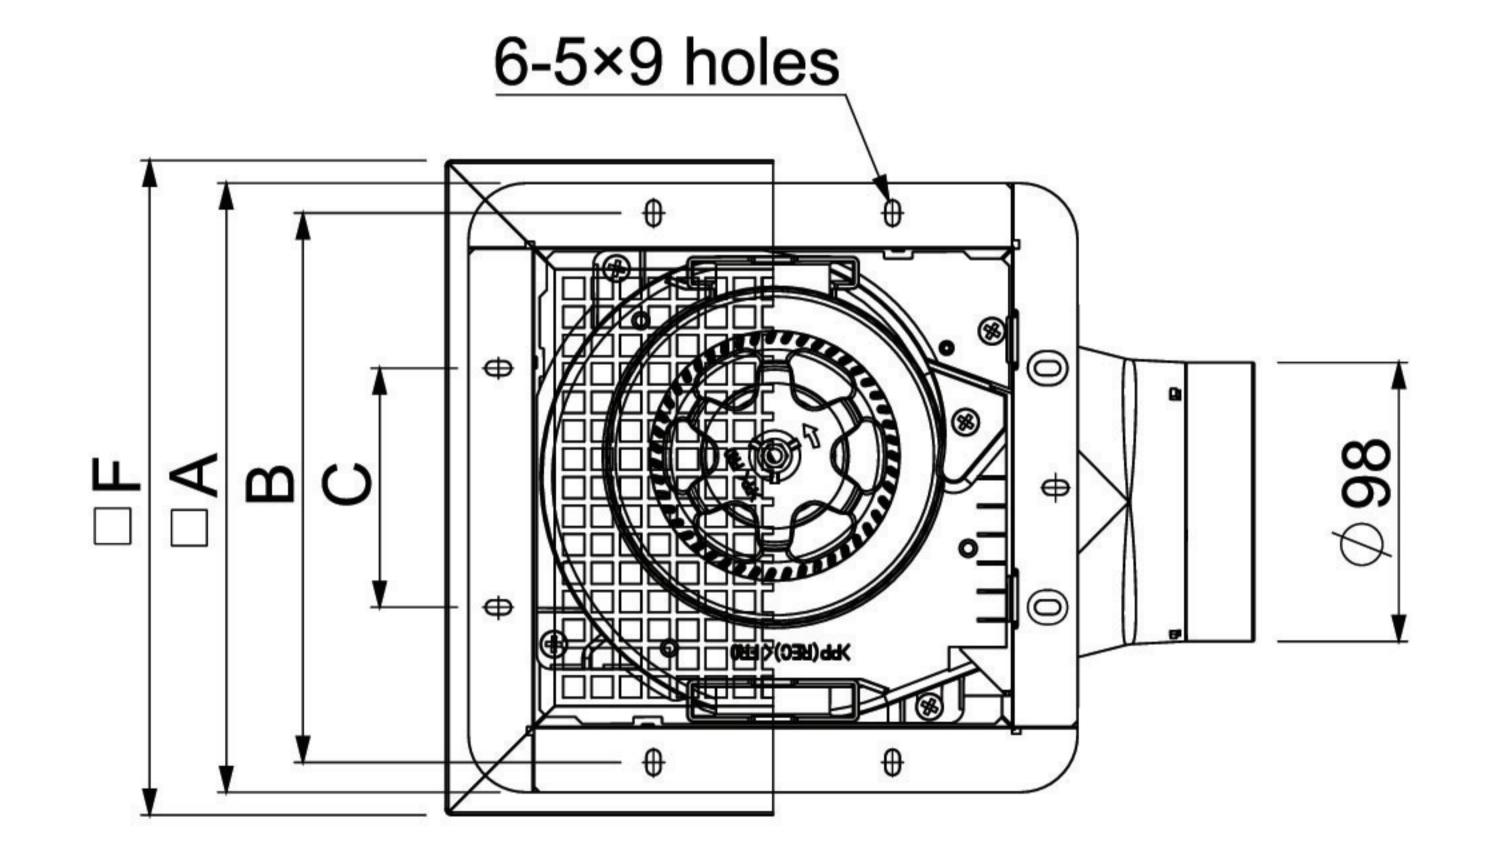

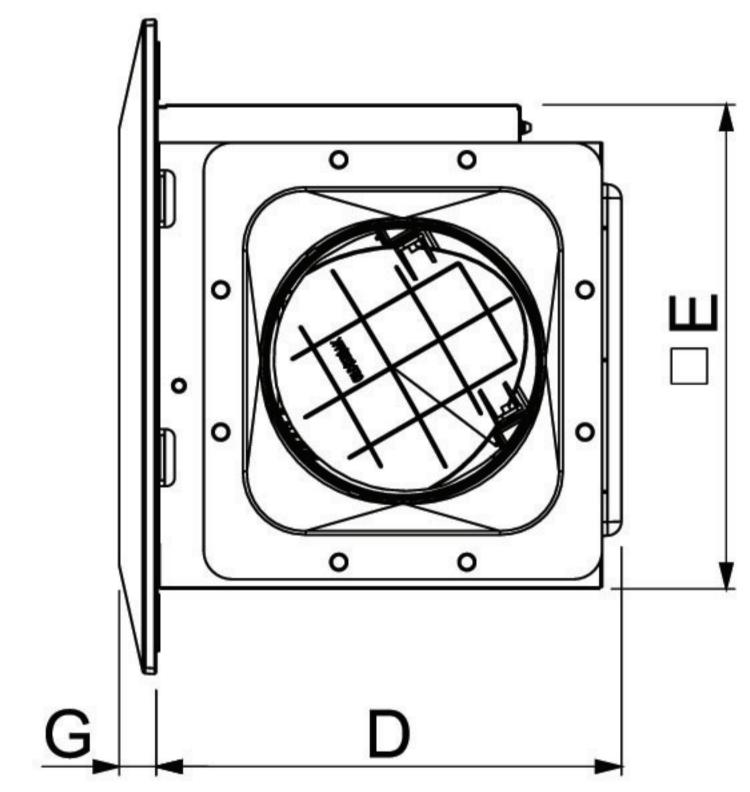

AND CONTROL

FV-17CU9

Taper blade sirocco fan

Super low noise level

HP (half pitch) motor with ball bearing

Panasonic Electric Works Vietnam Co.,

Ltd. certifies that the Ceiling Mount

Type models shown herein are licensed

to bear the AMCA Seal. The ratings

shown are based on tests and

procedures performed in accordance

with AMCA Publication 211 and AMCA

Publication 311 and comply with the

requirements of the AMCA Certified

Ratings Program.

Curve-shaped backdraff shutter


	Voltage	Frequency		CFM / SONE AT	STATIC Pressure (ps-inches of H <sub>2</sub> 0)				
Model	[V]	[Hz]	Inches of H <sub>2</sub> O	0	0.1	0.125	RPM	Watts*	Watts**
	220	/0	CFM	44	32	29	111	10	10
EV 17CH0	220	60	Sones	0.3	0.5	0.6	664	10	10
FV-17CU9	0./0	Ε0	CFM	51	43	40	700	10	0.5
	240	50	Sones	0.3	0.4	0.5	728	10	9.5

Performance certified is for installation type B: Free inlet, Ducted outlet. Performance ratings include the effects of an inlet grille and backdraft shutter. Speed (RPM) shown is nominal. Performance is based on actual speed of test. The sound ratings shown are loudness values in fan sones at 5 ft. (1.5m) in a hemispherical free field calculated per AMCA International Standard 301. Values shown are for installation type B: Free inlet hemispherical sone levels

## • SUPER QUIET SERIES



							Unit: mm
A	В	C	D	E	F	G	Duct Size
278	255	140	175	233	290	16	Ø100

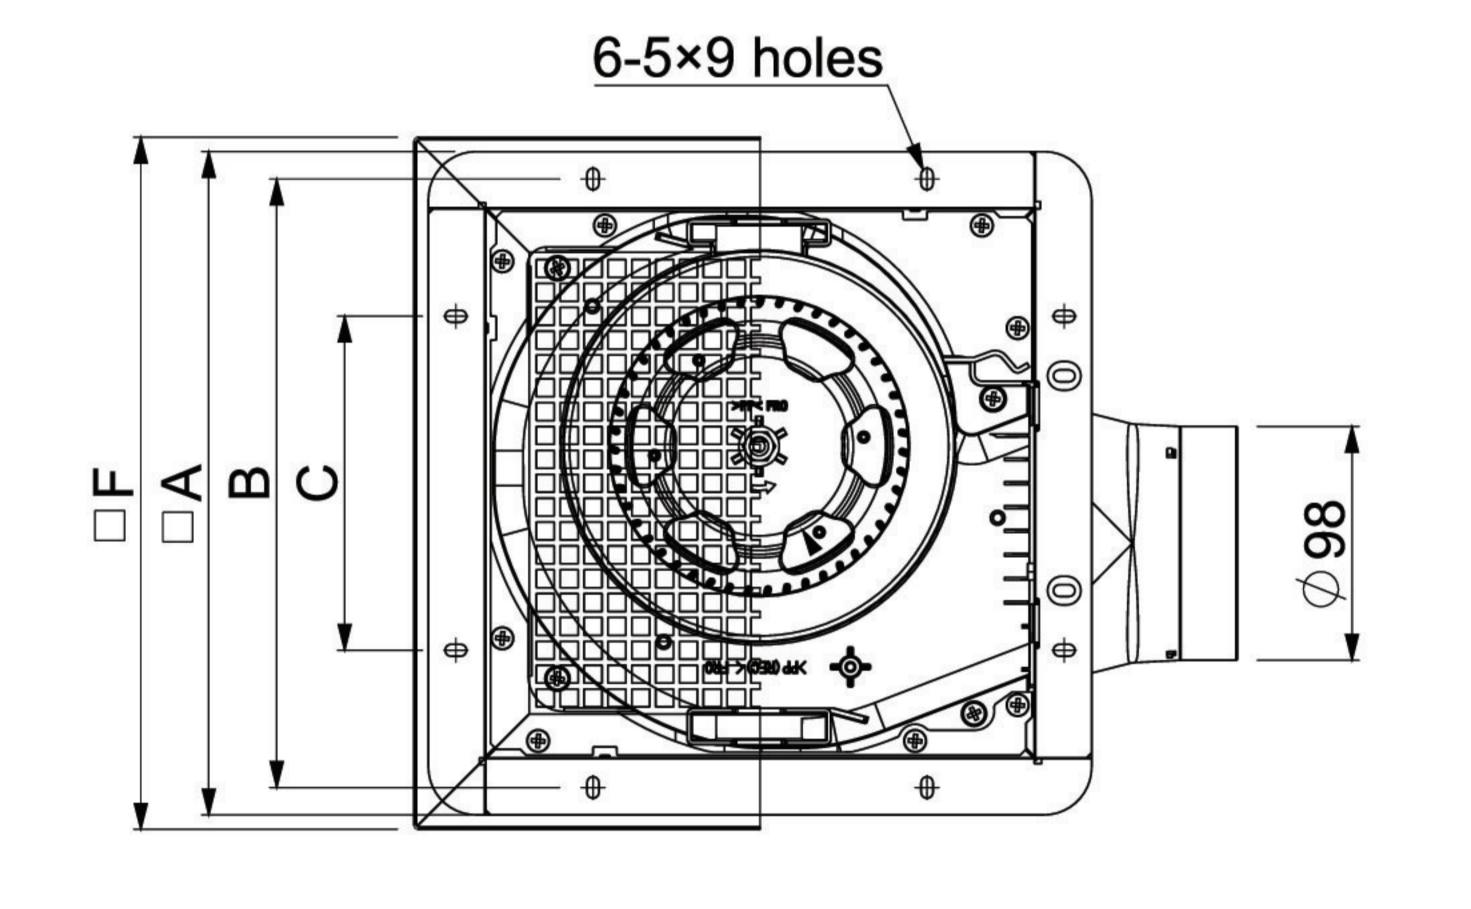


#### FV-24CU9 / FV-24CH9

- HP (half pitch) motor with ball bearing
- Taper blade sirocco fan
- Curve-shaped backdraff shutter
- Super low noise level



Panasonic Electric Works Vietnam Co., Ltd. certifies that the Ceiling Mount Type models shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

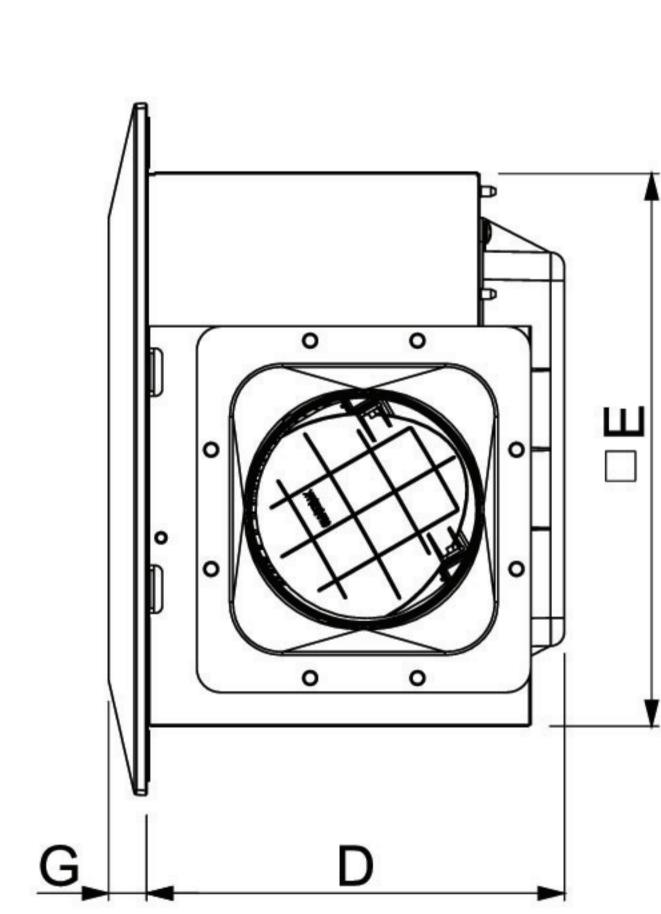

Model	Voltage	Frequency			CFM / SONE AT STATIC	Pressure (ps-inches	of H <sub>2</sub> 0)		DDM	Watts*	Watts**
	[V]	[Hz]	Inches of H <sub>2</sub> O	0	0.1	0.125	0.25	0.375	RPM		
			CFM	83	73	68	46	- <b>□</b>	EOE	13	13.5
FV-24CU9	220	60	Sones	0.4	0.5	0.6	1.3	_	585		
	2/0	EU	CFM	89	77	75	51	.=	614	13	12
	240	50	Sones	0.5	0.7	0.7	1.4	_			
	220	/ 0	CFM	109	99	96	75	48	701	22	20.5
FV-24CH9	220	60	Sones	1.0	0.9	1.0	1.3	2.2	791		
	2/0		CFM	117	109	96	73	33	0/4	01	10 E
	240	50	Sones	1.2	1.2	1.2	1.3	1.8	861	21	19.5

Performance certified is for installation type B: Free inlet, Ducted outlet. Performance ratings include the effects of an inlet grille and backdraft shutter. Speed (RPM) shown is nominal. Performance is based on actual speed of test. The sound ratings shown are loudness values in fan sones at 5 ft. (1.5m) in a hemispherical free field calculated per AMCA International Standard 301. Values shown are for installation type B: Free inlet hemispherical sone lovels.

3

<sup>\*</sup> the Watts rating is for AMCA test method and it is at the static pressure of 0 inch of H<sub>2</sub>O.

<sup>\*\*</sup> the Watts rating is only for IEC test method and the AMCA Certified Rating Seal does not apply to IEC test method watts.

<sup>\*</sup> the Watts rating is for AMCA test method and it is at the static pressure of 0 inch of H20.

<sup>\*\*</sup> the Watts rating is only for IEC test method and the AMCA Certified Rating Seal does not apply to IEC test method watts.



NOTE			
y <u>-</u>			