


Rectangular Multi-Blade Damper

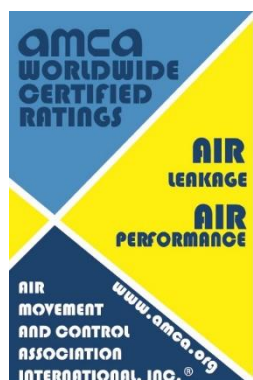

Dianduo Engineering JiangSu Co.,Ltd. certifies that the RMBD (Rectangular Multi-Blade Damper) shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to Air Leakage and Air Performance ratings.

Ratings

Pressure: 0 to 2.5KPa

Temperature: 0°C to 49°C

Leakage: Class 1 at 0.5KPa

Class 1 at 1.0KPa

Class 1 at 2.5KPa

Standard Construction

Frame: Stainless Steel、Stainless Steel With Coating、Galvanizing

Blade: (Stainless Steel、Stainless Steel With Coating、Galvanizing) with Seal



Damper Sizes

914mm×914mm

1600mm×914mm

Description

RMBD is a low leakage volume control damper. It can be installed vertically or horizontally position, with electric or handed actuators.

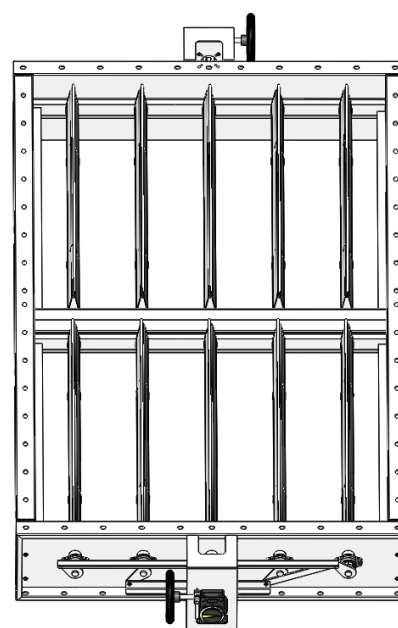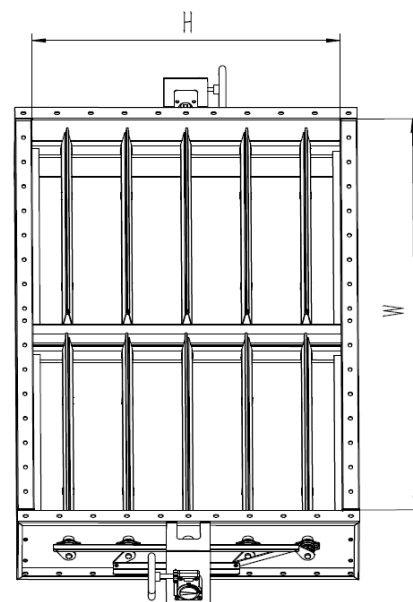

Test Information

Air leakage is based on operation between 0°C to 49°C

Tested for air leakage in accordance with ANSI/AMCA Standard 500-D, Figure 5.4A

Tested for air performance in accordance with ANSI/AMCA Standard 500-D, Figure 5.3

Torque

Data are based on a torque of 82 N•m/m² applied to close and seat the damper during the test.

Leakage Performance

| | Leakage Class | | | |
|--------------|---------------|-----------|-----------|-----------|
| Damper Size | at 0.5Kpa | at 1.0Kpa | at 1.5Kpa | at 2.5Kpa |
| 1600mm×914mm | 1 | 1 | 1 | 1 |

Air Performance

