

**STANDARD CONSTRUCTION****FRAME:** .081" thk. (nominal) extruded aluminum, 6063-T52/T6 alloy.**BLADE:** .050" thk. (nominal) extruded aluminum, 6063-T52/T6 alloy.Horizontal and vertical blades approximately  $1\frac{3}{16}$ " on center.**LOUVER FACE:** Head and blades are contained within jambs, sill contains jambs.**SCREENS:** (When indicated, in a removable frame.) $\frac{1}{2}$ " flattened aluminum (.051" thick),-or-  $\frac{1}{2}$ " sq. mesh, intermediate double-crimped aluminum wire, .063" dia.,-or-  $1\frac{3}{16}$ " mesh, .011" dia. aluminum wire, insect screen.**DRAIN PAN:** .060" thk. (nominal) formed aluminum with welded and caulked end dams.**FINISH:** Mill**OPTIONS**

Finish - Baked Enamel, Kynar, Anodized



**NOTES**


1.  $\frac{1}{2}$ " nominal deduction will be made to the opening size given.
2. Louvers larger than the maximum factory assembled size will require field assembly of smaller louver sections.

**LOUVER SIZES**

| Min Panel   | Max Single Panel |
|-------------|------------------|
| 12"W x 12"H | 60"W x 96"H      |

This louver has been tested to **AMCA Standard 550 for High Velocity Rain Resistance**. See Page 3 for seal and listing information.

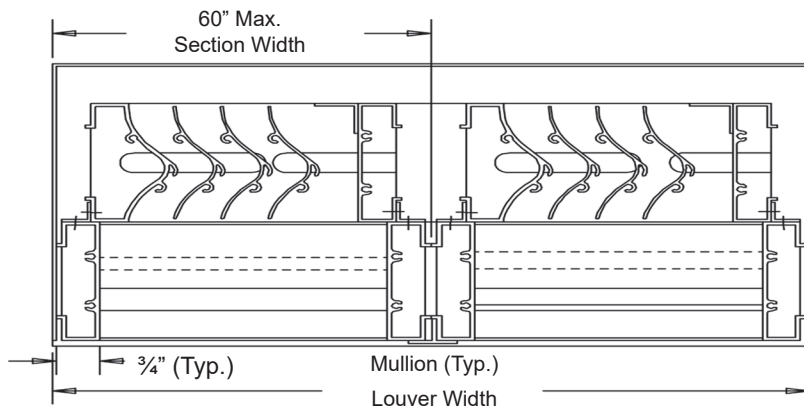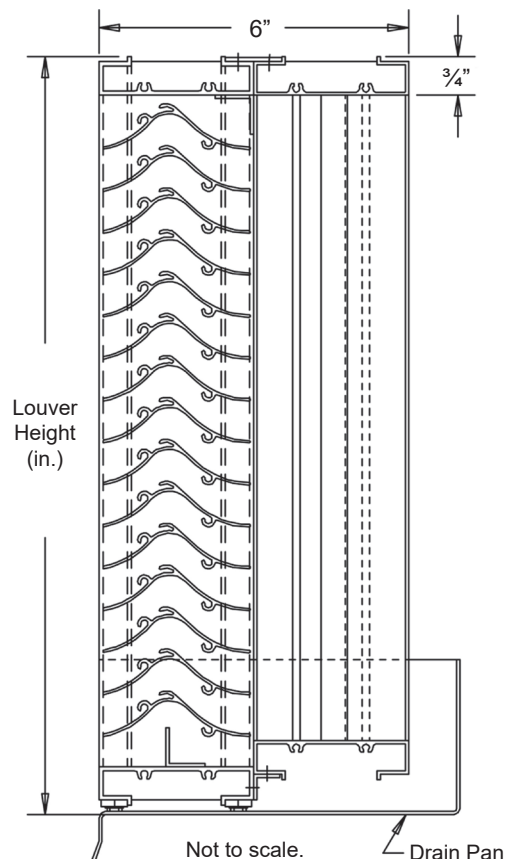

|                |     |              |        |             |        |         |         |          |  |      |  |
|----------------|-----|--------------|--------|-------------|--------|---------|---------|----------|--|------|---|
|                |     |              |        |             |        |         |         |          |  |      |   |
| Item #         | Qty | Width        | Height | Width       | Height | Mullion | Type    | Location |  |      |   |
|                |     | Opening Size |        | Louver Size |        |         | Screens |          |  |      |   |
| Arch. / Eng. : |     |              |        |             |        | EDR:    |         | ECN:     |  | Job: |   |
| Contractor:    |     |              |        |             |        |         |         |          |  |      |   |
| Project:       |     |              |        |             |        | Date:   |         | DWN:     |  | DWG: |   |

In the interest of product development, Louvers &amp; Dampers reserves the right to make changes without notice.

www.louvers-dampers.com

450 Riverside Drive • Wyalusing PA, 18853 • Phone 570-746-1888 • Fax 570-746-9286

**PERFORMANCE DATA**

Pressure Drop: .17 in. wg at 1000 fpm


Free Area: 6.94 sq.ft. (43.4%) for 48"W x 48"H sample tested in accordance with AMCA Standard 500-L.

Class "A" Rating with 99.8% efficiency at 3 in. rain fall at intake velocity of 1771 fpm (10,573 cfm) at wind speed of 29 mph.

Class "A" Rating with 99.8% efficiency at 8 in. rain fall at intake velocity of 1774 fpm (10,590 cfm) at wind speed of 50 mph.

Testing based on 48" x 48" based on AMCA Standard 500-L.

Ratings do not include effects of a screen.

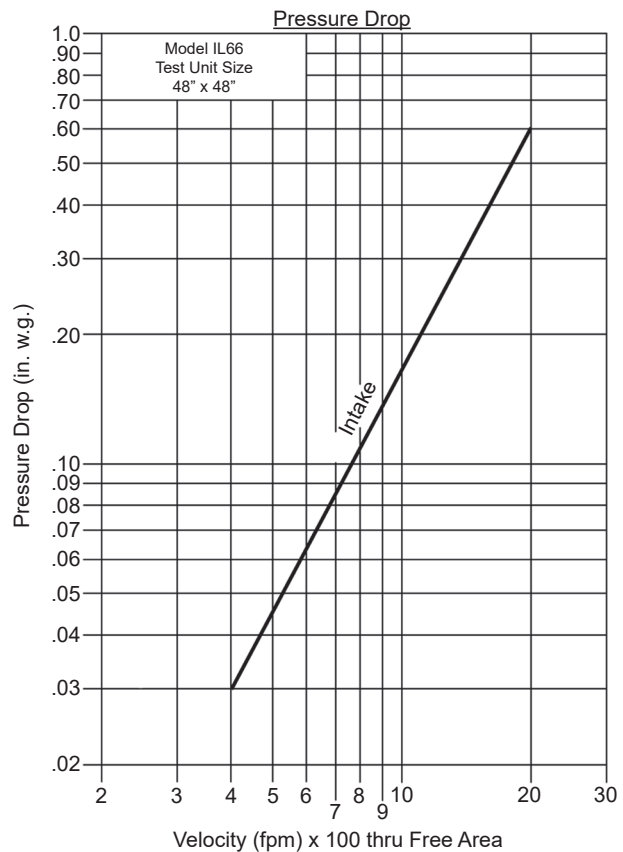

Intake air converted to standard air density. Tested to AMCA Standard 500-L, Figure 5.5.

|              |     | Free Area (sq.ft.) |      |      |      |       |       |       |       |       |
|--------------|-----|--------------------|------|------|------|-------|-------|-------|-------|-------|
|              |     | Width (in.)        |      |      |      |       |       |       |       |       |
| Height (in.) | 12" | 12"                | 18"  | 24"  | 30"  | 36"   | 42"   | 48"   | 54"   | 60"   |
|              | 12" | 0.30               | 0.48 | 0.66 | 0.84 | 1.02  | 1.20  | 1.38  | 1.56  | 1.74  |
|              | 24" | 0.68               | 1.10 | 1.52 | 1.93 | 2.35  | 2.77  | 3.19  | 3.60  | 4.02  |
|              | 36" | 1.07               | 1.72 | 2.38 | 3.03 | 3.69  | 4.34  | 4.99  | 5.65  | 6.30  |
|              | 48" | 1.49               | 2.39 | 3.30 | 4.21 | 5.12  | 6.03  | 6.94  | 7.85  | 8.75  |
|              | 60" | 1.85               | 2.98 | 4.10 | 5.23 | 6.36  | 7.49  | 8.62  | 9.75  | 10.88 |
|              | 72" | 2.23               | 3.60 | 4.97 | 6.33 | 7.70  | 9.06  | 10.43 | 11.79 | 13.16 |
|              | 84" | 2.62               | 4.22 | 5.83 | 7.43 | 9.03  | 10.63 | 12.24 | 13.84 | 15.44 |
|              | 96" | 3.04               | 4.90 | 6.75 | 8.61 | 10.47 | 12.32 | 14.18 | 16.04 | 17.89 |

Wind Driven Rainwater Penetration Test

Conducted to AMCA Standard 500-L.

Test size 1m x 1m (39.7" x 39.7") core area, nominal.

Louver Free Area 5.97 square feet.

| Core Ventilation (m/s)      | 0.0 | 0.5 | 1.0 | 1.5 | 2.0 | 2.5 | 3.0 | 3.5 | 4.0   | 4.5   | 5.0    | Rain Fall / MPH                                       |
|-----------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-------|-------|--------|---|
| FPM                         | -   | -   | -   | -   | -   | -   | -   | -   | 786   | 874   | 982    | 3 in. / hr.<br>rain fall<br>and<br>29 mph<br>Velocity |
| Free Area Ventilation (cfm) | -   | -   | -   | -   | -   | -   | -   | -   | 8,458 | 9,415 | 10,573 |   |
| Free Area Velocity (fpm)    | -   | -   | -   | -   | -   | -   | -   | -   | 1417  | 1577  | 1771   |   |
| Effective Rating Class      | A   | A   | A   | A   | A   | A   | A   | A   | A     | A     | A      |   |
| Effectiveness Ratio (%)     | -   | -   | -   | -   | -   | -   | -   | -   | 99.9  | 99.8  | 99.8   |   |
| FPM                         | -   | -   | -   | -   | -   | -   | -   | -   | 787   | 877   | 984    | 8 in. / hr.<br>rain fall<br>and<br>50 mph<br>Velocity |
| Free Area Ventilation (cfm) | -   | -   | -   | -   | -   | -   | -   | -   | 8,471 | 9,551 | 10,590 |   |
| Free Area Velocity (fpm)    | -   | -   | -   | -   | -   | -   | -   | -   | 1419  | 1600  | 1774   |   |
| Effective Rating Class      | A   | A   | A   | A   | A   | A   | A   | A   | A     | A     | A      |   |
| Effectiveness Ratio (%)     | -   | -   | -   | -   | -   | -   | -   | -   | 99.9  | 99.9  | 99.8   |   |

Wind Driven Rain Penetration Classifications

| Class | Effectiveness % |
|-------|-----------------|
| A     | 100 to 99%      |
| B     | 98.9% to 95%    |
| C     | 94.9% to 80%    |
| D     | Below 80%       |

Discharge Loss Coefficient Classifications

| Class | Discharge Loss Coefficient |
|-------|----------------------------|
| 1     | 0.4 and above              |
| 2     | 0.3 to 0.399               |
| 3     | 0.2 to 0.299               |
| 4     | 0.199 and below            |

Discharge Coefficient

Intake Cd= .29 (CLASS 3)

Class 1 Loss Coefficient has the least resistance to airflow.

1. Core area is the front opening of a louver assembly with the blades removed.
2. Core area velocity is the airflow rate through the louver divided by the core area (39.37" x 39.37").
3. Free area is the minimum area through which air can pass. It is determined by multiplying the sum of the minimum distance between intermediate blades, top blade and head, bottom blade and sill, by the minimum distance between jambs.
4. Discharge loss coefficient is calculated by dividing a louver actual airflow rate vs. a theoretical airflow for the opening, providing an indication of the louver air flow characteristics.

HIGH VELOCITY  
RAIN RESISTANT  
WITH BLADES FULLY OPENSee [www.AMCA.org](http://www.AMCA.org) for all certified or listed productsThis label does not signify  
AMCA airflow performance  
certification.

Louvers & Dampers certifies that the Model IL66 shown herein is approved to bear the AMCA Listing Label. The ratings shown are based on tests and procedures performed in accordance with AMCA Publications and comply with the requirements of the AMCA Listing Label Program.

The AMCA Listing Label applies to High Velocity Rain Resistant Louvers.

Louvers & Dampers certifies that the Model IL66 shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to Air Performance and Wind Driven Rain only.