


Vestibule Exception Compliance: up to 14 ft. AFF / Optimal Environmental Separation: up to 10 ft. AFF



Berner International certifies that the air curtains shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program. Rated data shown is for base (electric heated) units. The AMCA Certified Ratings Seal applies to airflow rate, average outlet velocity, outlet velocity uniformity, velocity projection and power rating at free delivery only.

2 Year Limited Warranty

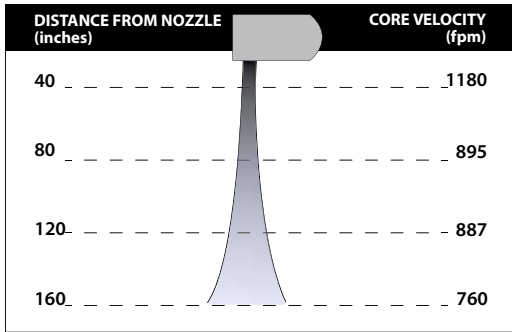

indoor use



MODEL	Nozzle Width (in)	Max Vel. at Nozzle (fpm)	Avg. Outlet Vel. (fpm)	Air Volume (cfm)	Outlet Vel. Uniformity	Power Rating (kW)	Motor(s) @ hp	Max. Electric Capacity (kW)	Heater Output (MBH)	Air Temp. Rise (°F)	Net Wt. (lbs)
AC10-F-1036E	36.00	3,552	1,968	1,353	80%	0.45	1 @ 1/2	14	47.8	33°	88
AC10-F-1042E	42.00	3,543	1,773	1,422	82%	0.47	1 @ 1/2	14	47.8	31°	97
AC10-F-1048E	48.00	3,919	1,927	1,766	92%	0.63	1 @ 1/2	14	47.8	25°	113
AC10-F-1060E	59.00	4,087	1,594	1,796	86%	0.59	1 @ 1/2	14	47.8	25°	122
AC10-F-2072E	72.00	3,552	1,968	2,706	80%	0.90	2 @ 1/2	28	95.6	33°	176
AC10-F-2078E	78.00	3,552	1,863	2,775	80%	0.92	2 @ 1/2	28	95.6	32°	176
AC10-F-2084E	84.00	3,543	1,773	2,844	82%	0.94	2 @ 1/2	28	95.6	31°	194
AC10-F-2096E	96.00	3,919	1,927	3,532	92%	1.26	2 @ 1/2	28	95.6	25°	226
AC10-F-2108E	108.00	4,087	1,727	3,562	86%	1.22	2 @ 1/2	28	95.6	25°	235
AC10-F-2120E	118.00	4,087	1,594	3,592	86%	1.18	2 @ 1/2	28	95.6	25°	244
AC10-F-3132E	132.00	3,919	1,938	4,885	80%	1.71	3 @ 1/2	42	143.3	27°	314
AC10-F-3144E	144.00	3,919	1,927	5,298	92%	1.89	3 @ 1/2	42	143.3	25°	339

See sheets EP-272E-AC & EP-272E-EC for amp draws/total load requirements.

600/3/60 power supply includes extended cabinet, See drawing AC10-F-ELE-600

NOTE: Operation of standard motor (AC) at 50Hz will generate a 17% reduction in performance; no reduction for optional EC motors.

MODEL NUMBER CONFIGURATION

AC10-F-1 036 E B-100-AC -CB-D-R-SS

Series	Version	# of Motors	Opening Width	Heat	Voltage	Standard kW	Motor Type	Berner AIR	Opt. Data Link	Opt. Display	Opt. Cabinet Finish
AC10	F	1, 2, 3	036" - 144"	E=Electric Heated	AC & EC motors B = 208/1/60* J = 240/1/60* V = 230/1/50* K = 120/480 L = 120/600 S = 208/480 M = 208/600 U = 240/480 N = 240/600 X = 208/3/60 Y = 240/3/60 O = 380/3/50** L-XI = 600/3/60 † W = 277/1/60* WZ = 480/3/60**	14.0 - 42.0 (140 - 420) <i>See sheet EP-272 for alternate kW code</i>	AC (Std.) EC (Opt.)	CB=BASIC (Std.) CM=BMS (Opt.)	Opt. Data Link Interconnect (daisy chain)	Opt. Display R=Remote Display TB=Tablet	Opt. Cabinet Finish SS=Stainless Steel CC=Custom Color

STANDARD CONSTRUCTION

- 12 3/4" high x 25 3/4" deep
- 1/2 hp AC motor(s) - ten speeds
- Touchscreen interface with Intelliswitch™ digital controller, includes Berner AIR® BASIC (smart control)
- Clear satin anodized aluminum exterior
- Wall or Top Mounting
- High efficiency, low noise, articulating, three vane, Pro-V Nozzle
- Patented single stage venturi electric heater (open element)
- Filter (washable)

OPTIONS

- 1/2 hp EC motor(s) - ten speeds
- Alternate kW: see sheet EP-272E
- Berner AIR® BMS (smart control with BACnet and Modbus capabilities)
- Custom Color or Stainless
- Rear cover for top mounting to conceal fasteners

VELOCITY PROJECTION: Model AC10-F-1036E				
Distance from Nozzle (in)	40	80	120	160
Core Velocity (fpm)	1180	895	887	760
Uniformity (%)	83%	84%	92%	97%

ASHRAE 90.1-2019 vestibule exception requires, "a jet velocity of not less than 6.6 feet per second (400 fpm; 2.0 m/s) at 6.0 in (15 cm) above the floor."

Sound level measured 10' (3m) from the unit in free field:

- 1 motor: Min./Max. Speed: 53/56 dBA
- 2 motors: Min./Max. Speed: 56/59 dBA
- 3 motors: Min./Max. Speed: 59/61 dBA

Sound data is not AMCA certified.

Berner reserves the right to alter specifications without prior notice.