


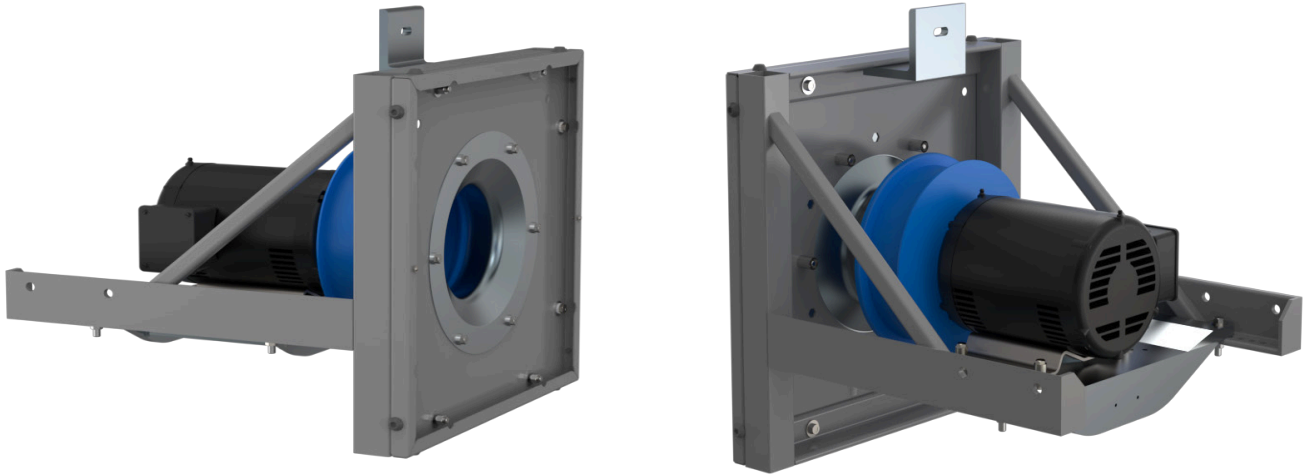

FAN MATRIX[™]

PRODUCT CATALOG

Part#: PD-RD-03042026-ANPA | Revised: April 30, 2026

We make air handling technology. BETTER.
Indoor/Outdoor Custom AHU

3 AMCA Certification

4 Performance Data

4 ANPA10

5 ANPA11

6 ANPA12

7 ANPA14

8 ANPA16

9 Sound Data

9 ANPA10

13 ANPA11

17 ANPA12

22 ANPA14

27 ANPA16

32 Revision History



ClimateCraft, Inc. certifies that the ANPA fan wheel shown herein is licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and AMCA Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.



Performance Data ANPA10

Models:
ANPA

5,260 RPM Max Speed

RPM	Unit	1.5"	2.0"	2.5"	3.0"	3.5"	4.0"	4.5"	5.0"	5.5"	6.0"	6.5"	7.0"	7.5"
3,400	CFM	1,829	1,727	1,610	1,475	1,301								
	BHP	1.01	1.05	1.08	1.10	1.08								
3,600	CFM	1,969	1,877	1,774	1,657	1,522	1,344							
	BHP	1.19	1.23	1.26	1.29	1.30	1.27							
3,800	CFM	2,105	2,022	1,930	1,827	1,711	1,578	1,400						
	BHP	1.38	1.42	1.46	1.50	1.52	1.52	1.49						
4,000	CFM	2,239	2,164	2,080	1,988	1,886	1,773	1,641	1,468					
	BHP	1.59	1.64	1.68	1.72	1.76	1.78	1.77	1.73					
4,200	CFM	2,372	2,303	2,226	2,142	2,051	1,951	1,840	1,712	1,547				
	BHP	1.83	1.87	1.92	1.96	2.01	2.04	2.05	2.05	2.00				
4,400	CFM	2,503	2,439	2,369	2,292	2,209	2,119	2,022	1,914	1,791	1,634			
	BHP	2.09	2.13	2.18	2.23	2.27	2.32	2.35	2.36	2.35	2.30			
4,600	CFM	2,632	2,573	2,508	2,438	2,362	2,280	2,192	2,097	1,993	1,875	1,728		
	BHP	2.36	2.41	2.46	2.51	2.56	2.61	2.65	2.68	2.69	2.68	2.63		
4,800	CFM	2,761	2,706	2,646	2,581	2,511	2,436	2,356	2,270	2,178	2,078	1,965	1,828	
	BHP	2.66	2.71	2.76	2.81	2.87	2.92	2.97	3.01	3.03	3.05	3.03	2.99	
5,000	CFM		2,837	2,781	2,720	2,656	2,587	2,513	2,435	2,352	2,263	2,166	2,059	1,932
	BHP		3.03	3.08	3.14	3.19	3.25	3.30	3.35	3.39	3.41	3.42	3.42	3.38

- Performance ratings do not include the effects of appurtenances.
- Performance certified is for installation type A: free inlet, free outlet.
- Power [BHP] excludes drives.
- Light gray shaded area = Class 2, Dark gray shaded area = Class 3

Performance Data ANPA11

Models:
ANPA

4,690 RPM Max Speed

RPM	Unit	1.5"	2.0"	2.5"	3.0"	3.5"	4.0"	4.5"	5.0"	5.5"	6.0"	6.5"	7.0"	7.5"
2,800	CFM	2,160	2,009	1,823										
	BHP	1.07	1.11	1.12										
3,000	CFM	2,371	2,239	2,087	1,899									
	BHP	1.29	1.33	1.37	1.38									
3,200	CFM	2,577	2,459	2,328	2,177	1,988								
	BHP	1.54	1.59	1.64	1.67	1.67								
3,400	CFM	2,779	2,671	2,554	2,425	2,277	2,092							
	BHP	1.82	1.88	1.93	1.98	2.00	2.00							
3,600	CFM	2,978	2,879	2,773	2,658	2,532	2,387	2,208						
	BHP	2.13	2.20	2.26	2.31	2.35	2.38	2.37						
3,800	CFM	3,174	3,082	2,985	2,882	2,770	2,647	2,507	2,337					
	BHP	2.47	2.55	2.61	2.68	2.73	2.77	2.79	2.79					
4,000	CFM	3,368	3,283	3,193	3,098	2,997	2,888	2,769	2,635	2,474				
	BHP	2.85	2.93	3.00	3.07	3.14	3.19	3.23	3.25	3.25				
4,200	CFM	3,560	3,480	3,397	3,309	3,216	3,118	3,013	2,898	2,770	2,620	2,424		
	BHP	3.27	3.35	3.43	3.50	3.57	3.63	3.69	3.73	3.75	3.75	3.71		
4,400	CFM		3,676	3,598	3,516	3,431	3,341	3,245	3,143	3,033	2,911	2,770	2,598	
	BHP		3.80	3.88	3.96	4.04	4.11	4.17	4.22	4.27	4.29	4.29	4.26	
4,600	CFM		3,870	3,797	3,720	3,640	3,557	3,470	3,377	3,279	3,174	3,058	2,927	2,771
	BHP		4.28	4.37	4.45	4.53	4.61	4.68	4.75	4.80	4.84	4.87	4.88	4.85

- Performance ratings do not include the effects of appurtenances.
- Performance certified is for installation type A: free inlet, free outlet.
- Power [BHP] excludes drives.
- Light gray shaded area = Class 2, Dark gray shaded area = Class 3

Performance Data ANPA12

Models:
ANPA

ALU Max Speed: 3,900 RPM

Steel Max Speed: 4,500 RPM

RPM	Unit	1.5"	2.0"	2.5"	3.0"	3.5"	4.0"	4.5"	5.0"	5.5"	6.0"	6.5"	7.0"
2,400	CFM	2,701	2,475	2,212									
	BHP	1.25	1.29	1.31									
2,600	CFM	3,021	2,830	2,612	2,362								
	BHP	1.55	1.61	1.65	1.66								
2,800	CFM	3,327	3,166	2,978	2,768	2,532	2,232						
	BHP	1.91	1.97	2.03	2.07	2.07	2.02						
3,000	CFM	3,623	3,485	3,323	3,142	2,942	2,722	2,452					
	BHP	2.31	2.38	2.45	2.51	2.54	2.55	2.49					
3,200	CFM	3,912	3,792	3,652	3,493	3,320	3,132	2,926	2,686				
	BHP	2.76	2.84	2.92	2.98	3.04	3.09	3.08	3.04				
3,400	CFM		4,090	3,967	3,829	3,676	3,510	3,334	3,142	2,924			
	BHP		3.35	3.43	3.51	3.58	3.64	3.68	3.69	3.68			
3,600	CFM		4,381	4,273	4,151	4,017	3,870	3,712	3,544	3,366	3,168	2,932	
	BHP		3.91	4.01	4.09	4.17	4.25	4.31	4.35	4.40	4.37	4.30	
3,800	CFM			4,570	4,463	4,343	4,212	4,072	3,922	3,764	3,598	3,416	3,212
	BHP			4.62	4.72	4.80	4.88	4.96	5.03	5.14	5.16	5.15	5.09
4,000	CFM			4,862	4,765	4,658	4,542	4,416	4,282	4,140	3,992	3,834	3,668
	BHP			5.39	5.5	5.59	5.68	5.77	5.85	5.92	5.97	6.00	6.00
4,200	CFM				5,061	4,965	4,862	4,748	4,628	4,500	4,364	4,224	4,078
	BHP				6.27	6.37	6.47	6.56	6.66	6.74	6.81	6.87	6.91
4,400	CFM				5,352	5,266	5,172	5,070	4,961	4,845	4,723	4,596	4,462
	BHP				7.09	7.21	7.31	7.41	7.51	7.60	7.69	7.77	7.83

- Performance ratings do not include the effects of appurtenances.
- Performance certified is for installation type A: free inlet, free outlet.
- Power [BHP] excludes drives.
- Light gray shaded area = Class 2, Dark gray shaded area = Class 3

Performance Data ANPA14

Models:
ANPA

ALU Max Speed: 3,640 RPM

Steel Max Speed: 4,000 RPM

RPM	Unit	1.5"	2.0"	2.5"	3.0"	3.5"	4.0"	4.5"	5.0"	5.5"	6.0"	6.5"	7.0"	7.5"	8.0"	8.5"	9.0"	9.5"
2,000	CFM	3,026	2,710	2,310														
	BHP	1.31	1.34	1.39														
2,200	CFM	3,482	3,230	2,930	2,560													
	BHP	1.70	1.76	1.78	1.75													
2,400	CFM	3,913	3,704	3,462	3,182	2,848												
	BHP	2.16	2.24	2.29	2.56	2.28												
2,600	CFM	4,332	4,152	3,948	3,718	3,460	3,158											
	BHP	2.70	2.79	2.86	2.91	2.93	2.90											
2,800	CFM	4,740	4,580	4,405	4,210	3,996	3,756	3,482	3,164									
	BHP	3.31	3.42	3.51	3.58	3.63	3.66	3.64	3.56									
3,000	CFM	5,140	4,998	4,842	4,674	4,490	4,288	4,066	3,820	3,540	3,204							
	BHP	4.00	4.15	4.25	4.34	4.41	4.46	4.49	4.48	4.42	4.30							
3,200	CFM	5,534	5,406	5,268	5,118	4,956	4,782	4,594	4,390	4,166	3,916	3,633						
	BHP	4.76	4.95	5.08	5.18	5.27	5.34	5.40	5.44	5.44	5.40	5.58						
3,400	CFM	5,924	5,808	5,682	5,548	5,404	5,250	5,086	4,910	4,720	4,516	4,294	4,048	3,762				
	BHP	5.59	5.85	5.99	6.11	6.22	6.31	6.39	6.45	6.49	6.51	6.49	6.43	6.30				
3,600	CFM	6,312	6,204	6,088	5,966	5,838	5,700	5,554	5,400	5,236	5,060	4,872	4,670	4,450	4,208	3,930		
	BHP	6.63	6.84	7.00	7.13	7.26	7.36	7.46	7.55	7.62	7.67	7.69	7.69	7.65	7.56	7.42		
3,800	CFM		6,596	6,490	6,379	6,260	6,136	6,006	5,868	5,722	5,566	5,404	5,230	5,046	4,848	4,634	4,400	4,132
	BHP		7.90	8.09	8.25	8.38	8.50	8.62	8.72	8.82	8.89	8.95	8.98	9.00	8.98	8.92	8.82	8.67

- Performance ratings do not include the effects of appurtenances.
- Performance certified is for installation type A: free inlet, free outlet.
- Power [BHP] excludes drives.
- Light gray shaded area = Class 2, Dark gray shaded area = Class 3

Performance Data ANPA16

Models:
ANPA

ALU Max Speed: 3,150 RPM

Steel Max Speed: 3,700 RPM

RPM	Unit	1.5"	2.0"	2.5"	3.0"	3.5"	4.0"	4.5"	5.0"	5.5"	6.0"	6.5"	7.0"	7.5"	8.0"	8.5"
1,600	CFM	3,108	2,564													
	BHP	1.17	1.15													
1,800	CFM	3,788	3,412	2,922												
	BHP	1.63	1.65	1.63												
2,000	CFM	4,408	4,116	3,766	3,333											
	BHP	2.18	2.23	2.26	2.24											
2,200	CFM	4,992	4,758	4,482	4,164	3,780	3,276									
	BHP	2.84	2.92	2.98	3.01	2.98	2.88									
2,400	CFM	5,556	5,358	5,132	4,876	4,586	4,248	3,842								
	BHP	3.62	3.72	3.80	3.86	3.89	3.88	3.82								
2,600	CFM	6,106	5,936	5,744	5,530	5,292	5,028	4,728	4,386	3,960						
	BHP	4.51	4.66	4.76	4.84	4.90	4.94	4.94	4.90	4.78						
2,800	CFM	6,646	6,494	6,330	6,148	5,948	5,728	5,486	5,220	4,920	4,578	4,150				
	BHP	5.53	5.71	5.85	5.96	6.04	6.11	6.15	6.17	6.15	6.07	5.91				
3,000	CFM	7,178	7,044	6,898	6,740	6,566	6,380	6,176	5,954	5,714	5,454	5,160	4,824	4,414		
	BHP	6.65	6.91	7.08	7.22	7.32	7.41	7.48	7.54	7.57	7.57	7.53	7.43	7.24		
3,200	CFM		7,584	7,454	7,312	7,160	6,998	6,822	6,634	6,430	6,214	5,980	5,724	5,444	5,120	4,734
	BHP		8.23	8.45	8.61	8.75	8.86	8.95	9.04	9.1	9.14	9.16	9.15	9.09	8.97	8.78
3,400	CFM		8,118	8,000	7,874	7,738	7,594	7,440	7,278	7,100	6,916	6,716	6,506	6,278	6,030	5,766
	BHP		9.66	9.94	10.15	10.31	10.45	10.57	10.68	10.76	10.83	10.89	10.93	10.93	10.90	10.85
3,600	CFM			8,540	8,424	8,302	8,174	8,036	7,890	7,738	7,575	7,404	7,220	7,028	6,824	6,606
	BHP			11.55	11.81	12.01	12.18	12.32	12.44	12.56	12.65	12.73	12.80	12.85	12.88	12.88

- Performance ratings do not include the effects of appurtenances.
- Performance certified is for installation type A: free inlet, free outlet.
- Power [BHP] excludes drives.
- Light gray shaded area = Class 2, Dark gray shaded area = Class 3

Sound Data ANPA10

Models:
ANPA

RPM	Static Pressure [in WC]	Inlet/Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
3,400	1.5	Inlet	76	74	79	85	78	76	76	69	88
		Outlet	85	82	80	88	84	84	80	74	93
3,400	2.0	Inlet	75	73	78	84	77	76	75	68	87
		Outlet	84	81	79	87	83	83	79	73	92
3,400	2.5	Inlet	74	72	78	84	77	76	74	67	87
		Outlet	86	80	77	87	82	82	76	71	92
3,400	3.0	Inlet	74	71	76	83	75	75	72	67	86
		Outlet	85	79	76	86	81	81	75	70	90
3,400	3.5	Inlet	73	70	75	82	74	74	72	67	84
		Outlet	84	78	75	85	80	80	74	69	89
3,600	1.5	Inlet	77	76	80	86	79	78	77	72	89
		Outlet	87	84	82	90	86	86	82	76	95
3,600	2.0	Inlet	77	75	80	85	79	77	77	71	88
		Outlet	86	83	81	89	85	85	81	75	94
3,600	2.5	Inlet	77	75	80	85	79	78	76	70	88
		Outlet	85	82	80	88	84	84	80	74	93
3,600	3.0	Inlet	76	74	79	84	78	77	75	69	88
		Outlet	87	81	78	88	83	83	77	72	93
3,600	3.5	Inlet	75	73	77	84	77	76	74	68	87
		Outlet	86	80	77	87	82	82	76	71	92
3,600	4.0	Inlet	74	71	76	83	76	75	73	68	86
		Outlet	85	79	76	86	81	81	75	70	91
3,800	1.5	Inlet	79	78	81	87	80	79	79	74	90
		Outlet	89	86	84	92	88	88	84	78	96
3,800	2.0	Inlet	79	76	81	86	80	78	79	73	90
		Outlet	88	85	83	91	87	87	83	77	95
3,800	2.5	Inlet	79	76	82	86	80	79	79	72	90
		Outlet	87	84	82	90	86	86	82	76	95
3,800	3.0	Inlet	78	76	82	86	80	79	78	71	90
		Outlet	89	83	80	90	85	85	79	74	94
3,800	3.5	Inlet	78	75	80	86	79	78	77	70	89
		Outlet	88	82	79	89	84	84	78	73	94
3,800	4.0	Inlet	77	74	79	86	78	77	76	69	88
		Outlet	87	81	78	88	83	83	77	72	93
3,800	4.5	Inlet	76	73	79	84	77	76	75	69	87
		Outlet	86	80	77	87	82	82	76	71	92
4,000	1.5	Inlet	79	79	82	88	82	80	80	75	91
		Outlet	90	87	85	93	89	89	85	79	98
4,000	2.0	Inlet	80	78	82	87	82	80	80	75	91
		Outlet	89	86	84	92	88	88	84	78	97

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_A and outlet Lw_o and Lw_{oA} sound power levels for Installation Type A: free inlet, free outlet.

Table continued on next page

Table continued from previous page

RPM	Static Pressure [in WC]	Inlet/ Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
4,000	2.5	Inlet	80	77	82	87	82	80	80	74	91
		Outlet	89	86	84	92	88	88	84	78	96
4,000	3.0	Inlet	79	77	82	87	82	80	79	73	91
		Outlet	88	85	83	91	87	87	83	77	95
4,000	3.5	Inlet	79	77	81	86	81	80	78	72	90
		Outlet	90	84	81	91	86	86	80	75	95
4,000	4.0	Inlet	78	76	80	86	80	79	77	71	89
		Outlet	89	83	80	90	85	85	79	74	95
4,000	4.5	Inlet	77	75	79	85	80	78	76	71	89
		Outlet	88	82	79	89	84	84	78	73	94
4,000	5.0	Inlet	76	74	79	84	79	77	76	70	88
		Outlet	88	82	79	89	84	84	78	73	93
4,200	1.5	Inlet	80	81	83	89	84	81	81	77	92
		Outlet	91	88	86	94	90	90	86	80	99
4,200	2.0	Inlet	81	80	83	88	84	81	81	76	92
		Outlet	91	88	86	94	90	90	86	80	98
4,200	2.5	Inlet	81	79	83	88	84	81	81	76	92
		Outlet	90	87	85	93	89	89	85	79	98
4,200	3.0	Inlet	80	78	82	88	84	81	80	75	92
		Outlet	89	86	84	92	88	88	84	78	97
4,200	3.5	Inlet	80	78	82	87	83	81	80	74	91
		Outlet	92	86	83	93	88	88	82	77	97
4,200	4.0	Inlet	79	77	81	87	83	80	79	73	91
		Outlet	91	85	82	92	87	87	81	76	96
4,200	4.5	Inlet	78	76	80	86	82	79	77	72	90
		Outlet	90	84	81	91	86	86	80	75	96
4,200	5.0	Inlet	78	76	80	85	82	79	77	72	89
		Outlet	89	83	80	90	85	85	79	74	95
4,200	5.5	Inlet	77	75	79	84	81	78	77	72	88
		Outlet	89	83	80	90	85	85	79	74	94
4,400	1.5	Inlet	82	82	83	89	87	83	82	79	94
		Outlet	85	87	85	88	94	93	87	83	98
4,400	2.0	Inlet	82	81	83	89	86	83	82	78	93
		Outlet	84	86	84	87	93	92	86	82	98
4,400	2.5	Inlet	82	81	83	89	86	83	82	77	93
		Outlet	84	86	84	87	93	92	86	82	97
4,400	3.0	Inlet	82	80	83	89	86	83	82	77	93
		Outlet	83	85	83	86	92	91	85	81	96
4,400	3.5	Inlet	81	79	82	89	85	82	81	76	93
		Outlet	82	84	82	85	91	90	84	80	96

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_iA and outlet Lw_o and Lw_oA sound power levels for Installation Type A: free inlet, free outlet.

Table continued on next page

Table continued from previous page

RPM	Static Pressure [in WC]	Inlet/ Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
4,400	4.0	Inlet	81	79	82	88	85	82	81	75	92
		Outlet	84	85	81	83	91	90	83	77	95
4,400	4.5	Inlet	80	78	81	87	85	81	80	75	91
		Outlet	83	84	80	82	90	89	82	76	94
4,400	5.0	Inlet	79	77	80	86	84	80	78	74	91
		Outlet	82	83	79	81	89	88	81	75	93
4,400	5.5	Inlet	78	76	80	85	84	80	78	74	90
		Outlet	82	83	79	81	89	88	81	75	93
4,400	6.0	Inlet	78	75	80	85	83	79	78	73	89
		Outlet	81	82	78	80	88	87	80	74	92
4,600	1.5	Inlet	83	83	84	90	89	84	84	80	95
		Outlet	86	88	86	89	95	94	88	84	99
4,600	2.0	Inlet	83	83	84	90	89	84	84	80	95
		Outlet	85	87	85	88	94	93	87	83	99
4,600	2.5	Inlet	83	82	83	90	89	84	83	79	95
		Outlet	85	87	85	88	94	93	87	83	98
4,600	3.0	Inlet	83	82	83	90	88	84	83	78	95
		Outlet	84	86	84	87	93	92	86	82	98
4,600	3.5	Inlet	83	81	83	90	88	84	83	78	94
		Outlet	84	86	84	87	93	92	86	82	97
4,600	4.0	Inlet	82	80	82	89	87	83	82	77	94
		Outlet	83	85	83	86	92	91	85	81	97
4,600	4.5	Inlet	81	80	82	89	87	83	81	76	93
		Outlet	84	85	81	83	91	90	83	77	96
4,600	5.0	Inlet	81	79	81	87	87	82	80	76	92
		Outlet	84	85	81	83	91	90	83	77	95
4,600	5.5	Inlet	80	78	81	86	87	81	79	75	92
		Outlet	83	84	80	82	90	89	82	76	95
4,600	6.0	Inlet	79	77	81	86	86	81	79	75	91
		Outlet	83	84	80	82	90	89	82	76	94
4,600	6.5	Inlet	79	76	80	85	85	80	79	75	90
		Outlet	82	83	79	81	89	88	81	75	93
4,800	1.5	Inlet	84	85	84	90	92	85	85	81	96
		Outlet	87	89	87	90	96	95	89	85	100
4,800	2.0	Inlet	84	84	84	91	91	85	85	81	96
		Outlet	87	89	87	90	96	95	89	85	100
4,800	2.5	Inlet	84	84	84	91	91	85	85	80	96
		Outlet	86	88	86	89	95	94	88	84	100
4,800	3.0	Inlet	84	83	84	91	91	85	85	80	96
		Outlet	86	88	86	89	95	94	88	84	99

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_iA and outlet Lw_o and Lw_oA sound power levels for Installation Type A: free inlet, free outlet.

Table continued on next page

Table continued from previous page

RPM	Static Pressure [in WC]	Inlet/ Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
4,800	3.5	Inlet	84	83	83	91	90	85	85	79	96
		Outlet	85	87	85	88	94	93	87	83	99
4,800	4.0	Inlet	83	82	83	91	90	85	84	79	95
		Outlet	85	87	85	88	94	93	87	83	98
4,800	4.5	Inlet	83	81	82	90	89	84	83	78	95
		Outlet	86	87	83	85	93	92	85	79	97
4,800	5.0	Inlet	82	81	82	89	89	83	82	77	94
		Outlet	85	86	82	84	92	91	84	78	97
4,800	5.5	Inlet	82	80	82	88	89	83	81	77	93
		Outlet	85	86	82	84	92	91	84	78	96
4,800	6.0	Inlet	81	79	82	87	89	82	80	77	93
		Outlet	84	85	81	83	91	90	83	77	96
4,800	6.5	Inlet	80	78	81	86	89	82	80	76	92
		Outlet	84	85	81	83	91	90	83	77	95
4,800	7.0	Inlet	80	77	81	85	88	81	80	76	92
		Outlet	83	84	80	82	90	89	82	76	95
5,000	2.0	Inlet	84	86	85	91	92	85	86	82	97
		Outlet	88	90	88	91	97	96	90	86	101
5,000	2.5	Inlet	84	85	85	91	92	86	86	82	97
		Outlet	87	89	87	90	96	95	89	85	101
5,000	3.0	Inlet	85	85	85	91	92	86	86	81	97
		Outlet	87	89	87	90	96	95	89	85	100
5,000	3.5	Inlet	84	85	84	92	91	86	86	81	97
		Outlet	86	88	86	89	95	94	88	84	100
5,000	4.0	Inlet	83	84	84	91	91	86	85	80	96
		Outlet	86	88	86	89	95	94	88	84	99
5,000	4.5	Inlet	83	83	83	91	91	85	85	80	96
		Outlet	85	87	85	88	94	93	87	83	99
5,000	5.0	Inlet	82	83	83	90	90	85	84	79	95
		Outlet	87	88	84	86	94	93	86	80	98
5,000	5.5	Inlet	82	82	83	89	90	84	83	78	95
		Outlet	86	87	83	85	93	92	85	79	98
5,000	6.0	Inlet	81	81	82	88	90	83	82	78	94
		Outlet	86	87	83	85	93	92	85	79	97
5,000	6.5	Inlet	81	80	82	87	90	83	82	78	93
		Outlet	85	86	82	84	92	91	84	78	97
5,000	7.0	Inlet	80	80	82	86	89	83	81	77	93
		Outlet	85	86	82	84	92	91	84	78	96
5,000	7.5	Inlet	80	79	82	85	89	82	81	77	92
		Outlet	84	85	81	83	91	90	83	77	96

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_iA and outlet Lw_o and Lw_oA sound power levels for Installation Type A: free inlet, free outlet.

Sound Data ANPA11

Models:
ANPA

RPM	Static Pressure [in WC]	Inlet/Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
2,800	1.5	Inlet	74	72	78	84	75	77	73	71	87
		Outlet	86	82	79	87	84	83	76	73	92
2,800	2	Inlet	73	71	78	84	74	77	73	70	86
		Outlet	86	80	76	85	82	81	73	70	91
2,800	2.5	Inlet	71	70	76	83	74	77	71	69	86
		Outlet	85	79	75	84	81	80	72	69	90
3,000	1.5	Inlet	77	74	80	86	76	79	74	73	89
		Outlet	88	84	81	89	86	85	78	75	94
3,000	2	Inlet	76	73	79	86	75	78	74	72	88
		Outlet	87	83	80	88	85	84	77	74	93
3,000	2.5	Inlet	75	72	78	86	75	78	73	71	88
		Outlet	88	82	78	87	84	83	75	72	92
3,000	3	Inlet	73	72	76	85	75	78	72	70	87
		Outlet	86	80	76	85	82	81	73	70	91
3,200	1.5	Inlet	79	77	80	87	78	80	77	74	90
		Outlet	90	86	83	91	88	87	80	77	96
3,200	2	Inlet	78	76	80	86	78	79	76	73	89
		Outlet	89	85	82	90	87	86	79	76	95
3,200	2.5	Inlet	77	75	79	86	78	79	76	73	89
		Outlet	90	84	80	89	86	85	77	74	95
3,200	3	Inlet	76	74	78	86	77	78	75	72	88
		Outlet	89	83	79	88	85	84	76	73	94
3,200	3.5	Inlet	74	74	78	86	77	78	74	72	88
		Outlet	88	82	78	87	84	83	75	72	92
3,400	1.5	Inlet	80	79	82	88	80	81	79	75	91
		Outlet	91	87	84	92	89	88	81	78	98
3,400	2	Inlet	79	78	81	87	80	80	78	75	90
		Outlet	91	87	84	92	89	88	81	78	97
3,400	2.5	Inlet	79	78	81	87	80	80	78	74	90
		Outlet	90	86	83	91	88	87	80	77	96
3,400	3	Inlet	78	77	80	87	80	80	77	74	90
		Outlet	91	85	81	90	87	86	78	75	96
3,400	3.5	Inlet	77	76	79	87	79	79	76	73	89
		Outlet	90	84	80	89	86	85	77	74	95
3,400	4	Inlet	76	76	79	87	79	78	76	73	89
		Outlet	89	83	79	88	85	84	76	73	94
3,600	1.5	Inlet	81	82	83	90	82	82	80	77	93
		Outlet	93	89	86	94	91	90	83	80	99
3,600	2	Inlet	80	80	82	89	81	81	80	76	92
		Outlet	92	88	85	93	90	89	82	79	99
3,600	2.5	Inlet	80	80	82	89	81	81	79	76	92
		Outlet	92	88	85	93	90	89	82	79	98

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet L_{wi}, L_{wA} and outlet L_{wo} and L_{wA} sound power levels for Installation Type A: free inlet, free outlet.

Table continued on next page

ClimateCraft works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateCraft's Customer Service Department at 405-415-9230 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateCraft's opinion or commendation of its products. The latest version of this document is available at www.climatecraft.com. © ClimateCraft, Inc. All Rights Reserved 2026

Table continued from previous page

RPM	Static Pressure [in WC]	Inlet/ Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
3,600	3	Inlet	80	79	82	89	82	81	79	75	92
		Outlet	91	87	84	92	89	88	81	78	97
3,600	3.5	Inlet	79	79	82	88	81	81	79	75	91
		Outlet	92	86	82	91	88	87	79	76	97
3,600	4	Inlet	78	77	80	88	81	80	78	75	91
		Outlet	91	85	81	90	87	86	78	75	96
3,600	4.5	Inlet	77	77	80	88	80	79	77	74	90
		Outlet	90	84	80	89	86	85	77	74	95
3,800	1.5	Inlet	82	84	85	92	83	83	82	79	95
		Outlet	95	91	88	96	93	92	85	82	101
3,800	2	Inlet	82	83	84	91	83	82	81	78	94
		Outlet	94	90	87	95	92	91	84	81	100
3,800	2.5	Inlet	81	82	83	91	82	82	81	77	93
		Outlet	93	89	86	94	91	90	83	80	100
3,800	3	Inlet	81	81	83	90	83	82	81	77	93
		Outlet	93	89	86	94	91	90	83	80	99
3,800	3.5	Inlet	81	81	84	90	83	82	81	77	93
		Outlet	94	88	84	93	90	89	81	78	99
3,800	4	Inlet	80	80	83	90	83	82	80	76	93
		Outlet	93	87	83	92	89	88	80	77	98
3,800	4.5	Inlet	79	79	81	90	82	81	79	76	92
		Outlet	93	87	83	92	89	88	80	77	97
3,800	5	Inlet	79	79	82	90	82	80	78	76	92
		Outlet	92	86	82	91	88	87	79	76	96
4,000	1.5	Inlet	83	85	86	92	86	84	84	80	96
		Outlet	96	92	89	97	94	93	86	83	102
4,000	2	Inlet	83	84	85	92	85	83	83	79	95
		Outlet	96	92	89	97	94	93	86	83	102
4,000	2.5	Inlet	83	83	84	91	85	83	82	79	94
		Outlet	95	91	88	96	93	92	85	82	101
4,000	3	Inlet	82	83	84	91	85	83	82	79	94
		Outlet	94	90	87	95	92	91	84	81	101
4,000	3.5	Inlet	82	83	84	91	85	83	82	78	94
		Outlet	94	90	87	95	92	91	84	81	100
4,000	4	Inlet	82	82	85	90	85	83	82	78	94
		Outlet	95	89	85	94	91	90	82	79	100
4,000	4.5	Inlet	81	81	84	90	85	83	82	78	94
		Outlet	95	89	85	94	91	90	82	79	99
4,000	5	Inlet	80	80	82	90	84	82	80	77	93
		Outlet	94	88	84	93	90	89	81	78	99

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_iA and outlet Lw_o and Lw_oA sound power levels for Installation Type A: free inlet, free outlet.

Table continued on next page

Table continued from previous page

RPM	Static Pressure [in WC]	Inlet/ Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
4,000	5.5	Inlet	80	80	82	90	84	81	80	77	93
		Outlet	93	87	83	92	89	88	80	77	98
4,200	1.5	Inlet	85	86	87	93	88	85	85	81	97
		Outlet	97	93	90	98	95	94	87	84	104
4,200	2	Inlet	84	86	86	92	88	85	85	81	96
		Outlet	97	93	90	98	95	94	87	84	103
4,200	2.5	Inlet	84	85	85	92	87	84	84	80	96
		Outlet	96	92	89	97	94	93	86	83	103
4,200	3	Inlet	84	84	84	91	87	84	84	80	95
		Outlet	96	92	89	97	94	93	86	83	102
4,200	3.5	Inlet	84	84	85	91	87	84	84	80	95
		Outlet	95	91	88	96	93	92	85	82	102
4,200	4	Inlet	84	84	85	91	87	84	84	79	95
		Outlet	95	91	88	96	93	92	85	82	101
4,200	4.5	Inlet	84	84	85	91	88	84	84	79	95
		Outlet	96	90	86	95	92	91	83	80	101
4,200	5	Inlet	83	82	84	91	87	84	83	79	94
		Outlet	96	90	86	95	92	91	83	80	100
4,200	5.5	Inlet	82	81	83	90	87	83	82	78	94
		Outlet	95	89	85	94	91	90	82	79	100
4,200	6	Inlet	81	81	83	90	87	82	81	78	94
		Outlet	94	88	84	93	90	89	81	78	99
4,200	6.5	Inlet	82	82	85	90	87	82	81	78	94
		Outlet	93	87	83	92	89	88	80	77	98
4,400	2	Inlet	86	87	87	93	91	86	86	82	97
		Outlet	98	94	91	99	96	95	88	85	104
4,400	2.5	Inlet	86	87	86	93	90	85	86	82	97
		Outlet	98	94	91	99	96	95	88	85	104
4,400	3	Inlet	85	86	86	92	90	85	85	81	96
		Outlet	97	93	90	98	95	94	87	84	103
4,400	3.5	Inlet	85	86	85	92	90	85	85	81	96
		Outlet	97	93	90	98	95	94	87	84	103
4,400	4	Inlet	85	85	86	92	90	85	85	81	96
		Outlet	96	92	89	97	94	93	86	83	103
4,400	4.5	Inlet	85	85	86	92	90	85	85	81	96
		Outlet	96	92	89	97	94	93	86	83	102
4,400	5	Inlet	85	85	86	91	90	85	85	80	96
		Outlet	97	91	87	96	93	92	84	81	102
4,400	5.5	Inlet	84	84	85	91	90	85	84	80	96
		Outlet	97	91	87	96	93	92	84	81	101

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_iA and outlet Lw_o and Lw_oA sound power levels for Installation Type A: free inlet, free outlet.

Table continued on next page

Table continued from previous page

RPM	Static Pressure [in WC]	Inlet/ Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
4,400	6	Inlet	83	83	84	90	90	84	83	79	95
		Outlet	96	90	86	95	92	91	83	80	101
4,400	6.5	Inlet	83	82	84	90	89	83	82	79	95
		Outlet	96	90	86	95	92	91	83	80	100
4,400	7	Inlet	83	83	85	90	89	83	82	79	95
		Outlet	95	89	85	94	91	90	82	79	100
4,600	2	Inlet	87	89	88	94	93	87	88	84	99
		Outlet	99	95	92	100	97	96	89	86	106
4,600	2.5	Inlet	87	88	87	93	93	86	87	83	98
		Outlet	99	95	92	100	97	96	89	86	105
4,600	3	Inlet	87	87	87	93	93	86	87	83	98
		Outlet	99	95	92	100	97	96	89	86	105
4,600	3.5	Inlet	87	87	86	92	92	85	86	82	98
		Outlet	98	94	91	99	96	95	88	85	104
4,600	4	Inlet	87	87	86	92	92	86	86	82	97
		Outlet	98	94	91	99	96	95	88	85	104
4,600	4.5	Inlet	87	86	86	92	92	86	86	82	97
		Outlet	97	93	90	98	95	94	87	84	104
4,600	5	Inlet	86	86	87	92	92	86	87	82	97
		Outlet	97	93	90	98	95	94	87	84	103
4,600	5.5	Inlet	86	86	87	92	92	86	86	81	97
		Outlet	98	92	88	97	94	93	85	82	103
4,600	6	Inlet	86	85	86	91	92	86	86	81	97
		Outlet	98	92	88	97	94	93	85	82	103
4,600	6.5	Inlet	85	84	85	90	92	85	85	81	96
		Outlet	97	91	87	96	93	92	84	81	102
4,600	7	Inlet	84	84	85	90	92	85	84	80	96
		Outlet	97	91	87	96	93	92	84	81	101
4,600	7.5	Inlet	84	84	86	90	92	84	83	80	96
		Outlet	96	90	86	95	92	91	83	80	101

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_iA and outlet Lw_e and Lw_eA sound power levels for Installation Type A: free inlet, free outlet.

Sound Data ANPA12

Models:
ANPA

RPM	Static Pressure [in WC]	Inlet/Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
2,400	1.5	Inlet	72	72	81	85	74	72	70	65	87
		Outlet	77	75	77	84	80	79	75	75	88
2,400	2	Inlet	70	71	81	86	74	71	68	63	88
		Outlet	73	73	73	82	79	79	73	72	86
2,400	2.5	Inlet	68	70	79	86	73	70	67	62	87
		Outlet	71	71	71	80	77	77	71	70	85
2,600	1.5	Inlet	74	75	82	86	77	75	73	68	88
		Outlet	80	78	80	87	83	82	78	78	91
2,600	2	Inlet	72	73	81	86	76	74	71	67	88
		Outlet	79	77	79	86	82	81	77	77	90
2,600	2.5	Inlet	71	72	80	86	75	73	70	65	88
		Outlet	74	74	74	83	80	80	74	73	88
2,600	3	Inlet	69	71	79	85	75	72	69	65	87
		Outlet	73	73	73	82	79	79	73	72	86
2,800	1.5	Inlet	75	77	83	88	79	77	75	71	90
		Outlet	82	80	82	89	85	84	80	80	93
2,800	2	Inlet	74	75	82	87	78	76	74	70	90
		Outlet	81	79	81	88	84	83	79	79	92
2,800	2.5	Inlet	73	74	82	87	78	76	73	68	89
		Outlet	80	78	80	87	83	82	78	78	91
2,800	3	Inlet	72	73	81	87	77	75	72	67	89
		Outlet	76	76	76	85	82	82	76	75	89
2,800	3.5	Inlet	71	73	80	86	76	74	71	67	88
		Outlet	75	75	75	84	81	81	75	74	88
2,800	4	Inlet	70	72	79	85	75	73	70	66	87
		Outlet	74	74	74	83	80	80	74	73	87
3,000	1.5	Inlet	77	79	85	90	80	79	77	73	92
		Outlet	84	82	84	91	87	86	82	82	95
3,000	2	Inlet	76	77	84	90	80	78	76	72	92
		Outlet	83	81	83	90	86	85	81	81	94
3,000	2.5	Inlet	75	76	83	89	79	78	75	71	91
		Outlet	82	80	82	89	85	84	80	80	93
3,000	3	Inlet	74	75	82	89	79	77	74	70	91
		Outlet	79	79	79	88	85	85	79	78	92
3,000	3.5	Inlet	73	74	82	89	78	77	73	69	90
		Outlet	78	78	78	87	84	84	78	77	91
3,000	4	Inlet	72	74	81	89	78	76	72	68	90
		Outlet	77	77	77	86	83	83	77	76	90
3,000	4.5	Inlet	71	74	81	87	77	75	72	68	89
		Outlet	76	76	76	85	82	82	76	75	89

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_A and outlet Lw_o and Lw_{oA} sound power levels for Installation Type A: free inlet, free outlet.

Table continued on next page

Table continued from previous page

RPM	Static Pressure [in WC]	Inlet/Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
3,200	1.5	Inlet	78	80	86	90	82	80	78	76	93
		Outlet	86	84	86	93	89	88	84	84	97
3,200	2	Inlet	78	79	85	90	82	80	78	75	93
		Outlet	85	83	85	92	88	87	83	83	96
3,200	2.5	Inlet	77	78	84	90	81	80	77	74	92
		Outlet	84	82	84	91	87	86	82	82	95
3,200	3	Inlet	76	77	84	90	81	79	77	73	92
		Outlet	84	82	84	91	87	86	82	82	95
3,200	3.5	Inlet	75	76	83	89	81	79	76	72	91
		Outlet	80	80	80	89	86	86	80	79	93
3,200	4	Inlet	75	76	82	89	80	78	75	71	91
		Outlet	79	79	79	88	85	85	79	78	92
3,200	4.5	Inlet	73	75	82	89	80	78	74	70	91
		Outlet	78	78	78	87	84	84	78	77	91
3,200	5	Inlet	73	75	81	88	79	77	74	70	90
		Outlet	77	77	77	86	83	83	77	76	91
3,400	2	Inlet	79	81	86	91	84	82	79	77	94
		Outlet	90	86	85	94	91	89	84	85	98
3,400	2.5	Inlet	79	80	86	91	83	82	79	76	94
		Outlet	89	85	84	93	90	88	83	84	98
3,400	3	Inlet	78	79	85	91	83	81	78	75	93
		Outlet	89	85	84	93	90	88	83	84	97
3,400	3.5	Inlet	77	79	85	90	83	81	78	74	93
		Outlet	88	84	83	92	89	87	82	83	96
3,400	4	Inlet	77	78	84	90	82	80	77	74	92
		Outlet	90	81	79	90	88	86	81	81	96
3,400	4.5	Inlet	76	77	83	90	82	80	77	73	92
		Outlet	90	81	79	90	88	86	81	81	95
3,400	5	Inlet	75	77	83	89	82	80	76	72	92
		Outlet	89	80	78	89	87	85	80	80	94
3,400	5.5	Inlet	74	76	82	89	81	79	76	72	91
		Outlet	88	79	77	88	86	84	79	79	94
3,600	2	Inlet	80	82	88	92	85	83	81	78	95
		Outlet	91	87	86	95	92	90	85	86	100
3,600	2.5	Inlet	80	82	87	92	85	83	81	78	95
		Outlet	91	87	86	95	92	90	85	86	99
3,600	3	Inlet	80	81	87	92	85	83	80	77	95
		Outlet	91	87	86	95	92	90	85	86	99
3,600	3.5	Inlet	79	81	86	92	84	83	80	77	95
		Outlet	90	86	85	94	91	89	84	85	98

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_iA and outlet Lw_o and Lw_oA sound power levels for Installation Type A: free inlet, free outlet.

Table continued on next page

Table continued from previous page

RPM	Static Pressure [in WC]	Inlet/ Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
3,600	4	Inlet	79	80	86	91	84	82	79	76	94
		Outlet	89	85	84	93	90	88	83	84	98
3,600	4.5	Inlet	78	79	85	91	84	82	79	75	93
		Outlet	92	83	81	92	90	88	83	83	97
3,600	5	Inlet	77	78	85	91	83	82	78	75	93
		Outlet	91	82	80	91	89	87	82	82	97
3,600	5.5	Inlet	77	78	84	91	83	81	78	74	93
		Outlet	90	81	79	90	88	86	81	81	96
3,600	6	Inlet	76	78	83	91	83	81	77	74	93
		Outlet	90	81	79	90	88	86	81	81	95
3,600	6.5	Inlet	75	78	83	90	82	80	77	74	92
		Outlet	89	80	78	89	87	85	80	80	95
3,800	2.5	Inlet	82	83	89	93	86	85	82	79	96
		Outlet	93	89	88	97	94	92	87	88	101
3,800	3	Inlet	81	83	88	94	86	85	82	79	96
		Outlet	92	88	87	96	93	91	86	87	101
3,800	3.5	Inlet	81	83	88	94	86	84	82	78	96
		Outlet	92	88	87	96	93	91	86	87	100
3,800	4	Inlet	81	82	88	93	86	84	81	78	96
		Outlet	91	87	86	95	92	90	85	86	100
3,800	4.5	Inlet	80	81	87	93	85	84	81	77	95
		Outlet	91	87	86	95	92	90	85	86	99
3,800	5	Inlet	80	80	87	92	85	84	80	77	95
		Outlet	93	84	82	93	91	89	84	84	98
3,800	5.5	Inlet	79	80	86	92	85	83	80	76	94
		Outlet	92	83	81	92	90	88	83	83	98
3,800	6	Inlet	79	79	85	92	85	83	79	76	94
		Outlet	92	83	81	92	90	88	83	83	97
3,800	6.5	Inlet	78	79	85	93	85	83	79	75	95
		Outlet	91	82	80	91	89	87	82	82	97
3,800	7	Inlet	77	79	84	92	84	82	79	75	94
		Outlet	91	82	80	91	89	87	82	82	96
4,000	2.5	Inlet	83	85	89	94	88	86	84	81	97
		Outlet	94	90	89	98	95	93	88	89	102
4,000	3	Inlet	83	84	89	94	88	86	84	80	97
		Outlet	94	90	89	98	95	93	88	89	102
4,000	3.5	Inlet	83	84	89	94	88	86	83	80	97
		Outlet	93	89	88	97	94	92	87	88	102
4,000	4	Inlet	83	84	88	94	88	85	83	79	97
		Outlet	93	89	88	97	94	92	87	88	101

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_iA and outlet Lw_o and Lw_oA sound power levels for Installation Type A: free inlet, free outlet.

Table continued on next page

Table continued from previous page

RPM	Static Pressure [in WC]	Inlet/ Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
4,000	4.5	Inlet	82	83	88	94	88	85	83	79	97
		Outlet	92	88	87	96	93	91	86	87	101
4,000	5	Inlet	82	82	88	93	87	85	82	78	96
		Outlet	92	88	87	96	93	91	86	87	100
4,000	5.5	Inlet	81	81	87	93	87	85	82	78	96
		Outlet	94	85	83	94	92	90	85	85	100
4,000	6	Inlet	81	81	87	92	87	84	82	77	95
		Outlet	94	85	83	94	92	90	85	85	99
4,000	6.5	Inlet	80	80	86	92	87	84	81	77	95
		Outlet	93	84	82	93	91	89	84	84	99
4,000	7	Inlet	80	80	86	92	87	84	81	77	95
		Outlet	93	84	82	93	91	89	84	84	98
4,200	3	Inlet	84	86	90	95	90	87	85	82	98
		Outlet	95	91	90	99	96	94	89	90	103
4,200	3.5	Inlet	84	86	89	95	90	87	85	81	98
		Outlet	95	91	90	99	96	94	89	90	103
4,200	4	Inlet	84	85	89	95	90	87	85	81	98
		Outlet	94	90	89	98	95	93	88	89	103
4,200	4.5	Inlet	84	85	89	95	90	86	85	80	98
		Outlet	94	90	89	98	95	93	88	89	102
4,200	5	Inlet	83	84	88	94	90	86	84	80	98
		Outlet	94	90	89	98	95	93	88	89	102
4,200	5.5	Inlet	83	83	88	94	90	86	84	80	97
		Outlet	93	89	88	97	94	92	87	88	101
4,200	6	Inlet	82	83	88	93	89	86	84	79	97
		Outlet	96	87	85	96	94	92	87	87	101
4,200	6.5	Inlet	82	82	87	93	89	86	83	79	96
		Outlet	95	86	84	95	93	91	86	86	101
4,200	7	Inlet	82	82	87	93	89	85	83	78	96
		Outlet	95	86	84	95	93	91	86	86	100
4,400	3	Inlet	86	87	90	96	92	88	87	83	99
		Outlet	96	92	91	100	97	95	90	91	105
4,400	3.5	Inlet	86	87	90	96	92	88	87	83	99
		Outlet	96	92	91	100	97	95	90	91	104
4,400	4	Inlet	85	87	90	96	92	88	87	82	99
		Outlet	96	92	91	100	97	95	90	91	104
4,400	4.5	Inlet	85	86	89	96	93	88	86	82	99
		Outlet	95	91	90	99	96	94	89	90	104
4,400	5	Inlet	85	86	89	96	93	87	86	82	99
		Outlet	95	91	90	99	96	94	89	90	103

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_iA and outlet Lw_o and Lw_oA sound power levels for Installation Type A: free inlet, free outlet.

Table continued on next page

Table continued from previous page

RPM	Static Pressure [in WC]	Inlet/ Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
4,400	5.5	Inlet	85	85	89	95	92	87	86	81	99
		Outlet	95	91	90	99	96	94	89	90	103
4,400	6	Inlet	84	85	89	95	92	87	85	81	98
		Outlet	94	90	89	98	95	93	88	89	103
4,400	6.5	Inlet	84	84	88	94	92	87	85	80	98
		Outlet	97	88	86	97	95	93	88	88	102
4,400	7	Inlet	84	83	88	94	91	87	85	80	97
		Outlet	96	87	85	96	94	92	87	87	102

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_iA and outlet Lw_o and Lw_oA sound power levels for Installation Type A: free inlet, free outlet.

RPM	Static Pressure [in WC]	Inlet/Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
2,000	1.5	Inlet	72	71	82	80	72	70	67	64	85
		Outlet	90	83	87	81	77	77	68	63	93
2,000	2	Inlet	70	69	81	79	71	69	66	63	84
		Outlet	89	82	86	80	76	76	67	62	91
2,000	2.5	Inlet	68	68	80	78	70	68	65	62	83
		Outlet	87	80	84	78	74	74	65	60	90
2,200	1.5	Inlet	74	73	83	84	76	72	70	67	88
		Outlet	93	85	83	87	80	78	72	69	95
2,200	2	Inlet	73	72	82	83	75	72	69	67	87
		Outlet	92	84	82	86	79	77	71	68	94
2,200	2.5	Inlet	71	71	81	82	74	71	68	65	86
		Outlet	91	83	81	85	78	76	70	67	93
2,200	3	Inlet	70	70	80	81	73	70	68	65	85
		Outlet	89	81	79	83	76	74	68	65	91
2,400	1.5	Inlet	76	76	85	87	78	75	73	71	90
		Outlet	96	90	88	90	83	80	77	75	98
2,400	2	Inlet	76	75	84	86	77	75	72	70	89
		Outlet	95	87	85	89	82	80	74	71	97
2,400	2.5	Inlet	74	74	83	85	76	74	71	70	88
		Outlet	94	86	84	88	81	79	73	70	96
2,400	3	Inlet	73	72	82	85	76	73	70	68	88
		Outlet	93	85	83	87	80	78	72	69	95
2,400	3.5	Inlet	72	71	81	84	75	72	70	67	87
		Outlet	92	84	82	86	79	77	71	68	94
2,600	1.5	Inlet	79	78	86	89	80	78	76	74	92
		Outlet	98	92	90	92	85	82	79	77	101
2,600	2	Inlet	78	77	86	88	80	78	75	73	91
		Outlet	98	92	90	92	85	82	79	77	100
2,600	2.5	Inlet	77	76	85	87	79	77	74	72	91
		Outlet	97	89	87	91	84	82	76	73	99
2,600	3	Inlet	76	75	84	87	78	76	73	71	90
		Outlet	96	88	86	90	83	81	75	72	98
2,600	3.5	Inlet	75	74	83	86	78	75	72	70	89
		Outlet	95	87	85	89	82	80	74	71	97
2,600	4	Inlet	74	73	82	86	77	75	72	69	88
		Outlet	94	86	84	88	81	79	73	70	96
2,800	1.5	Inlet	81	80	87	91	82	81	78	76	94
		Outlet	100	94	89	93	87	86	82	83	103
2,800	2	Inlet	81	79	87	90	82	80	77	76	93
		Outlet	100	94	89	93	87	86	82	83	102

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_iA and outlet Lw_o and Lw_oA sound power levels for Installation Type A: free inlet, free outlet.

Table continued on next page

Table continued from previous page

RPM	Static Pressure [in WC]	Inlet/Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
2,800	2.5	Inlet	80	79	86	90	82	80	77	75	93
		Outlet	99	93	87	93	85	86	80	78	101
2,800	3	Inlet	79	78	85	89	81	79	76	74	92
		Outlet	98	92	86	92	84	85	79	77	101
2,800	3.5	Inlet	78	77	85	89	80	78	75	73	91
		Outlet	97	91	85	91	83	84	78	76	100
2,800	4	Inlet	78	76	84	88	80	78	75	73	91
		Outlet	97	91	85	91	83	84	78	76	99
2,800	4.5	Inlet	77	75	83	88	79	77	74	72	90
		Outlet	96	90	84	90	82	83	77	75	98
2,800	5	Inlet	76	75	82	87	78	77	74	72	90
		Outlet	95	89	83	89	81	82	76	74	97
3,000	1.5	Inlet	84	82	88	93	84	83	80	79	96
		Outlet	102	96	91	95	89	88	84	85	105
3,000	2	Inlet	84	81	88	93	84	83	80	78	95
		Outlet	102	96	91	95	89	88	84	85	104
3,000	2.5	Inlet	83	81	88	92	84	82	79	77	95
		Outlet	101	95	90	94	88	87	83	84	103
3,000	3	Inlet	82	80	87	92	83	82	78	76	94
		Outlet	101	95	89	95	87	88	82	80	103
3,000	3.5	Inlet	82	79	86	91	83	81	78	76	94
		Outlet	100	94	88	94	86	87	81	79	102
3,000	4	Inlet	81	79	86	91	82	81	77	75	93
		Outlet	99	93	87	93	85	86	80	78	101
3,000	4.5	Inlet	80	78	85	91	81	80	77	75	93
		Outlet	98	92	86	92	84	85	79	77	101
3,000	5	Inlet	80	77	84	91	81	79	77	75	93
		Outlet	98	92	86	92	84	85	79	77	100
3,000	5.5	Inlet	80	77	83	90	80	79	77	75	92
		Outlet	97	91	85	91	83	84	78	76	99
3,000	6	Inlet	80	76	82	89	80	78	76	74	91
		Outlet	97	91	85	91	83	84	78	76	99
3,200	1.5	Inlet	88	84	90	94	85	85	82	81	97
		Outlet	104	98	93	97	91	90	86	87	106
3,200	2	Inlet	88	83	89	94	85	85	81	81	97
		Outlet	104	98	93	97	91	90	86	87	106
3,200	2.5	Inlet	87	83	89	93	85	85	81	80	97
		Outlet	103	97	92	96	90	89	85	86	105
3,200	3	Inlet	86	82	88	93	85	84	80	79	96
		Outlet	103	97	92	96	90	89	85	86	105

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_iA and outlet Lw_o and Lw_oA sound power levels for Installation Type A: free inlet, free outlet.

Table continued on next page

Table continued from previous page

RPM	Static Pressure [in WC]	Inlet/Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
3,200	3.5	Inlet	86	81	88	93	84	84	80	78	96
		Outlet	102	96	90	96	88	89	83	81	104
3,200	4	Inlet	85	81	88	92	84	83	79	78	95
		Outlet	101	95	89	95	87	88	82	80	104
3,200	4.5	Inlet	85	80	87	92	84	83	79	77	95
		Outlet	101	95	89	95	87	88	82	80	103
3,200	5	Inlet	84	79	86	92	83	82	79	77	94
		Outlet	100	94	88	94	86	87	81	79	102
3,200	5.5	Inlet	84	79	85	92	82	82	79	77	94
		Outlet	100	94	88	94	86	87	81	79	102
3,200	6	Inlet	84	78	85	92	82	81	79	77	94
		Outlet	99	93	87	93	85	86	80	78	101
3,200	6.5	Inlet	85	78	84	91	82	81	79	76	94
		Outlet	98	92	86	92	84	85	79	77	101
3,400	1.5	Inlet	88	85	91	95	87	87	84	83	98
		Outlet	106	100	95	99	93	92	88	89	108
3,400	2	Inlet	88	85	90	95	87	87	84	83	98
		Outlet	105	99	94	98	92	91	87	88	108
3,400	2.5	Inlet	87	84	90	94	87	87	83	82	98
		Outlet	105	99	94	98	92	91	87	88	107
3,400	3	Inlet	87	84	90	94	87	86	83	81	97
		Outlet	104	98	93	97	91	90	86	87	107
3,400	3.5	Inlet	86	83	89	94	86	86	82	81	97
		Outlet	104	98	93	97	91	90	86	87	106
3,400	4	Inlet	86	83	89	93	86	85	82	80	97
		Outlet	103	97	91	97	89	90	84	82	106
3,400	4.5	Inlet	85	82	88	93	86	85	81	79	96
		Outlet	103	97	91	97	89	90	84	82	105
3,400	5	Inlet	85	82	88	93	85	85	81	79	96
		Outlet	102	96	90	96	88	89	83	81	105
3,400	5.5	Inlet	84	81	87	92	85	84	81	78	95
		Outlet	102	96	90	96	88	89	83	81	104
3,400	6	Inlet	84	80	86	92	84	84	81	78	95
		Outlet	101	95	89	95	87	88	82	80	103
3,400	6.5	Inlet	84	80	86	92	84	83	81	78	95
		Outlet	101	95	89	95	87	88	82	80	103
3,400	7	Inlet	84	80	85	92	84	83	80	78	94
		Outlet	100	94	88	94	86	87	81	79	102
3,400	7.5	Inlet	84	79	85	91	83	82	80	78	94
		Outlet	100	94	88	94	86	87	81	79	102

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_iA and outlet Lw_o and Lw_oA sound power levels for Installation Type A: free inlet, free outlet.

Table continued on next page

Table continued from previous page

RPM	Static Pressure [in WC]	Inlet/Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
3,600	1.5	Inlet	88	87	92	97	89	89	86	85	100
		Outlet	107	101	96	100	94	93	89	90	109
3,600	2	Inlet	88	87	91	96	89	89	86	85	99
		Outlet	107	101	96	100	94	93	89	90	109
3,600	2.5	Inlet	87	86	91	96	88	88	85	84	99
		Outlet	107	101	96	100	94	93	89	90	109
3,600	3	Inlet	87	86	91	96	88	88	85	84	99
		Outlet	106	100	95	99	93	92	88	89	108
3,600	3.5	Inlet	87	85	90	95	88	88	85	83	98
		Outlet	106	100	95	99	93	92	88	89	108
3,600	4	Inlet	86	84	90	95	88	88	84	82	98
		Outlet	105	99	93	99	91	92	86	84	108
3,600	4.5	Inlet	86	84	90	95	88	87	84	82	98
		Outlet	105	99	93	99	91	92	86	84	107
3,600	5	Inlet	85	83	89	94	87	87	83	81	97
		Outlet	104	98	92	98	90	91	85	83	107
3,600	5.5	Inlet	85	83	89	94	87	86	83	81	97
		Outlet	104	98	92	98	90	91	85	83	106
3,600	6	Inlet	85	82	88	94	87	86	83	80	97
		Outlet	103	97	91	97	89	90	84	82	106
3,600	6.5	Inlet	84	82	88	93	86	85	83	80	96
		Outlet	103	97	91	97	89	90	84	82	105
3,600	7	Inlet	84	81	87	93	86	85	82	79	96
		Outlet	102	96	90	96	88	89	83	81	105
3,600	7.5	Inlet	84	81	86	93	85	84	82	79	96
		Outlet	102	96	90	96	88	89	83	81	104
3,600	8	Inlet	84	81	86	93	85	84	82	79	95
		Outlet	101	95	89	95	87	88	82	80	104
3,600	8.5	Inlet	83	80	86	92	84	83	82	79	95
		Outlet	101	95	89	95	87	88	82	80	103
3,800	2	Inlet	88	88	92	97	90	90	87	86	101
		Outlet	108	102	97	101	95	94	90	91	111
3,800	2.5	Inlet	88	88	92	97	90	90	87	86	100
		Outlet	108	102	97	101	95	94	90	91	110
3,800	3	Inlet	88	87	92	97	90	90	87	85	100
		Outlet	108	102	97	101	95	94	90	91	110
3,800	3.5	Inlet	88	87	92	97	90	89	86	85	100
		Outlet	107	101	96	100	94	93	89	90	110
3,800	4	Inlet	87	86	91	96	90	89	86	84	100
		Outlet	107	101	96	100	94	93	89	90	109

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_iA and outlet Lw_o and Lw_oA sound power levels for Installation Type A: free inlet, free outlet.

Table continued on next page

Table continued from previous page

RPM	Static Pressure [in WC]	Inlet/ Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
3,800	4.5	Inlet	87	86	91	96	89	89	86	84	99
		Outlet	107	101	95	101	93	94	88	86	109
3,800	5	Inlet	87	85	91	96	89	89	85	83	99
		Outlet	106	100	94	100	92	93	87	85	108
3,800	5.5	Inlet	86	85	90	95	89	88	85	83	99
		Outlet	106	100	94	100	92	93	87	85	108
3,800	6	Inlet	86	84	90	95	89	88	85	82	98
		Outlet	105	99	93	99	91	92	86	84	108
3,800	6.5	Inlet	85	84	89	95	89	87	84	82	98
		Outlet	105	99	93	99	91	92	86	84	107
3,800	7	Inlet	85	83	89	95	88	87	84	81	98
		Outlet	104	98	92	98	90	91	85	83	107
3,800	7.5	Inlet	85	83	88	94	88	86	84	81	97
		Outlet	104	98	92	98	90	91	85	83	106
3,800	8	Inlet	85	82	88	94	87	86	84	81	97
		Outlet	103	97	91	97	89	90	84	82	106
3,800	8.5	Inlet	85	82	87	94	87	85	84	81	97
		Outlet	103	97	91	97	89	90	84	82	105
3,800	9	Inlet	84	82	87	94	87	85	84	81	96
		Outlet	103	97	91	97	89	90	84	82	105
3,800	9.5	Inlet	84	82	87	93	86	84	83	81	96
		Outlet	102	96	90	96	88	89	83	81	105

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_{iA} and outlet Lw_o and Lw_{oA} sound power levels for Installation Type A: free inlet, free outlet.

Sound Data ANPA16

Models:
ANPA

RPM	Static Pressure [in WC]	Inlet/Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
1,600	1.5	Inlet	64	71	77	71	69	68	67	61	80
		Outlet	76	76	80	75	75	72	70	68	85
1,600	2	Inlet	64	69	77	70	69	67	66	61	79
		Outlet	74	74	78	73	73	70	68	66	83
1,800	1.5	Inlet	69	73	81	76	73	72	70	65	84
		Outlet	81	79	85	79	79	76	73	71	89
1,800	2	Inlet	68	72	80	75	72	71	69	64	83
		Outlet	79	79	83	78	78	75	73	71	87
1,800	2.5	Inlet	67	71	79	74	71	70	69	64	82
		Outlet	77	77	81	76	76	73	71	69	86
2,000	1.5	Inlet	73	75	84	80	76	75	74	69	87
		Outlet	84	82	88	82	82	79	76	74	92
2,000	2	Inlet	72	74	83	79	75	74	73	68	86
		Outlet	83	81	87	81	81	78	75	73	91
2,000	2.5	Inlet	71	73	82	79	74	73	72	67	85
		Outlet	81	81	85	80	80	77	75	73	90
2,000	3	Inlet	71	73	82	78	74	73	72	67	85
		Outlet	80	80	84	79	79	76	74	72	88
2,200	1.5	Inlet	77	77	85	84	79	78	76	72	89
		Outlet	86	82	83	88	86	82	77	76	93
2,200	2	Inlet	76	76	84	84	78	77	76	71	89
		Outlet	85	81	82	87	85	81	76	75	93
2,200	2.5	Inlet	74	75	84	83	78	76	75	71	88
		Outlet	85	81	82	87	85	81	76	75	92
2,200	3	Inlet	74	75	83	83	77	75	74	70	87
		Outlet	84	79	80	86	83	80	76	74	91
2,200	3.5	Inlet	73	75	83	82	76	75	74	70	87
		Outlet	83	78	79	85	82	79	75	73	89
2,200	4	Inlet	73	74	82	82	76	75	73	70	87
		Outlet	81	76	77	83	80	77	73	71	88
2,400	1.5	Inlet	81	80	86	88	82	80	79	75	92
		Outlet	89	85	86	91	89	85	80	79	96
2,400	2	Inlet	79	78	86	88	81	79	78	75	92
		Outlet	88	84	85	90	88	84	79	78	95
2,400	2.5	Inlet	78	78	85	87	80	79	77	74	91
		Outlet	87	83	84	89	87	83	78	77	94
2,400	3	Inlet	77	77	85	86	80	78	77	73	90
		Outlet	87	83	84	89	87	83	78	77	94
2,400	3.5	Inlet	76	76	84	86	79	77	76	73	90
		Outlet	86	81	82	88	85	82	78	76	93
2,400	4	Inlet	76	76	84	86	79	77	76	73	90
		Outlet	85	80	81	87	84	81	77	75	92

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_iA and outlet Lw_e and Lw_eA sound power levels for Installation Type A: free inlet, free outlet.

Table continued on next page

ClimateCraft works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateCraft's Customer Service Department at 405-415-9230 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateCraft's opinion or commendation of its products. The latest version of this document is available at www.climatecraft.com. © ClimateCraft, Inc. All Rights Reserved 2026

Table continued from previous page

RPM	Static Pressure [in WC]	Inlet/ Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
2,400	4.5	Inlet	76	76	83	86	78	77	76	73	89
		Outlet	84	79	80	86	83	80	76	74	91
2,600	1.5	Inlet	83	82	88	90	84	82	81	78	94
		Outlet	91	87	88	93	91	87	82	81	98
2,600	2	Inlet	82	81	87	90	83	82	80	77	94
		Outlet	90	86	87	92	90	86	81	80	97
2,600	2.5	Inlet	81	80	87	89	83	81	80	77	93
		Outlet	90	86	87	92	90	86	81	80	97
2,600	3	Inlet	80	79	86	89	82	81	79	76	92
		Outlet	89	85	86	91	89	85	80	79	96
2,600	3.5	Inlet	79	79	86	88	82	80	79	76	92
		Outlet	89	85	86	91	89	85	80	79	96
2,600	4	Inlet	78	78	85	88	82	80	78	75	91
		Outlet	88	83	84	90	87	84	80	78	95
2,600	4.5	Inlet	78	78	85	88	81	79	78	75	91
		Outlet	87	82	83	89	86	83	79	77	94
2,600	5	Inlet	78	78	84	88	81	79	78	75	91
		Outlet	87	82	83	89	86	83	79	77	93
2,600	5.5	Inlet	78	78	84	88	80	79	77	75	91
		Outlet	86	81	82	88	85	82	78	76	92
2,800	1.5	Inlet	85	84	89	93	86	85	83	80	96
		Outlet	94	87	87	95	92	90	85	83	100
2,800	2	Inlet	84	83	88	92	85	84	82	80	95
		Outlet	93	86	86	94	91	89	84	82	99
2,800	2.5	Inlet	83	82	88	91	85	84	82	79	95
		Outlet	93	86	86	94	91	89	84	82	99
2,800	3	Inlet	82	82	87	91	84	83	81	79	94
		Outlet	93	86	86	94	91	89	84	82	98
2,800	3.5	Inlet	81	81	87	90	84	83	81	78	94
		Outlet	92	85	85	93	90	88	83	81	98
2,800	4	Inlet	80	80	86	90	83	82	80	78	93
		Outlet	92	85	85	93	90	88	83	81	97
2,800	4.5	Inlet	80	80	86	90	83	82	80	77	93
		Outlet	93	84	83	91	89	87	82	80	97
2,800	5	Inlet	80	80	86	90	83	82	80	77	93
		Outlet	92	83	82	90	88	86	81	79	97
2,800	5.5	Inlet	80	80	85	90	83	81	80	77	93
		Outlet	92	83	82	90	88	86	81	79	96
2,800	6	Inlet	80	79	85	89	82	81	79	77	93
		Outlet	91	82	81	89	87	85	80	78	95

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_iA and outlet Lw_o and Lw_oA sound power levels for Installation Type A: free inlet, free outlet.

Table continued on next page

Table continued from previous page

RPM	Static Pressure [in WC]	Inlet/Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
2,800	6.5	Inlet	79	79	84	89	82	80	79	77	92
		Outlet	90	81	80	88	86	84	79	77	95
3,000	1.5	Inlet	88	86	90	95	87	87	85	82	98
		Outlet	96	89	89	97	94	92	87	85	102
3,000	2	Inlet	87	85	89	94	87	86	84	82	98
		Outlet	95	88	88	96	93	91	86	84	101
3,000	2.5	Inlet	86	84	89	94	87	86	84	81	97
		Outlet	95	88	88	96	93	91	86	84	101
3,000	3	Inlet	85	84	89	93	86	86	84	81	96
		Outlet	95	88	88	96	93	91	86	84	100
3,000	3.5	Inlet	84	83	88	92	86	85	83	80	96
		Outlet	94	87	87	95	92	90	85	83	100
3,000	4	Inlet	83	82	88	92	85	85	83	80	95
		Outlet	94	87	87	95	92	90	85	83	100
3,000	4.5	Inlet	82	81	87	92	85	84	82	80	95
		Outlet	93	86	86	94	91	89	84	82	99
3,000	5	Inlet	82	81	87	92	85	84	82	79	95
		Outlet	95	86	85	93	91	89	84	82	99
3,000	5.5	Inlet	82	81	87	92	84	84	82	79	95
		Outlet	94	85	84	92	90	88	83	81	99
3,000	6	Inlet	82	81	86	92	84	83	82	79	95
		Outlet	94	85	84	92	90	88	83	81	98
3,000	6.5	Inlet	82	81	86	92	84	83	81	79	95
		Outlet	93	84	83	91	89	87	82	80	97
3,000	7	Inlet	82	81	85	92	84	83	81	79	95
		Outlet	93	84	83	91	89	87	82	80	97
3,000	7.5	Inlet	82	81	85	92	83	82	81	79	95
		Outlet	92	83	82	90	88	86	81	79	96
3,200	2	Inlet	89	86	90	95	89	88	86	85	99
		Outlet	97	90	90	98	95	93	88	86	103
3,200	2.5	Inlet	88	86	90	95	88	87	86	84	98
		Outlet	97	90	90	98	95	93	88	86	103
3,200	3	Inlet	88	86	89	94	88	87	85	84	98
		Outlet	96	89	89	97	94	92	87	85	102
3,200	3.5	Inlet	87	85	89	94	88	87	85	84	98
		Outlet	96	89	89	97	94	92	87	85	102
3,200	4	Inlet	87	85	89	94	88	87	85	83	97
		Outlet	96	89	89	97	94	92	87	85	102
3,200	4.5	Inlet	86	84	88	93	87	86	84	83	97
		Outlet	95	88	88	96	93	91	86	84	101

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_iA and outlet Lw_o and Lw_oA sound power levels for Installation Type A: free inlet, free outlet.

Table continued on next page

Table continued from previous page

RPM	Static Pressure [in WC]	Inlet/ Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
3,200	5	Inlet	86	83	88	93	87	86	84	83	97
		Outlet	95	88	88	96	93	91	86	84	101
3,200	5.5	Inlet	85	83	87	93	87	86	84	83	96
		Outlet	97	88	87	95	93	91	86	84	101
3,200	6	Inlet	85	83	87	93	86	85	84	83	96
		Outlet	96	87	86	94	92	90	85	83	100
3,200	6.5	Inlet	85	82	86	92	86	85	84	83	96
		Outlet	96	87	86	94	92	90	85	83	100
3,200	7	Inlet	84	82	86	92	86	85	83	83	96
		Outlet	95	86	85	93	91	89	84	82	99
3,200	7.5	Inlet	84	82	86	92	85	85	83	82	95
		Outlet	95	86	85	93	91	89	84	82	99
3,200	8	Inlet	84	82	85	92	85	84	83	82	95
		Outlet	94	85	84	92	90	88	83	81	98
3,200	8.5	Inlet	83	81	85	91	85	84	83	82	95
		Outlet	94	85	84	92	90	88	83	81	98
3,400	2	Inlet	92	88	90	97	90	89	87	87	100
		Outlet	99	92	92	100	97	95	90	88	105
3,400	2.5	Inlet	92	87	90	96	90	89	87	87	100
		Outlet	98	91	91	99	96	94	89	87	104
3,400	3	Inlet	91	87	90	96	90	89	87	87	100
		Outlet	98	91	91	99	96	94	89	87	104
3,400	3.5	Inlet	91	87	90	96	89	89	86	87	100
		Outlet	98	91	91	99	96	94	89	87	104
3,400	4	Inlet	91	87	89	96	89	88	86	86	99
		Outlet	97	90	90	98	95	93	88	86	103
3,400	4.5	Inlet	90	87	89	96	89	88	86	86	99
		Outlet	97	90	90	98	95	93	88	86	103
3,400	5	Inlet	90	86	89	96	89	88	86	86	99
		Outlet	97	90	90	98	95	93	88	86	103
3,400	5.5	Inlet	90	86	88	95	88	88	86	86	99
		Outlet	97	90	90	98	95	93	88	86	102
3,400	6	Inlet	90	85	88	95	88	87	85	86	98
		Outlet	96	89	89	97	94	92	87	85	102
3,400	6.5	Inlet	90	85	87	95	88	87	85	87	98
		Outlet	98	89	88	96	94	92	87	85	102
3,400	7	Inlet	89	85	87	95	87	87	85	88	98
		Outlet	97	88	87	95	93	91	86	84	102
3,400	7.5	Inlet	89	84	86	94	87	87	85	87	98
		Outlet	97	88	87	95	93	91	86	84	101
3,400	8	Inlet	88	84	86	94	87	87	85	86	97
		Outlet	97	88	87	95	93	91	86	84	101

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_A and outlet Lw_e and Lw_A sound power levels for Installation Type A: free inlet, free outlet.

Table continued on next page

Table continued from previous page

RPM	Static Pressure [in WC]	Inlet/ Outlet	63Hz [dB]	125Hz [dB]	250Hz [dB]	500Hz [dB]	1,000Hz [dB]	2,000Hz [dB]	4,000Hz [dB]	8,000Hz [dB]	LwA [dB]
3,400	8.5	Inlet	88	83	85	94	87	87	85	86	97
		Outlet	96	87	86	94	92	90	85	83	100
3,600	2.5	Inlet	93	89	91	97	92	91	88	88	101
		Outlet	100	93	93	101	98	96	91	89	106
3,600	3	Inlet	93	89	91	97	91	90	88	88	101
		Outlet	100	93	93	101	98	96	91	89	106
3,600	3.5	Inlet	93	89	90	97	91	90	88	88	101
		Outlet	99	92	92	100	97	95	90	88	105
3,600	4	Inlet	93	89	90	97	91	90	88	88	101
		Outlet	99	92	92	100	97	95	90	88	105
3,600	4.5	Inlet	92	89	90	97	91	90	87	88	101
		Outlet	99	92	92	100	97	95	90	88	105
3,600	5	Inlet	92	88	90	96	91	90	87	87	100
		Outlet	99	92	92	100	97	95	90	88	105
3,600	5.5	Inlet	92	88	90	96	90	89	87	87	100
		Outlet	98	91	91	99	96	94	89	87	104
3,600	6	Inlet	92	88	89	96	90	89	87	87	100
		Outlet	98	91	91	99	96	94	89	87	104
3,600	6.5	Inlet	91	87	89	96	90	89	87	88	100
		Outlet	98	91	91	99	96	94	89	87	104
3,600	7	Inlet	91	87	88	96	90	89	86	88	99
		Outlet	99	90	89	97	95	93	88	86	104
3,600	7.5	Inlet	91	87	88	95	89	88	86	88	99
		Outlet	99	90	89	97	95	93	88	86	103
3,600	8	Inlet	91	86	88	95	89	88	86	88	99
		Outlet	99	90	89	97	95	93	88	86	103
3,600	8.5	Inlet	90	86	87	95	89	88	86	88	99
		Outlet	98	89	88	96	94	92	87	85	103

- The sound power level ratings shown are in decibels, referred to 10⁻¹² watts, calculated per AMCA Standard 301.
- The A-weighted sound power ratings shown are calculated per AMCA Standard 301.
- The values shown are for inlet Lw_i, Lw_iA and outlet Lw_o and Lw_oA sound power levels for Installation Type A: free inlet, free outlet.

Revision History

Models:
ANPA

Date	Item	Action
04/30/26	All	Created

FanMatrix™ and ClimateCraft®
are trademarks or registered
trademarks of ClimateCraft, Inc.



A NIBE GROUP MEMBER

1427 NW 3rd St | Oklahoma City, OK 73106
Phone: 405-415-9230 | Fax: 405-815-3052
www.climatecraft.com



P D - R D - 0 3 0 4 2 0 2 6 - A N P A

ClimateCraft works continually to improve its products. As a result, the design and specifications of each product at the time of order may be changed without notice and may not be as described herein. Please contact ClimateCraft's Customer Service Department at 405-415-9230 for specific information on the current design and specifications. Statements and other information contained herein are not express warranties and do not form the basis of any bargain between the parties, but are merely ClimateCraft's opinion or commendation of its products. The latest version of this document is available at www.climatecraft.com. © ClimateCraft, Inc. All Rights Reserved 2026