




KRUGER

AXIAL FLOW FAN **TDA** SERIES

T
D
A

S
e
r
i
e
s



Why KRUGER ?


KRUGER has been a leading innovator and manufacturer of residential, commercial and industrial fan application solutions across Asia since 1985. Today with a direct presence in over 18 regions throughout Asia; world class R&D and manufacturing facilities; KRUGER are able to offer their customers unparalleled service and support at a local level. Our customers place their trust in KRUGER.



What is a KRUGER TDA Axial Flow Fan ?

The TDA series is an economical axial fan designed for general clean air and smoke spill applications. It offers a good amount of airflow at medium pressure levels, and its simple, yet durable construction makes installation easy and maintenance minimal.

Why use a KRUGER TDA Axial Flow Fan ?

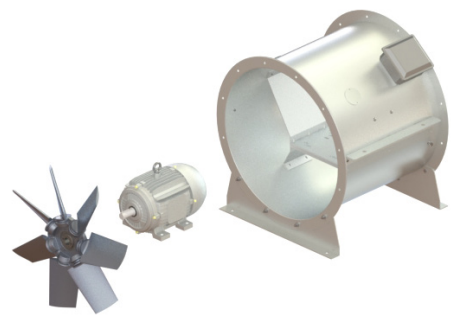

Simplified Design -> Reliable -> Low Startup Cost

The simple design of TDA fans contributes to their reliability. TDA has fewer complex components that might malfunction, providing cost-effective solutions and resulting to longer service life.

Direct-Driven -> Ease of Maintenance -> Reduced Maintenance Costs


The impeller of the TDA fan is directly attached to the motor shaft, eliminating losses due to drive transmission. This design not only simplifies maintenance but also facilitates part replacement.

Versatile Design -> Easy to Install -> Suitable for Various Ventilation Applications

Suitable for the extract (or supply) of clean, or high temperature airstreams. The manually adjustable pitch angle impeller of TDA fans provides a wide selection and application range, and is easy to adjust during fan commissioning.




Horizontal Floor Mount



Vertical Floor Mount



Horizontal Ceiling Hung



Vertical Ceiling Hung

Third Party Certification -> Guaranteed Performance -> What you see is what you get!

TDA fans undergo rigorous testing and receive certification from reputable third-party organizations, including AMCA and APPLUS. These tests adhere to national and international standards and are carried out in accredited testing facilities.

Air Performance and High Temperature Certification



◀ The quality and reliability of our products and services are recognized by certification bodies and accreditation authorities worldwide.

The TDA series is backed by Third-Party Certification, ensuring life safety through verified air flow performance, smoke, and fire protection.



◀ KRUGER VENTILATION INDUSTRIES (INDIA) PVT. LTD. certifies that the TDA Series shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA publication 211 and AMCA publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

Certified for high-temperature performance (up to 400°C/2Hrs) in accordance with EN12101-3 Standard, by globally renowned third-party testing and certification organizations, APPLUS, and TÜV SÜD.



Class	Temperature (°C)	Minimum functioning period (Minutes)
F ₂₅₀	250	120
F 300	300	60
F ₃₀₀	300	120
F 400	400	120

◀ *Please contact nearest KRUGER office for TDA F400 application range.



◀ TDA315 Fan Testing at APPLUS Test Laboratory in Spain.


Application




◀ Commercial Building



◀ Shopping center

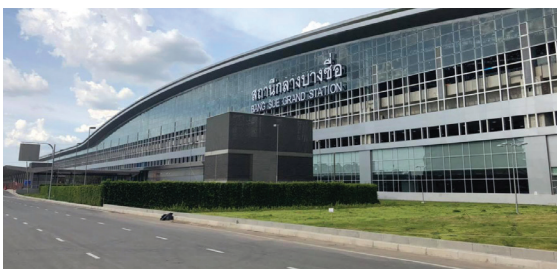

◀ Transport

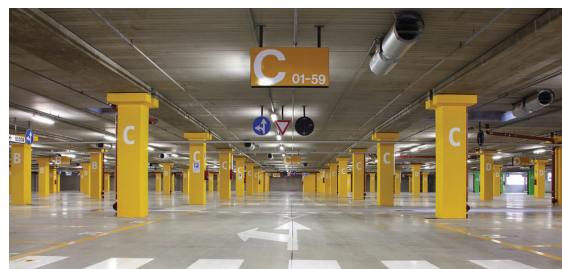

◀ Carpark

Summary of key standard TDA Series specifications:

A- Airflow and static pressure performance range up to 127,000 CMH and 1,100 Pa.

B- Airstream operating temperatures

Clean air standard ventilation application -20°C to +55°C.

High temperature smokespill application up to 300°C/2Hrs

C- Tube Casing

All TDA Series fan casings and components are fabricated from galvanized steel (sizes 315-1120) or high-grade carbon steel (sizes 1250-2000). For even more cost-competitive option, "short-casing" version is available upon request.

D- Impeller

Impeller with manually adjustable pitch angle, Impeller blades are made of Aluminum Alloy.

E- Coatings

All casings and components constructed from high-grade carbon steel will be finished with a zinc primer and a durable polyester coating. The polyester coating finish is salt-spray rated for up to 1000 hours, in accordance with the ASTM B117 testing standard. This makes them suitable for use in both indoor and outdoor environments.

F- Trim Balancing

All TDA Series fans undergo 100% trim balancing in every Kruger factory, achieving up to G2.5 balancing grade, compliant with the AMCA 204 Standard, before they are delivered.


G- High Efficiency Kruger Motor

All TDA Series fans are available with a wide range of both 1PH and 3PH (up to IE4) AC motors, including High-Temperature rated and permanent magnet motor options. For more information, please contact your local KRUGER Distributor.



Trim Balancing

Options and Accessories

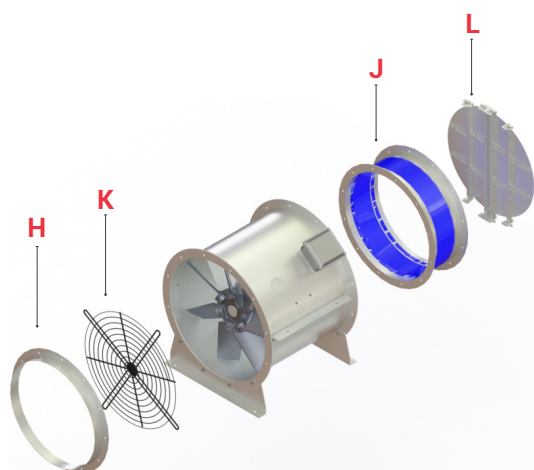

H- Inlet and outlet duct connection flanges to connect circular duct to TDA flanges

J- Circular flexible duct connectors, both standard and high temperature variations (up to F400).

K- Inlet and outlet safety guards.

L- Backdraft damper


M- Vibration isolator mounts for floor or ceiling mounted installations.

N- Special coatings for specialist corrosion application protection.


P- Spark resistance construction, per AMCA Standard 99.

Model number nomenclature

TDA 630 / 12AA / 7-7 / 12 ° / AL / F (400C° / 2hrs)

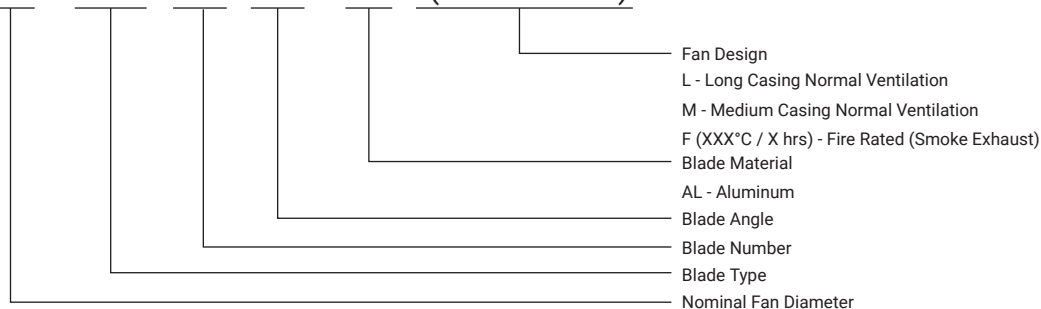

Dimensions

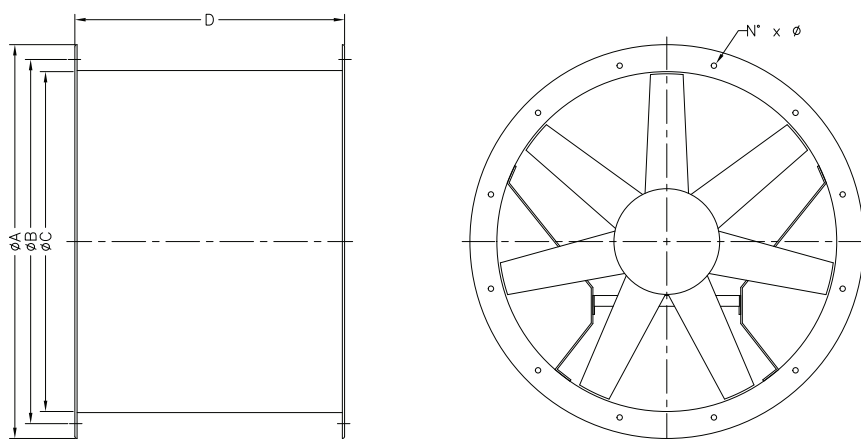

Dimension


Model	A	B	C	D		N	Ø	Weight (kg)		Max. Motor Frame size
				L/F	M			L/F	M	
355	355	395	35	355	200	8	10	15	12	D80
400	400	440	480	235	355	12	10	17	15	D90L
450	450	490	530	400	255	12	10	21	18	D100L
500	500	540	580	500	285	12	10	26	20	D100L
560	560	605	660	500	346	12	10	31	27	D100L
630	630	675	730	500	346	12	10	38	35	D112M
710	710	755	810	500	406	18	12	57	52	D112M
800	800	845	900	560	406	18	12	68	59	D132M
900	900	945	1000	630	495	18	12	88	79	D160M
1000	1000	1050	1100	630	550	24	12	97	90	D160M
1120	1120	1185	1250	900	650	24	12	149	128	D225M

All dimension in mm.

TDA355 / 12AA / 7-7 (186)

2850 rpm - 50 Hz

KRUGER

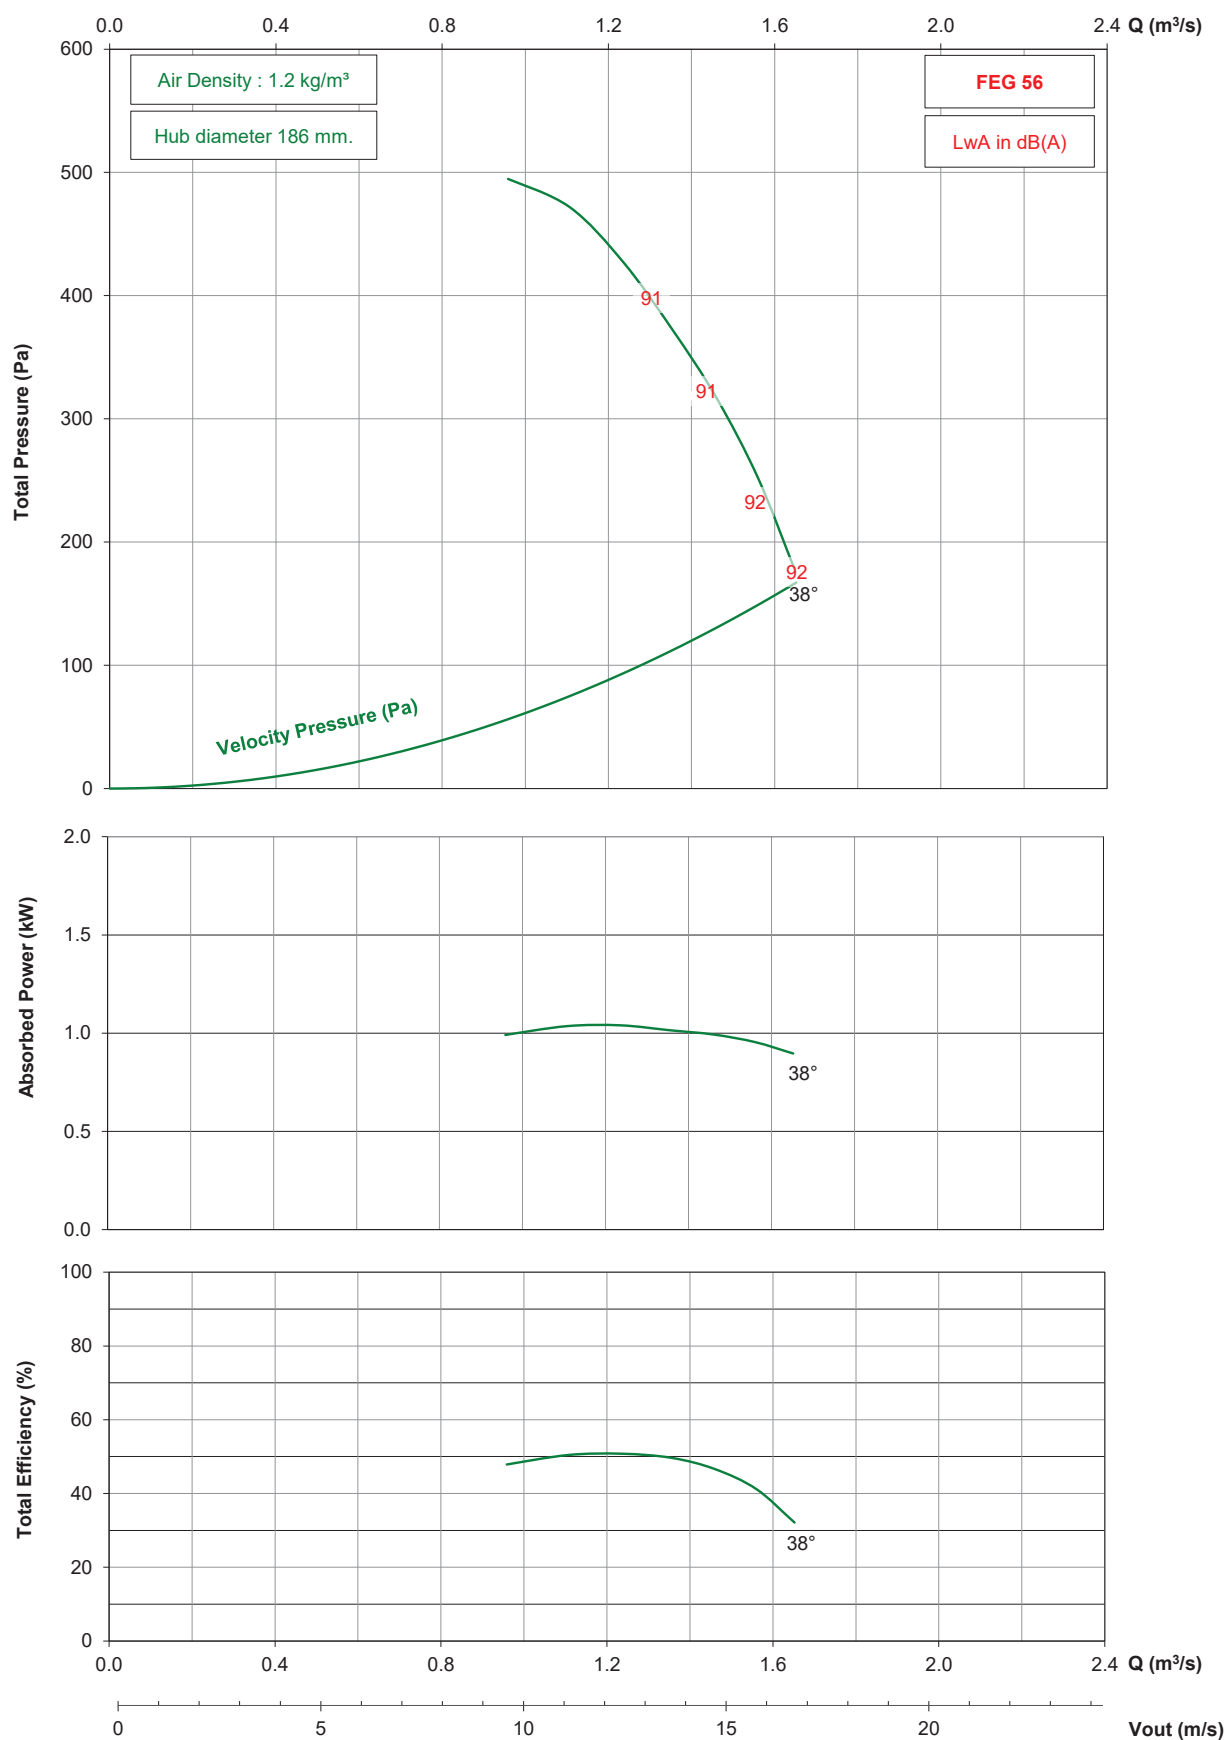


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA355 / 12AA / 7-7 (186)

1450 rpm - 50 Hz

KRUGER

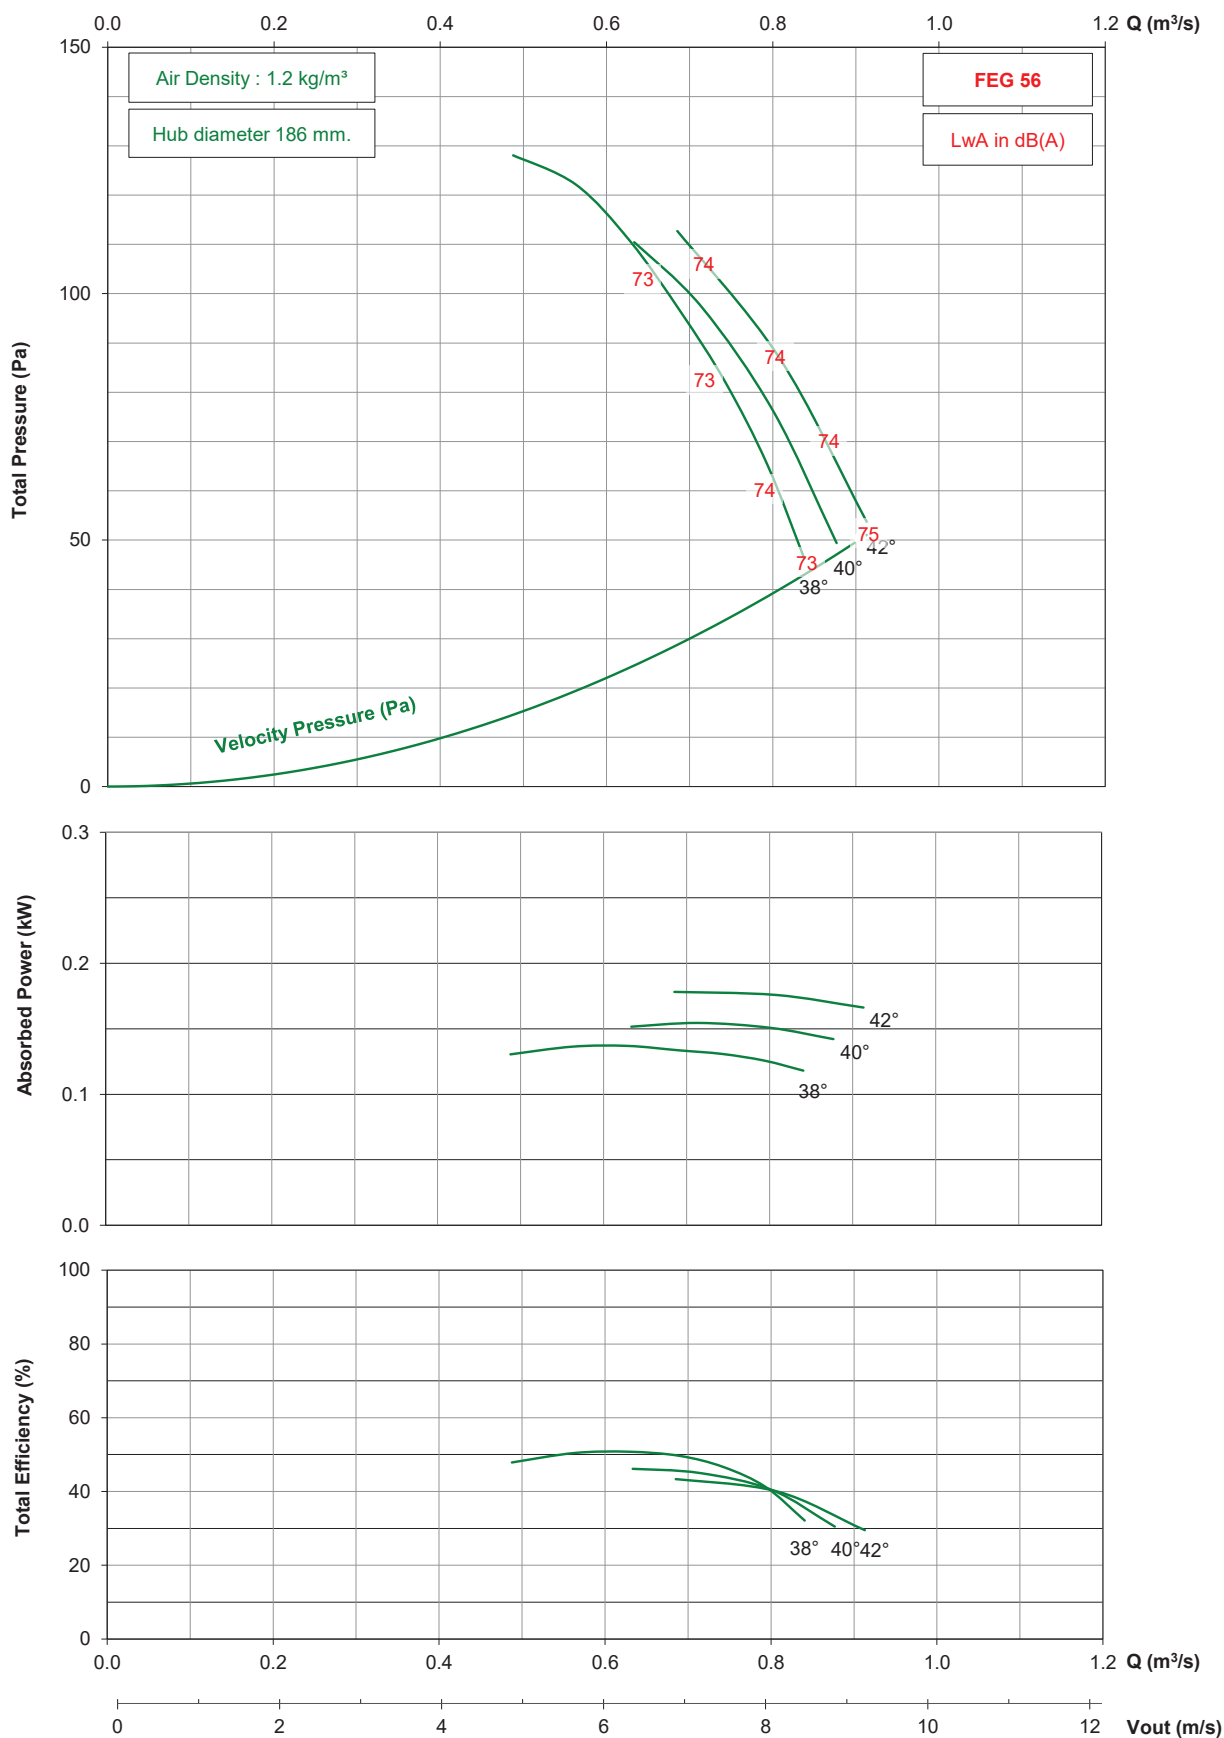


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA355 / 12AA / 7-7 (186)

1750 rpm - 60 Hz

KRUGER

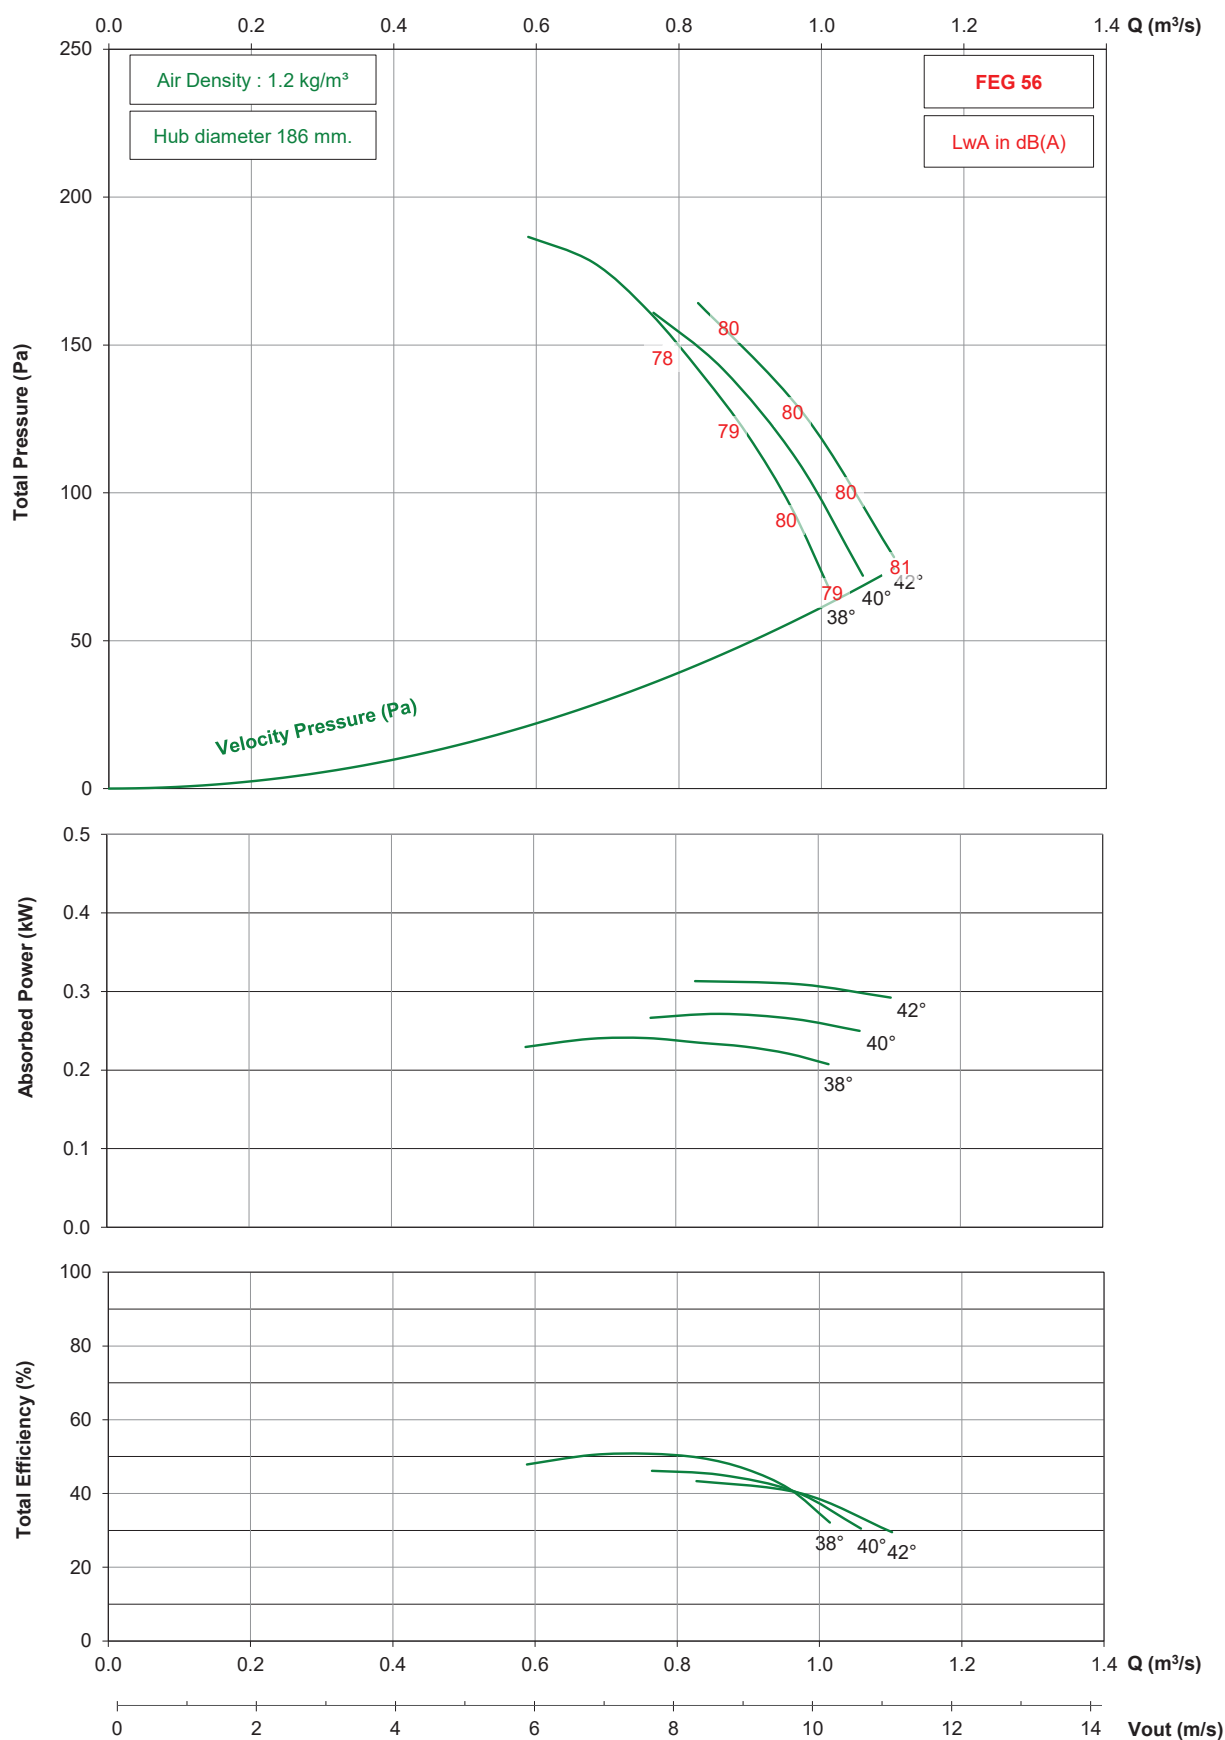


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA400 / 12AA / 9-9 (200)

2850 rpm - 50 Hz

KRUGER

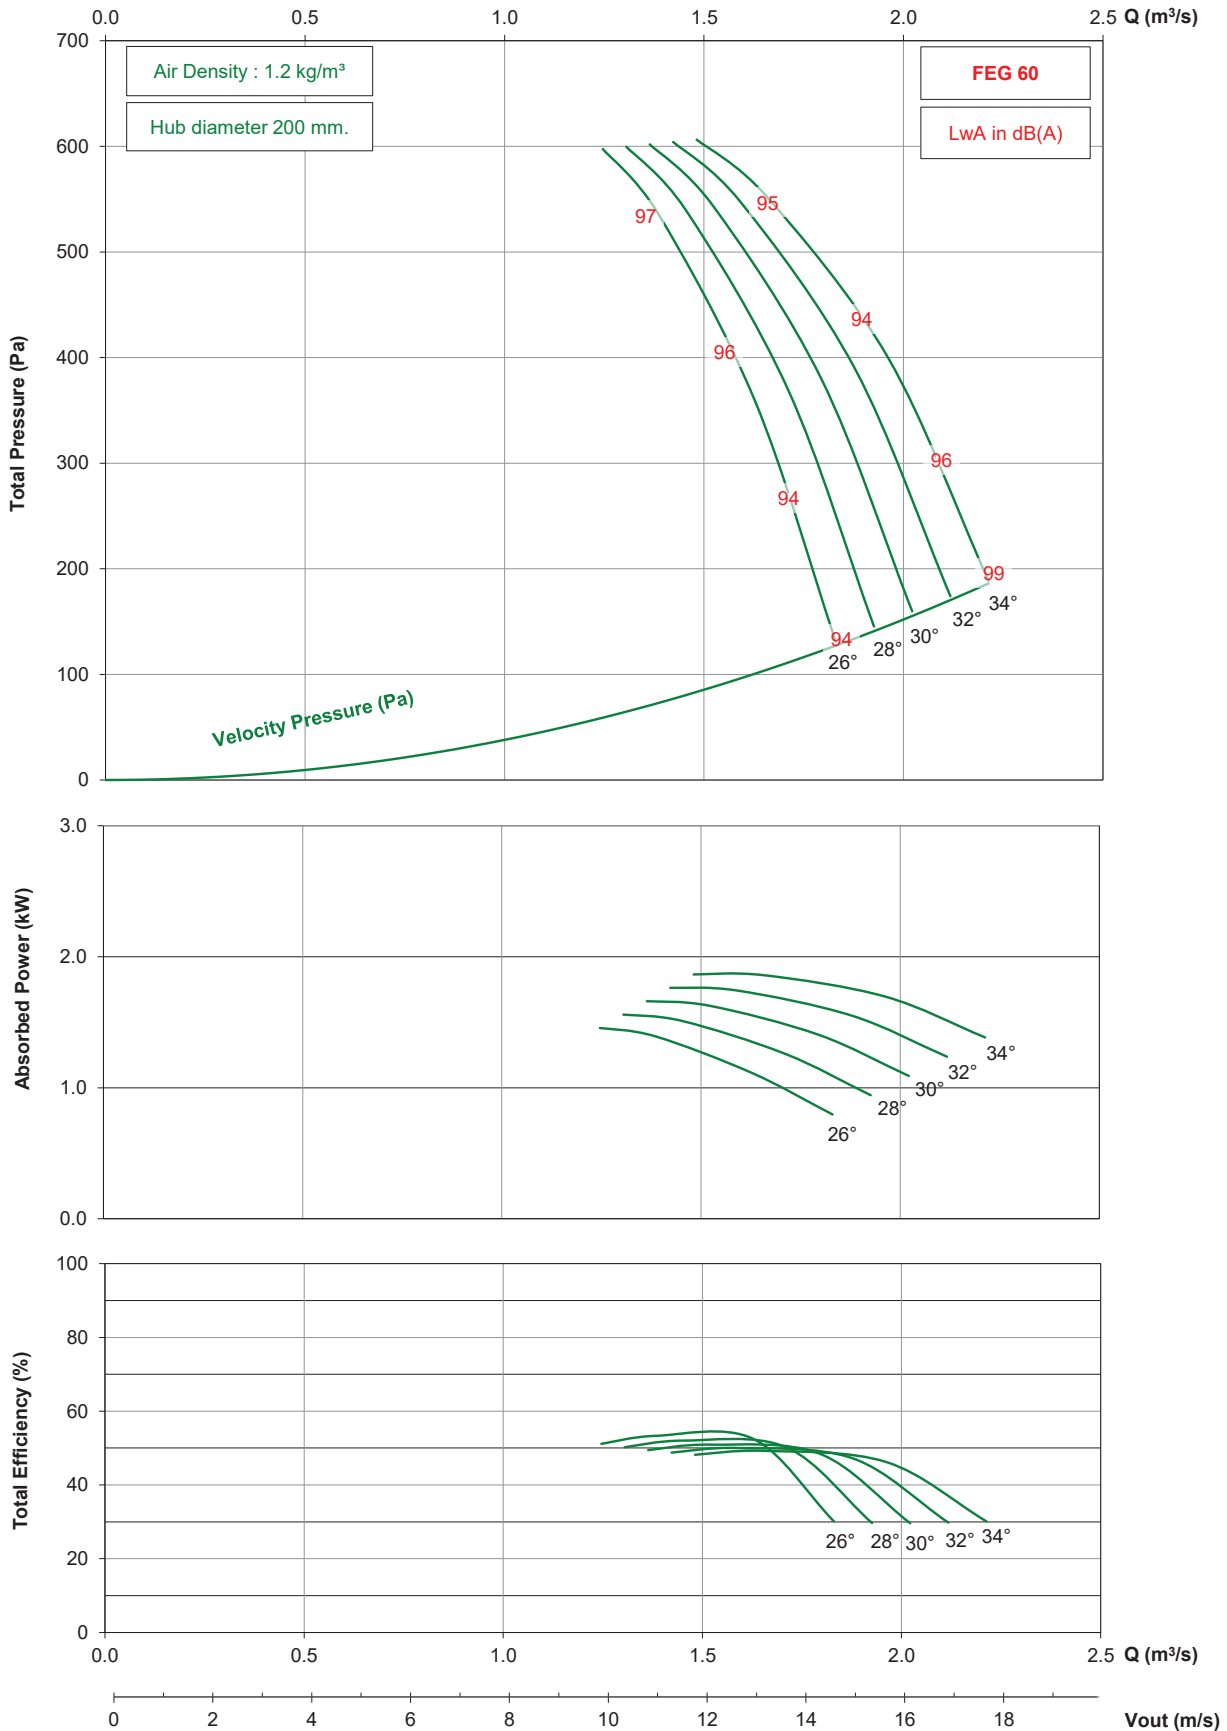


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.


TDA400 / 12AA / 9-9 (200)

1450 rpm - 50 Hz

KRUGER

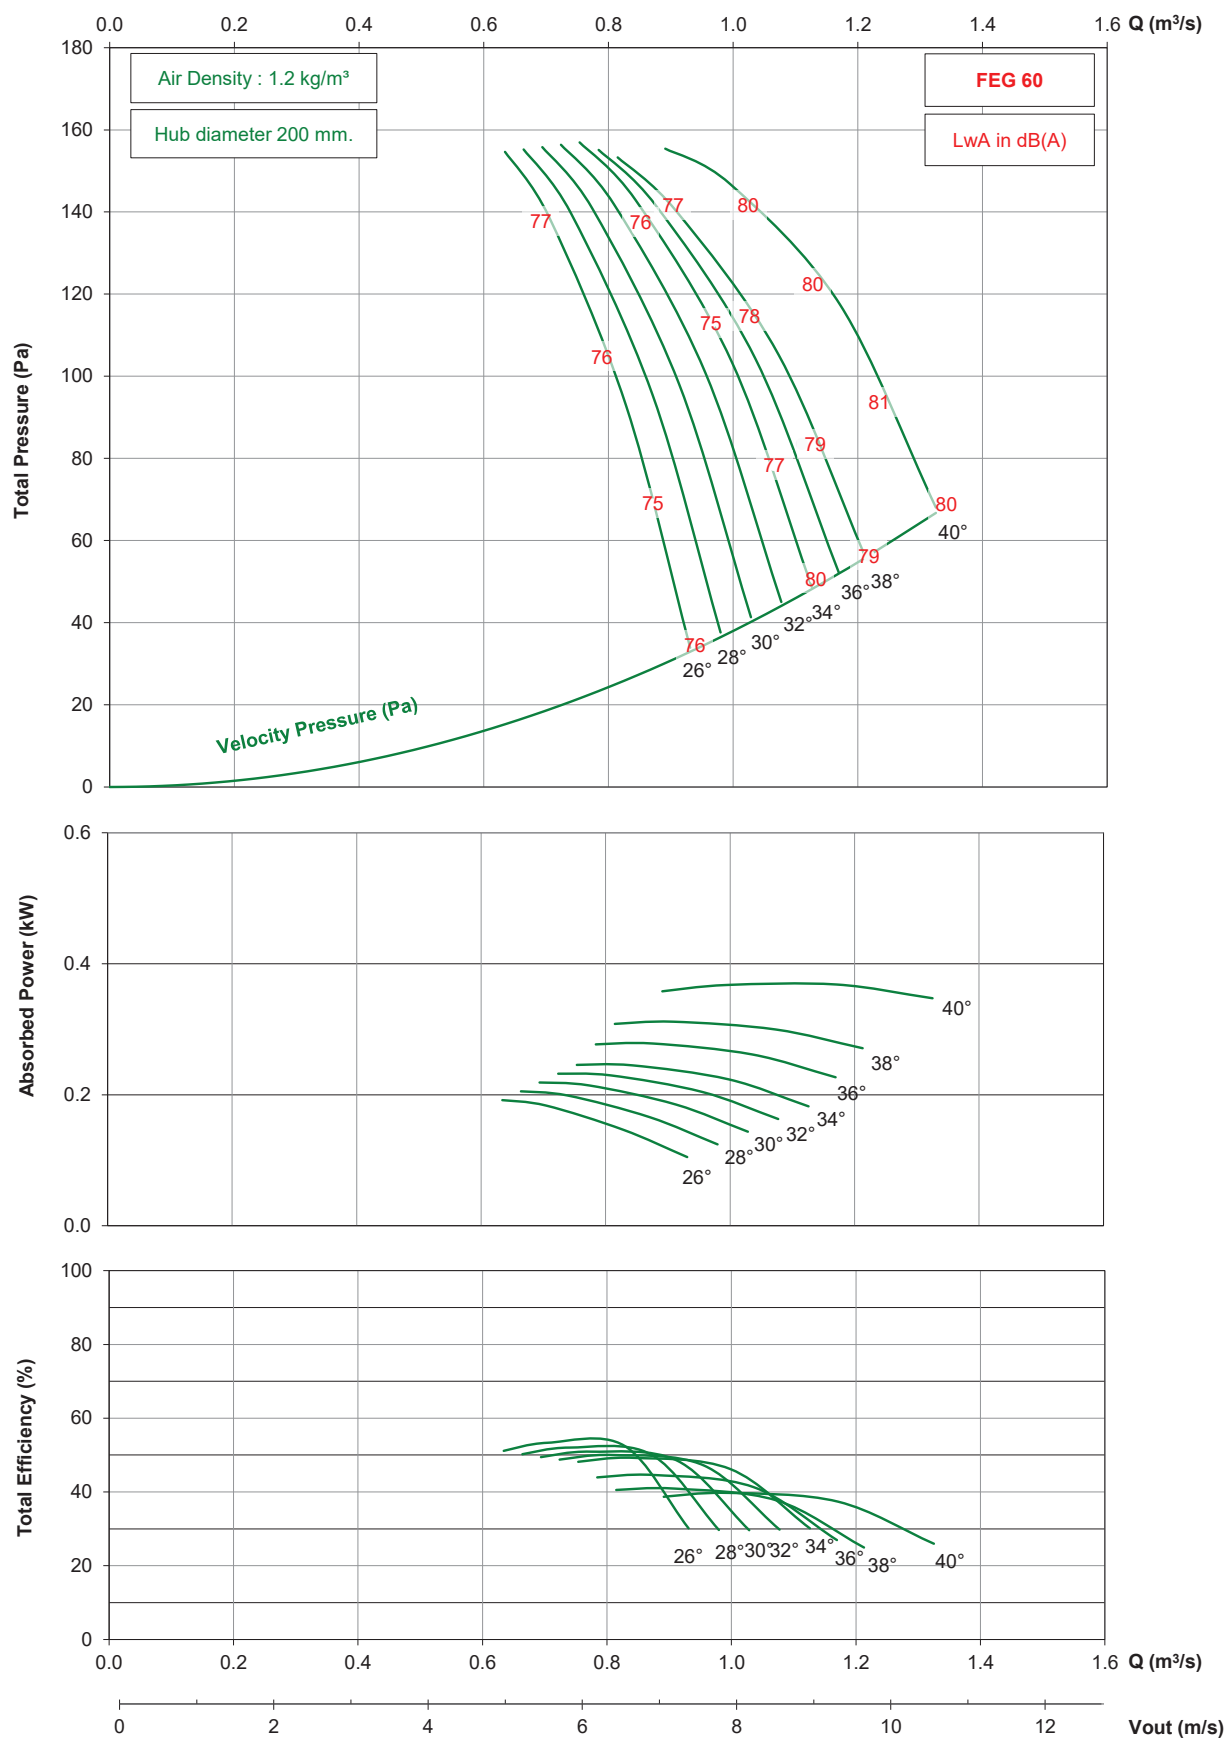

- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lwi(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

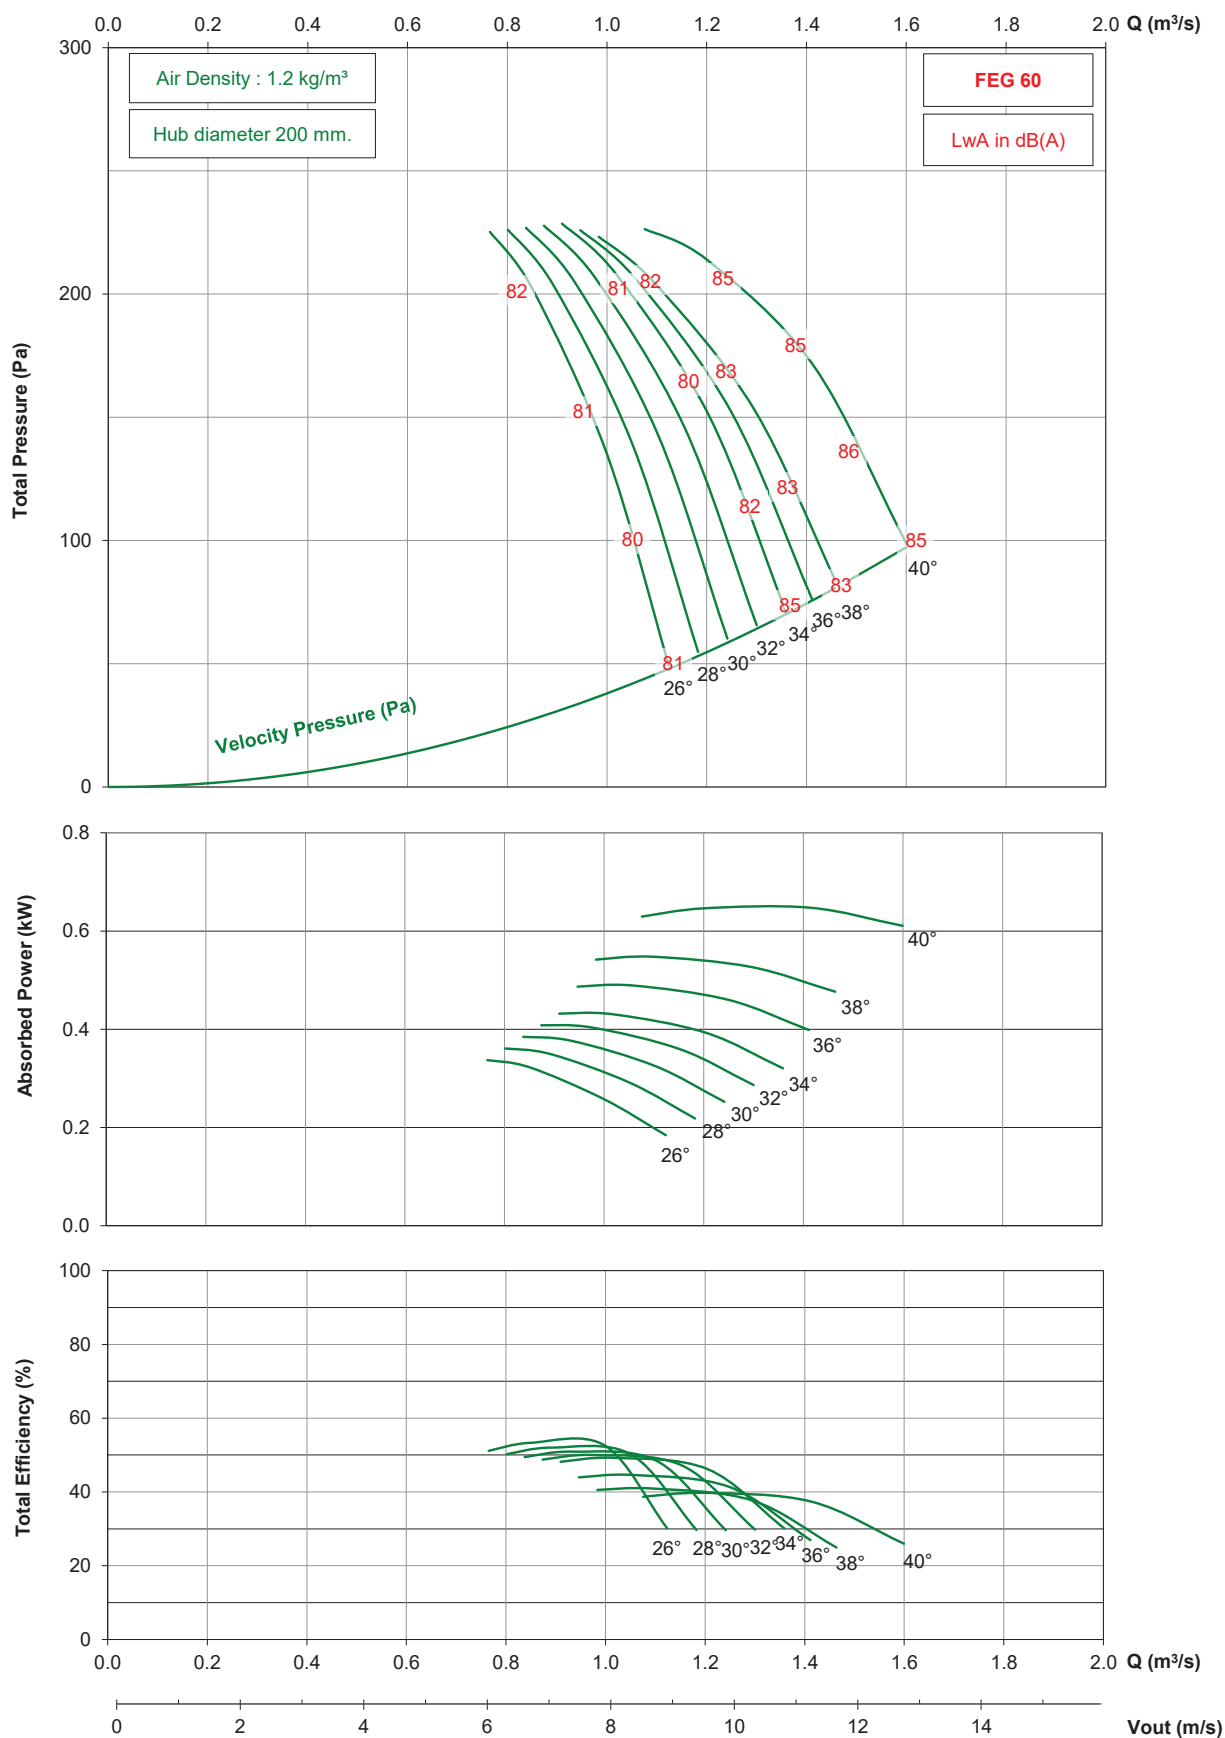


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA450 / 12AA / 9-9 (200)

2850 rpm - 50 Hz

KRUGER

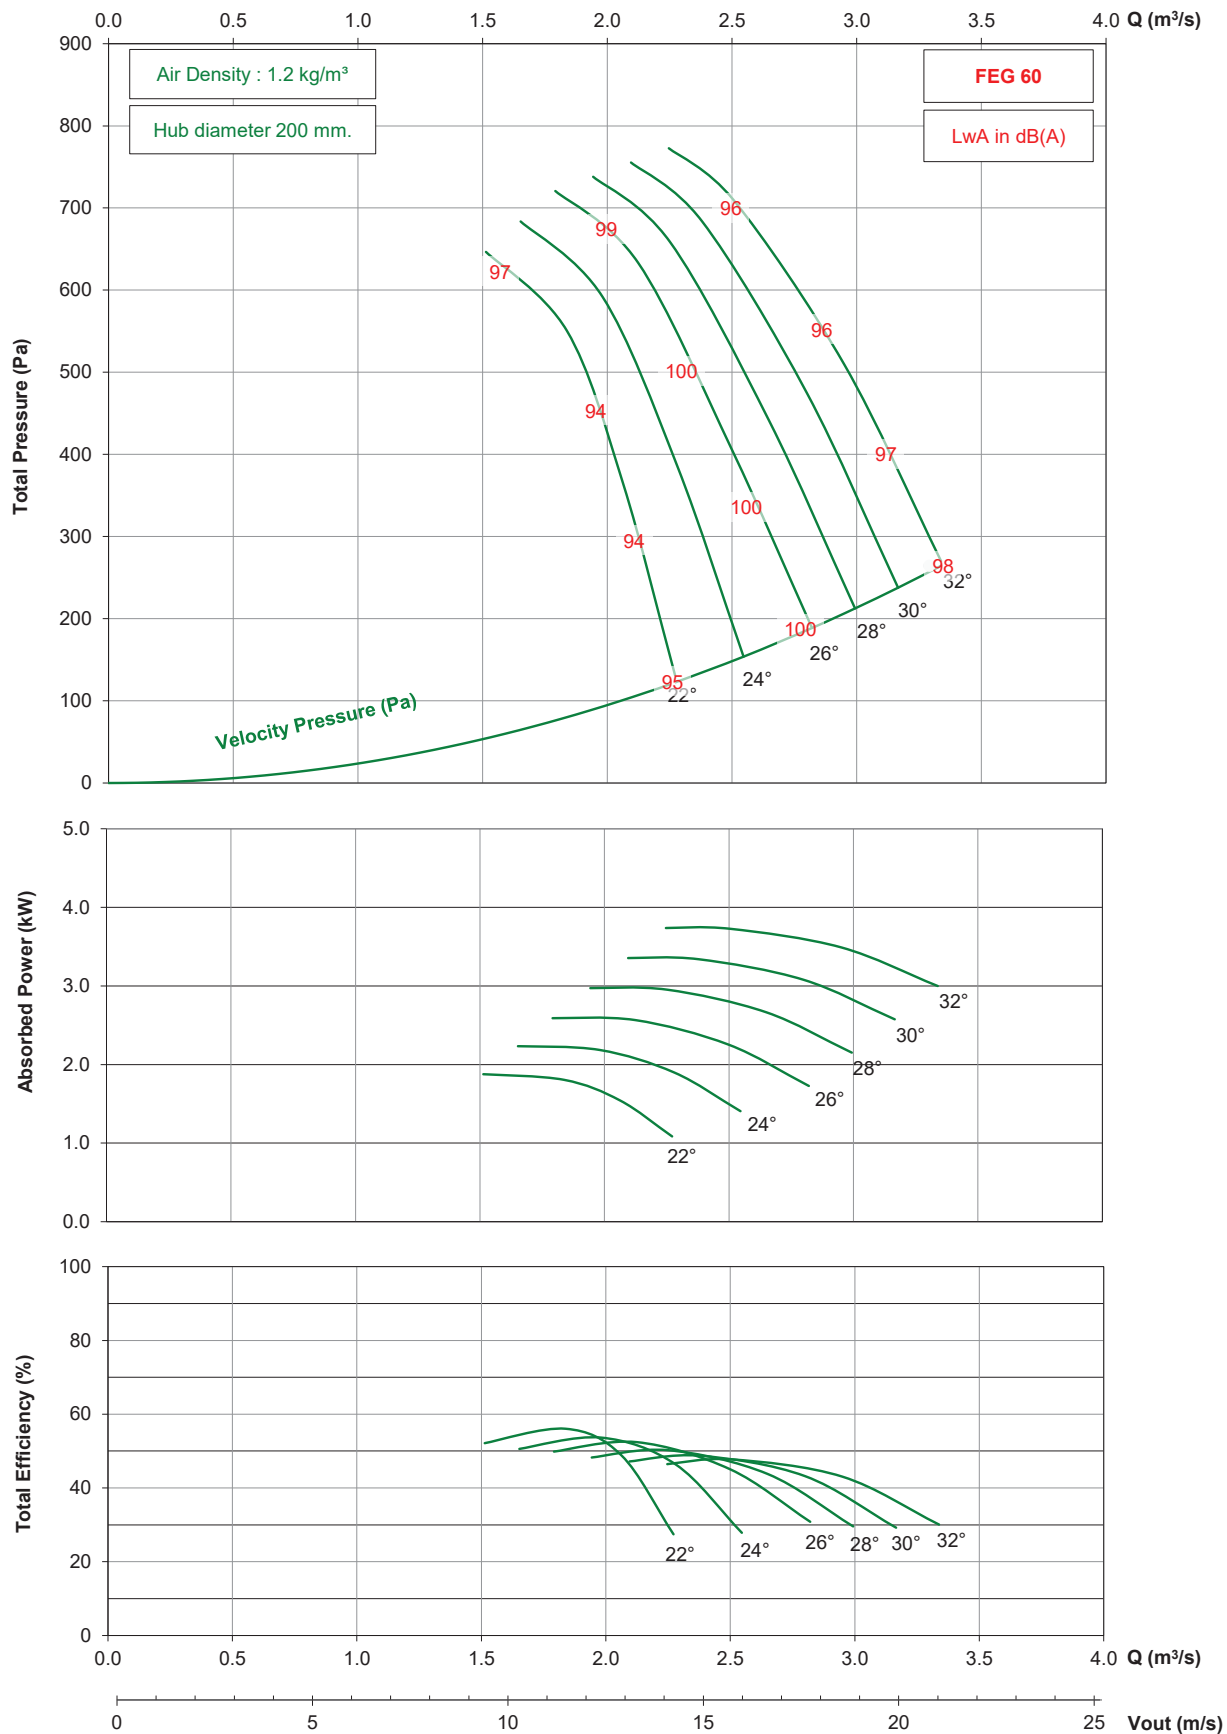


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA450 / 12AA / 9-9 (200)

1450 rpm - 50 Hz

KRUGER

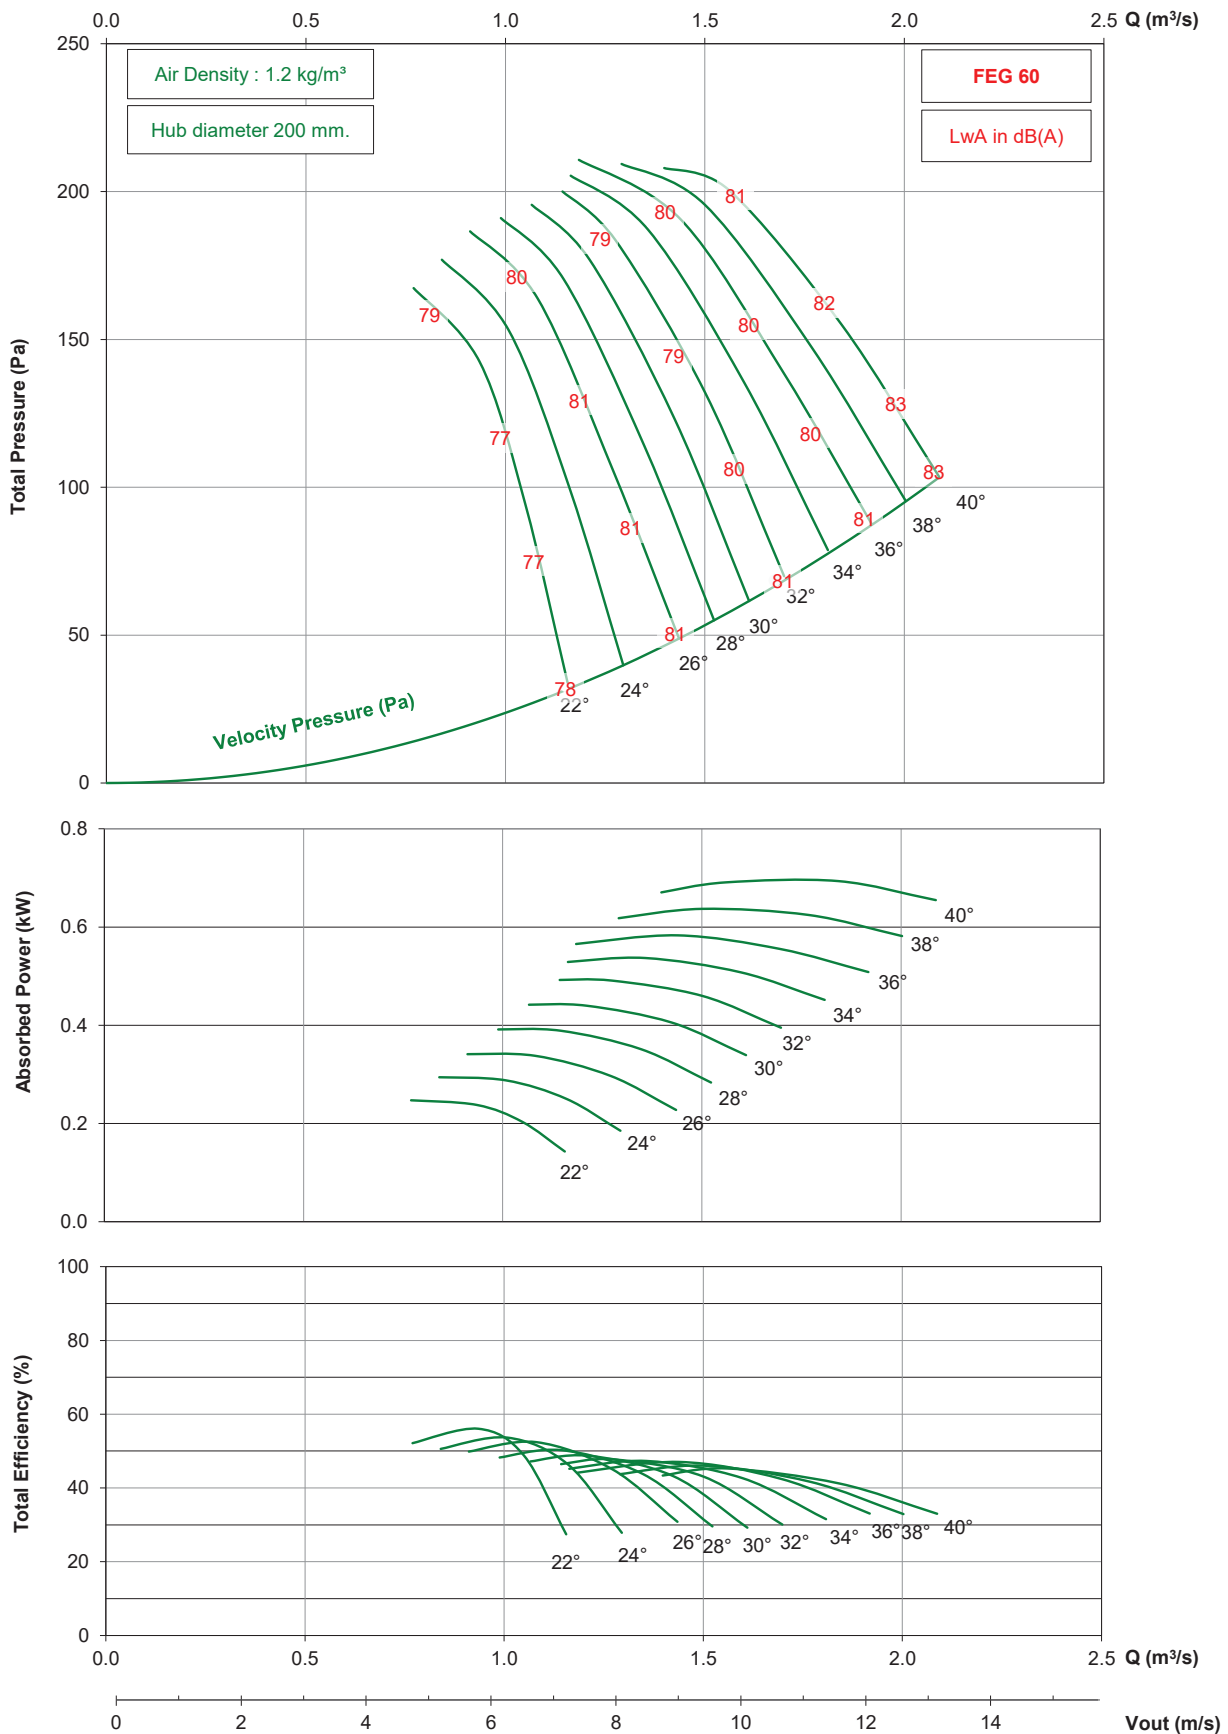


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA450 / 12AA / 9-9 (200)

1750 rpm - 60 Hz

KRUGER

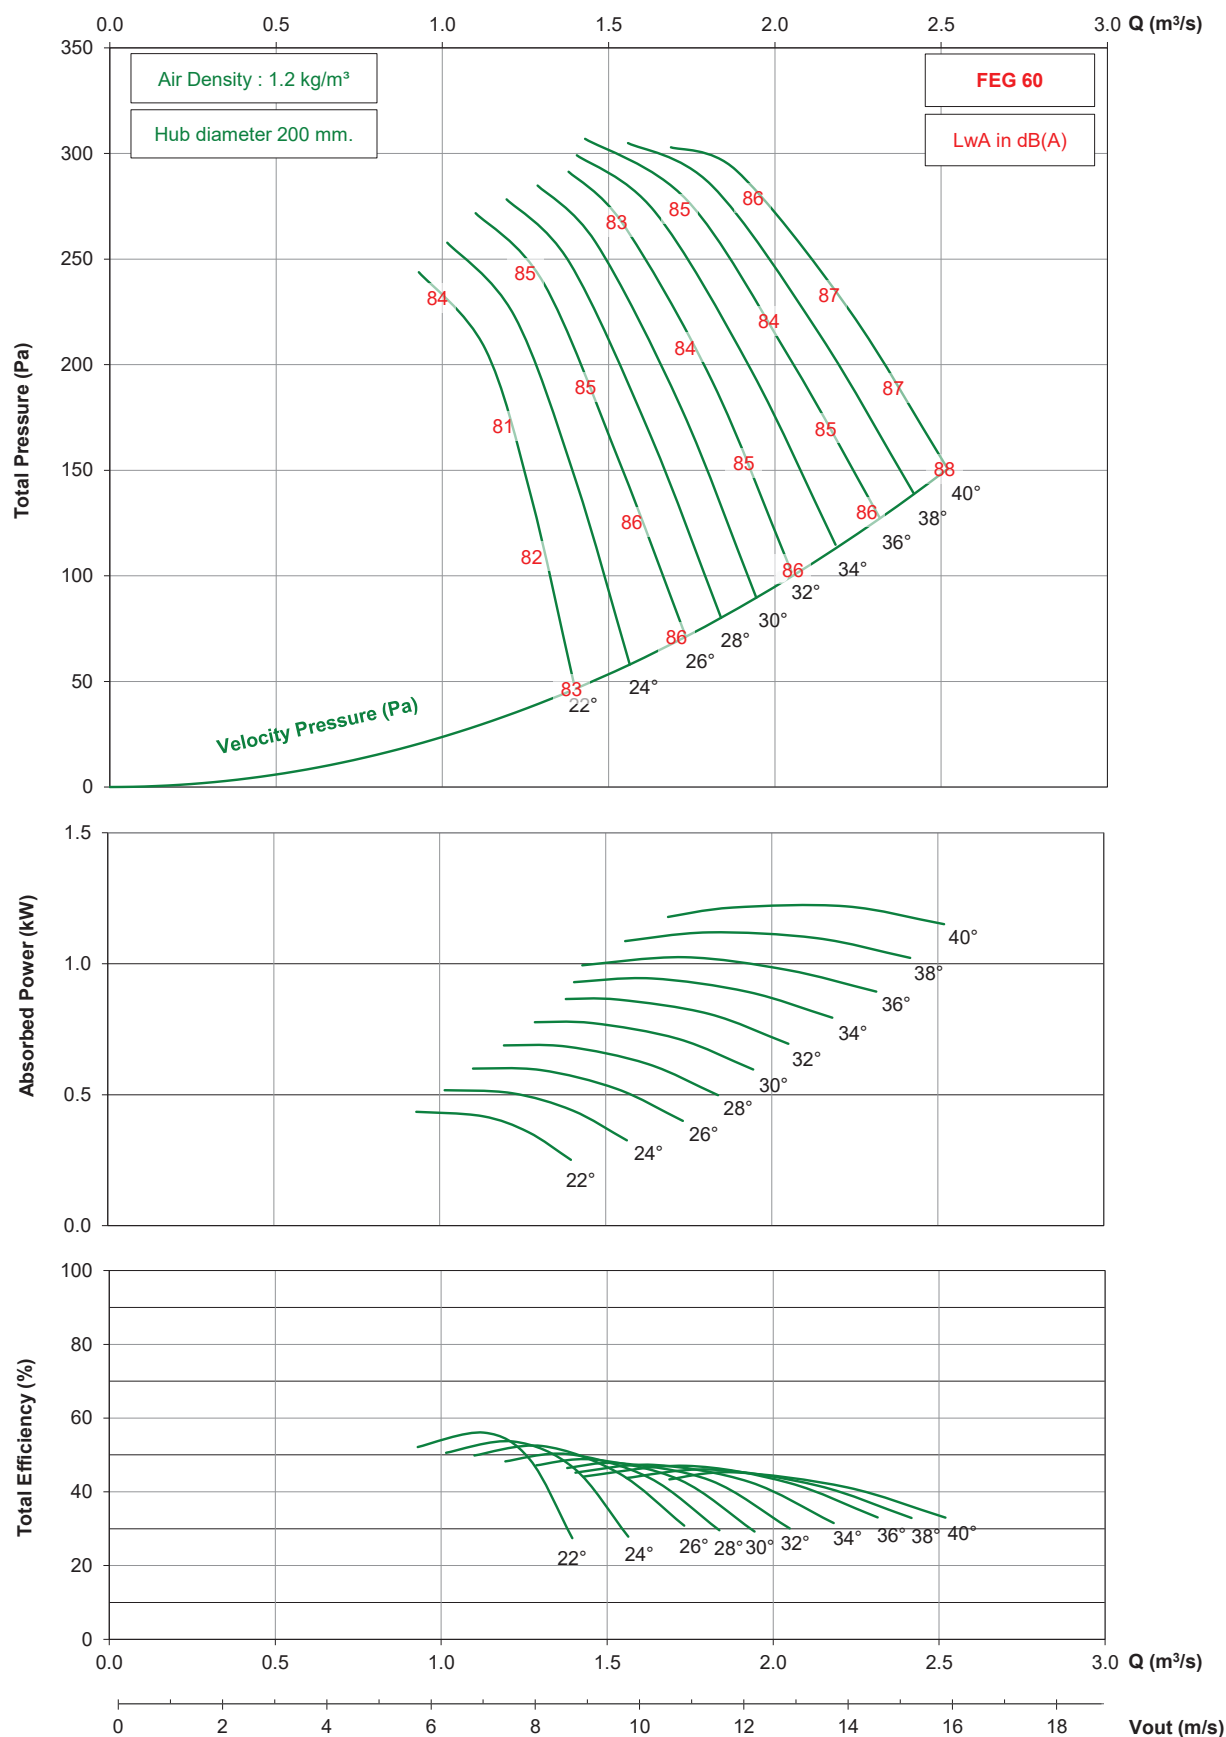


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
 - The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA500 / 9AA / 7-7 (186)

2850 rpm - 50 Hz

KRUGER

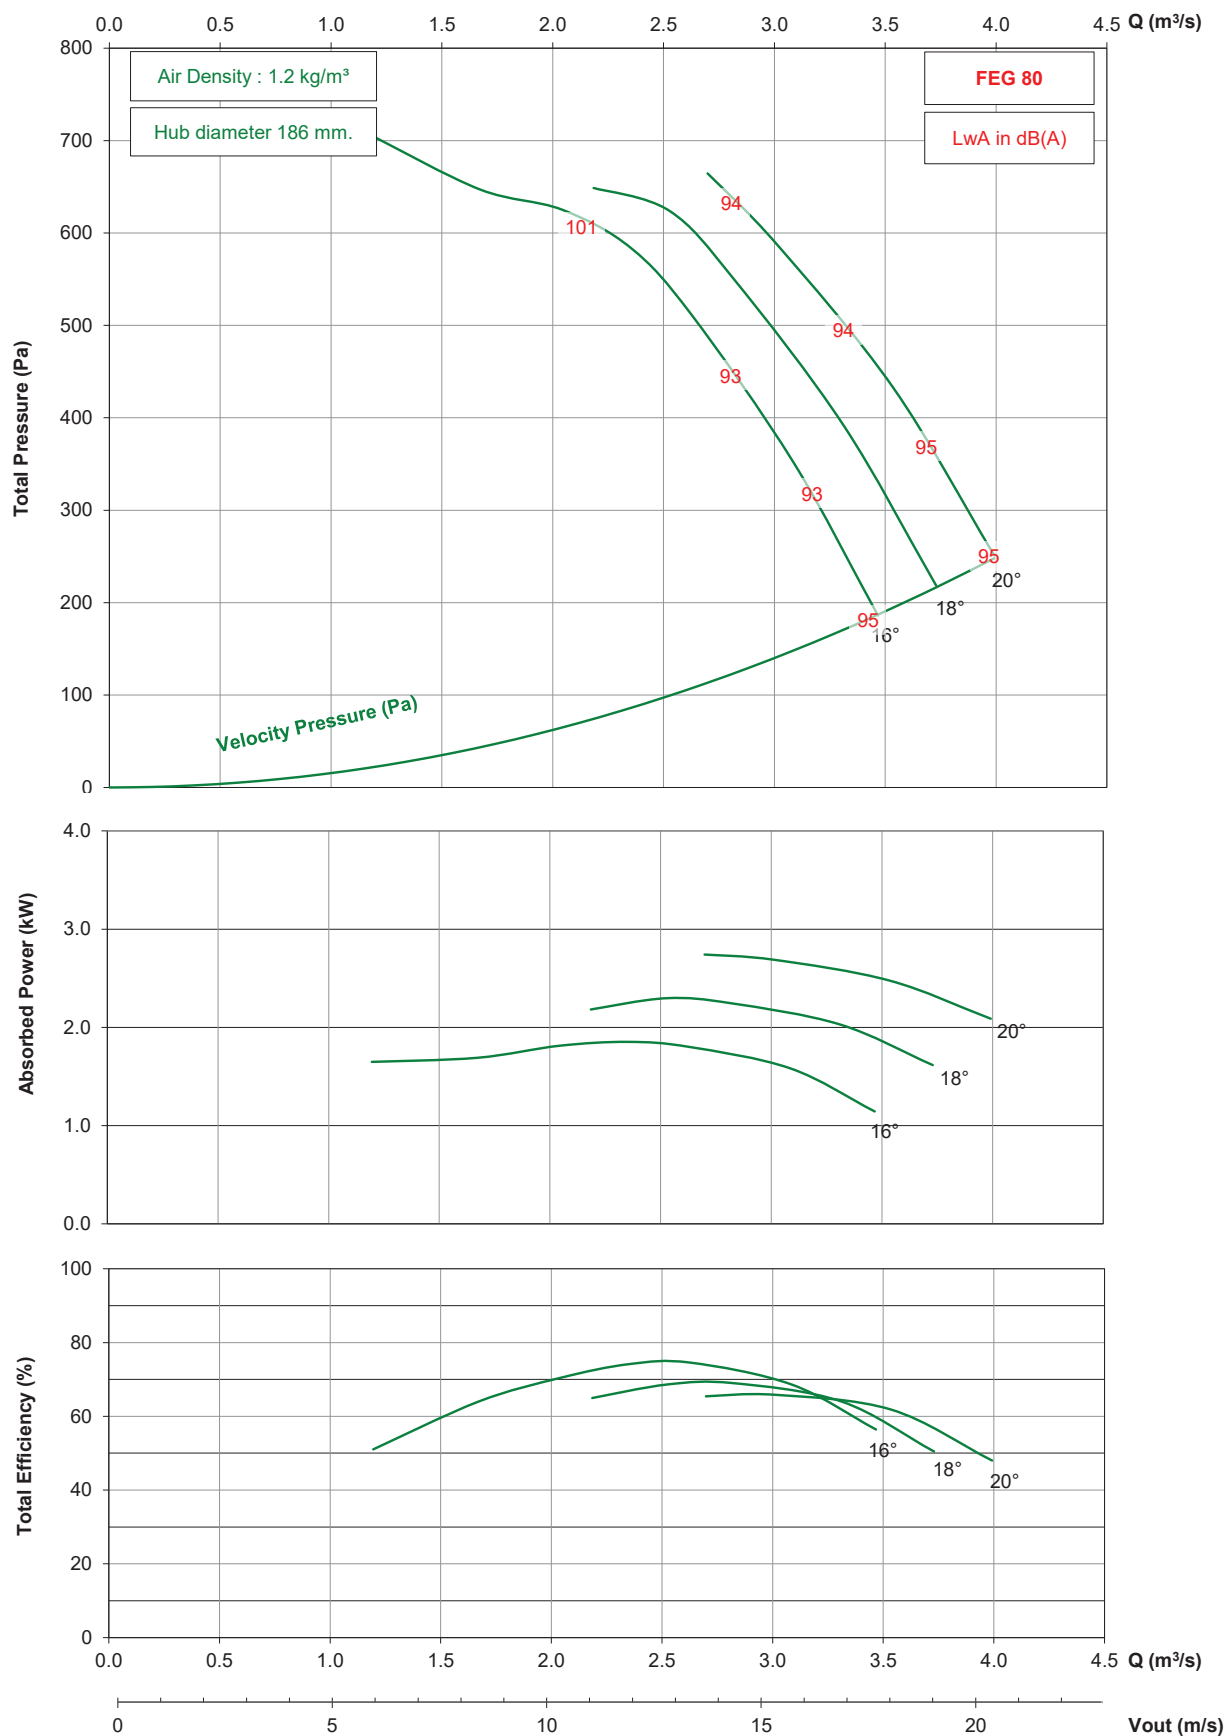


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lwi(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA500 / 9AA / 7-7 (186)

1450 rpm - 50 Hz

KRUGER

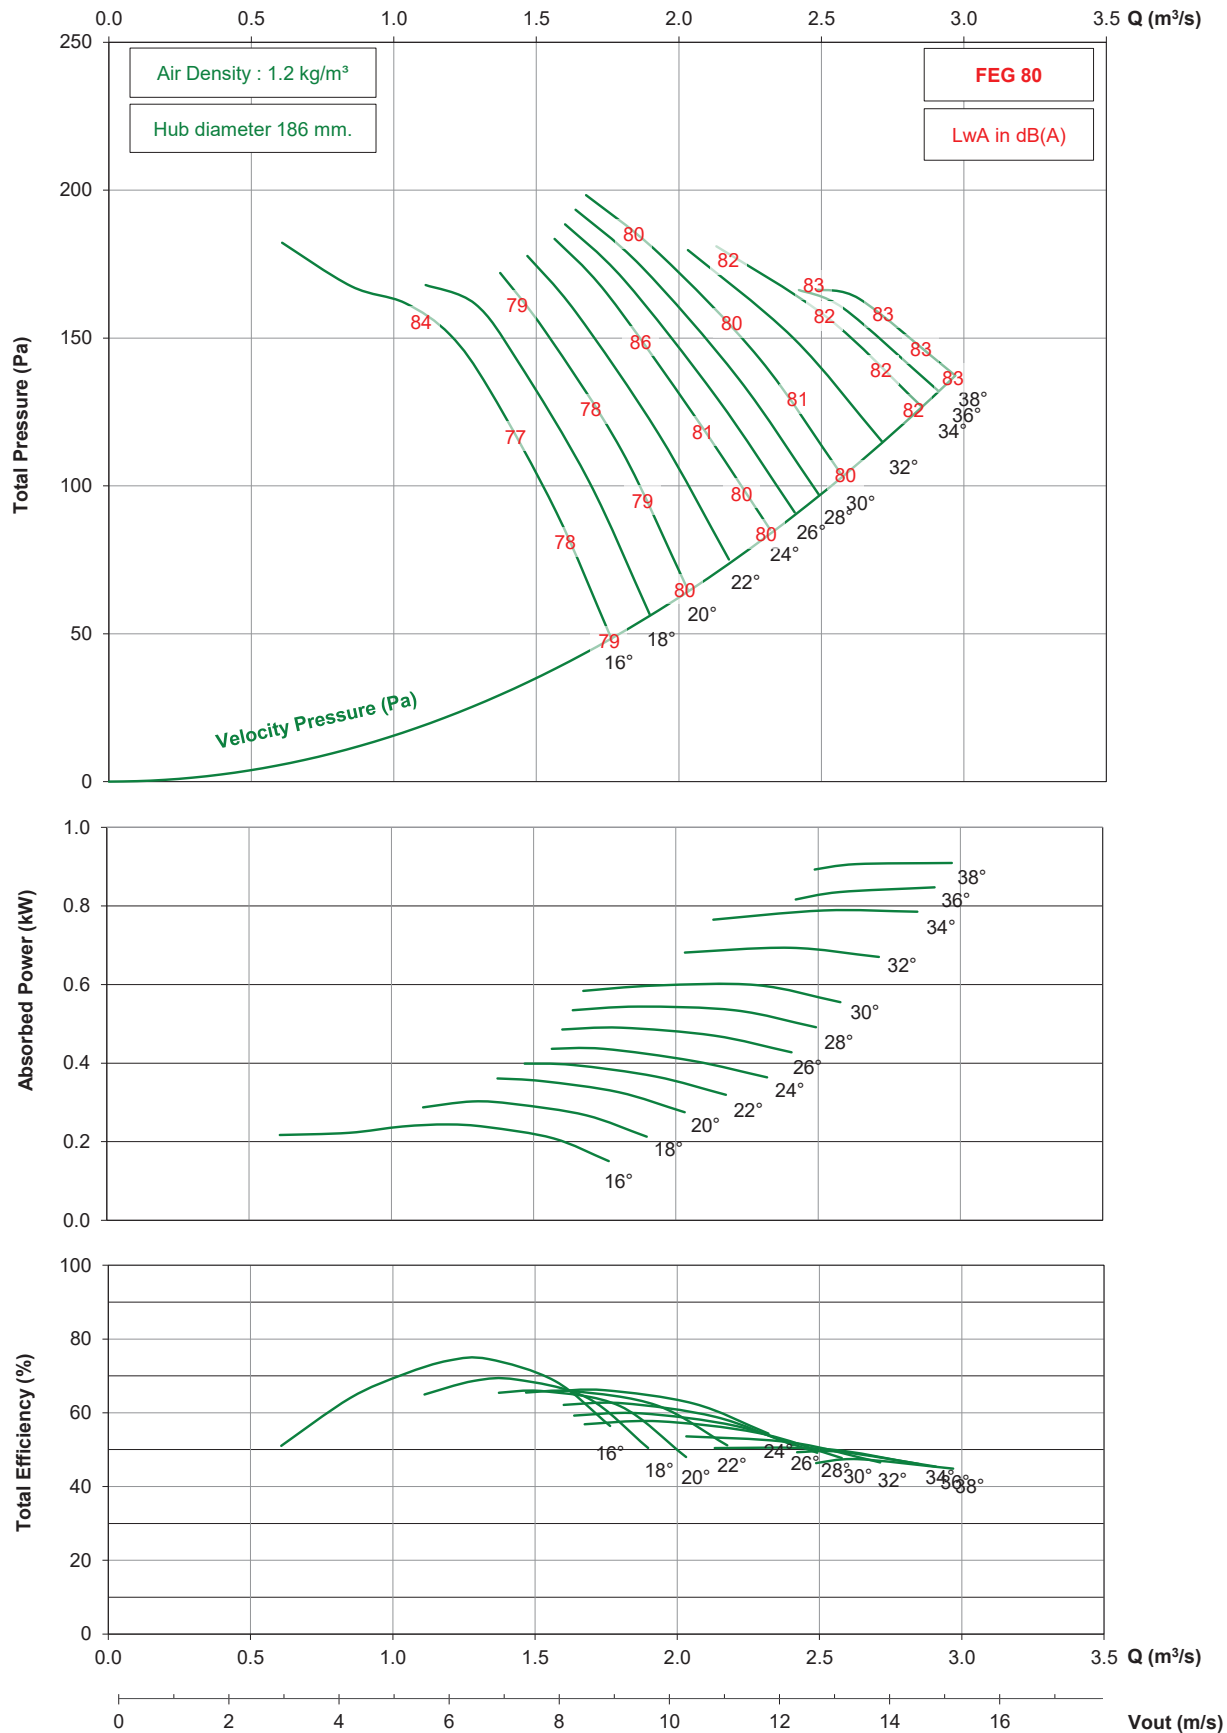


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA500 / 9AA / 7-7 (186)

1750 rpm - 60 Hz

KRUGER

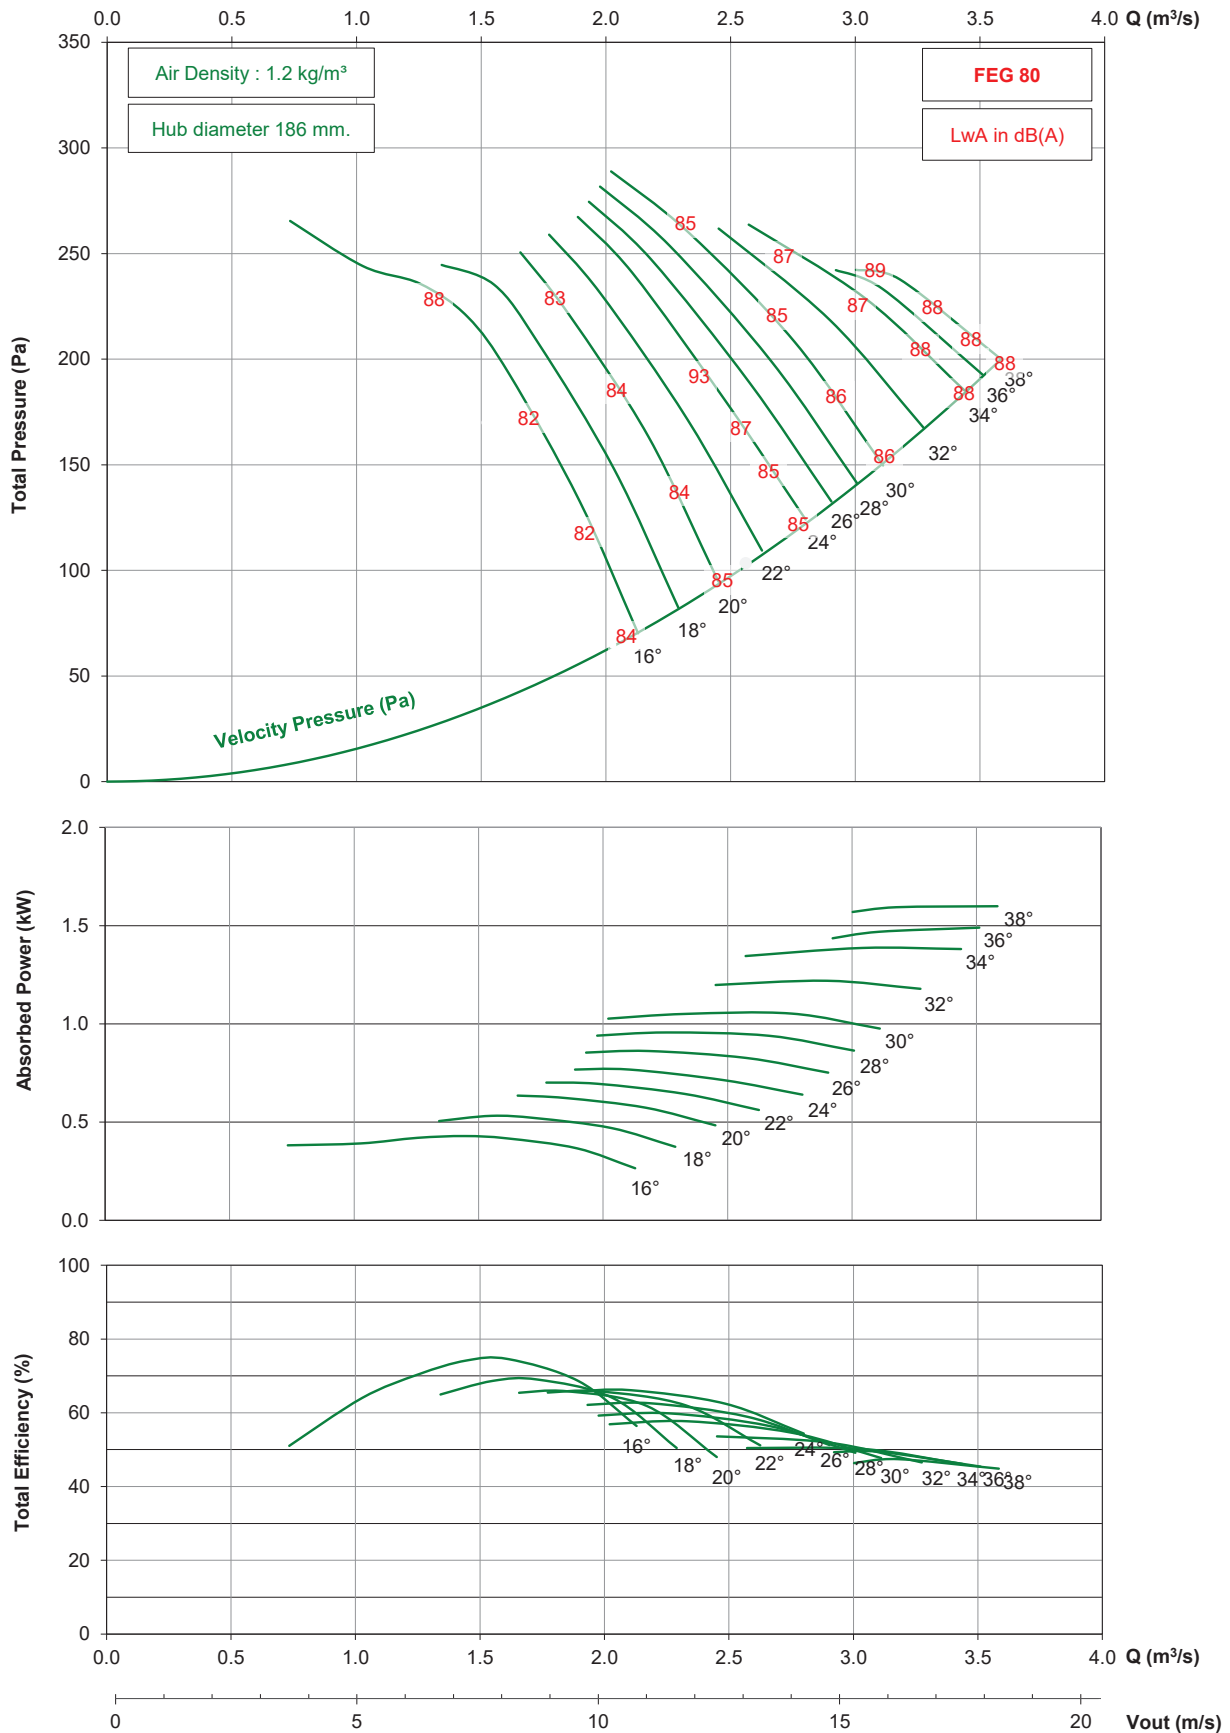


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA560 / 9AA / 7-7 (186)

2850 rpm - 50 Hz

KRUGER

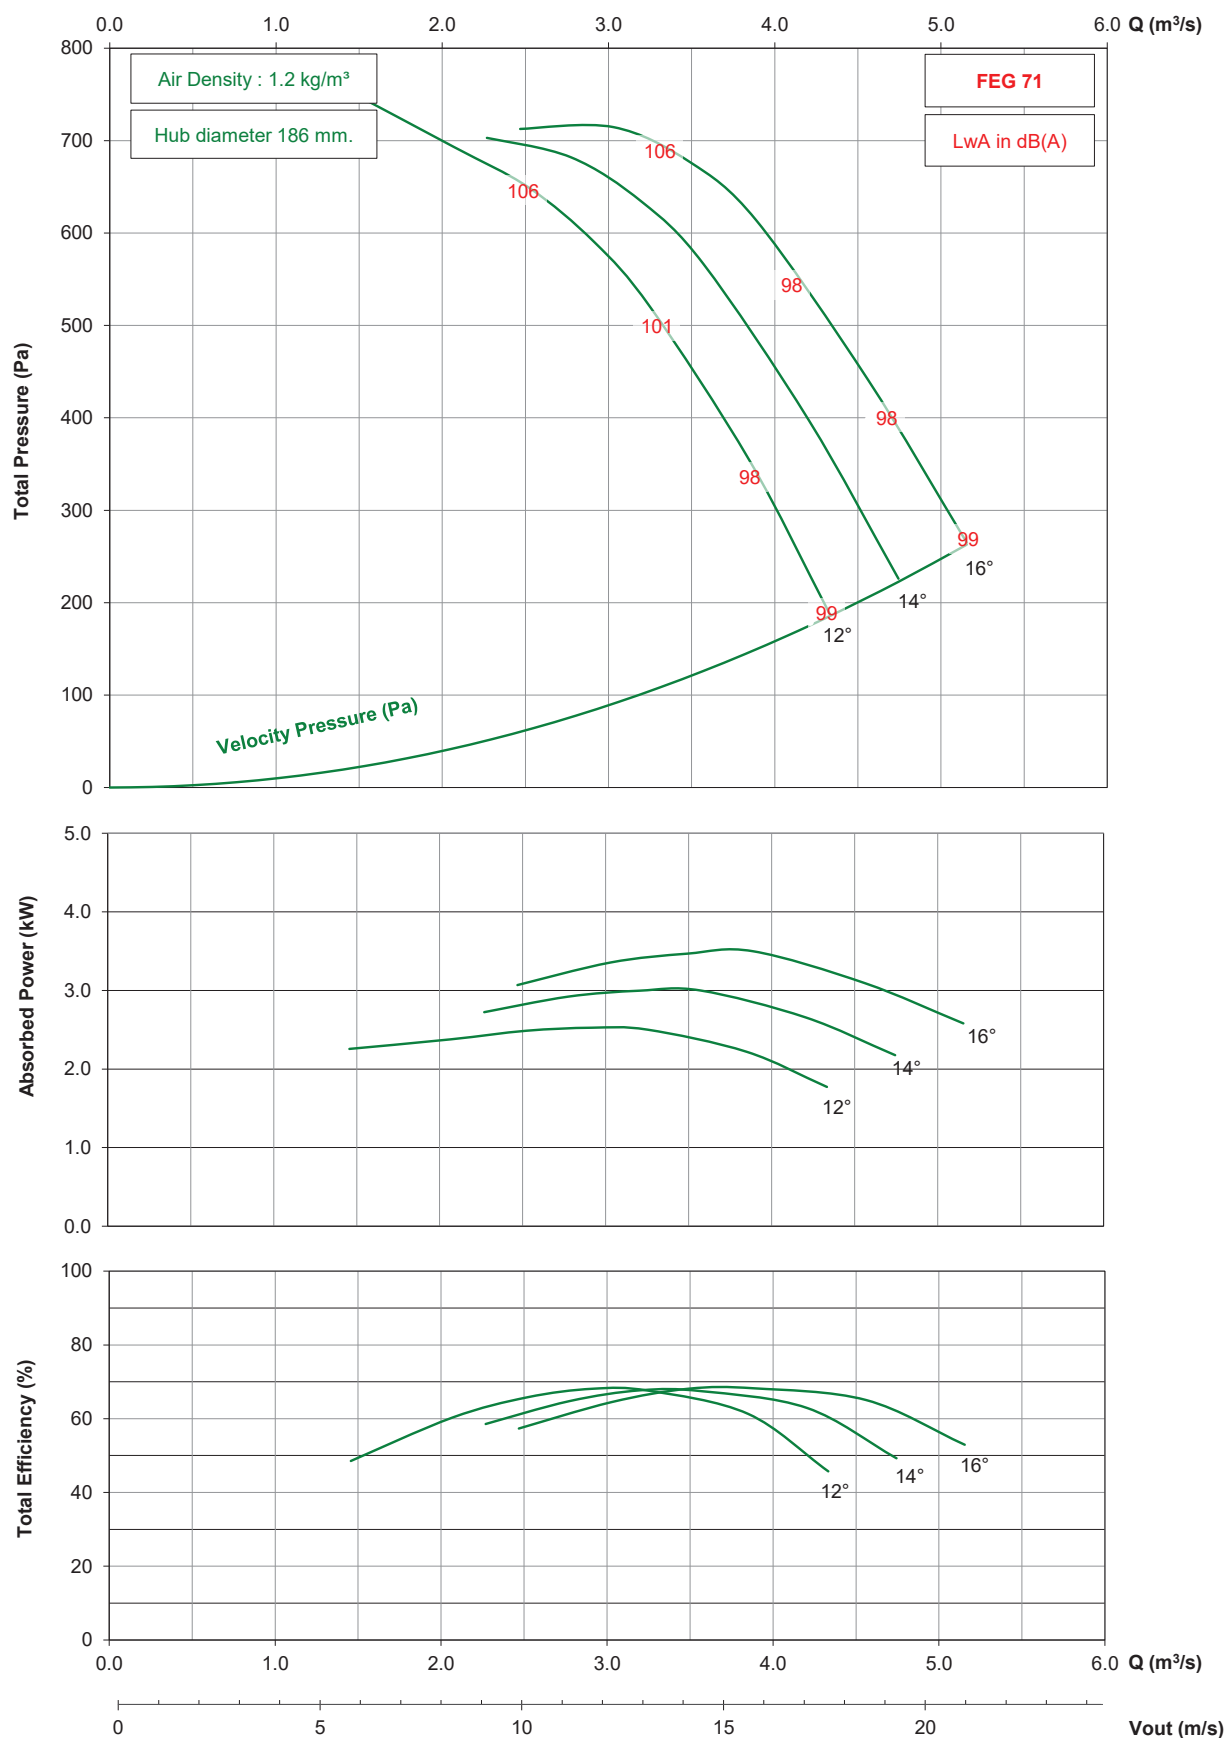


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA560 / 9AA / 7-7 (186)

1450 rpm - 50 Hz

KRUGER

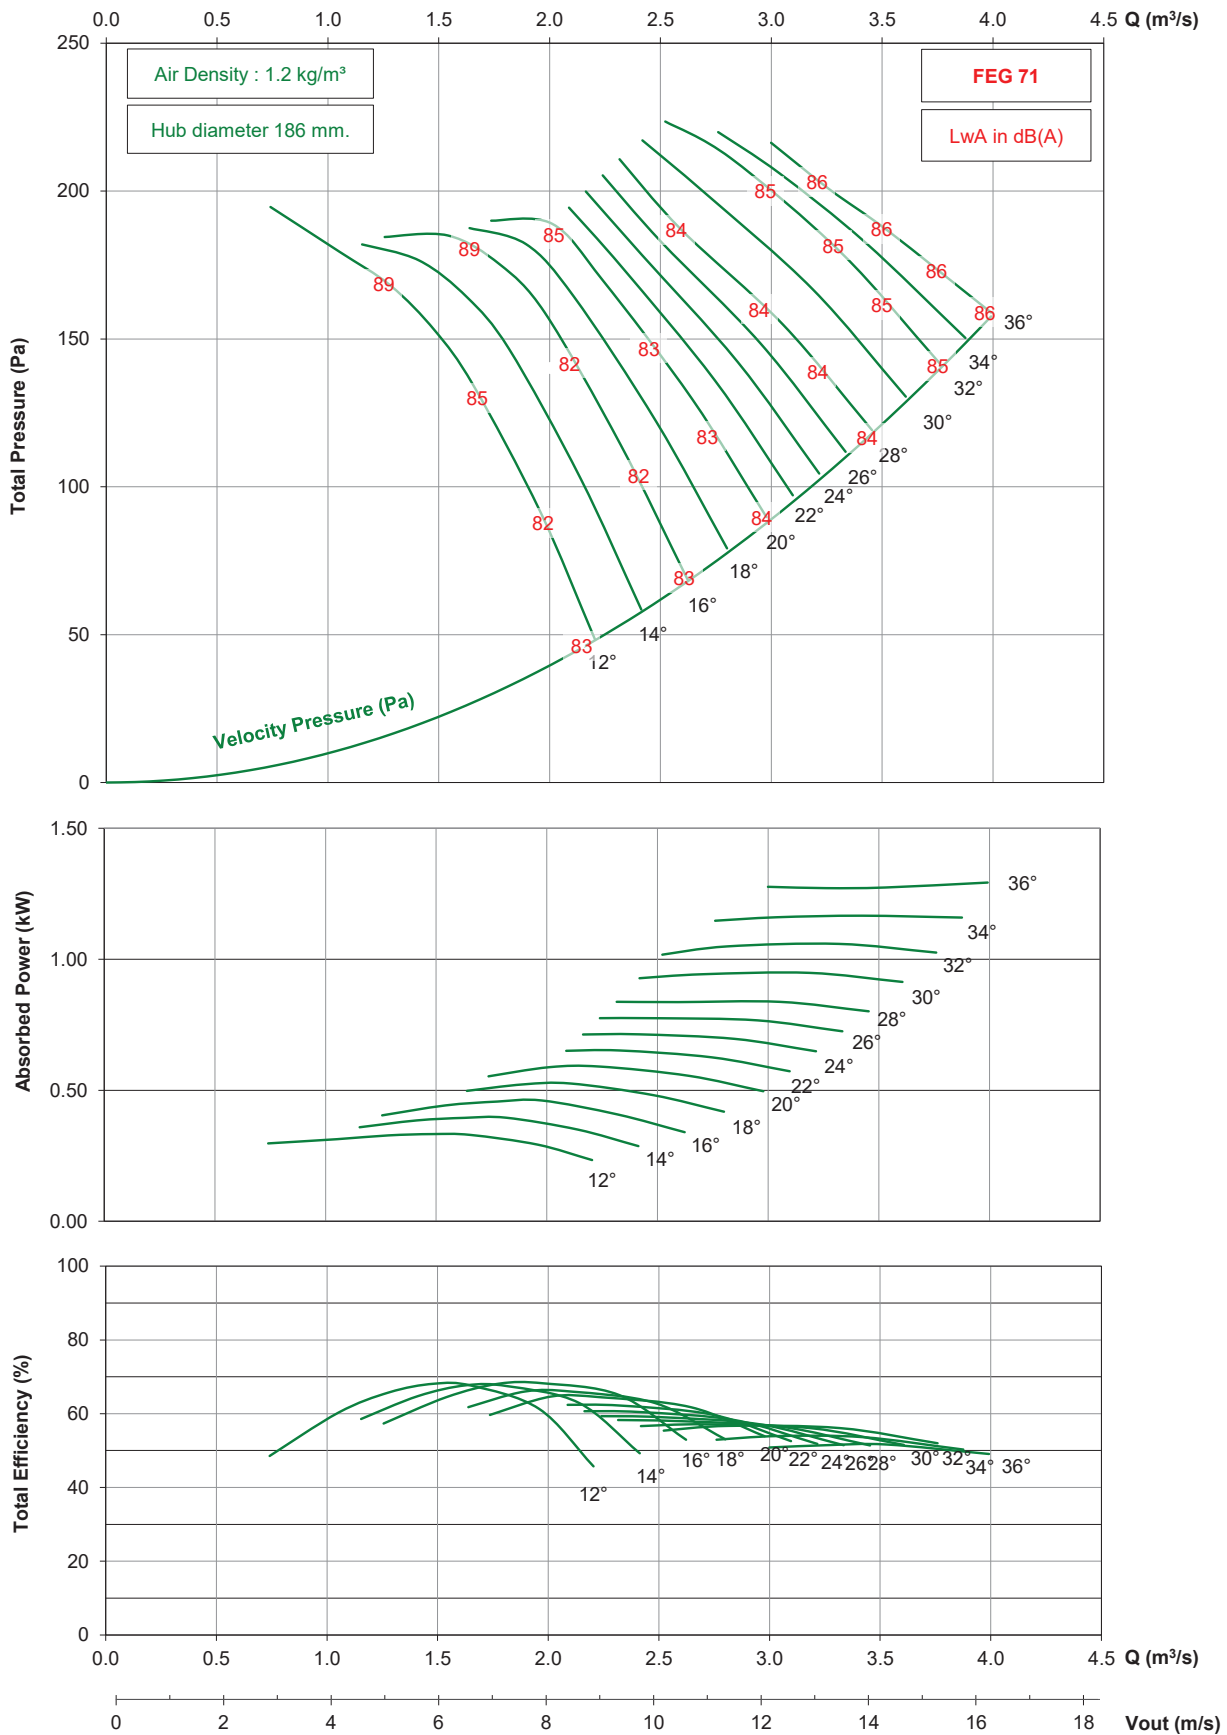


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA560 / 9AA / 7-7 (186)

1750 rpm - 60 Hz

KRUGER

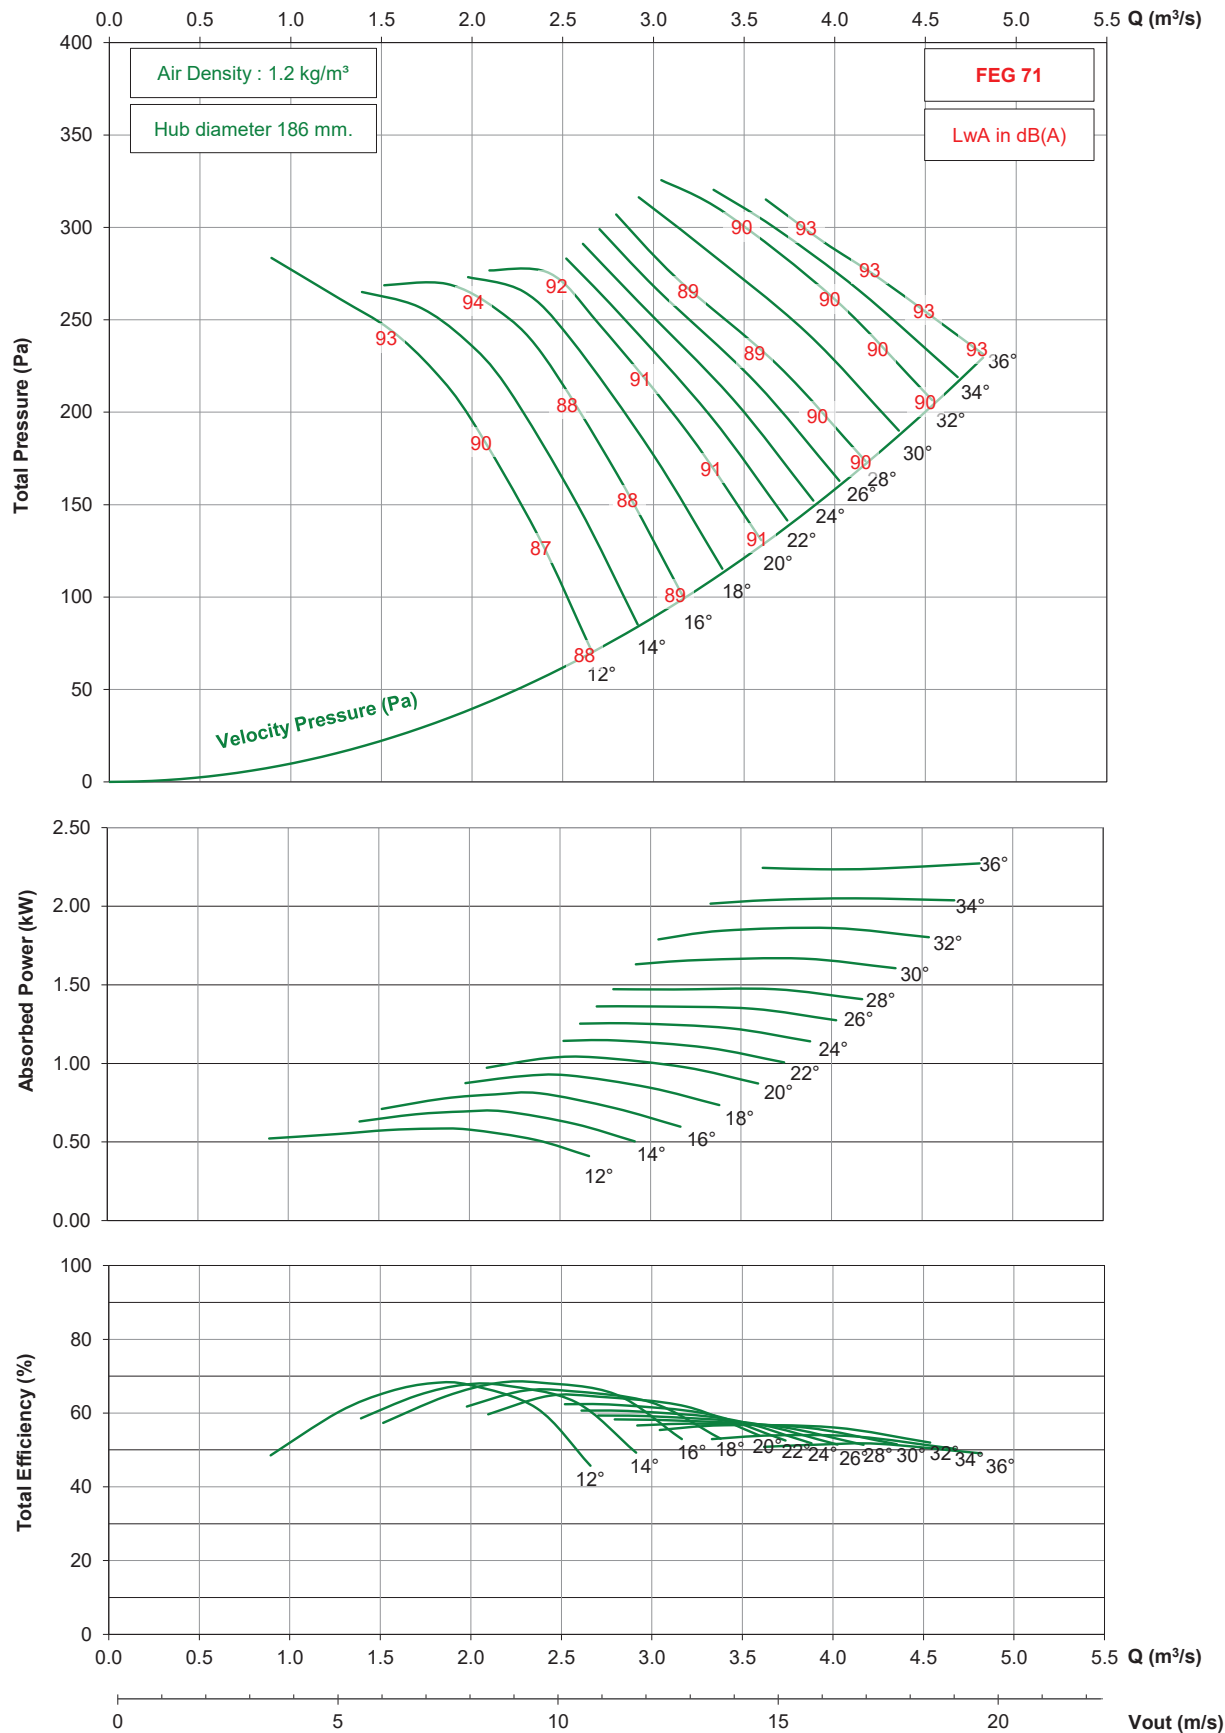


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA630 / 12AA / 9-9 (200)

2850 rpm - 50 Hz

KRUGER

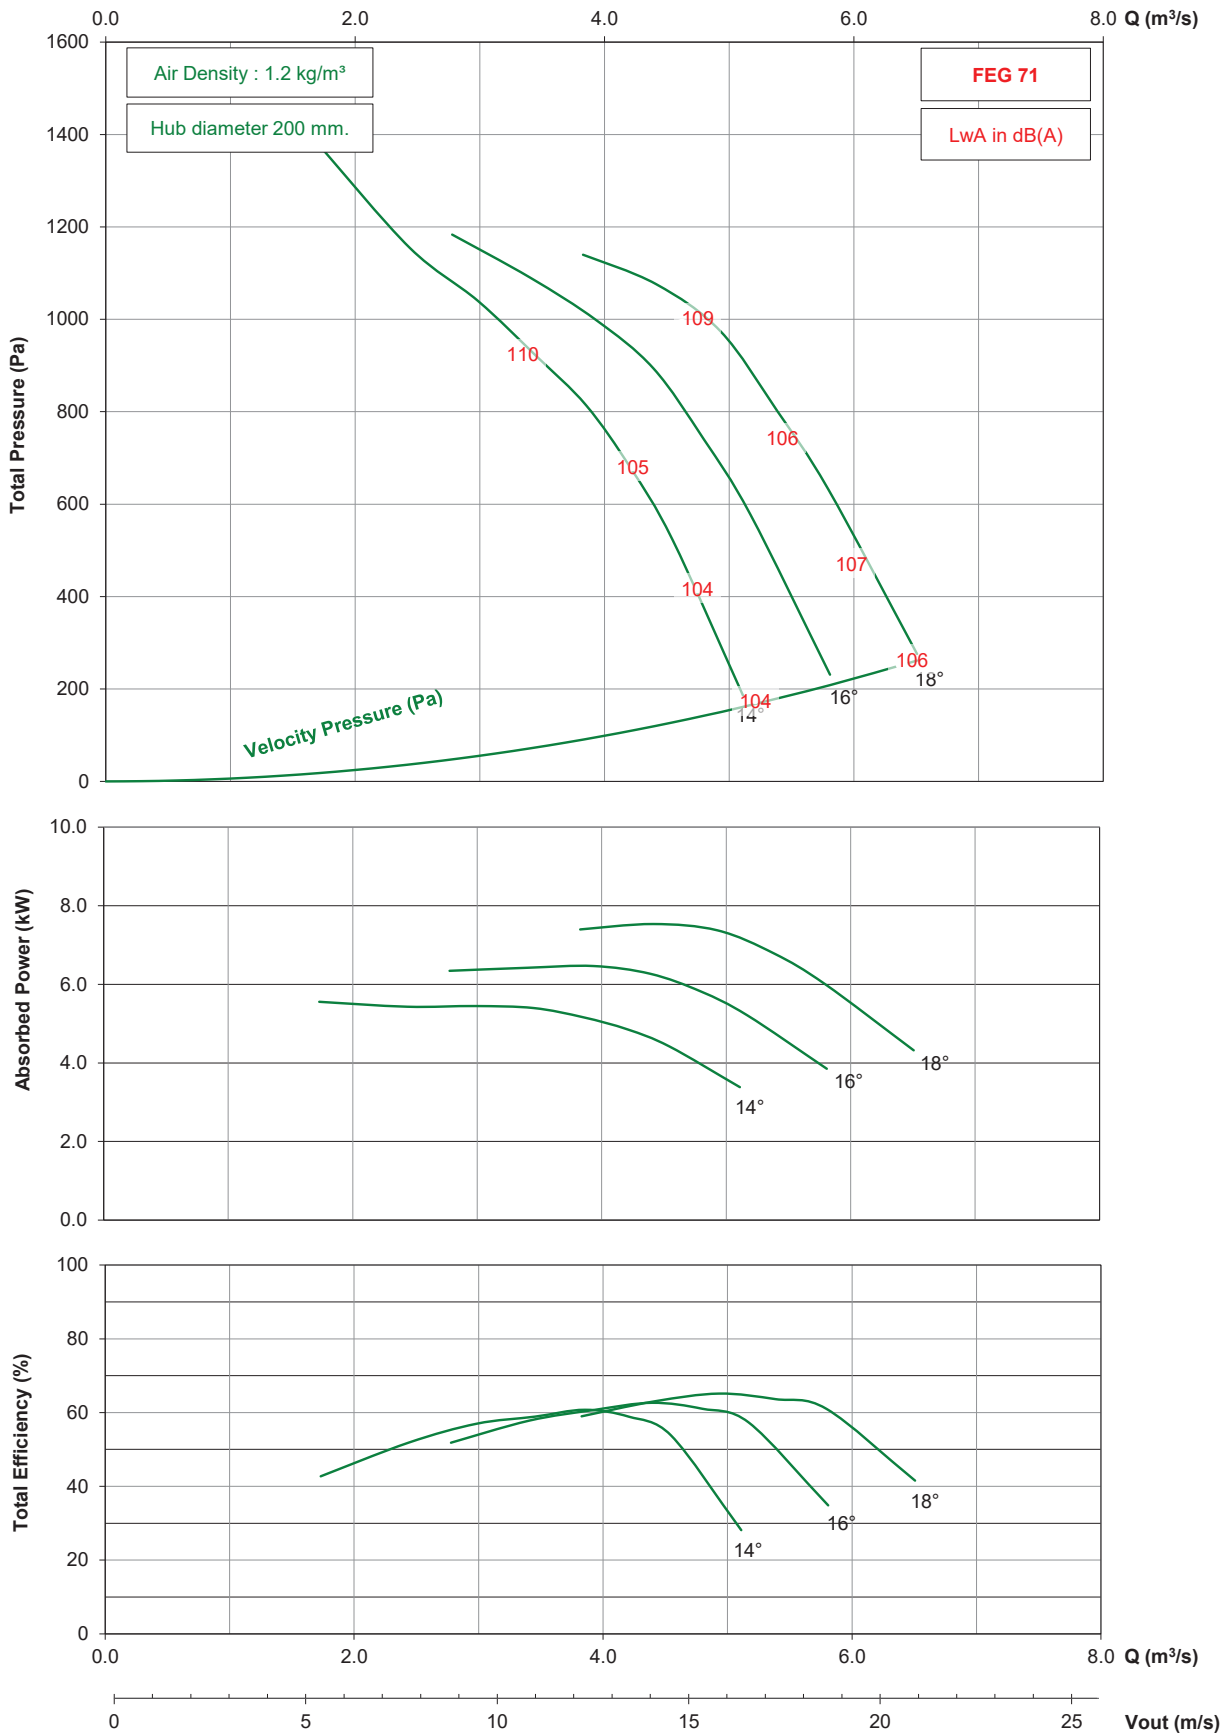


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA630 / 12AA / 9-9 (200)

1450 rpm - 50 Hz

KRUGER

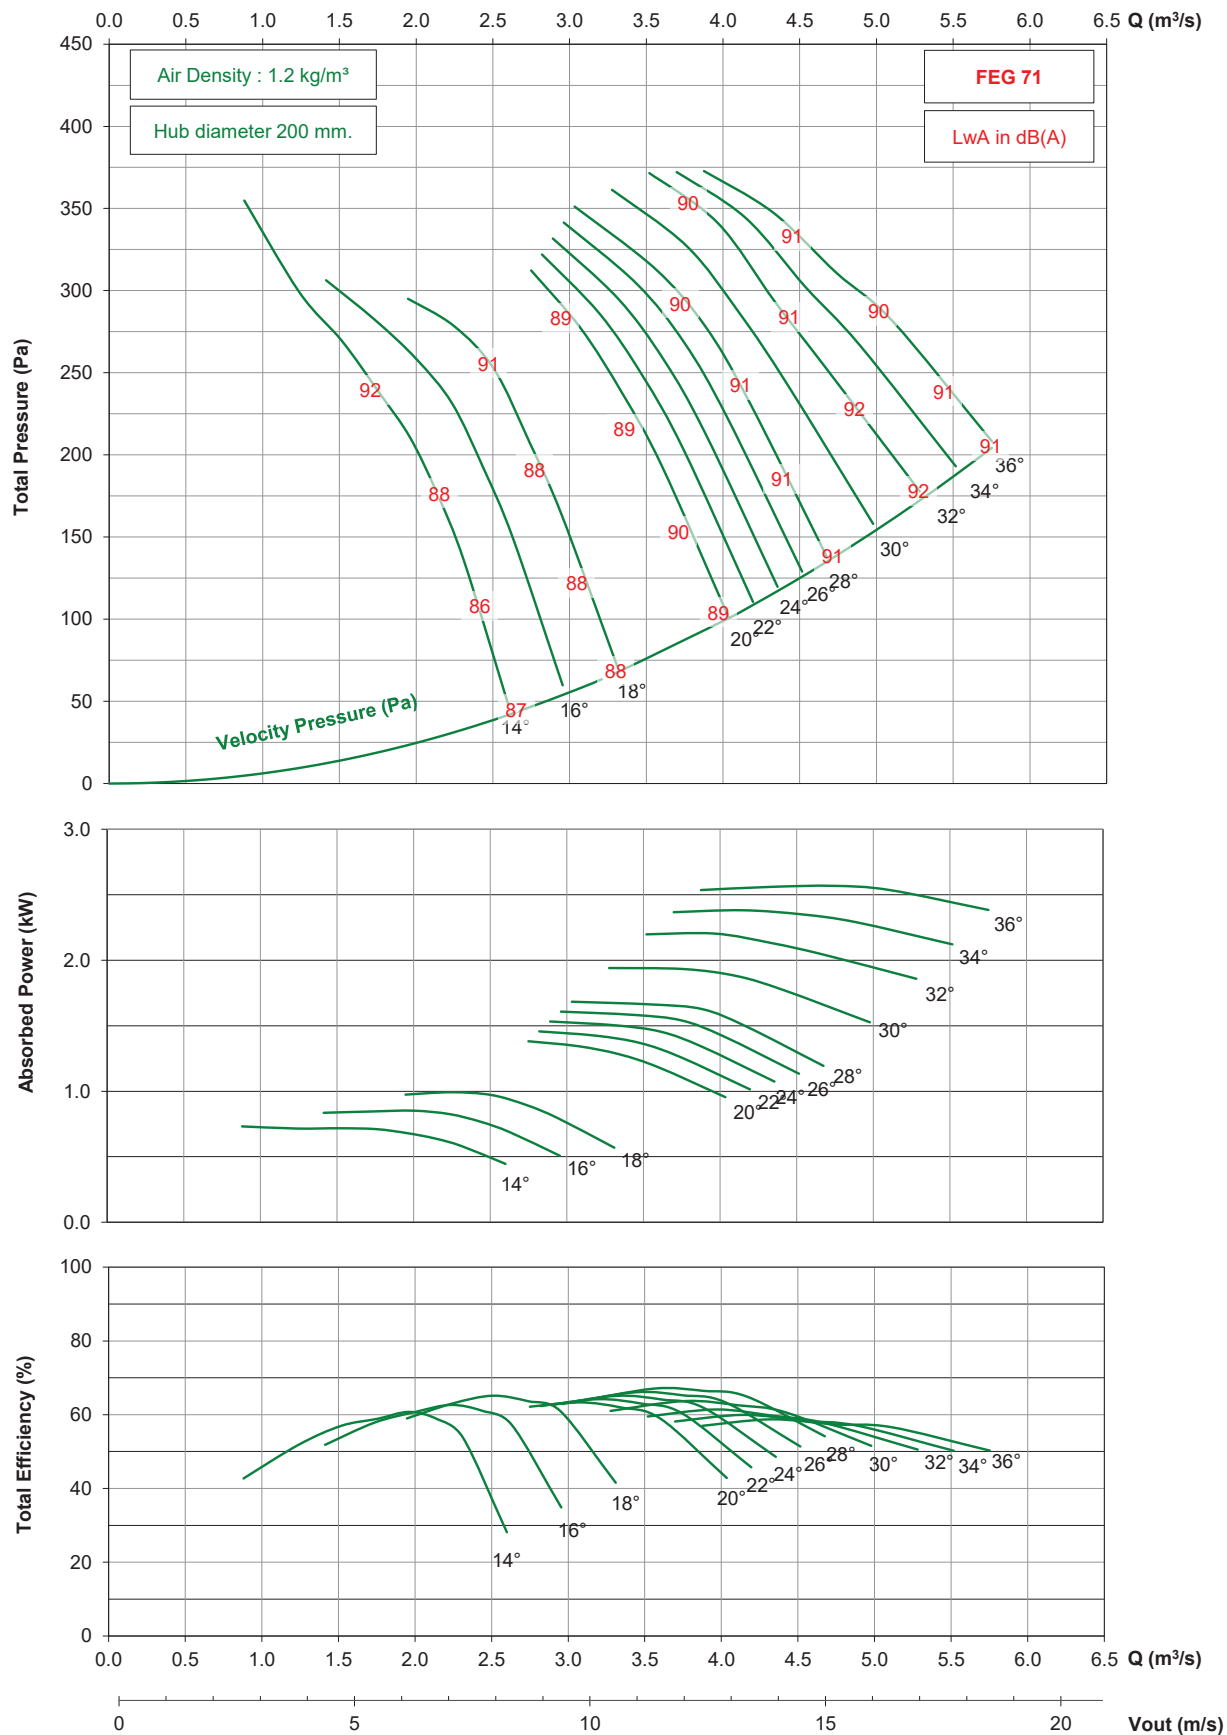


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
 - The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA630 / 12AA / 9-9 (200)

950 rpm - 50 Hz

KRUGER

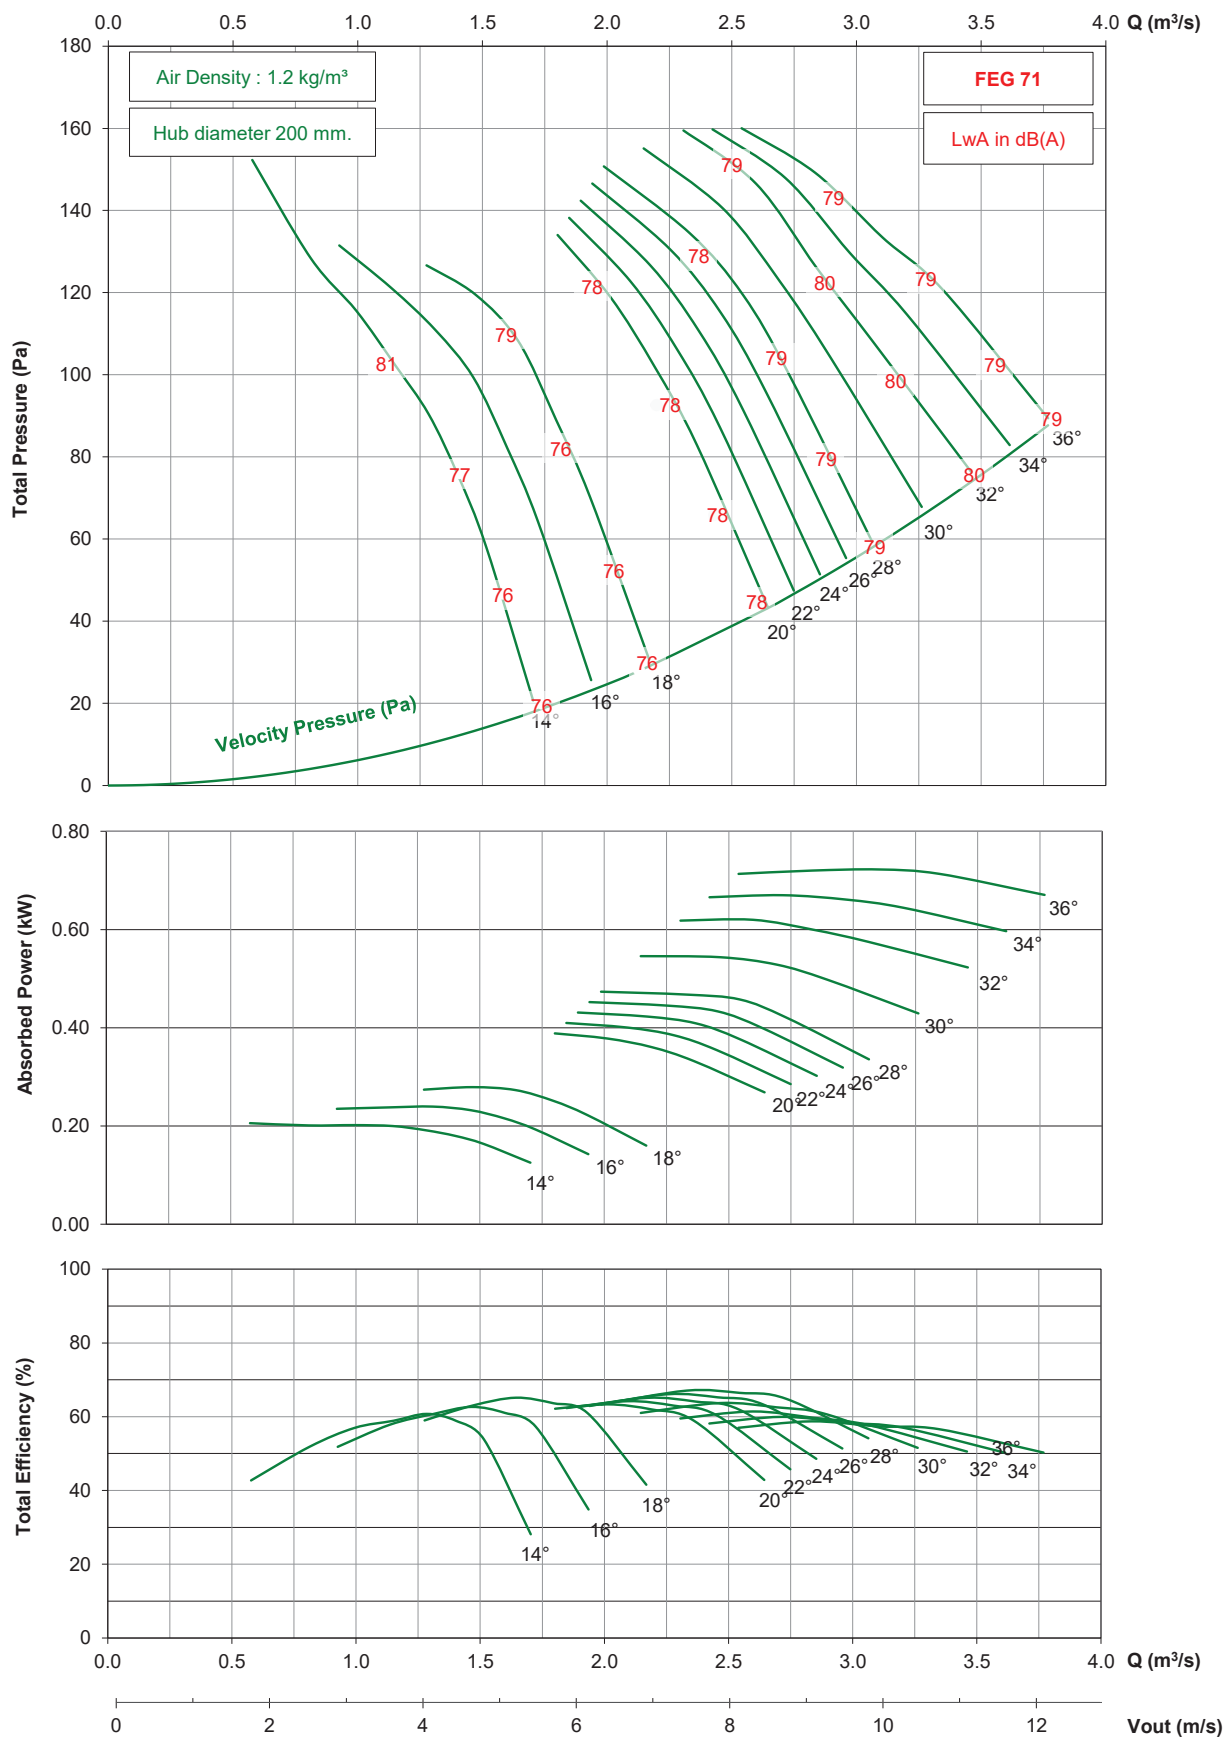


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA630 / 12AA / 9-9 (200)

725 rpm - 50 Hz

KRUGER

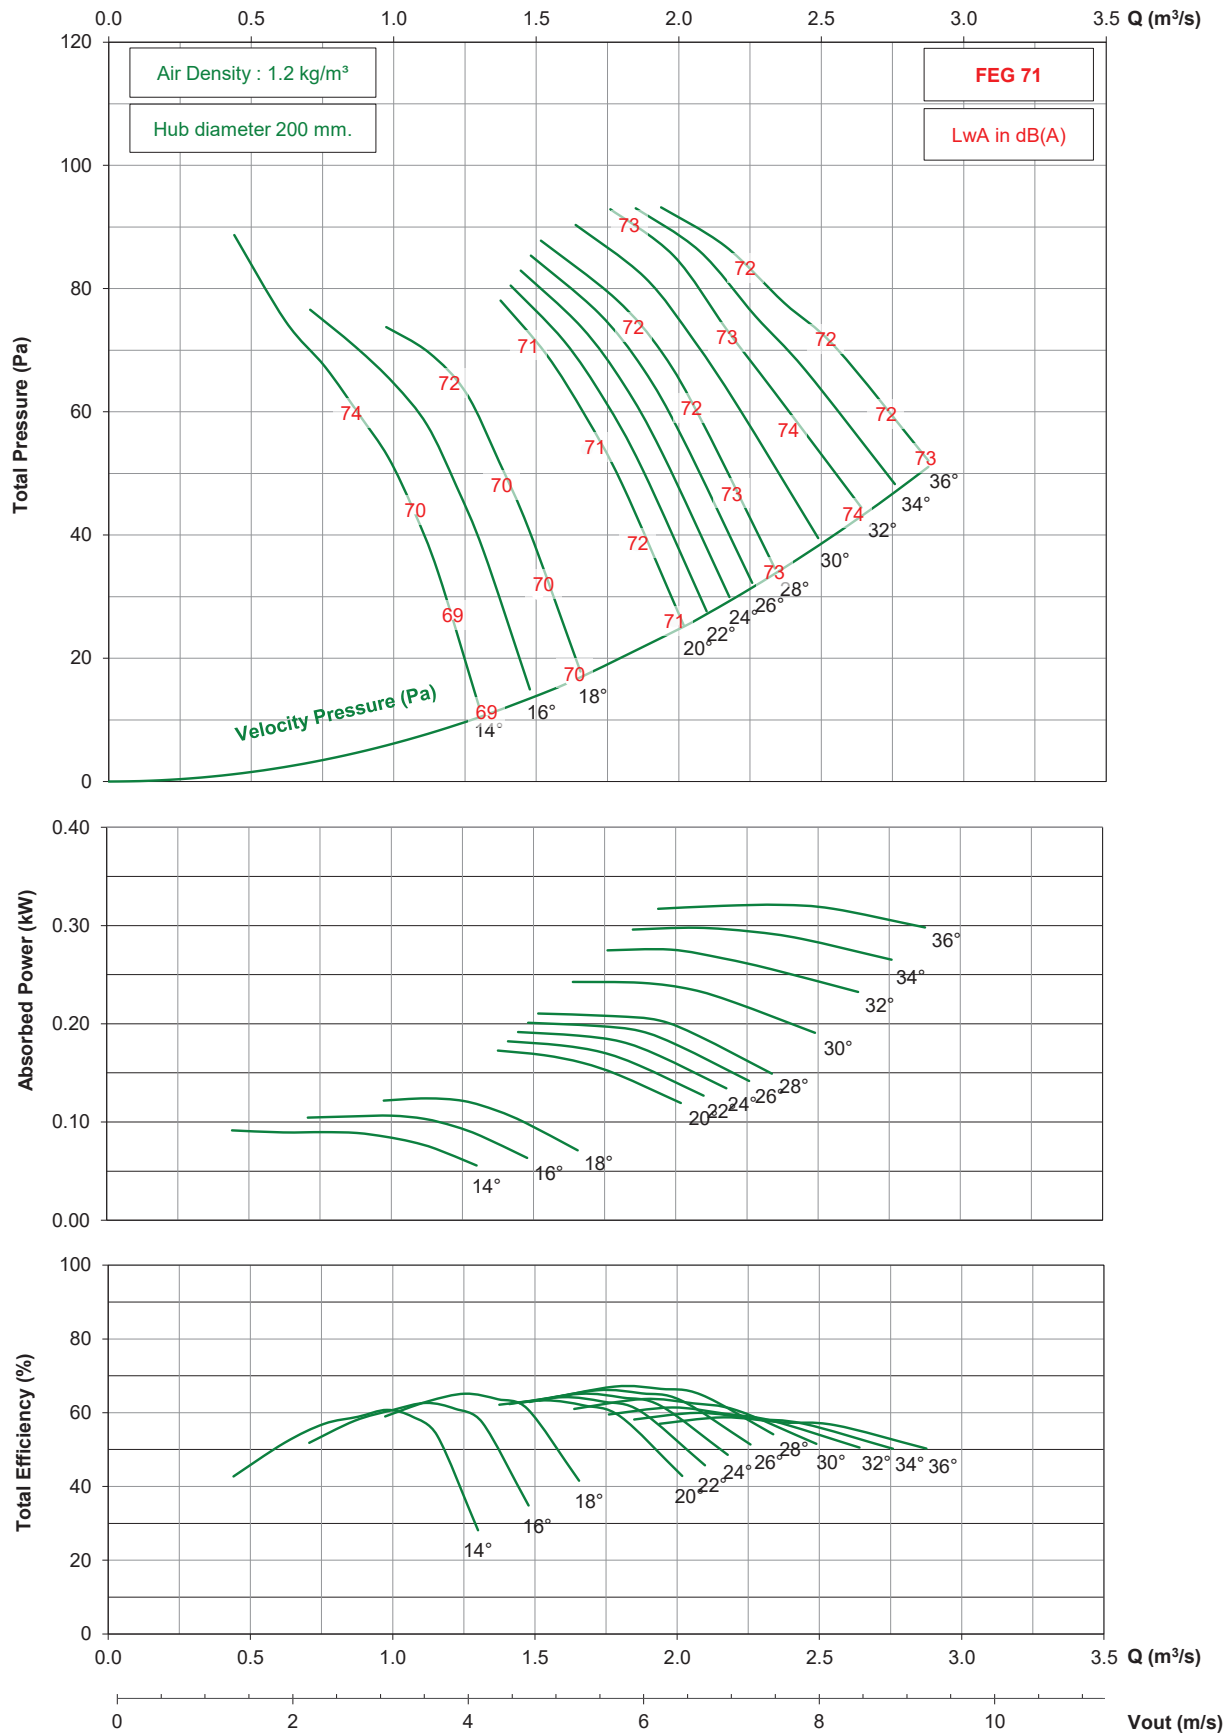


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA630 / 12AA / 9-9 (200)

1750 rpm - 60 Hz

KRUGER

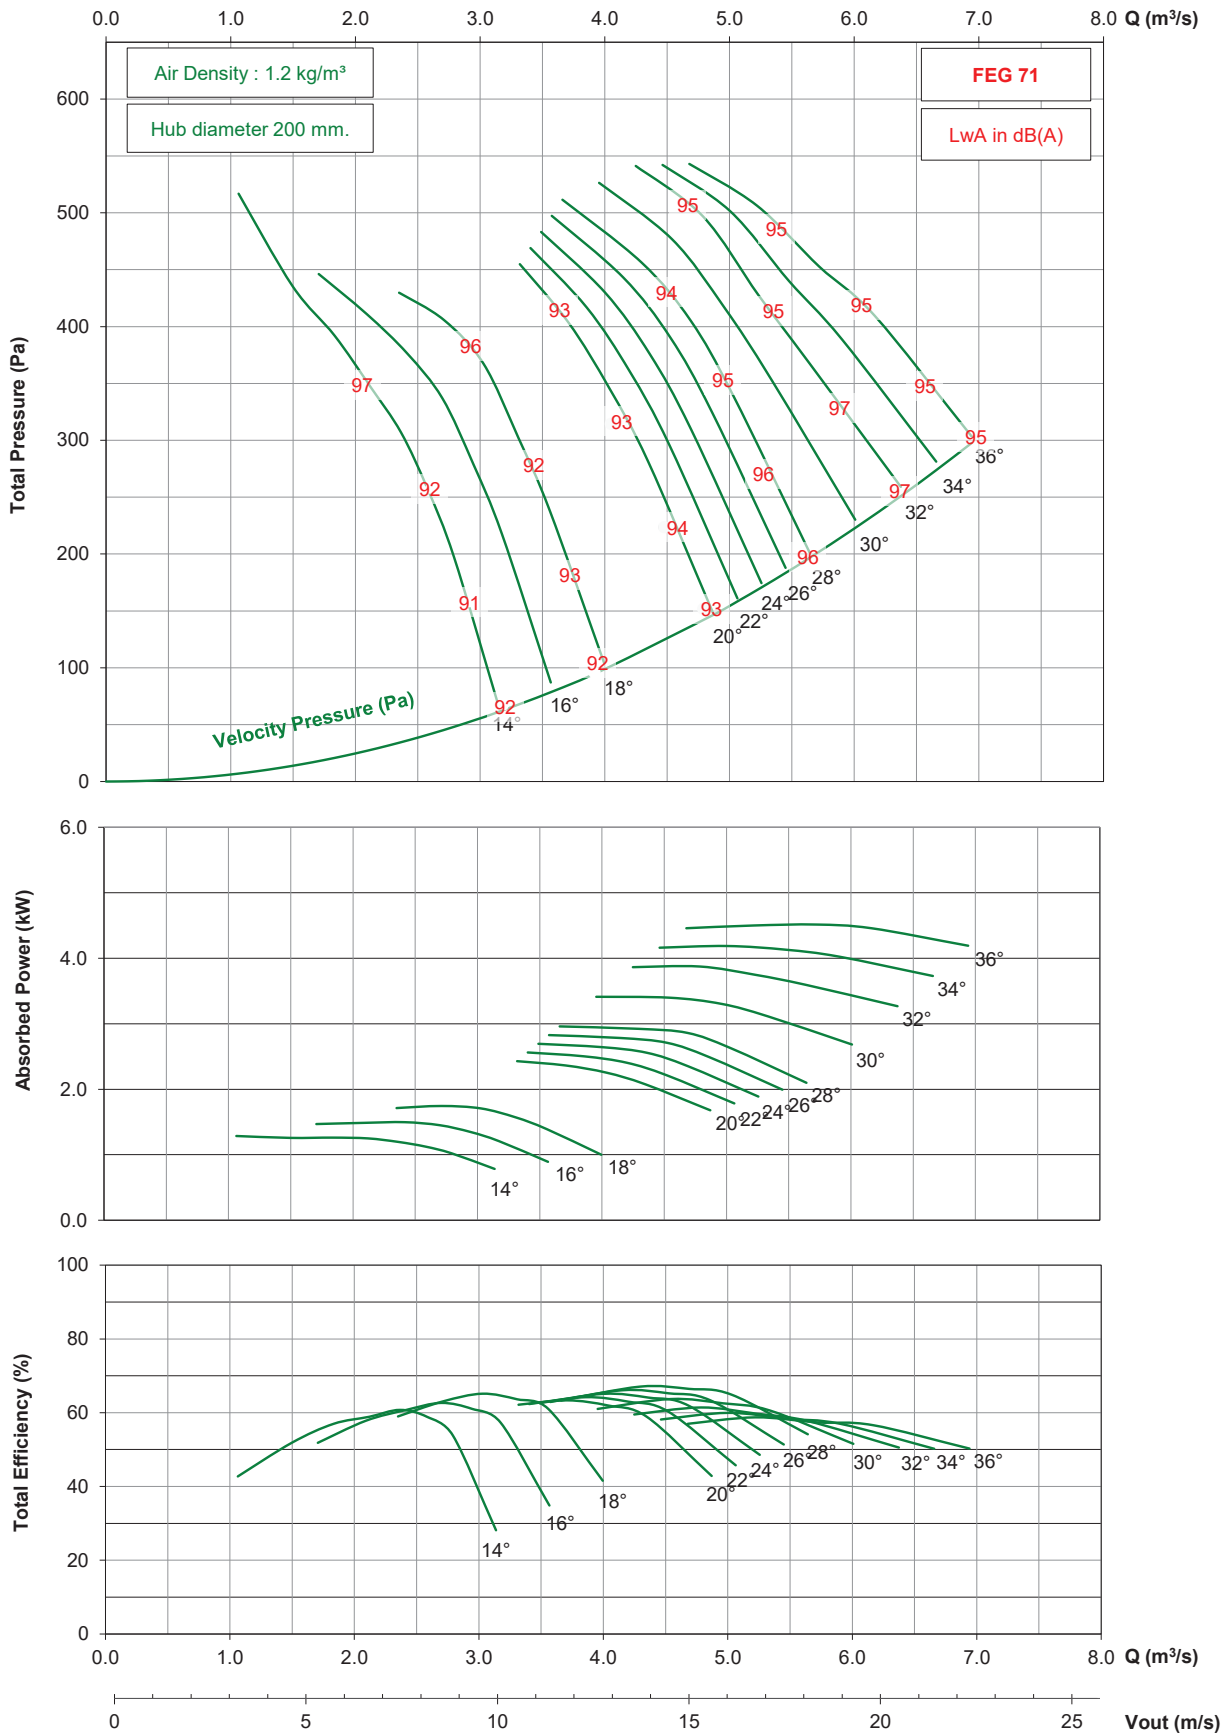


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA630 / 12AA / 9-9 (200)

1150 rpm - 60 Hz

KRUGER

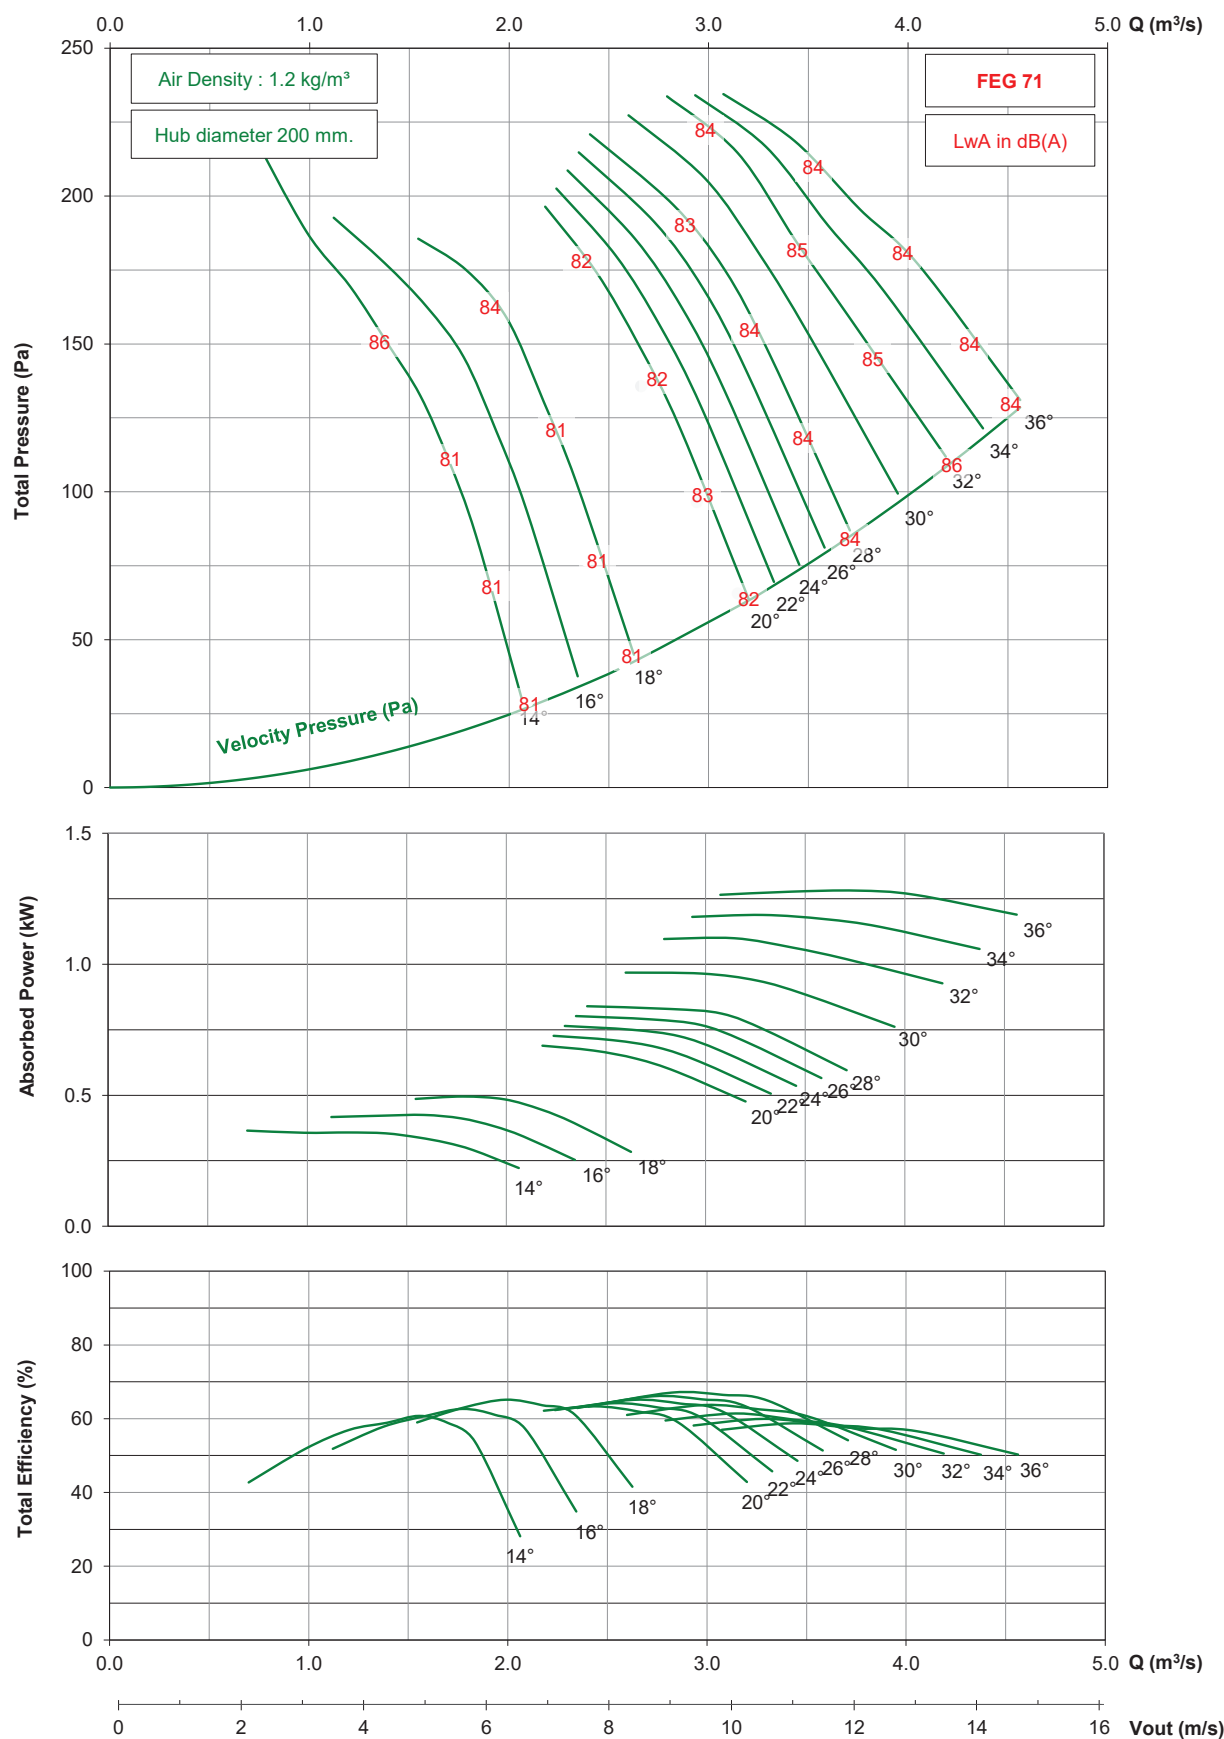


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA630 / 12AA / 9-9 (200)

875 rpm - 60 Hz

KRUGER

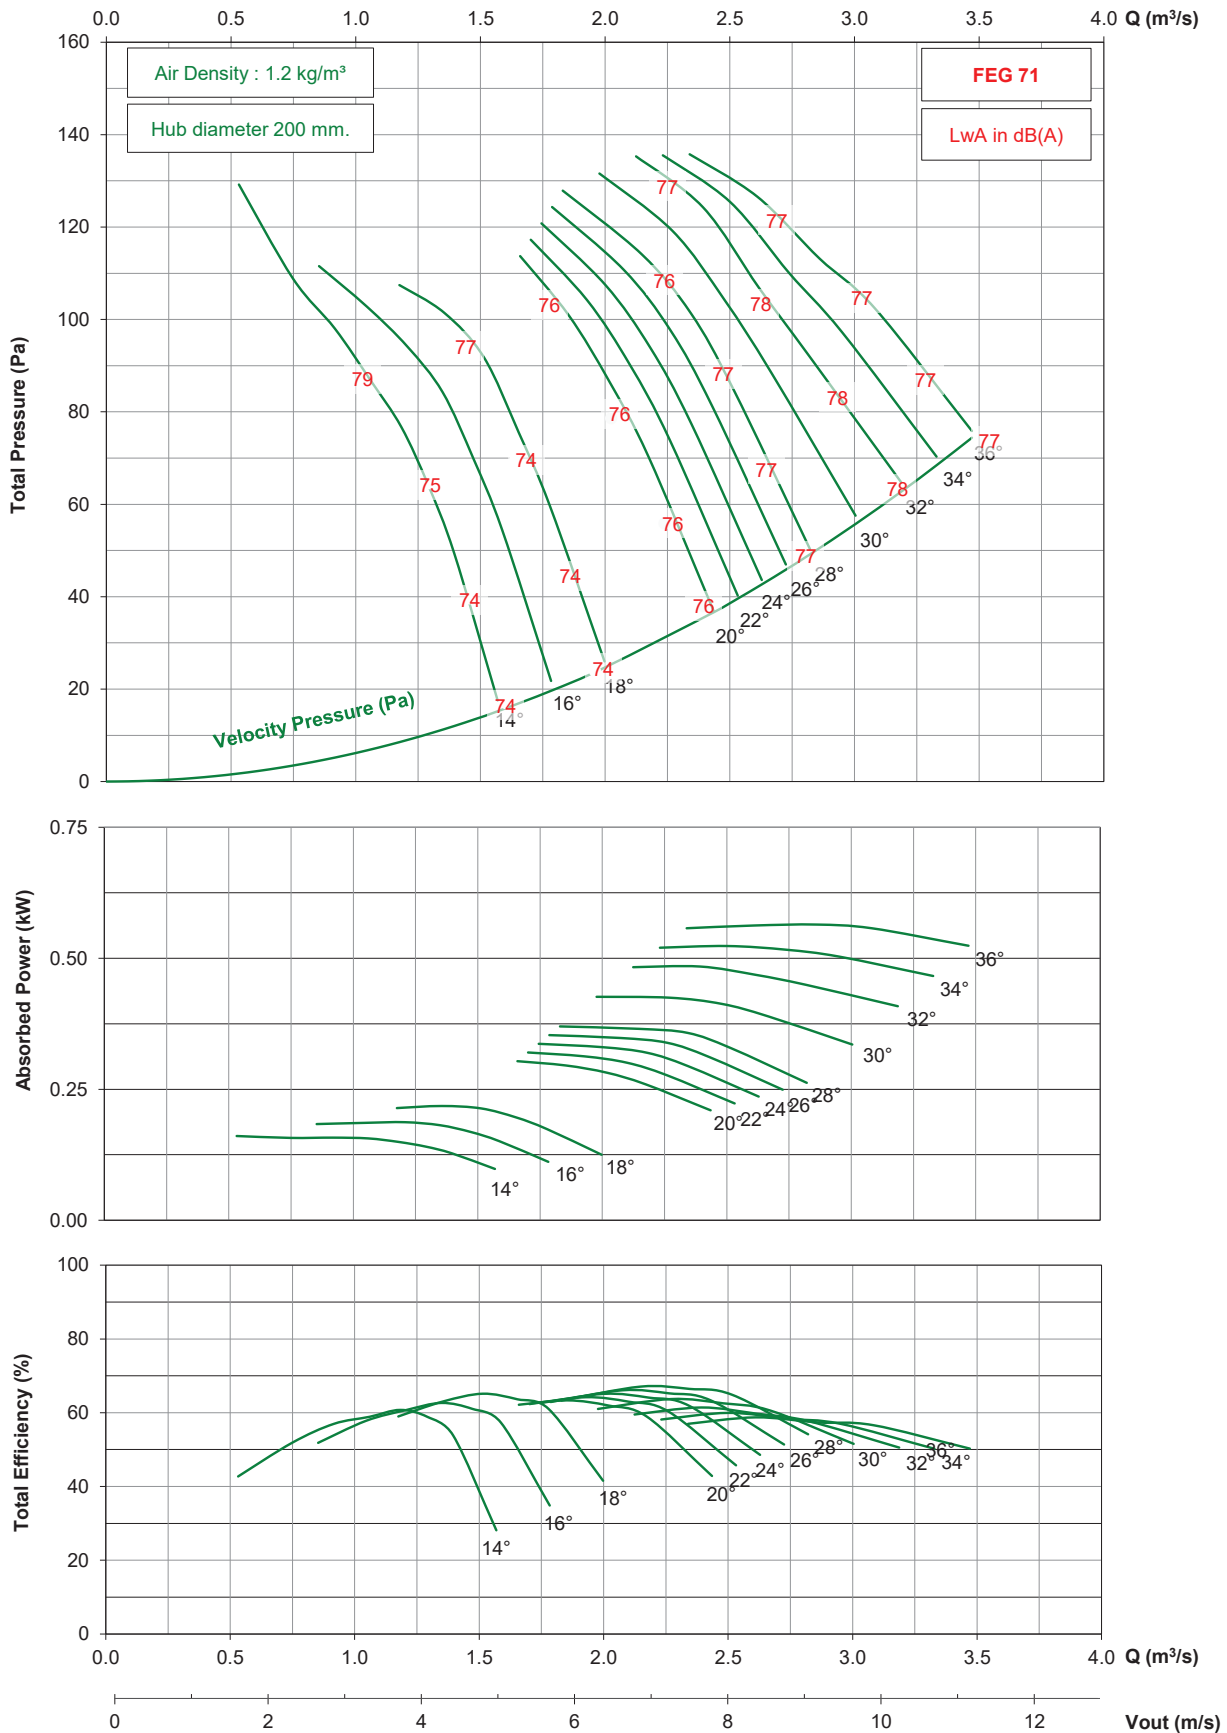


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA710 / 12AA / 12-12 (280)

2850 rpm - 50 Hz

KRUGER

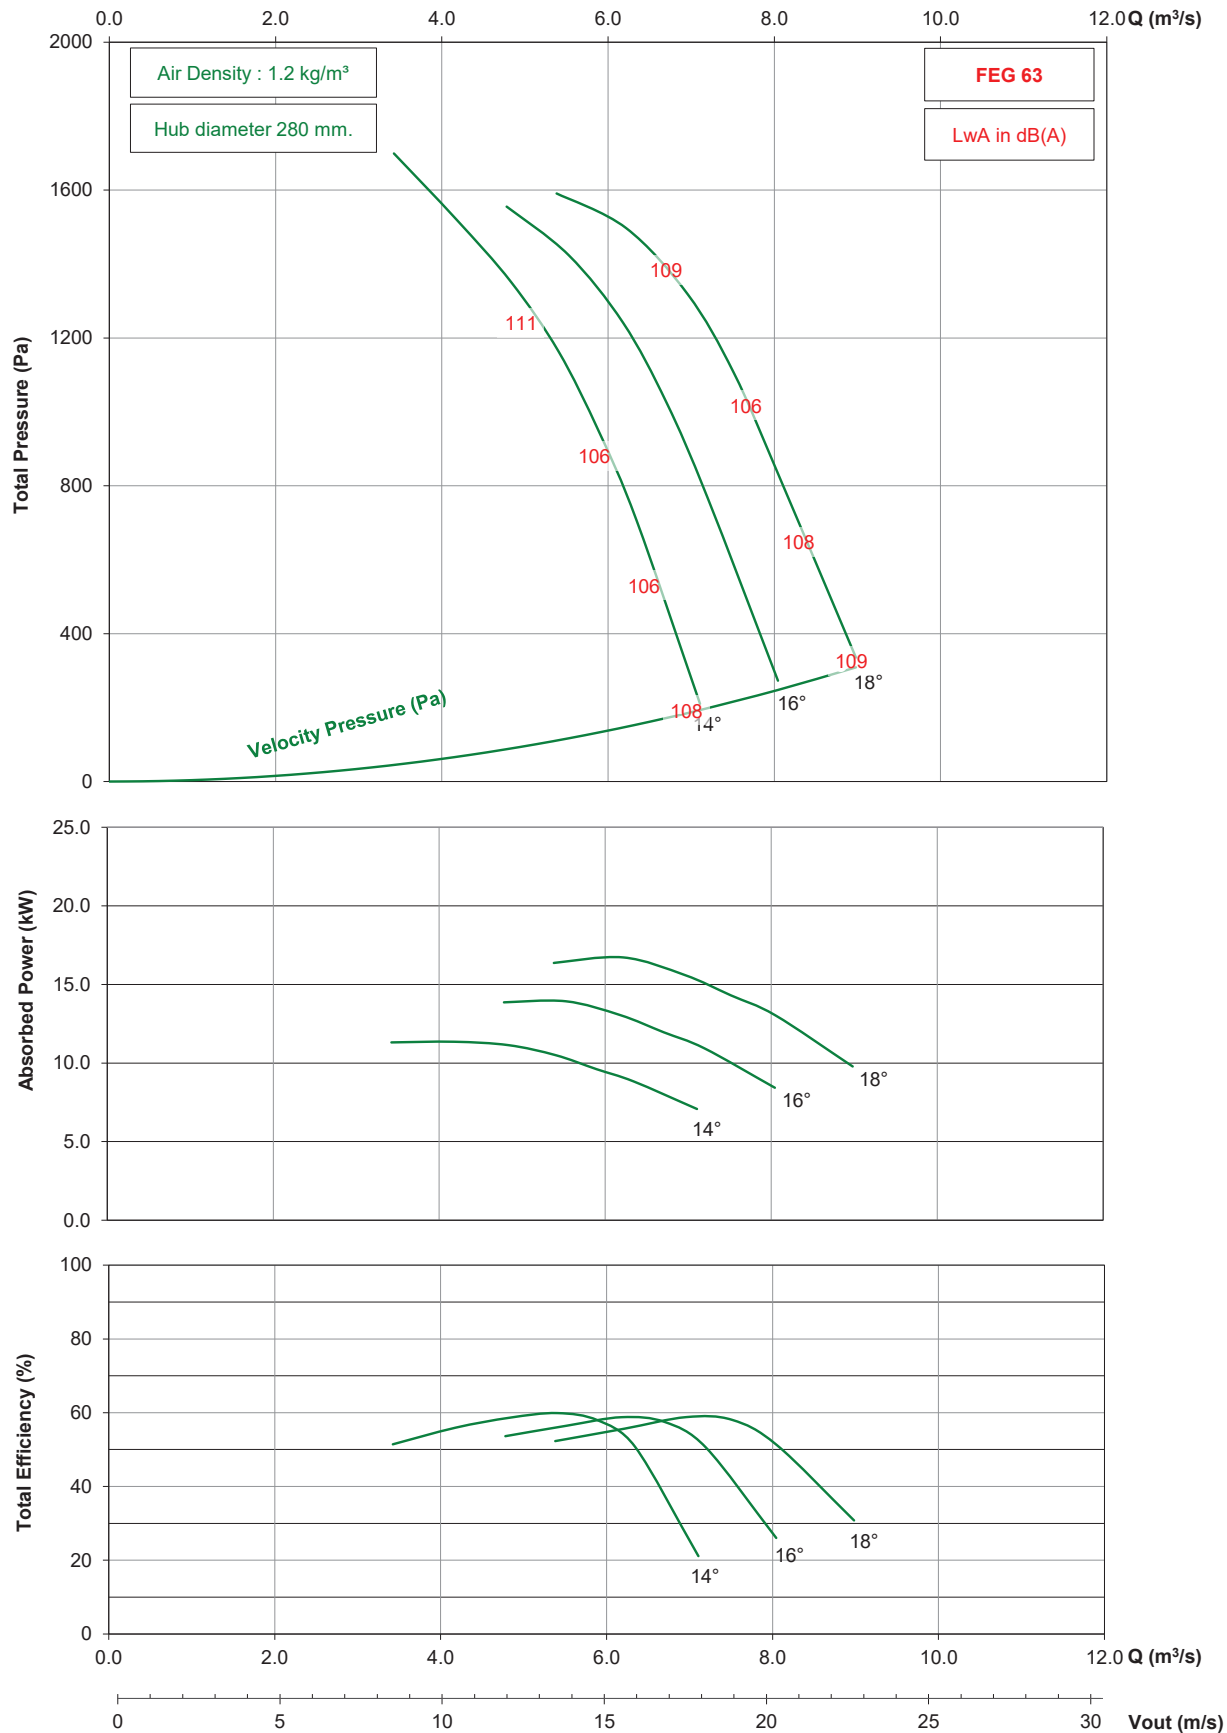


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lwi(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA710 / 12AA / 12-12 (280)

1450 rpm - 50 Hz

KRUGER

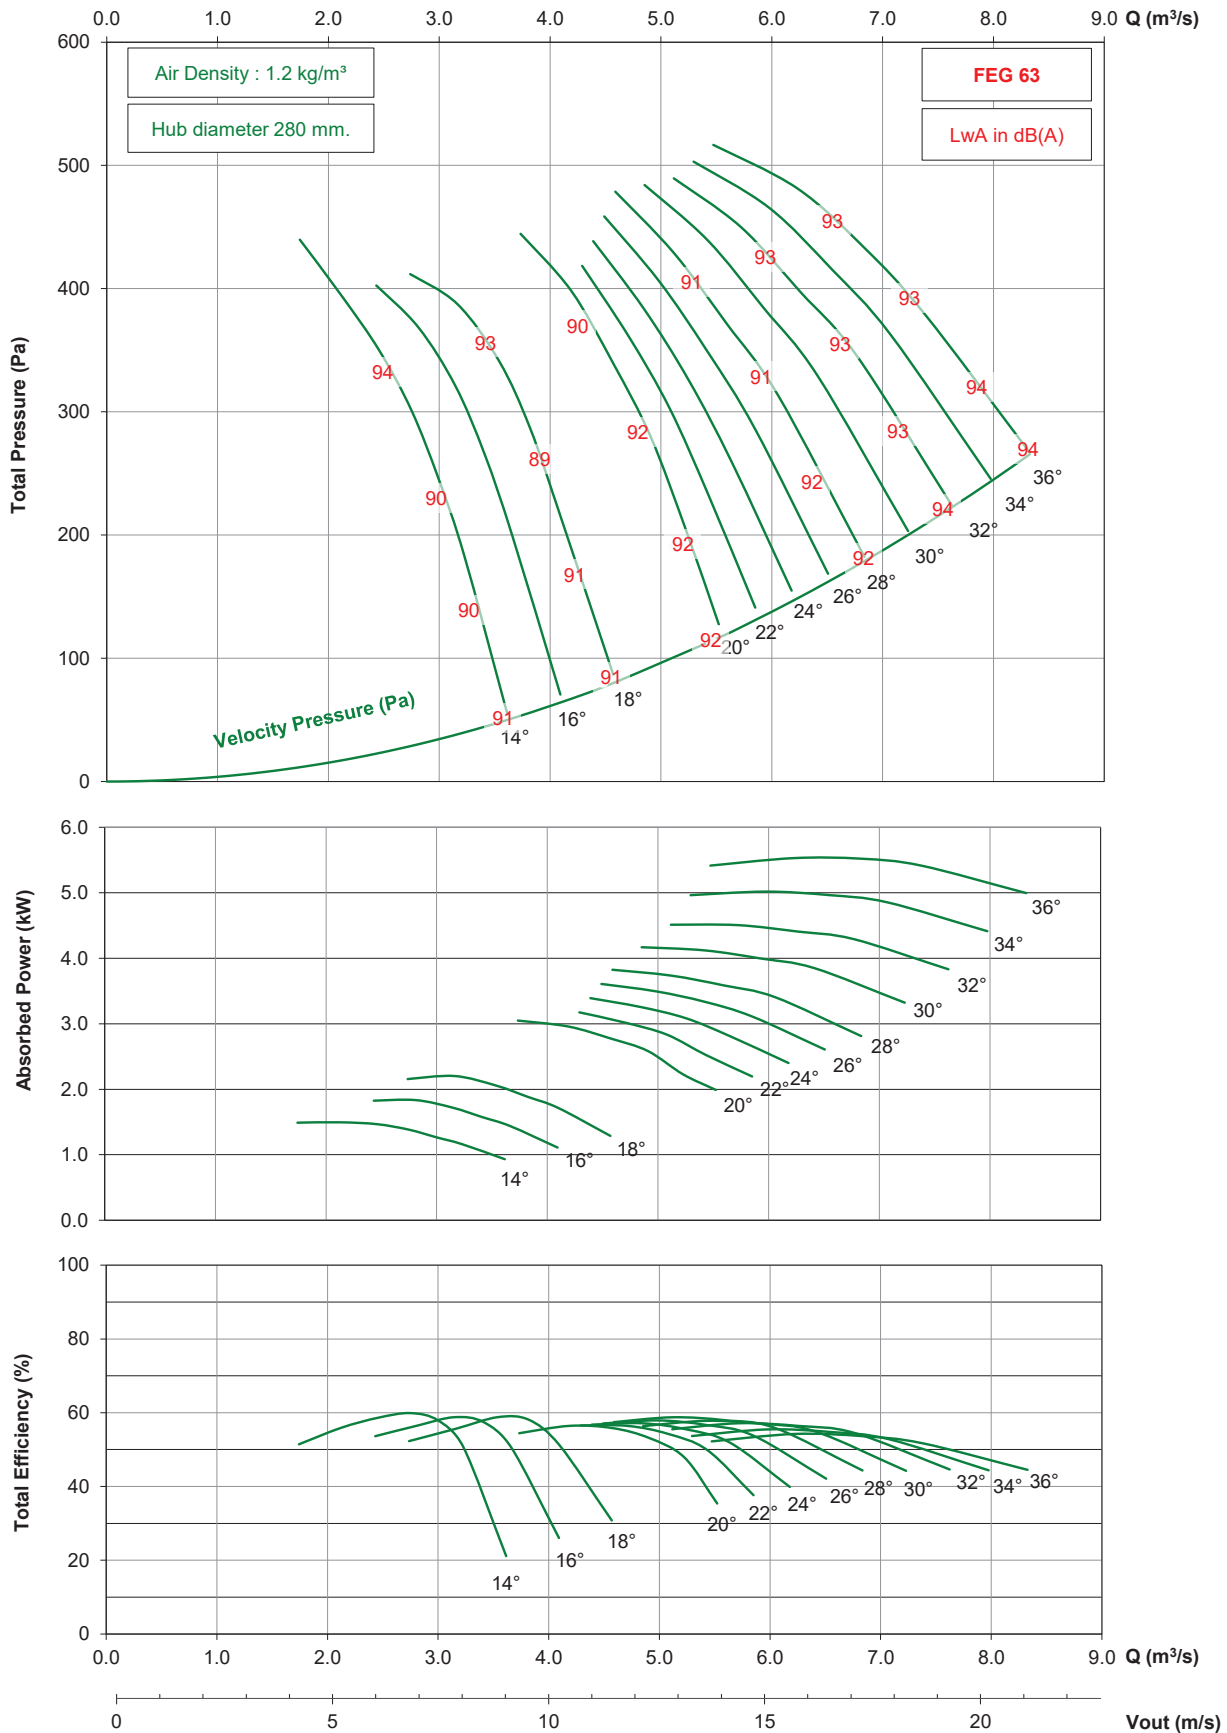


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA710 / 12AA / 12-12 (280)

950 rpm - 50 Hz

KRUGER

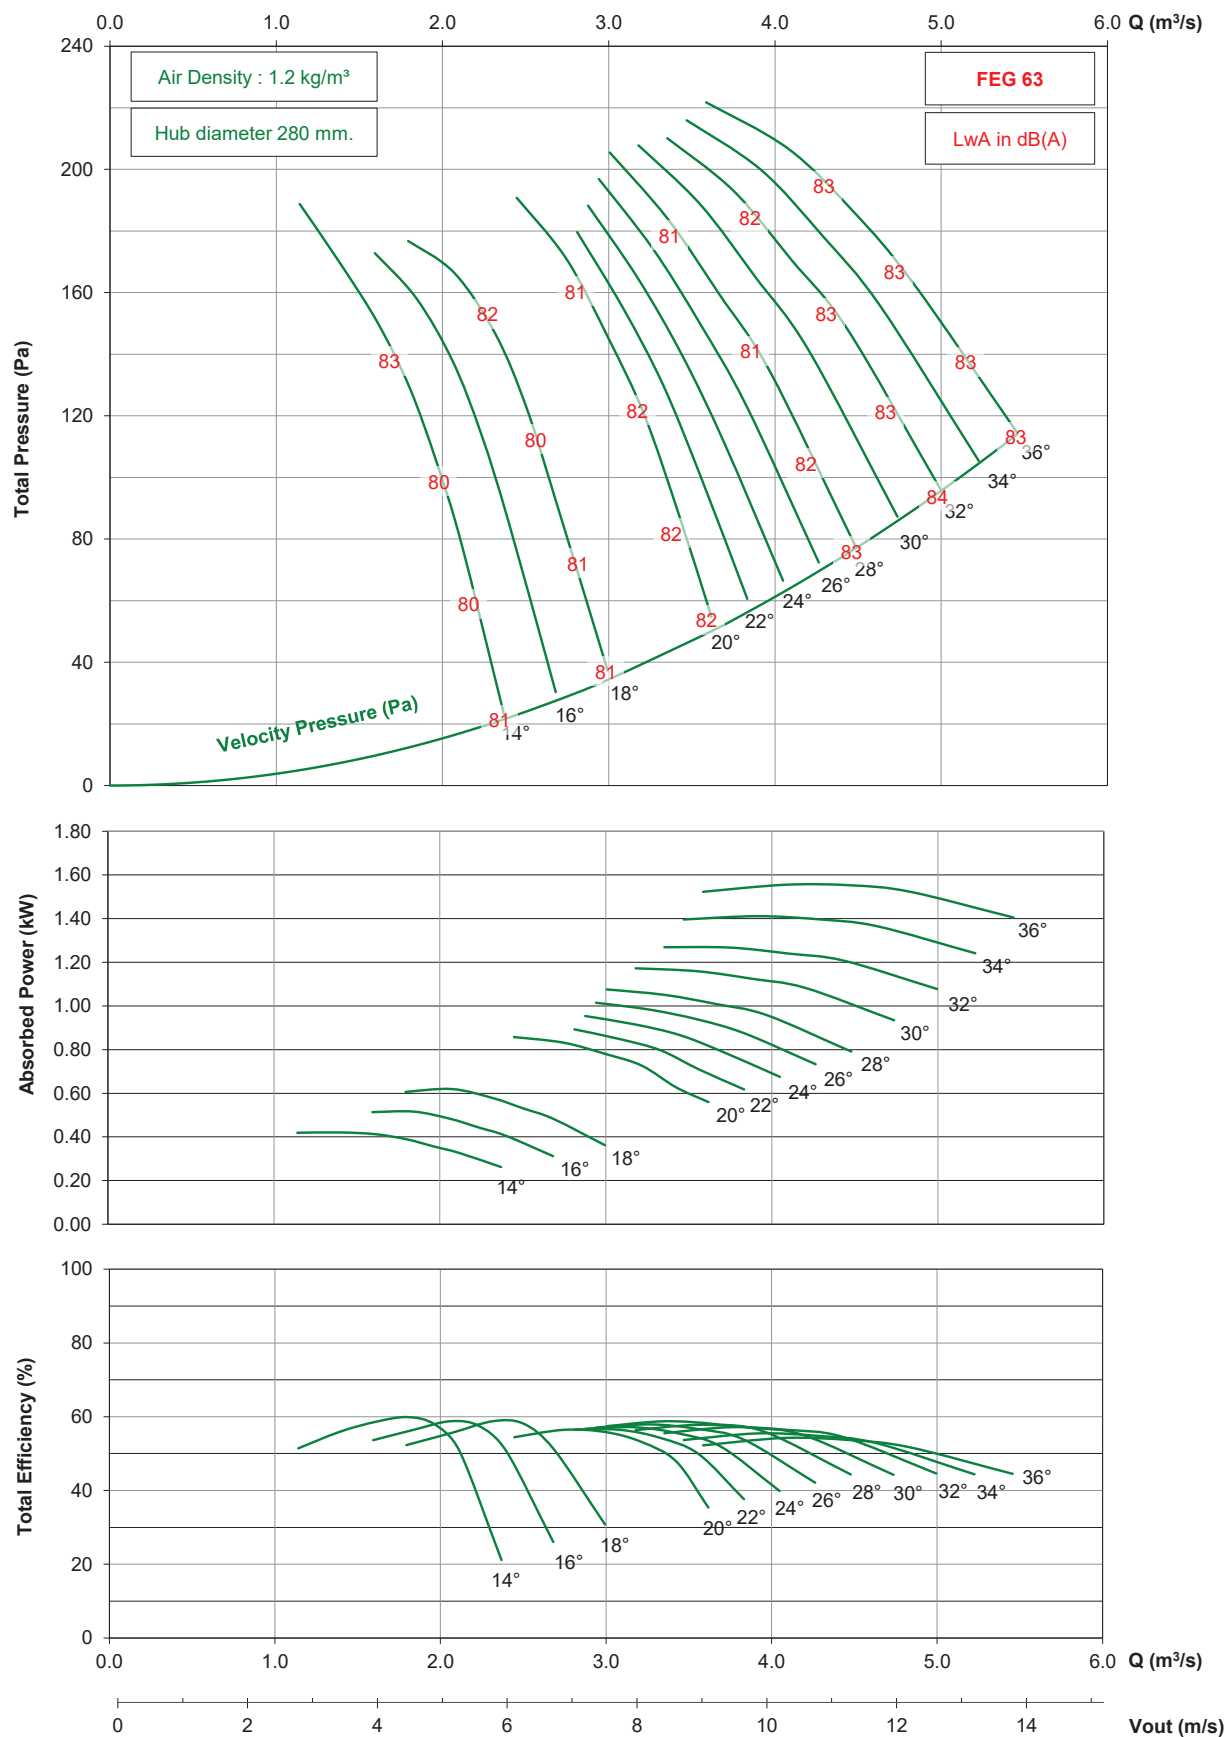


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
 - The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA710 / 12AA / 12-12 (280)

725 rpm - 50 Hz

KRUGER

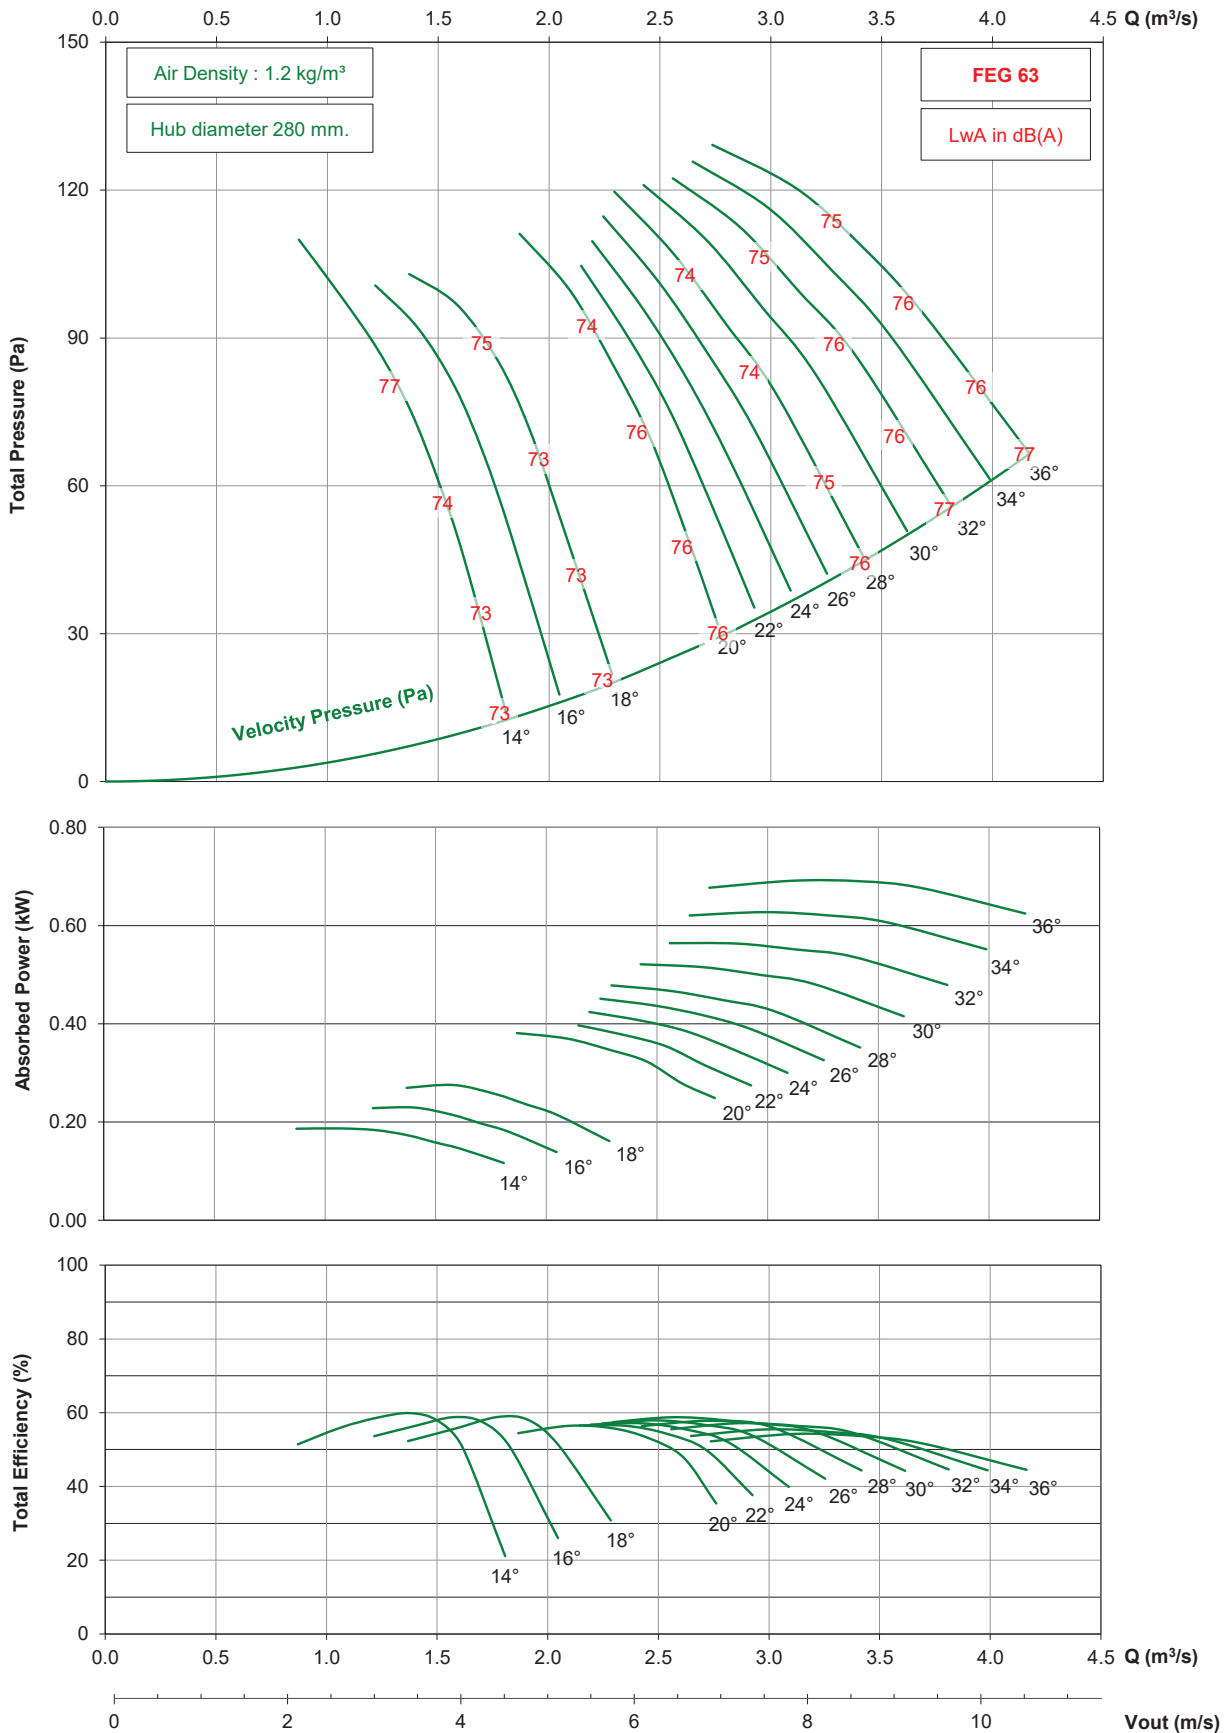


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA710 / 12AA / 12-12 (280)

1750 rpm - 60 Hz

KRUGER

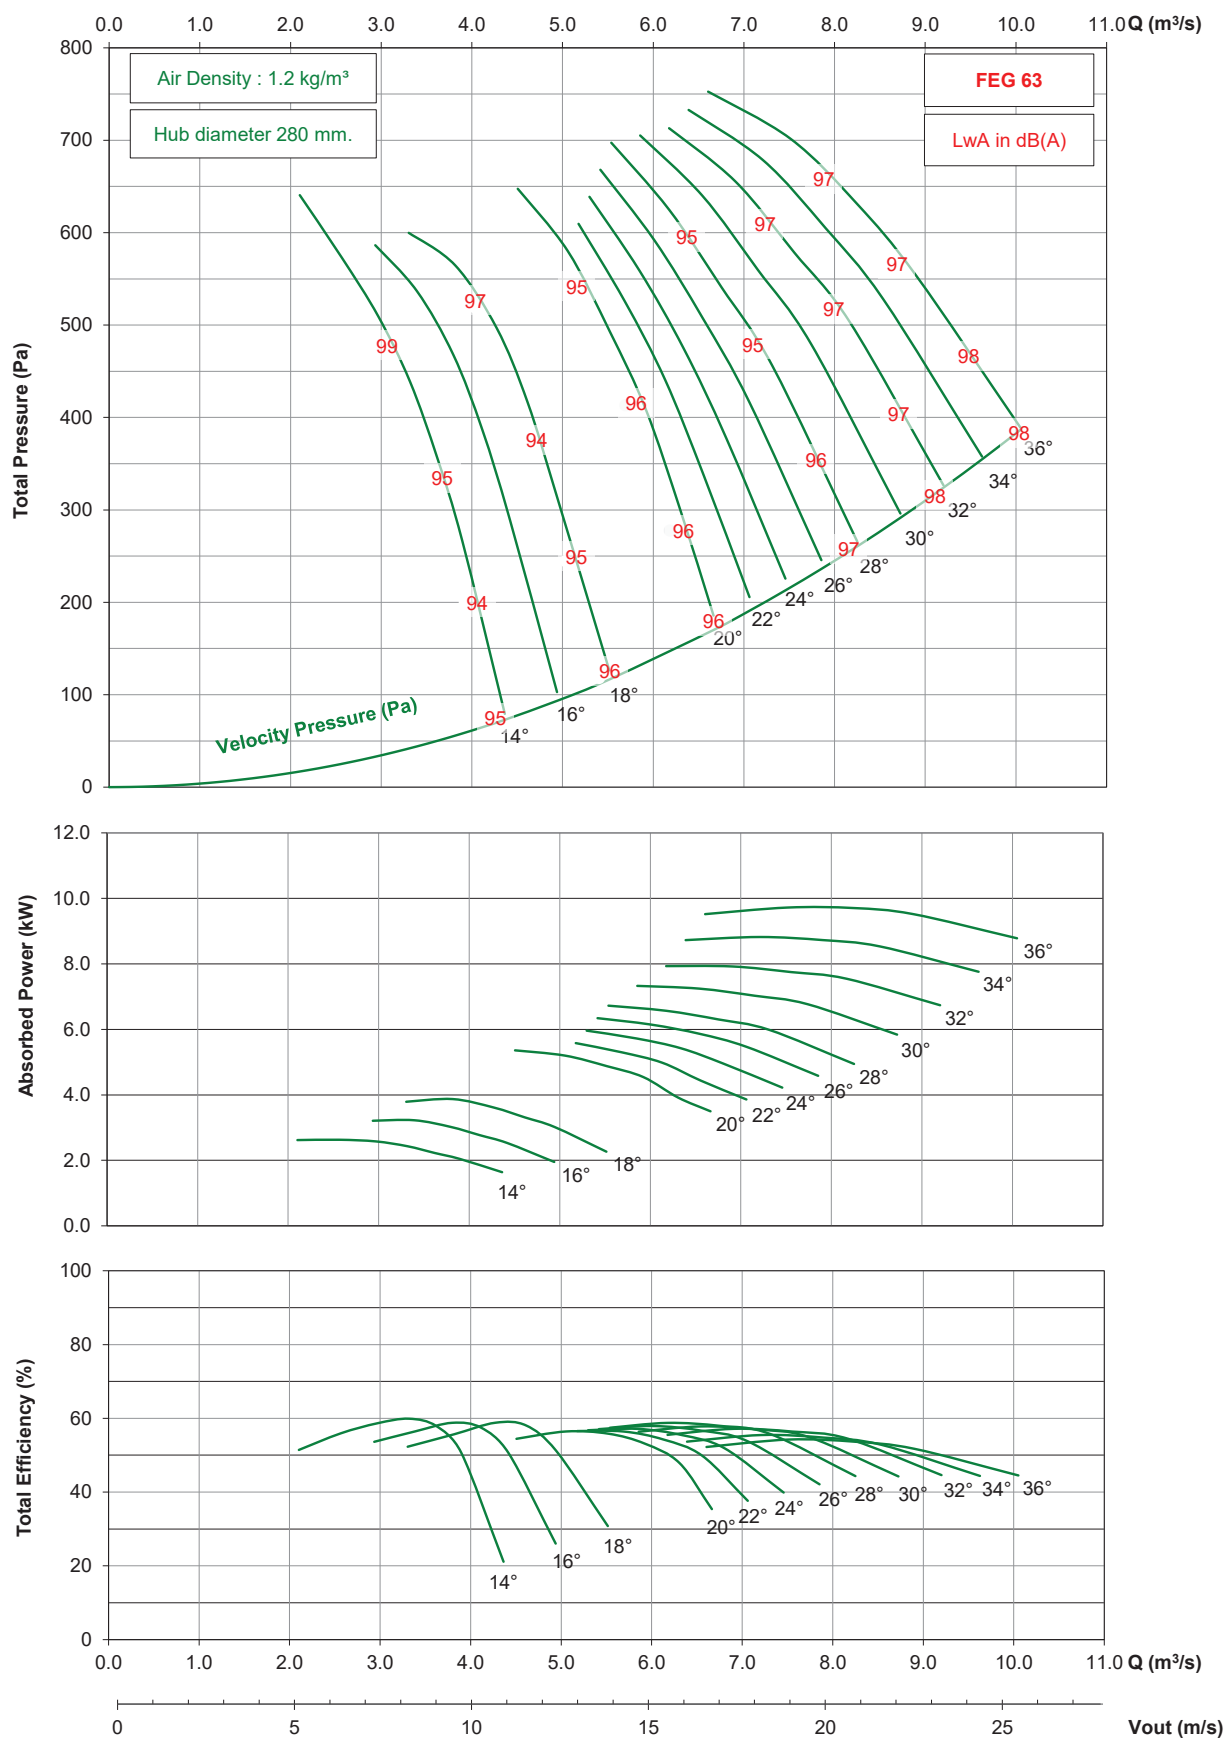


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
 - The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA710 / 12AA / 12-12 (280)

1150 rpm - 60 Hz

KRUGER

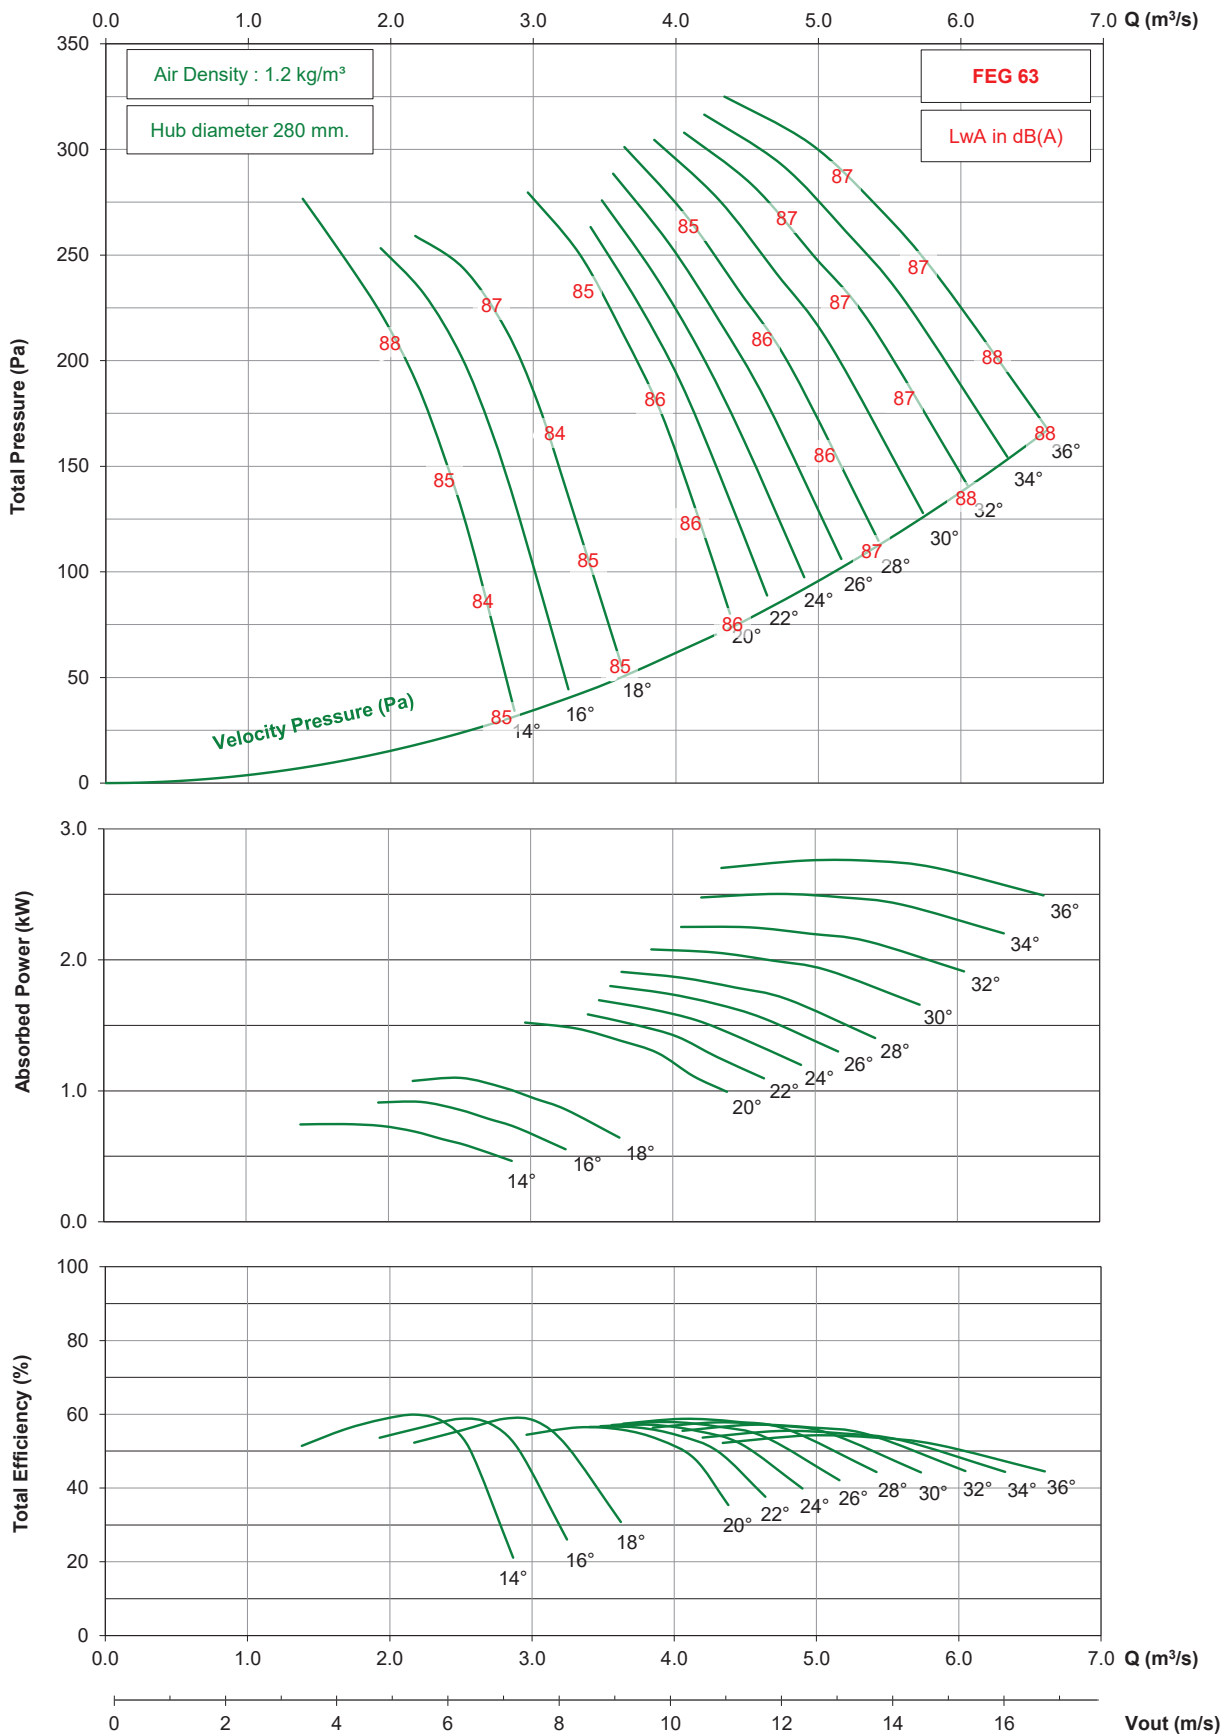


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA710 / 12AA / 12-12 (280)

875 rpm - 60 Hz

KRUGER

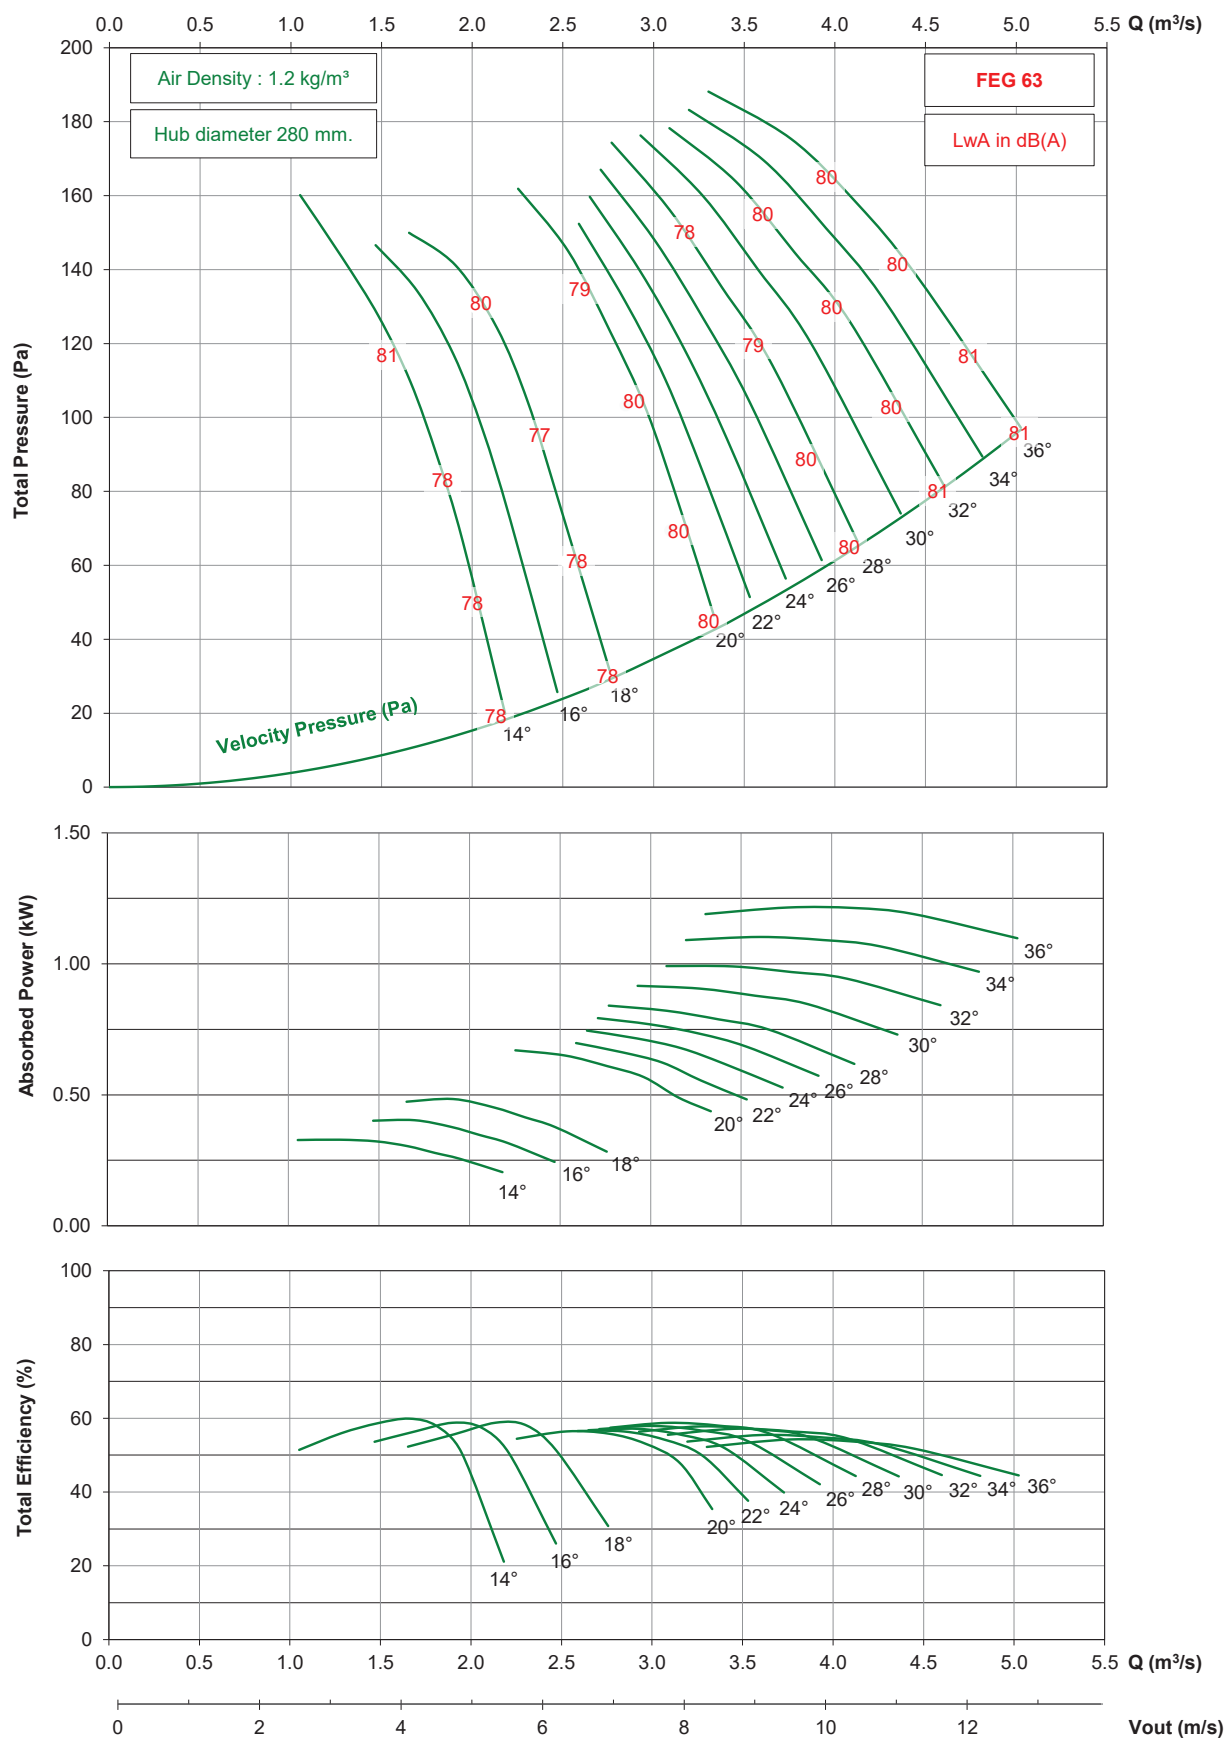


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA800 / 12AA / 12-12 (280)

1450 rpm - 50 Hz

KRUGER

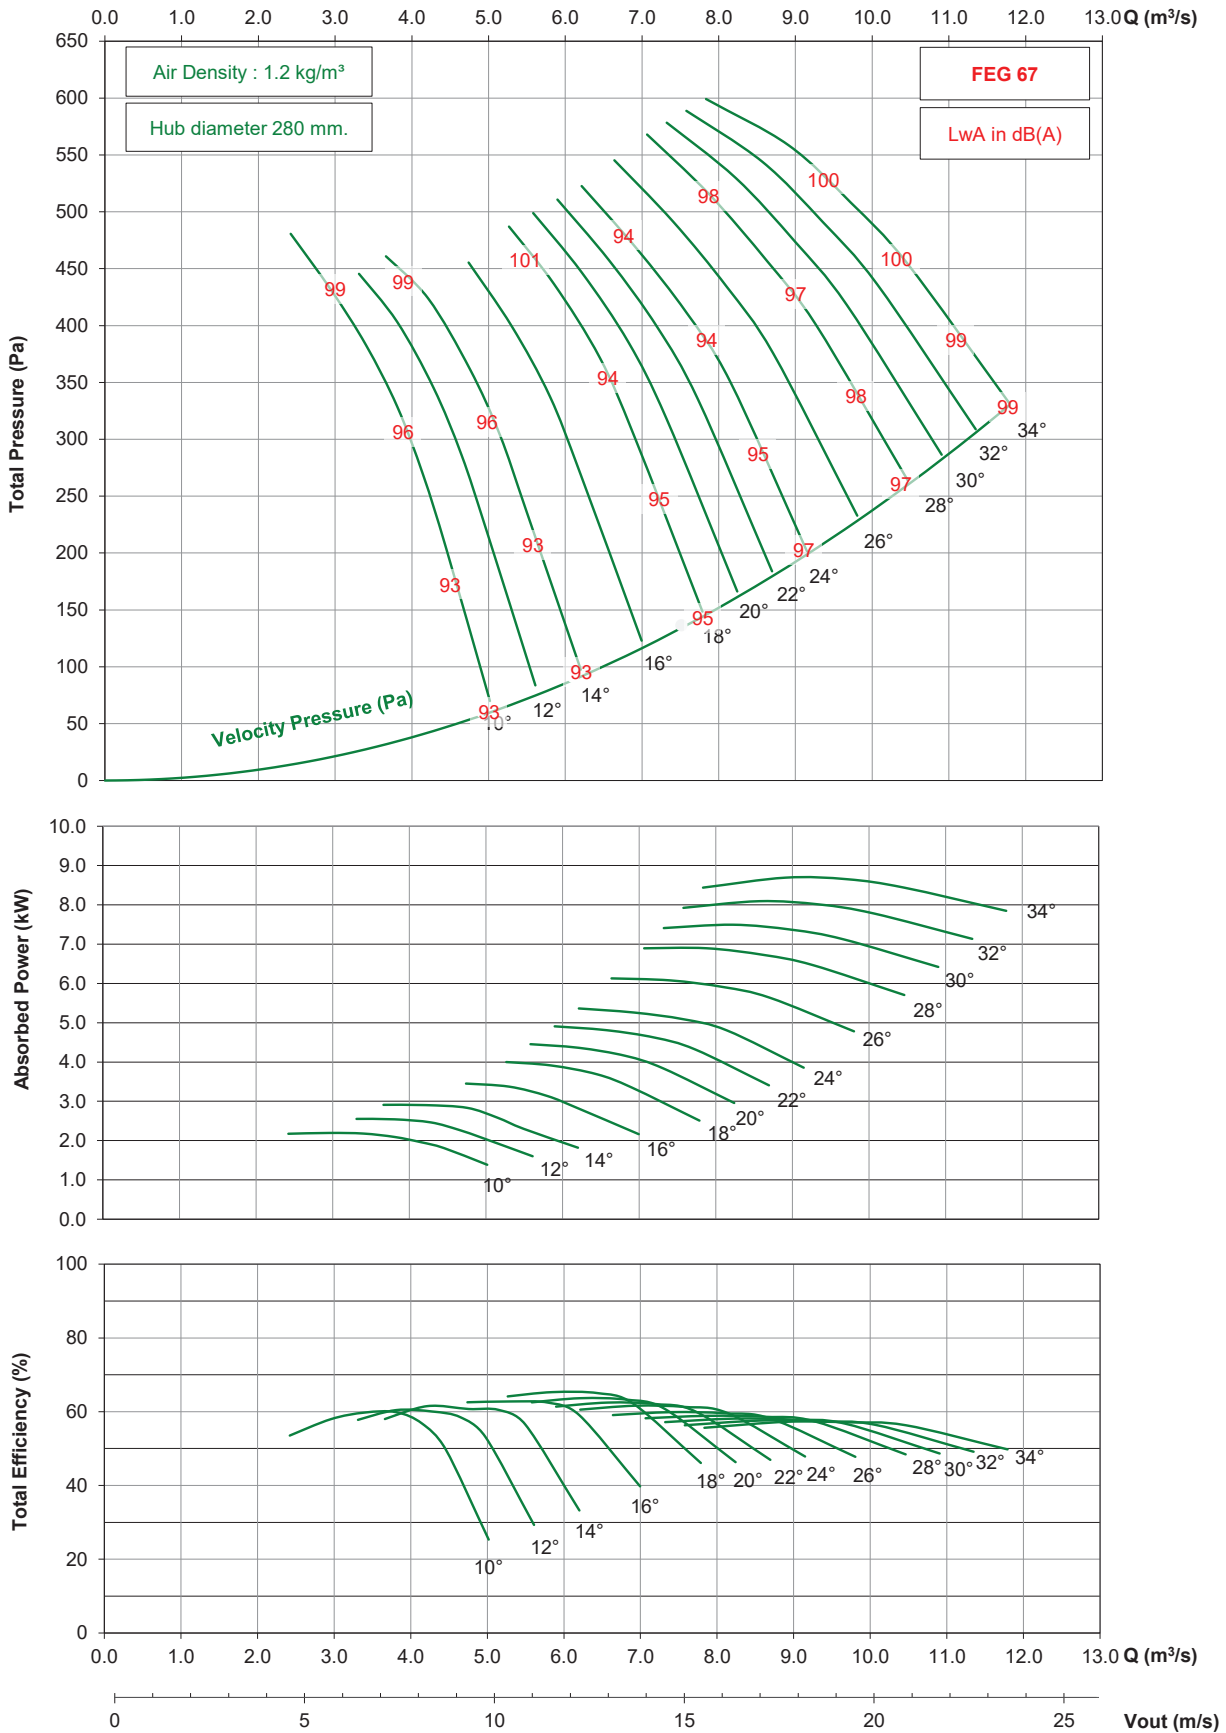


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA800 / 12AA / 12-12 (280)

950 rpm - 50 Hz

KRUGER

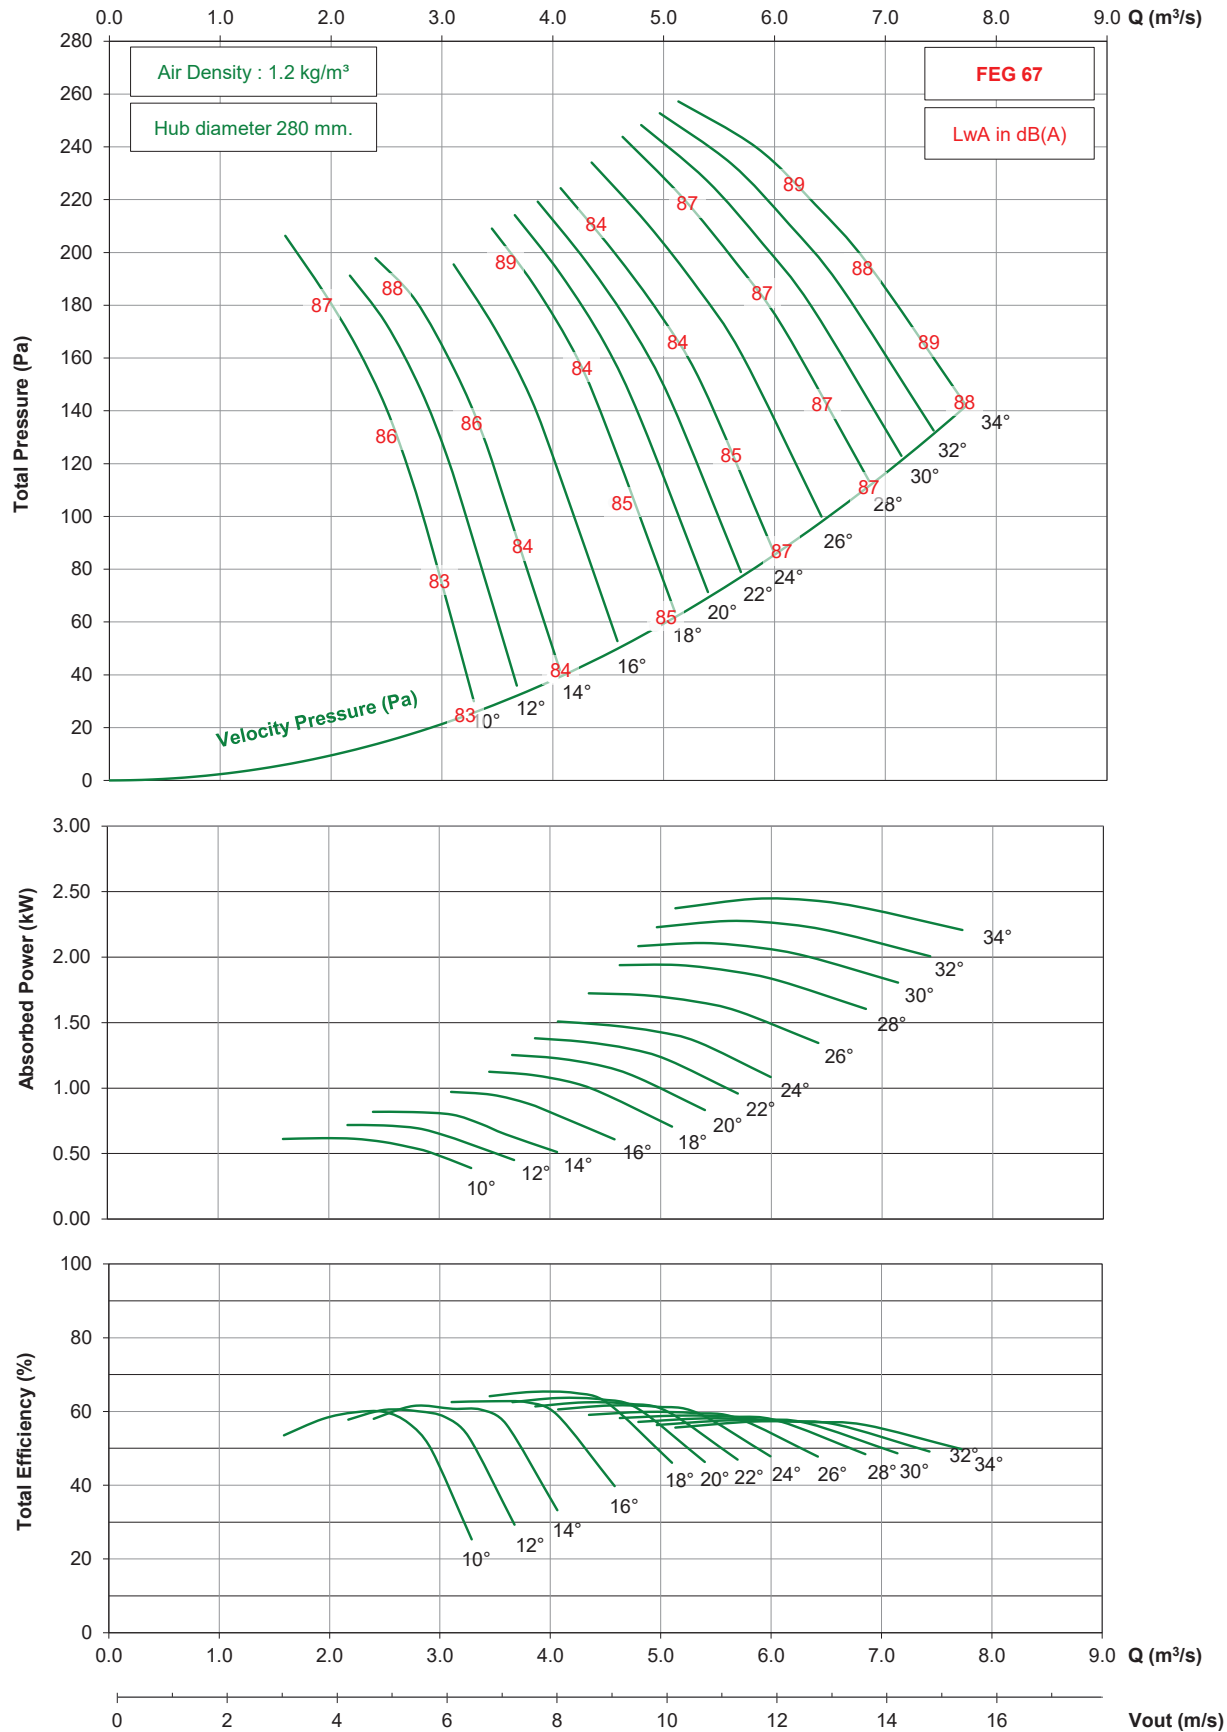


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA800 / 12AA / 12-12 (280)

725 rpm - 50 Hz

KRUGER

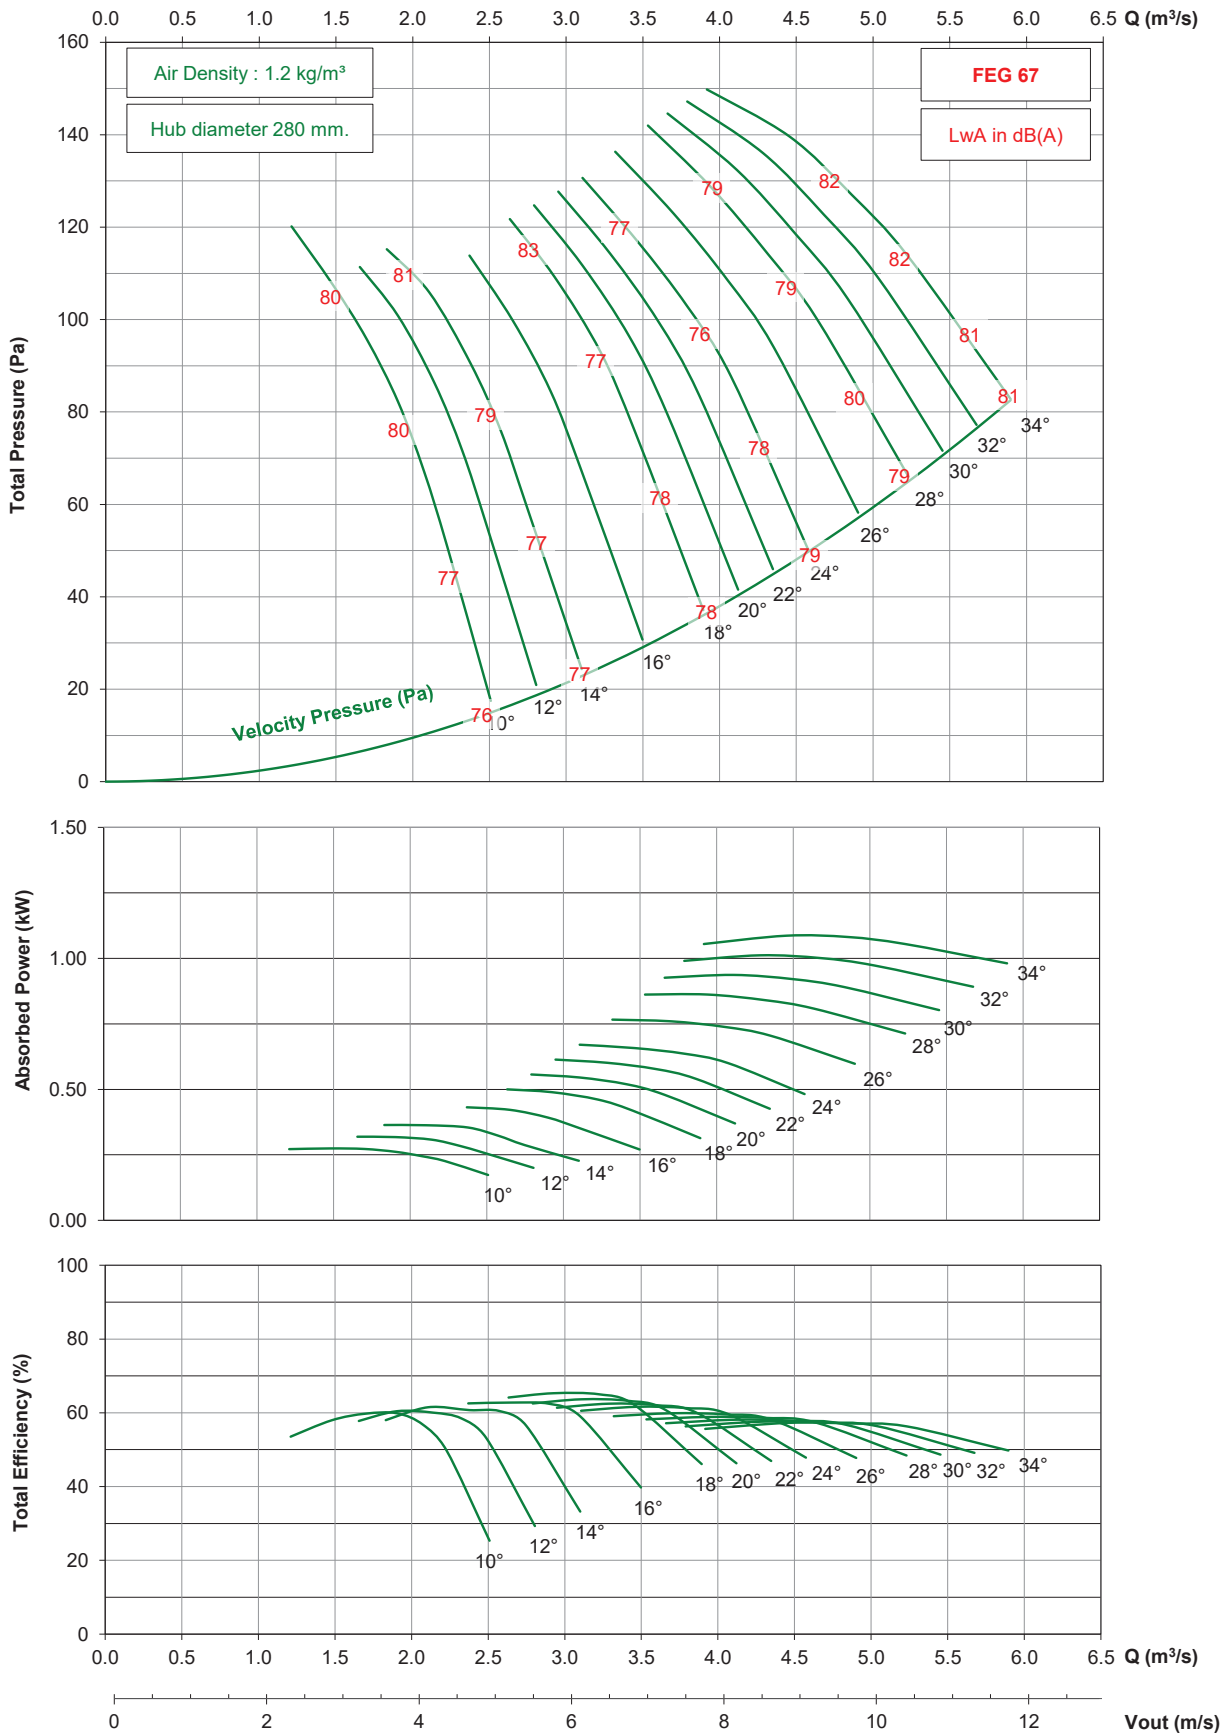


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA800 / 12AA / 12-12 (280)

1750 rpm - 60 Hz

KRUGER

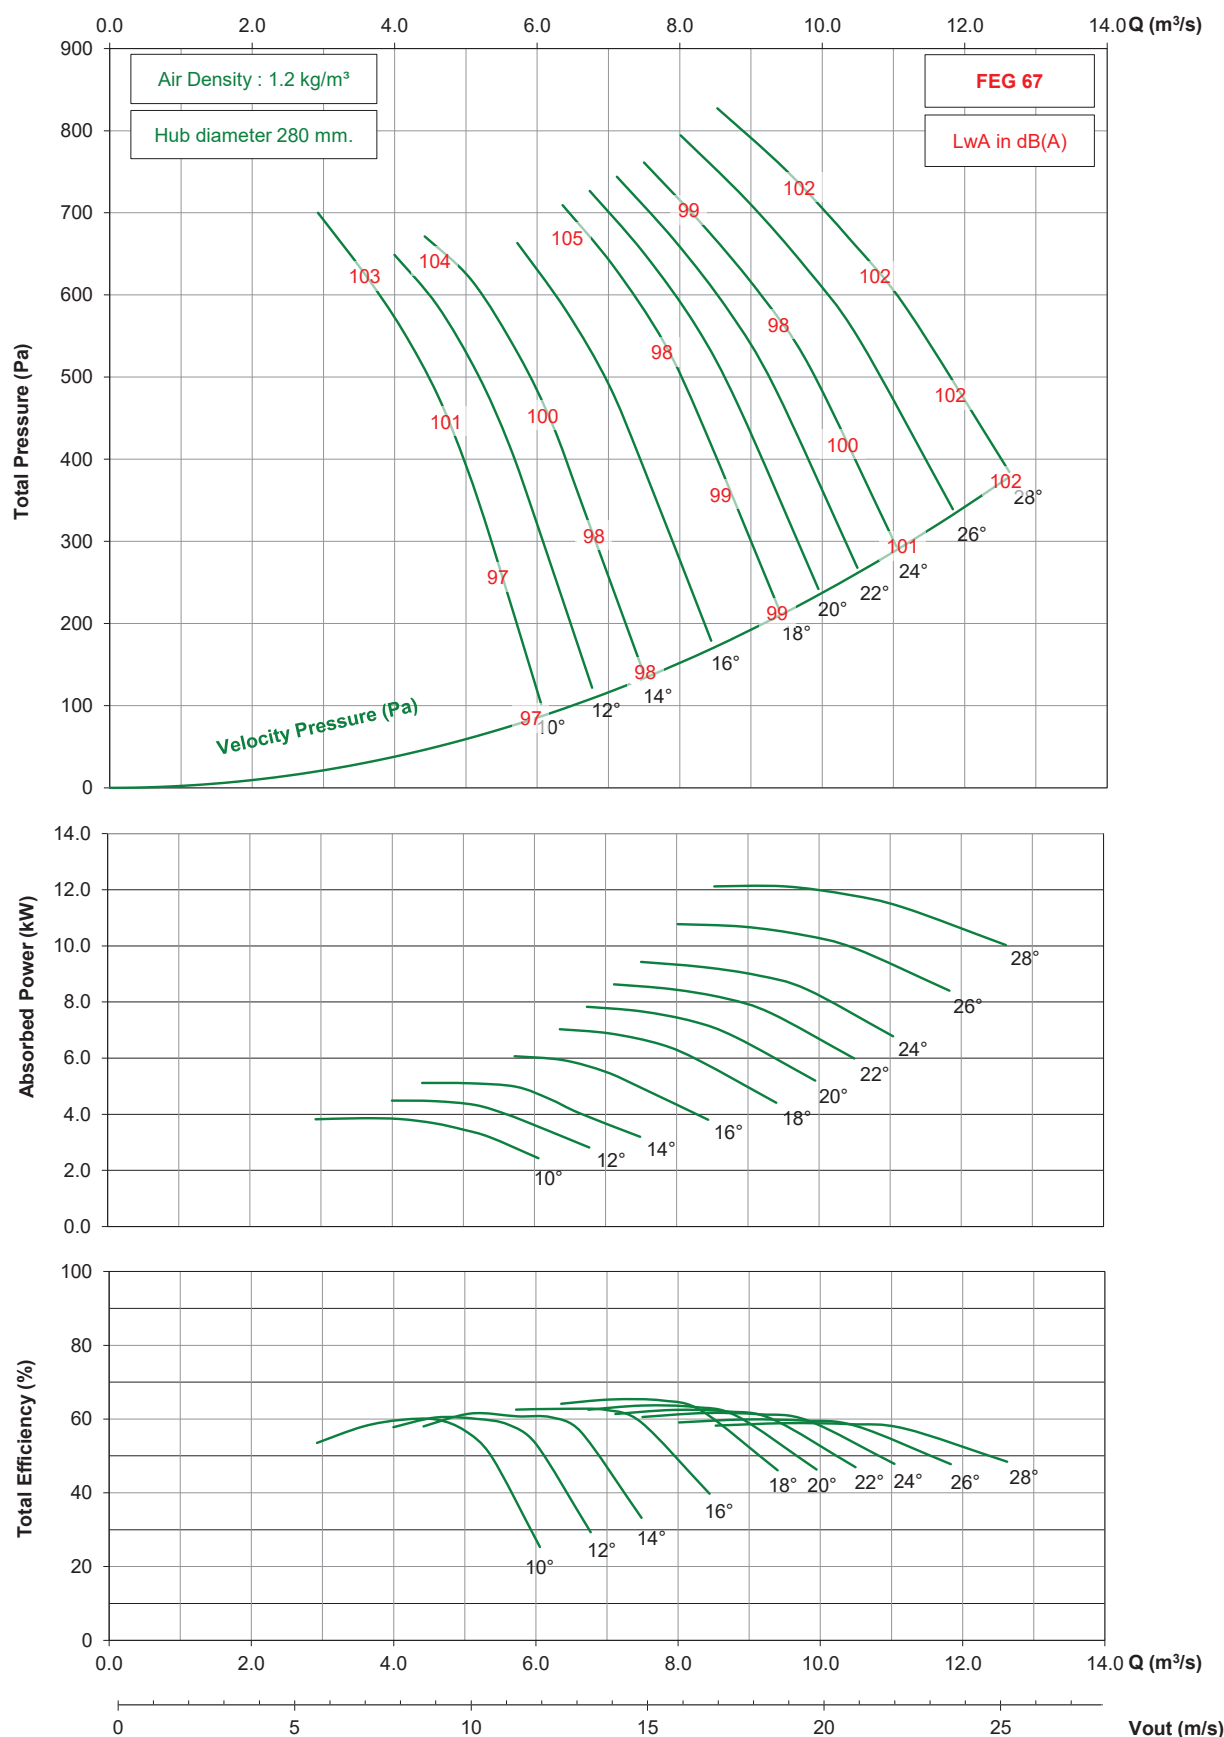


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA800 / 12AA / 12-12 (280)

1150 rpm - 60 Hz

KRUGER

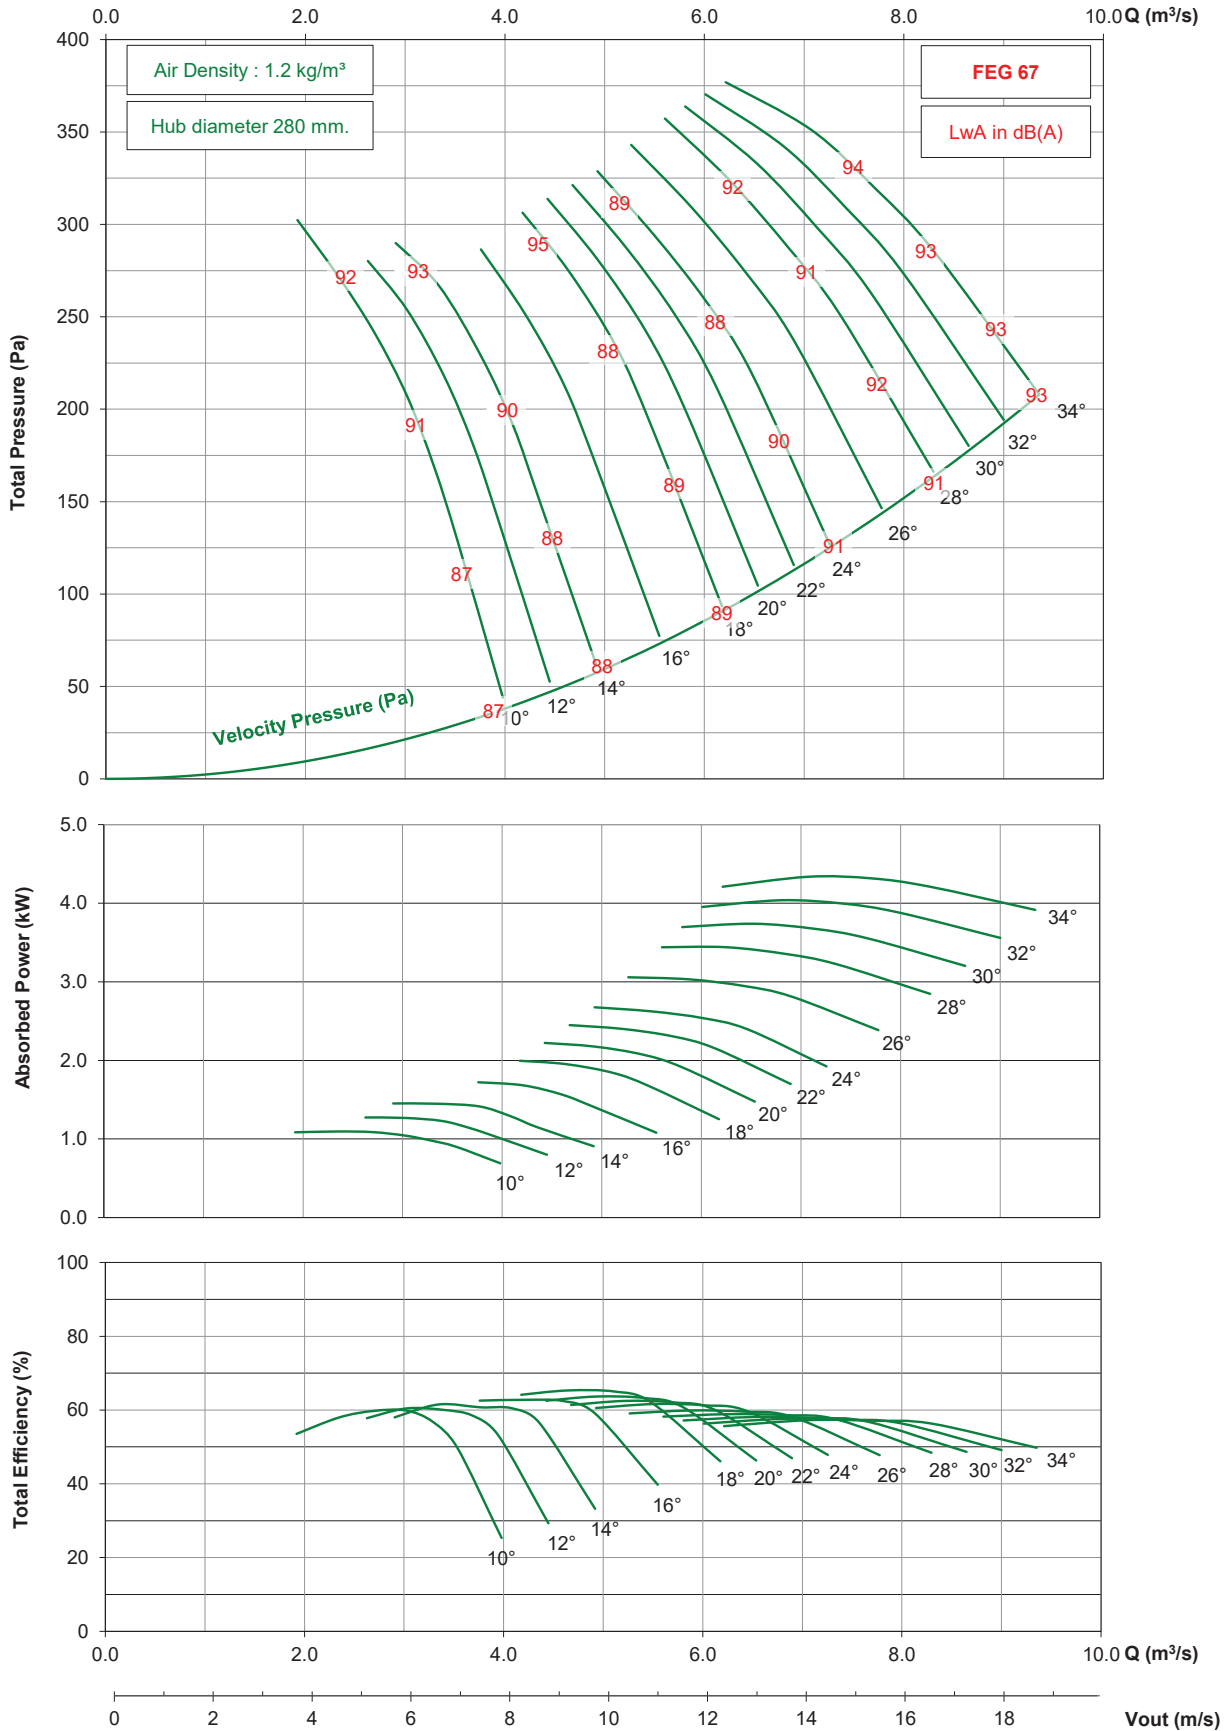


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA800 / 12AA / 12-12 (280)

875 rpm - 60 Hz

KRUGER

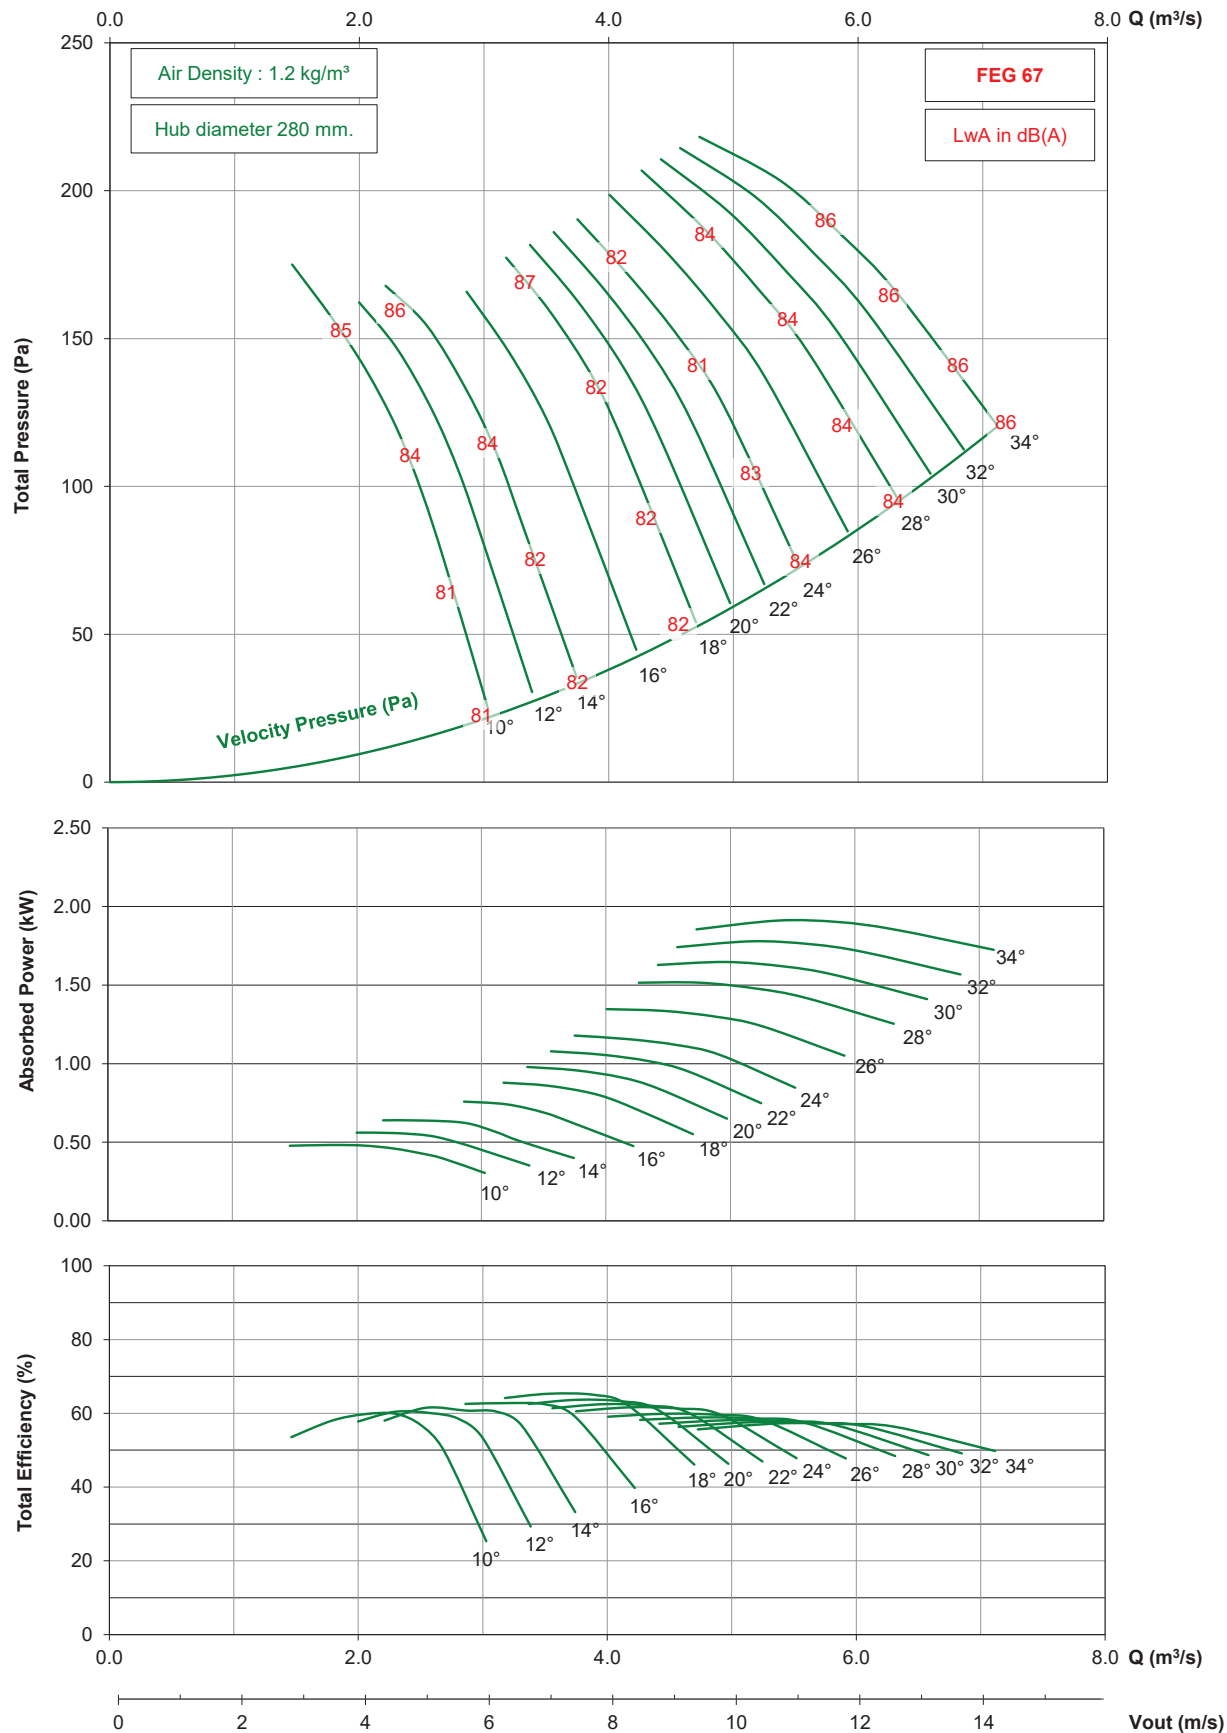


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA900 / 14AA / 9-9 (200)

1450 rpm - 50 Hz

KRUGER

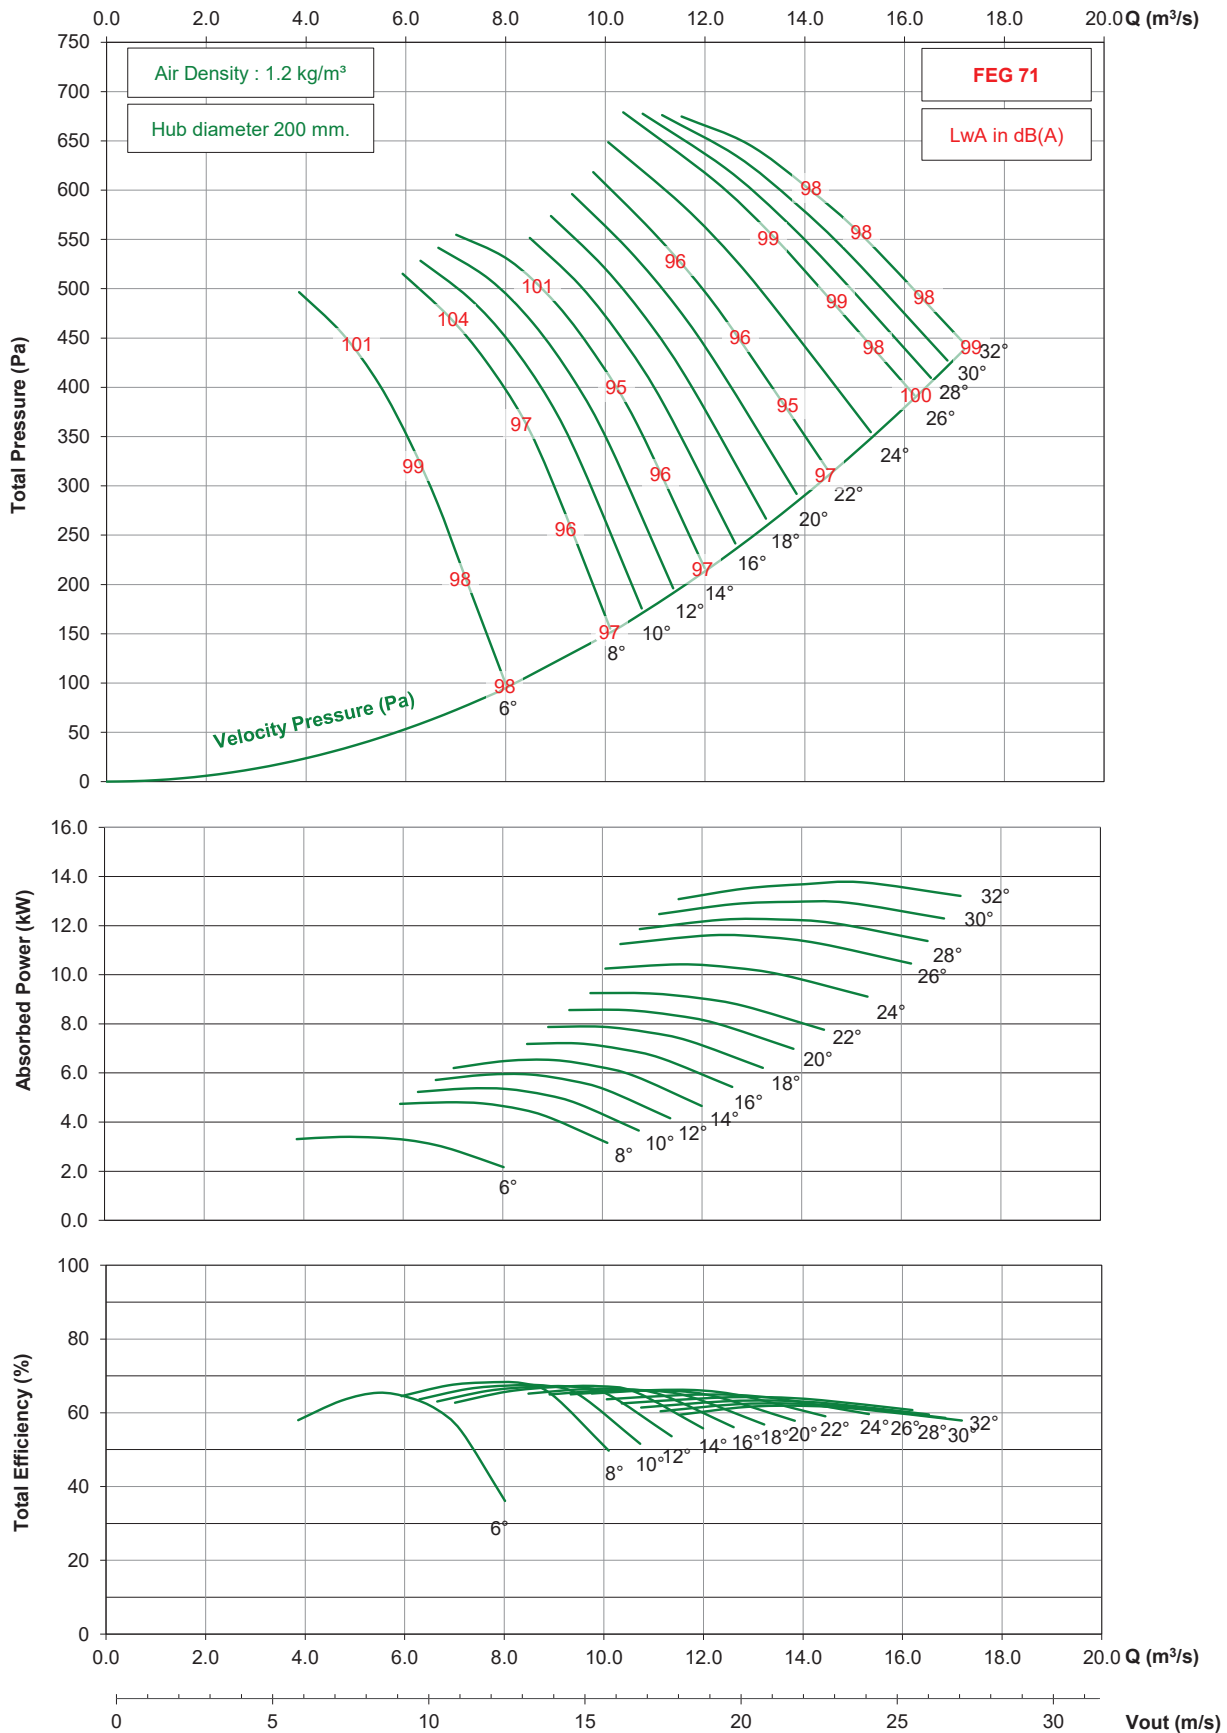


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lwi(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA900 / 14AA / 9-9 (200)

950 rpm - 50 Hz

KRUGER

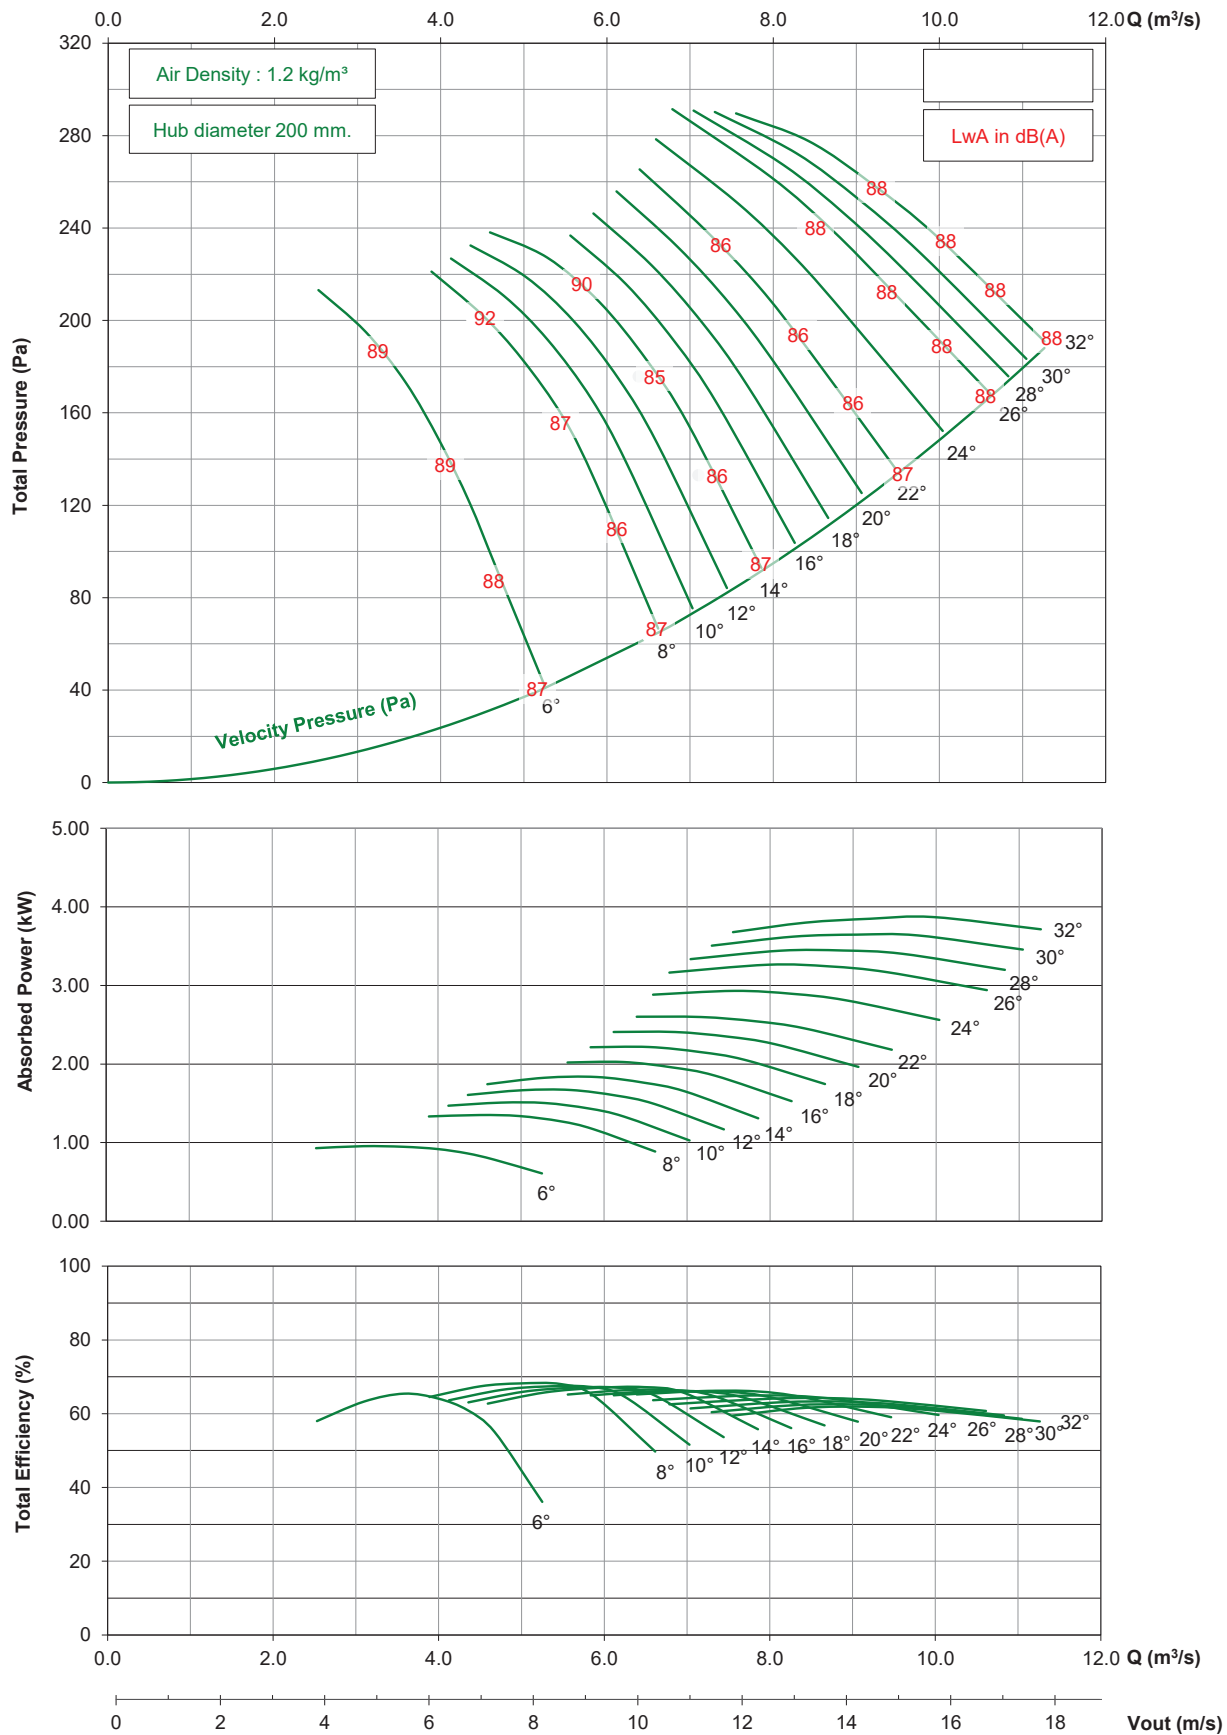


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA900 / 14AA / 9-9 (200)

725 rpm - 50 Hz

KRUGER

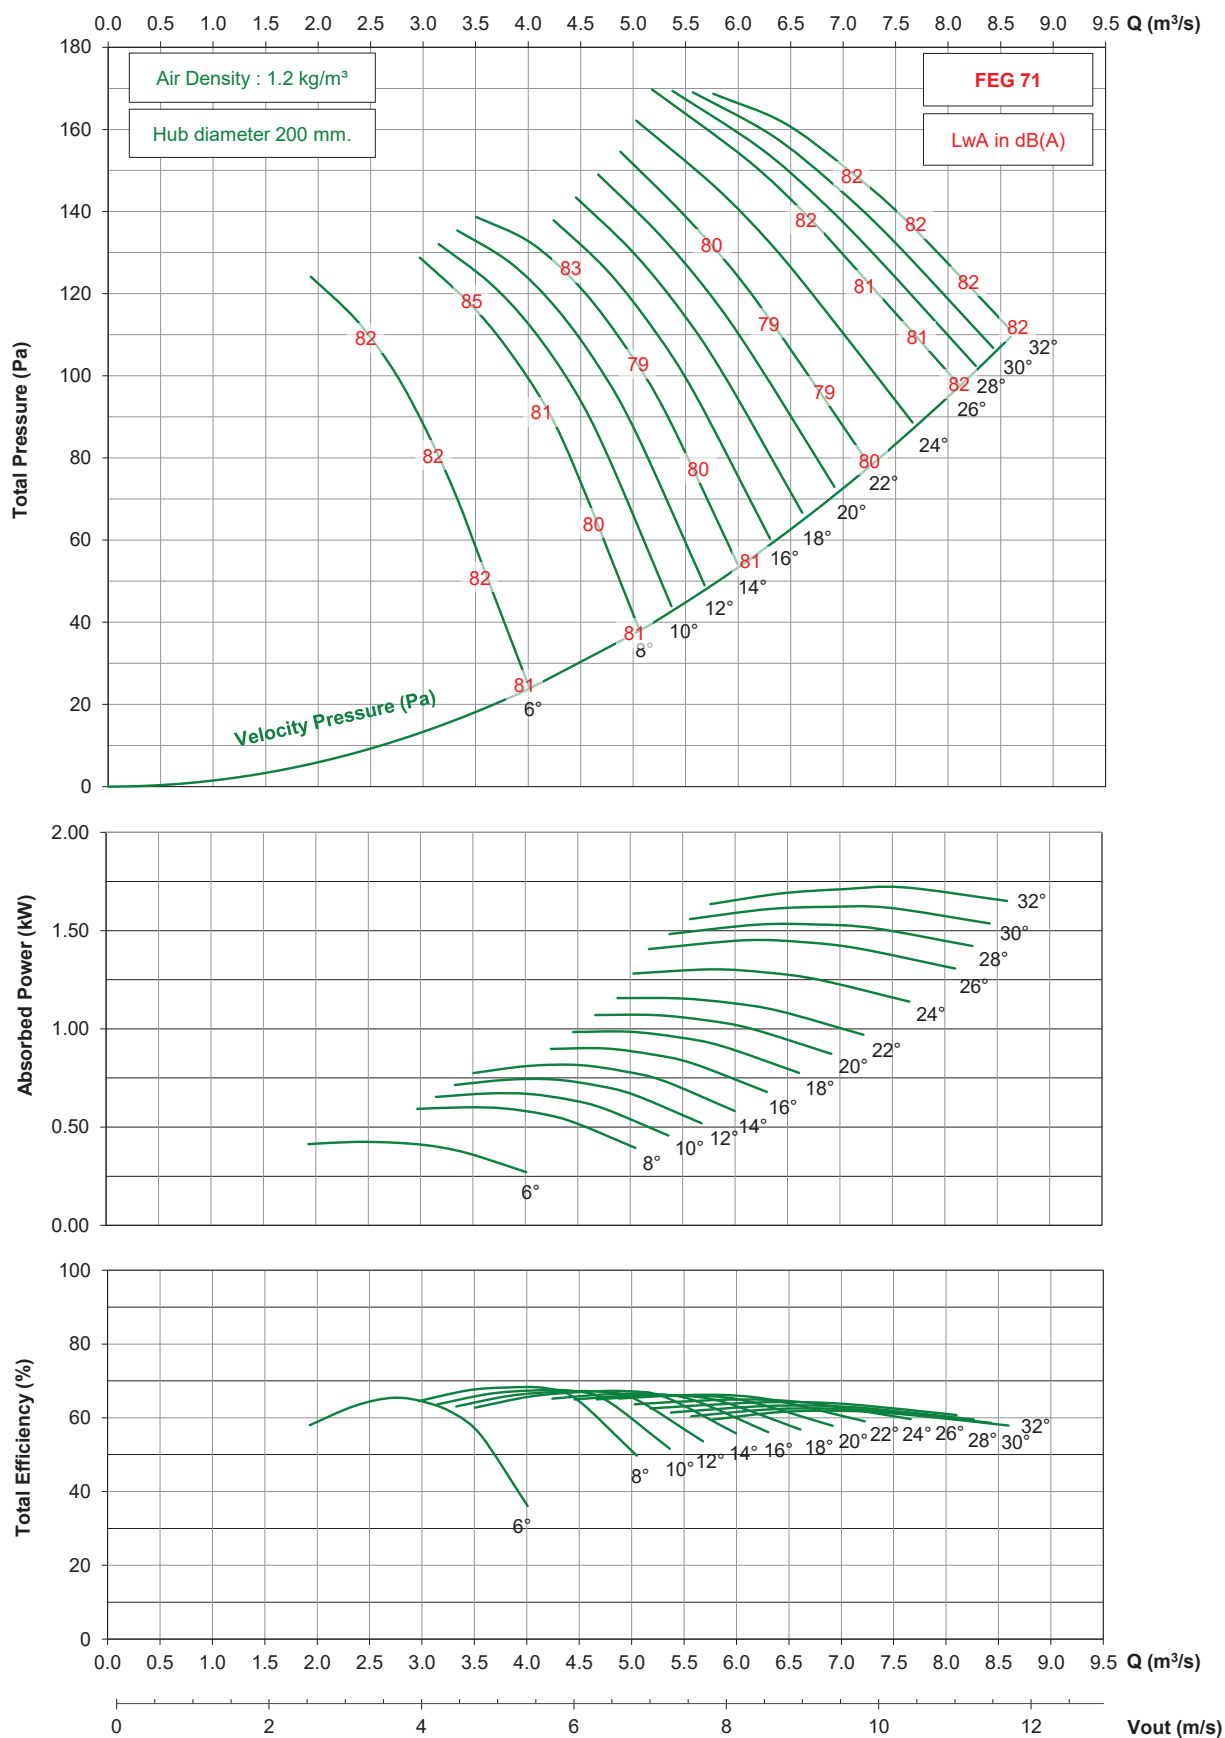


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA900 / 14AA / 9-9 (200)

1750 rpm - 60 Hz

KRUGER

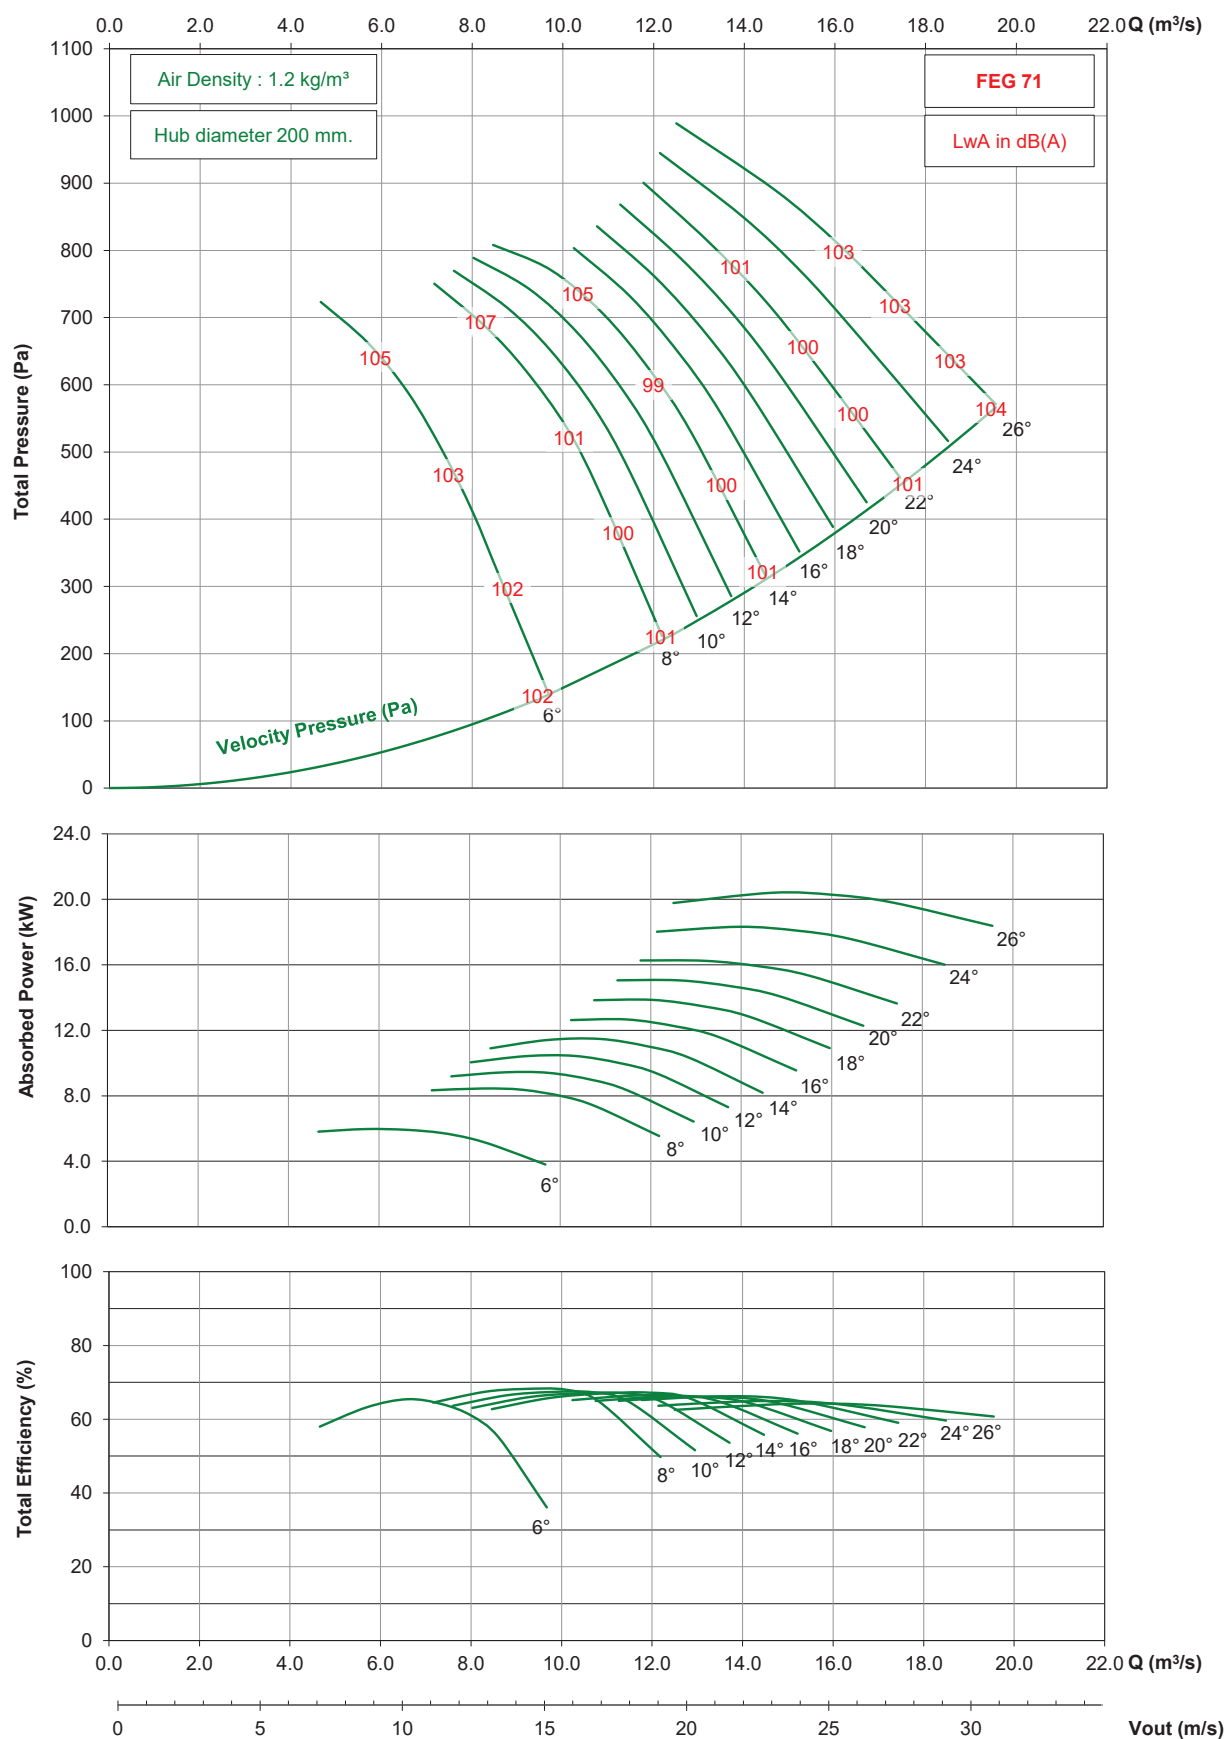


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
 - The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet $L_{wi}(A)$ sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA900 / 14AA / 9-9 (200)

1150 rpm - 60 Hz


KRUGER

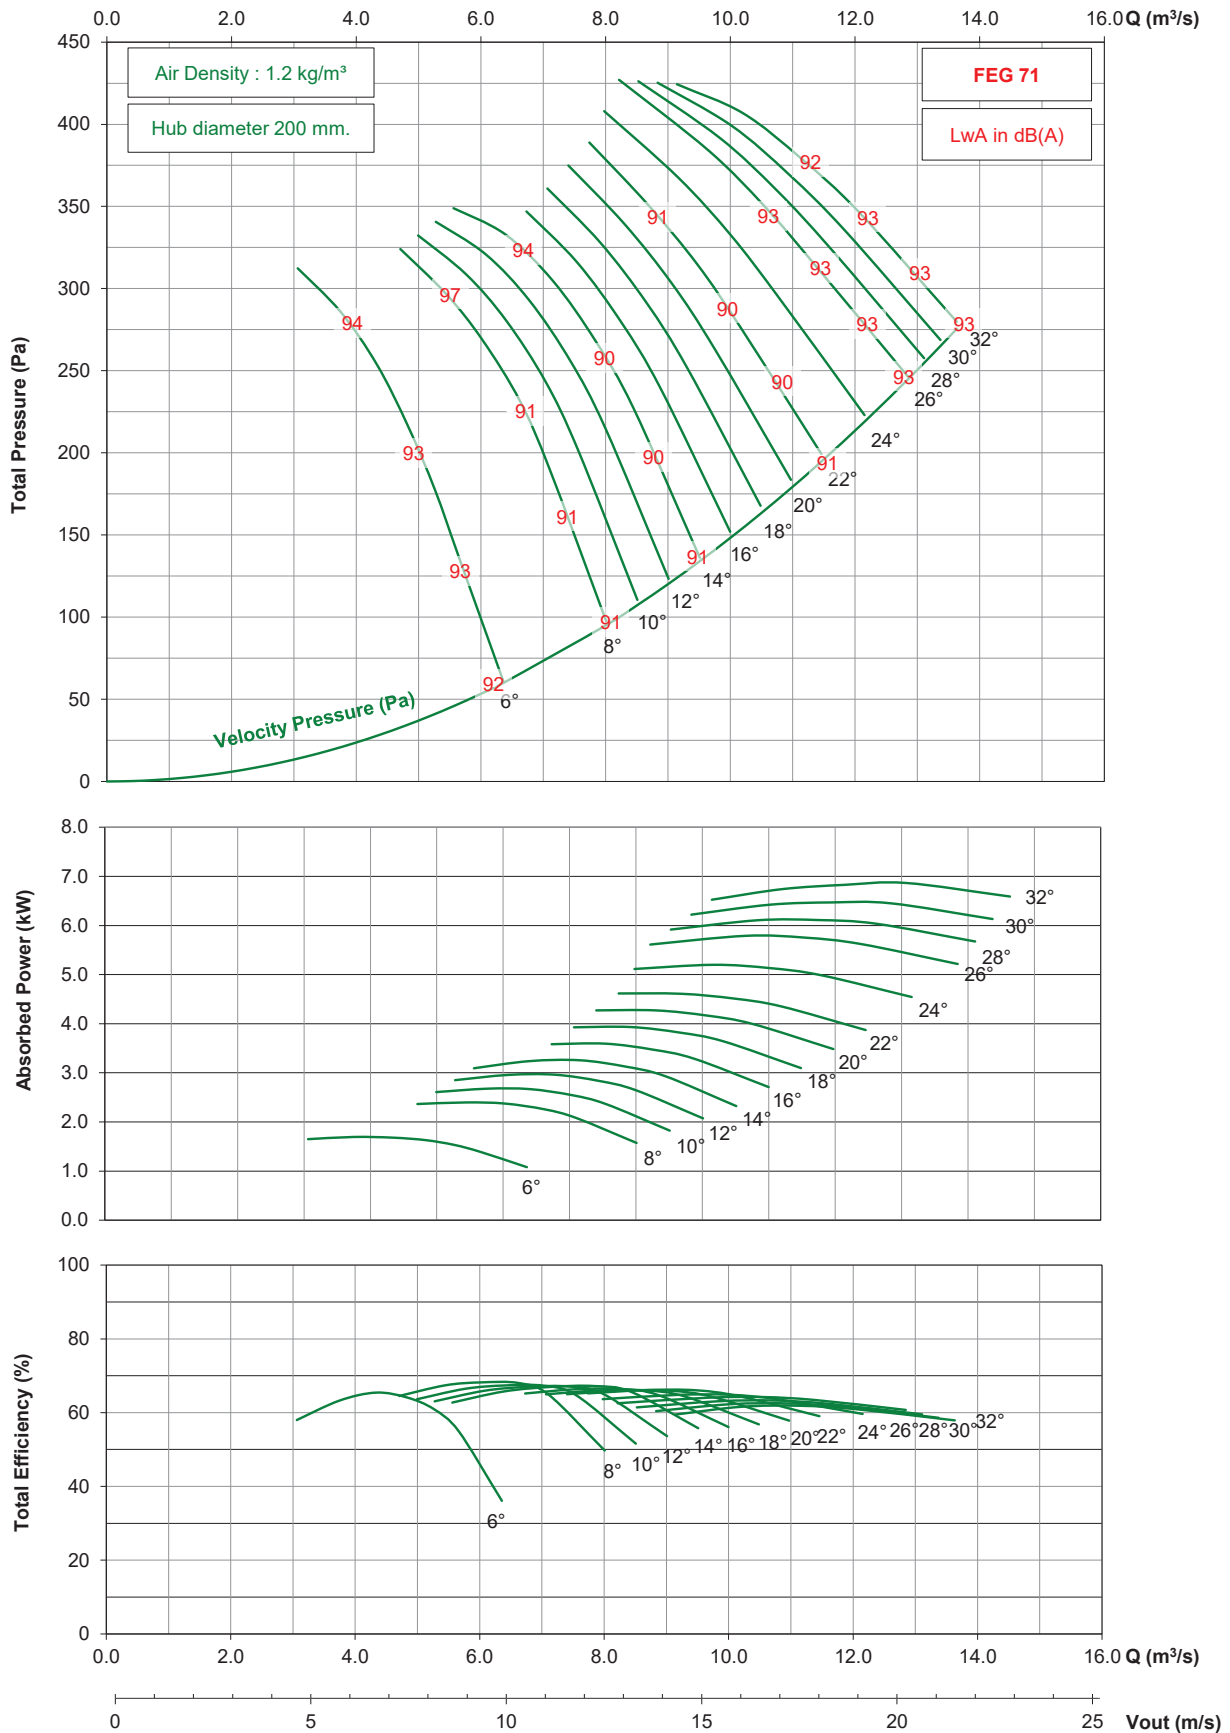

- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).


- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

875 rpm - 60 Hz

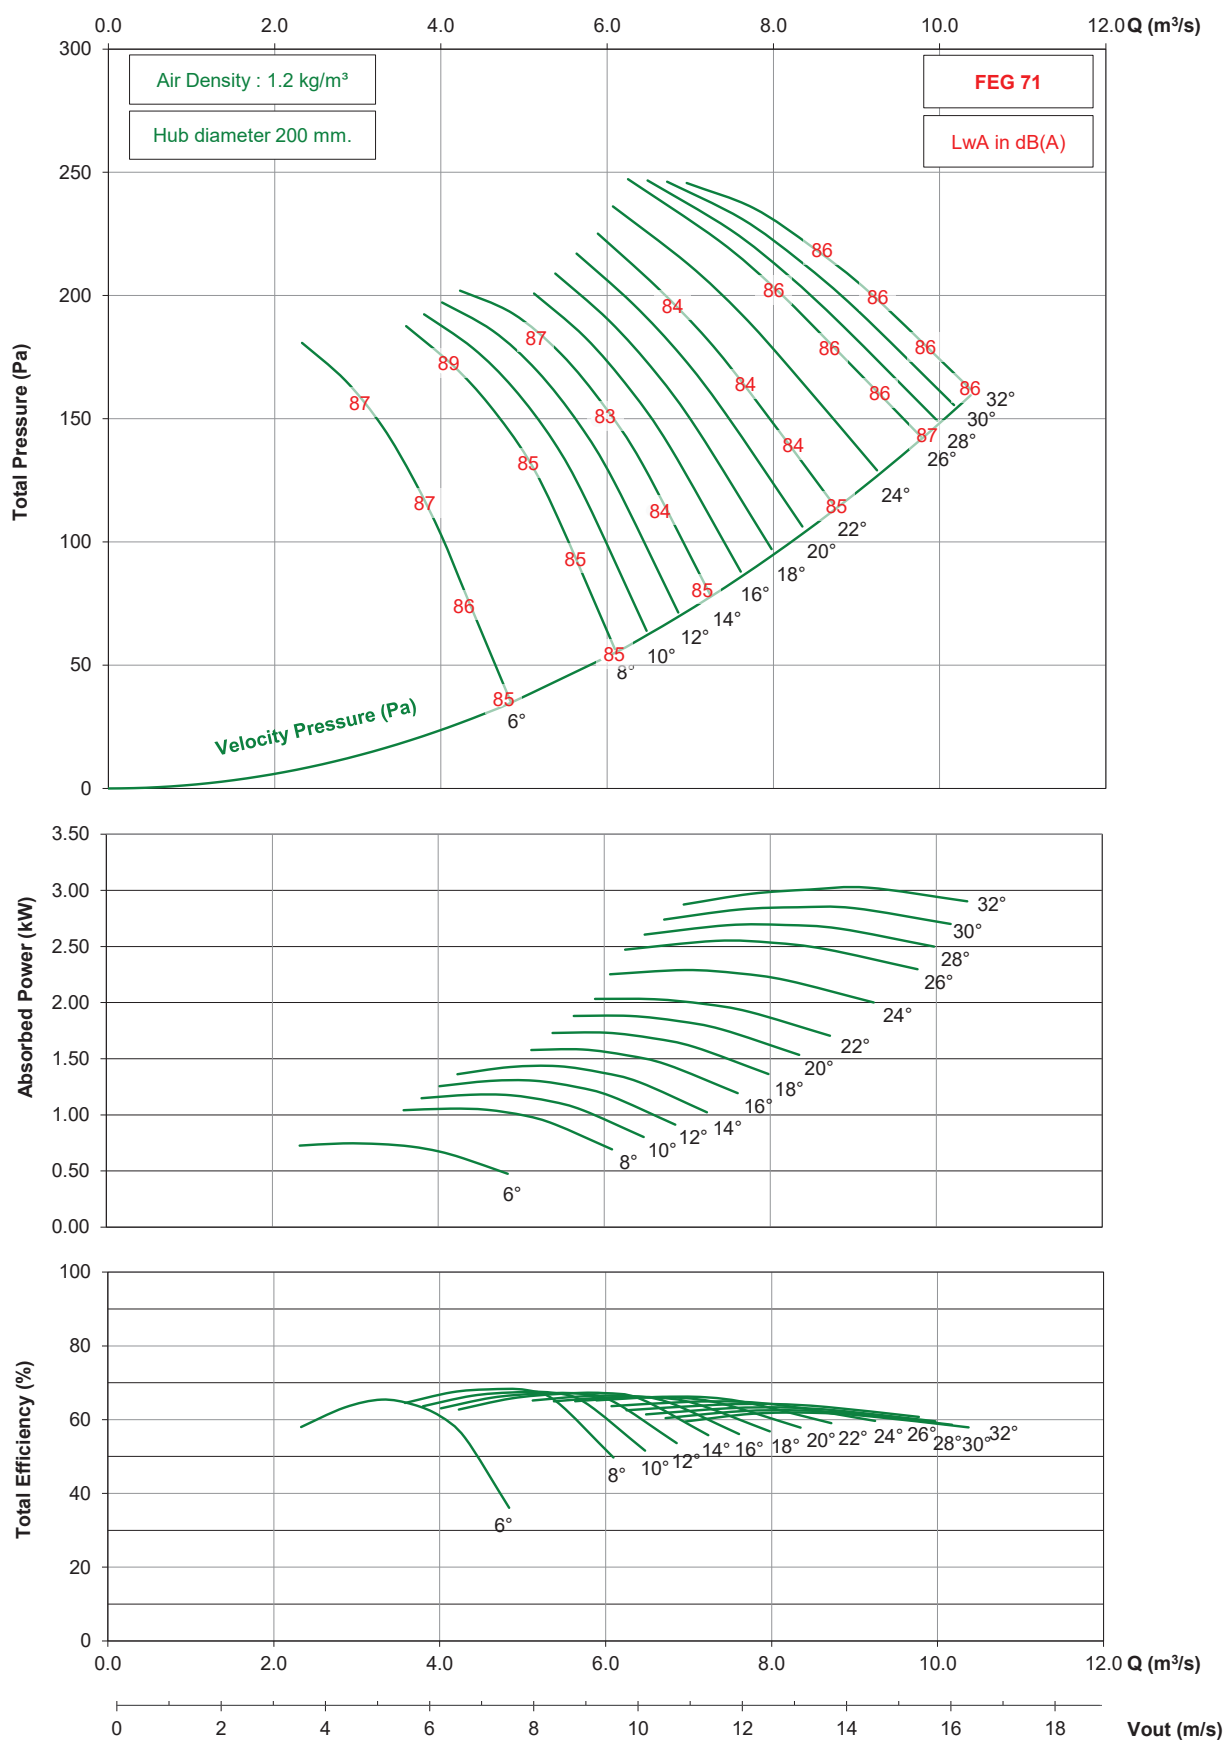KRUGER

- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet L_{wi}(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

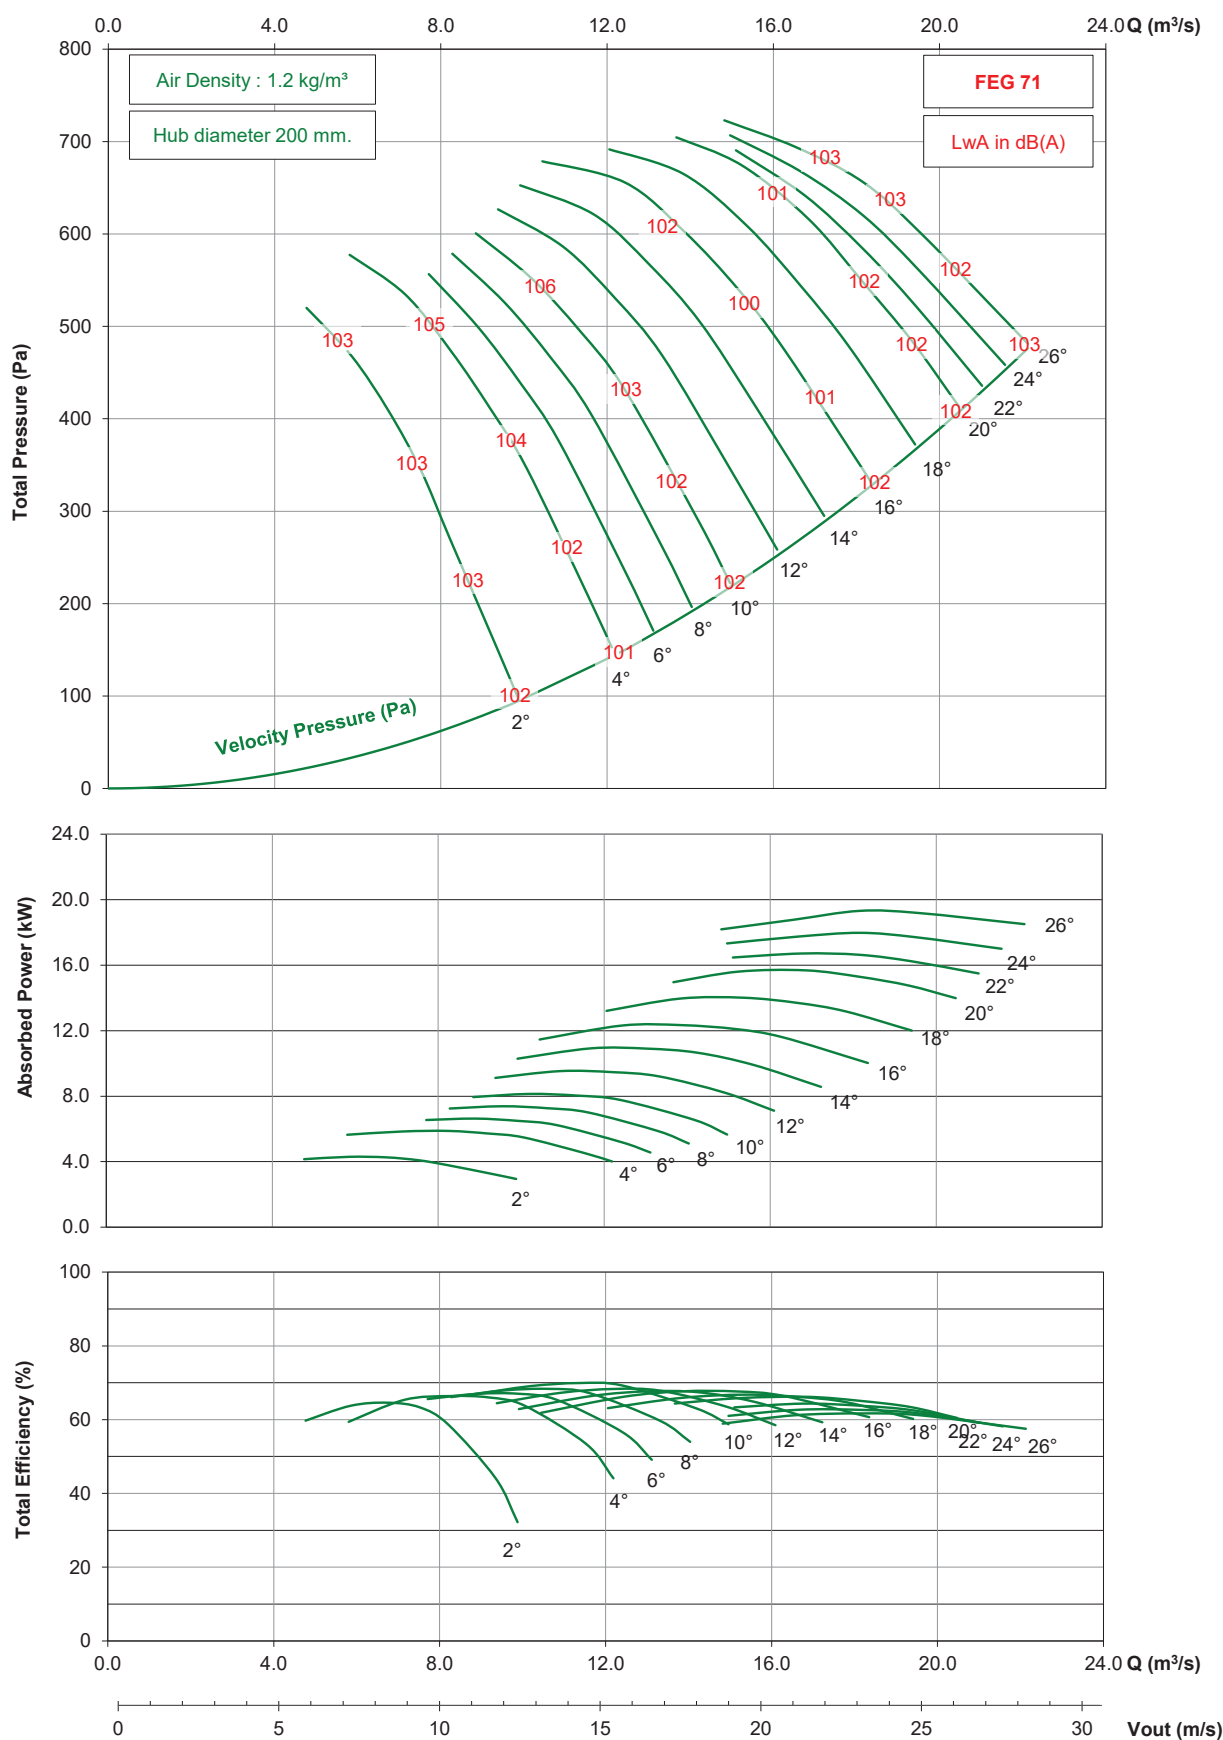


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet L_{wi}(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA1000 / 14AA / 9-9 (200)

950 rpm - 50 Hz

KRUGER

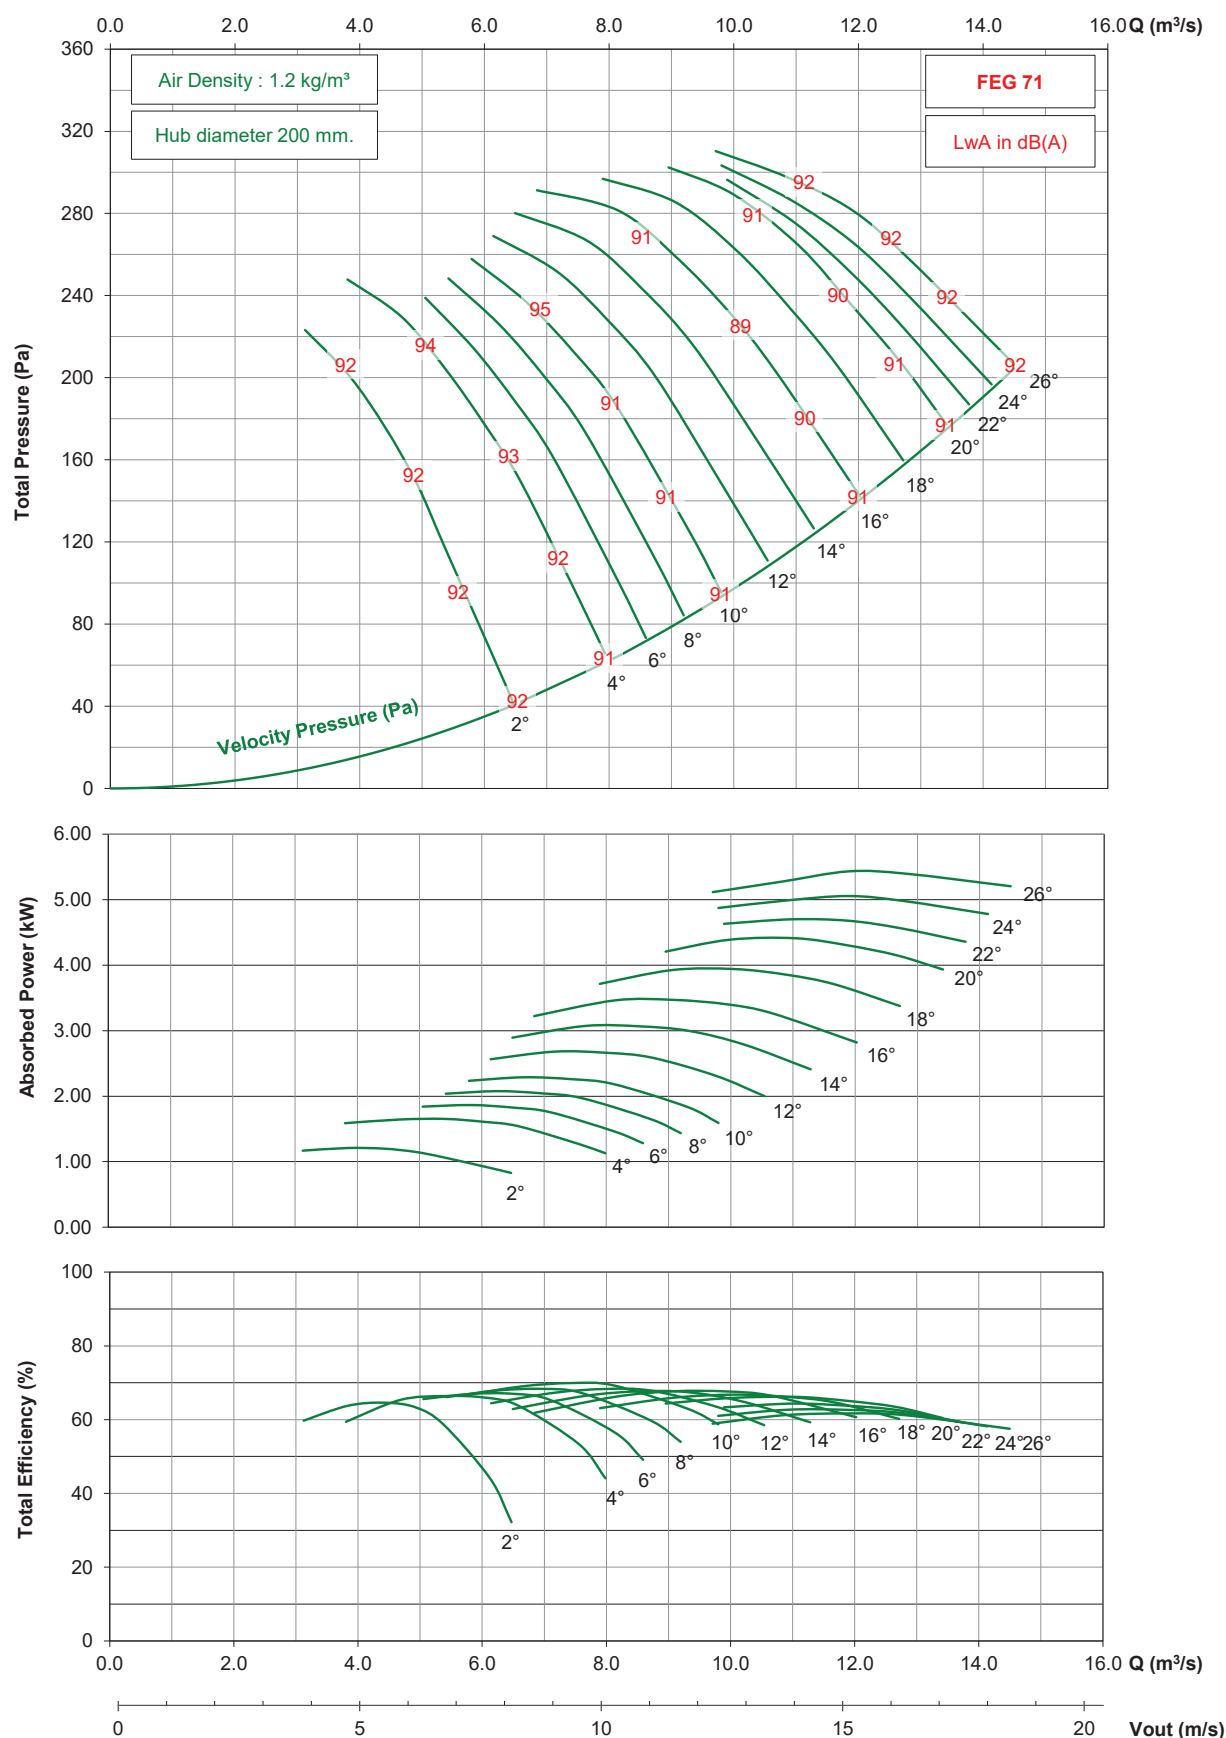


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA1000 / 14AA / 9-9 (200)

725 rpm - 50 Hz

KRUGER

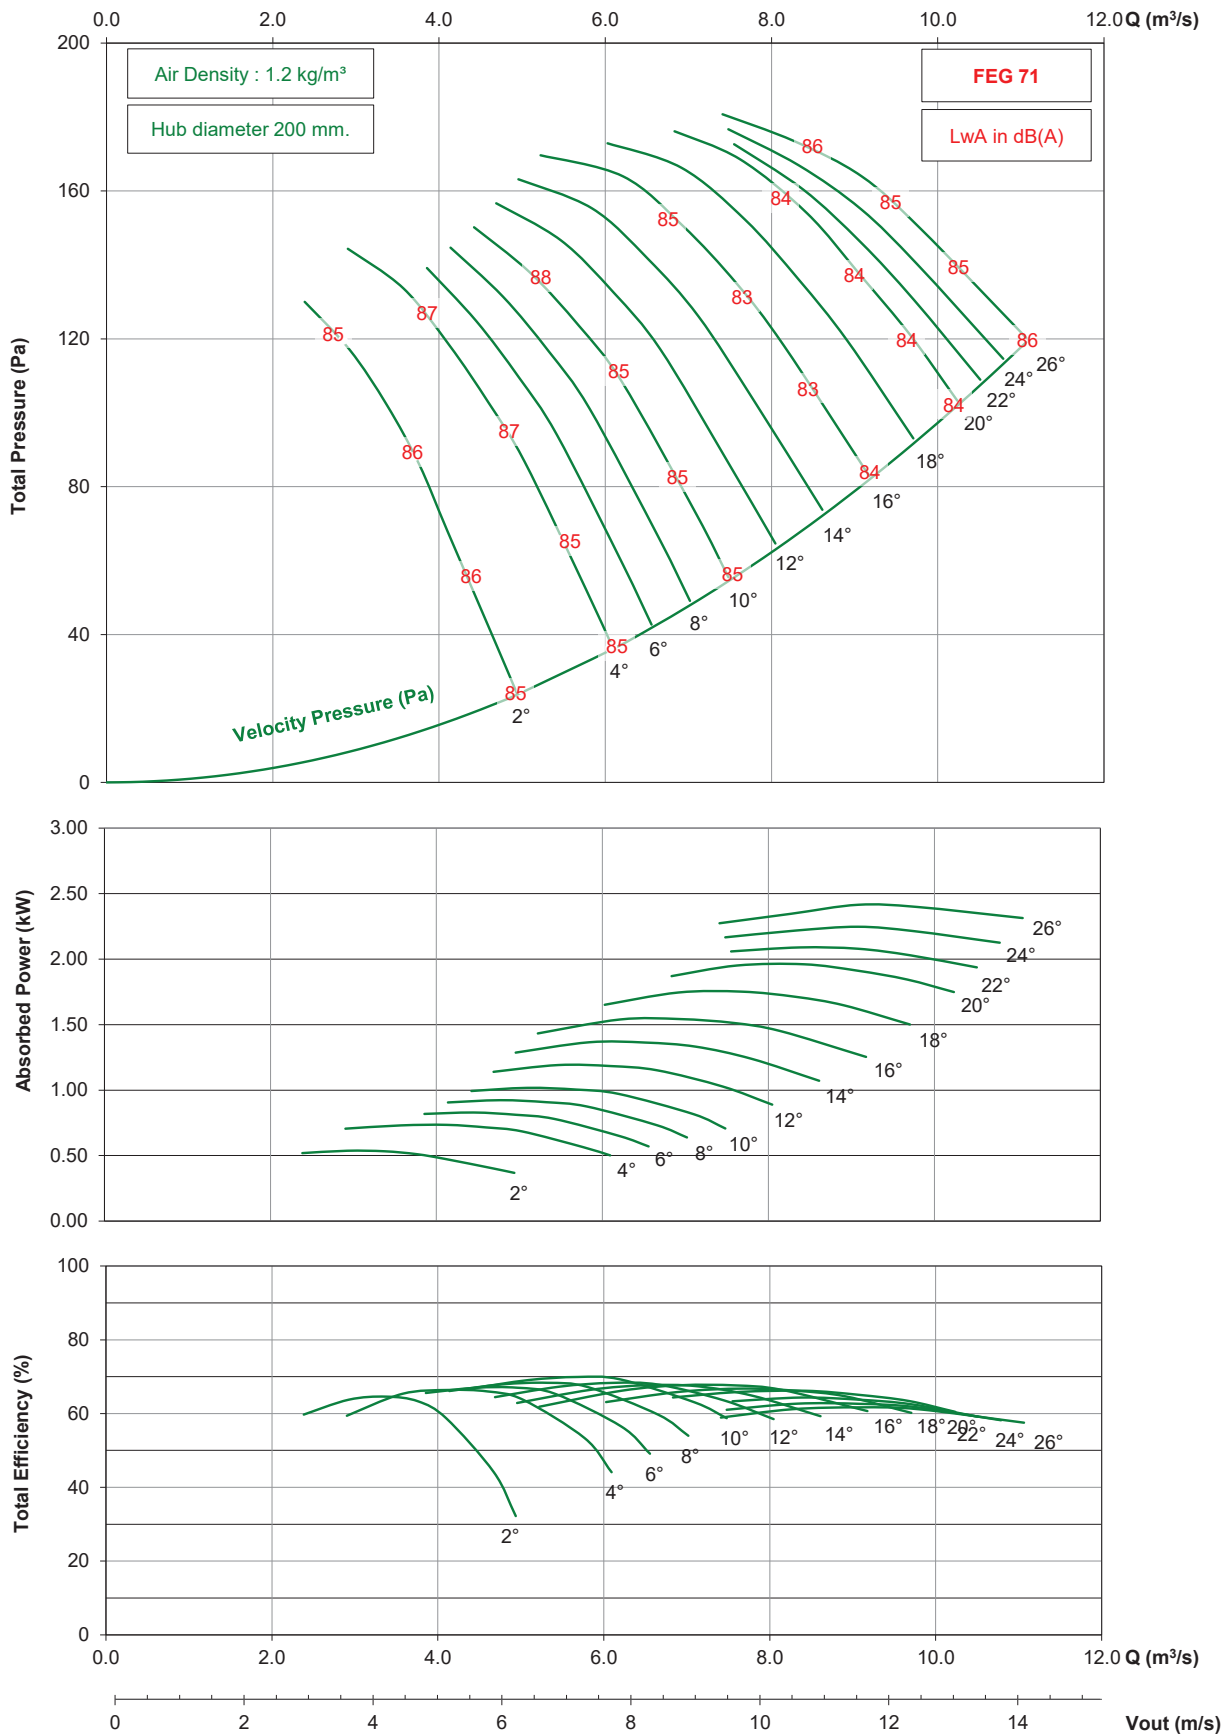


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA1000 / 14AA / 9-9 (200)

1750 rpm - 60 Hz

KRUGER

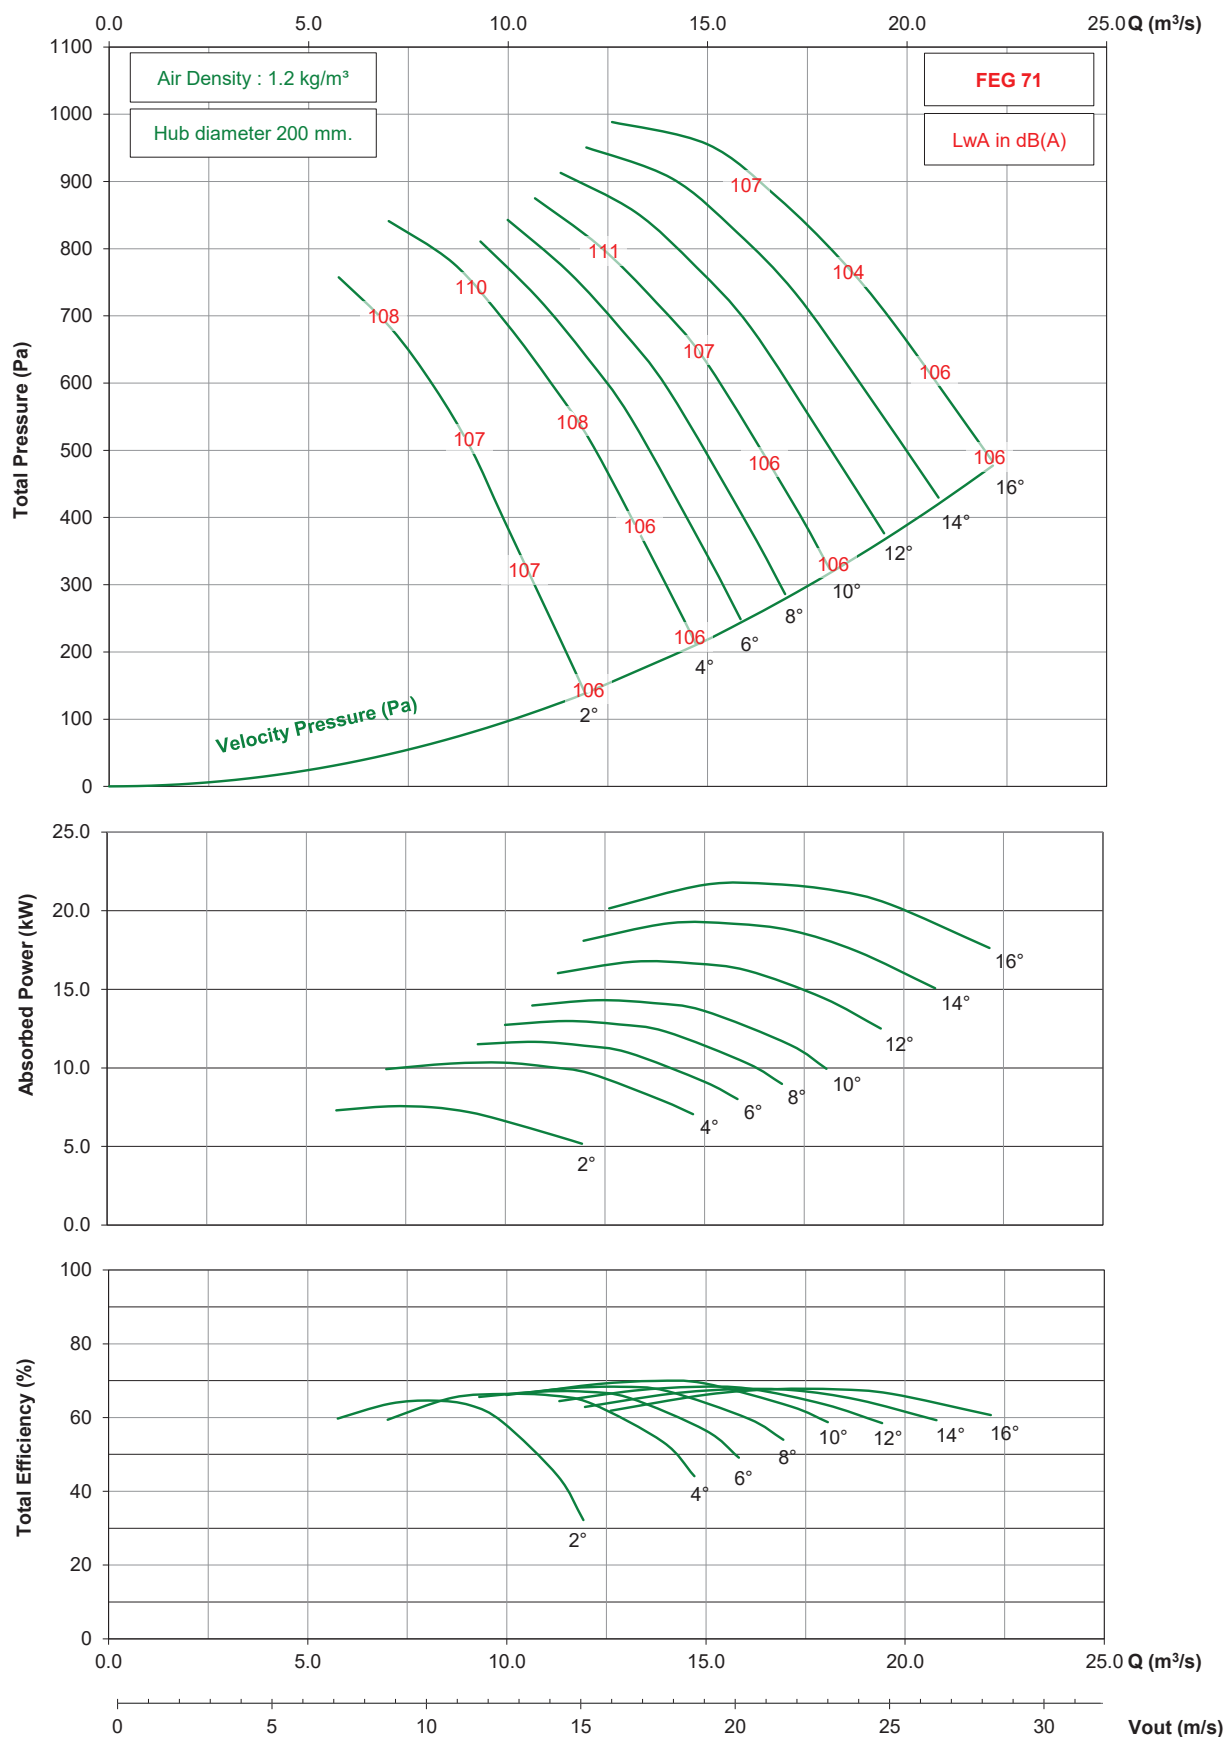


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA1000 / 14AA / 9-9 (200)

1150 rpm - 60 Hz

KRUGER

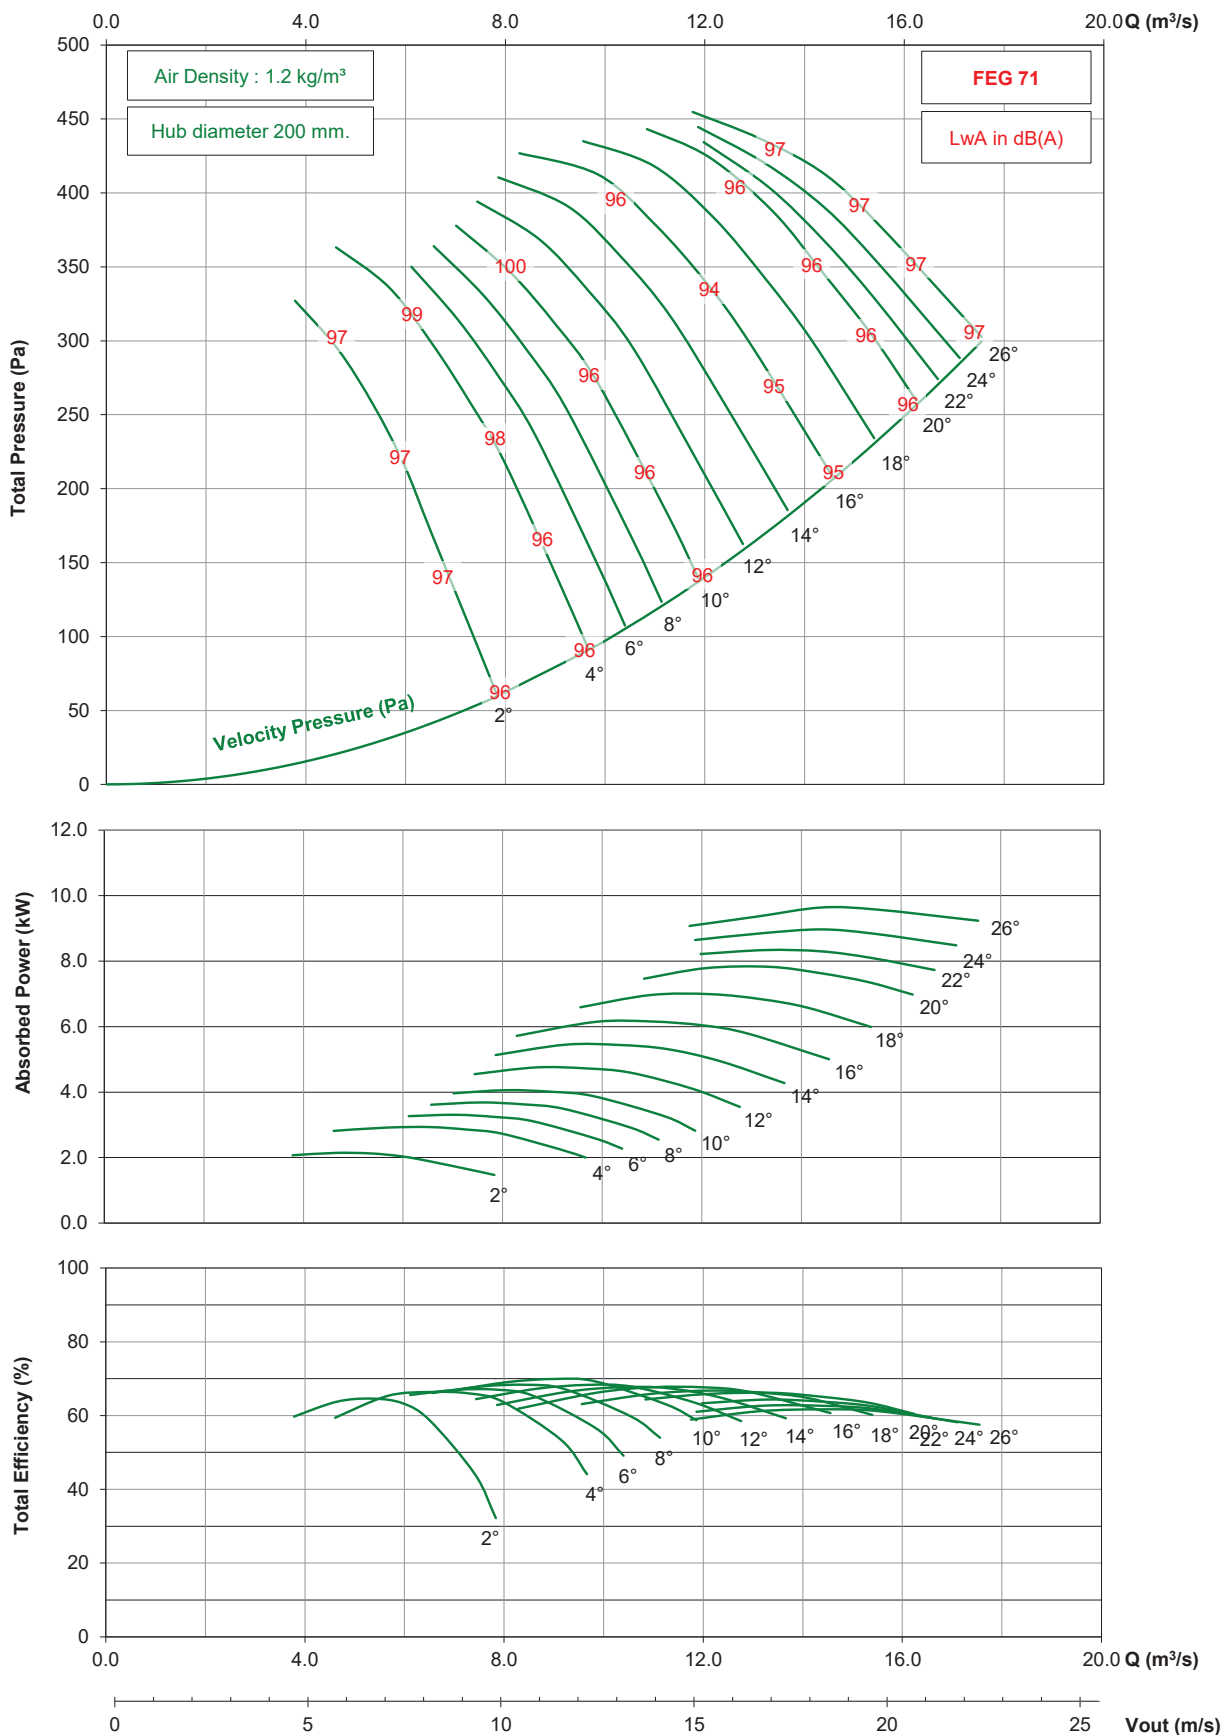


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA1000 / 14AA / 9-9 (200)

875 rpm - 60 Hz

KRUGER

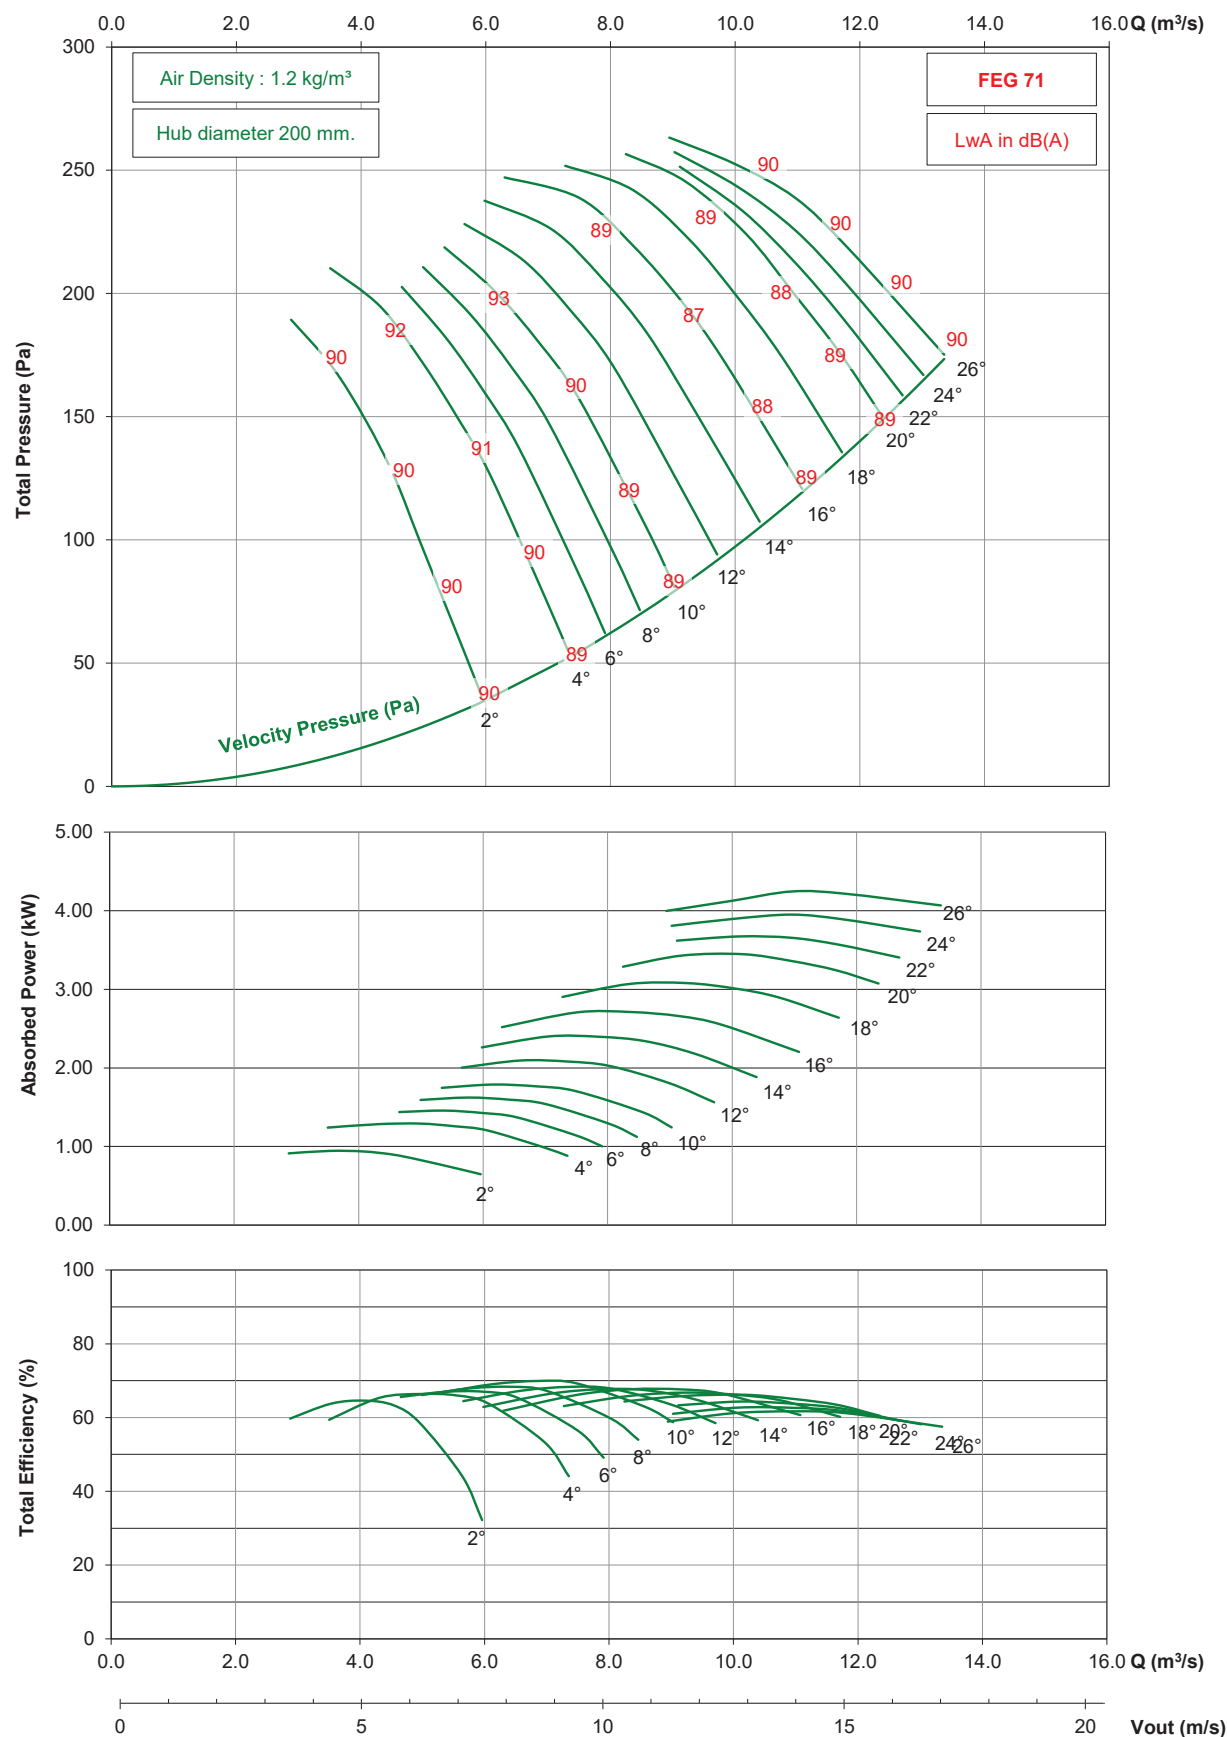


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA1120/ 14AA / 9-12 (280)

1450 rpm - 50 Hz

KRUGER

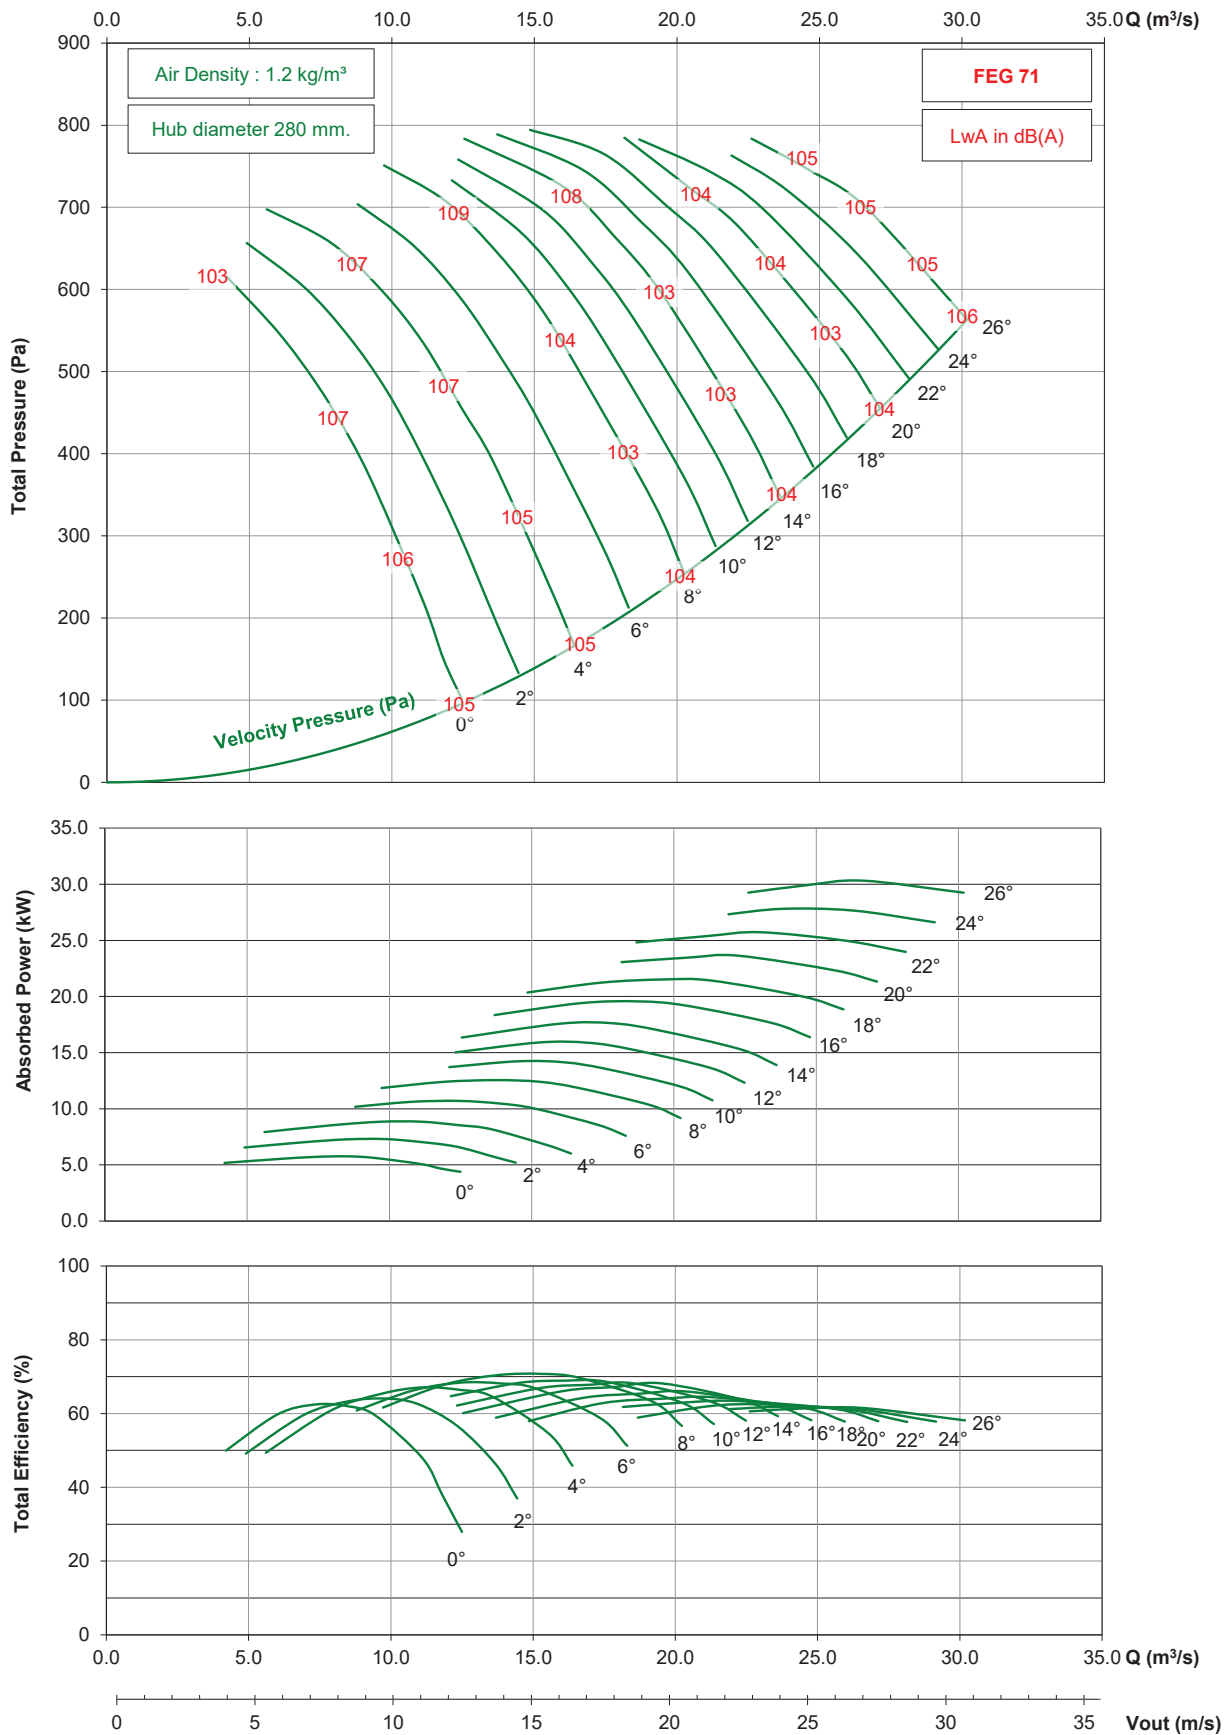


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA1120/ 14AA / 9-12 (280)

950 rpm - 50 Hz

KRUGER

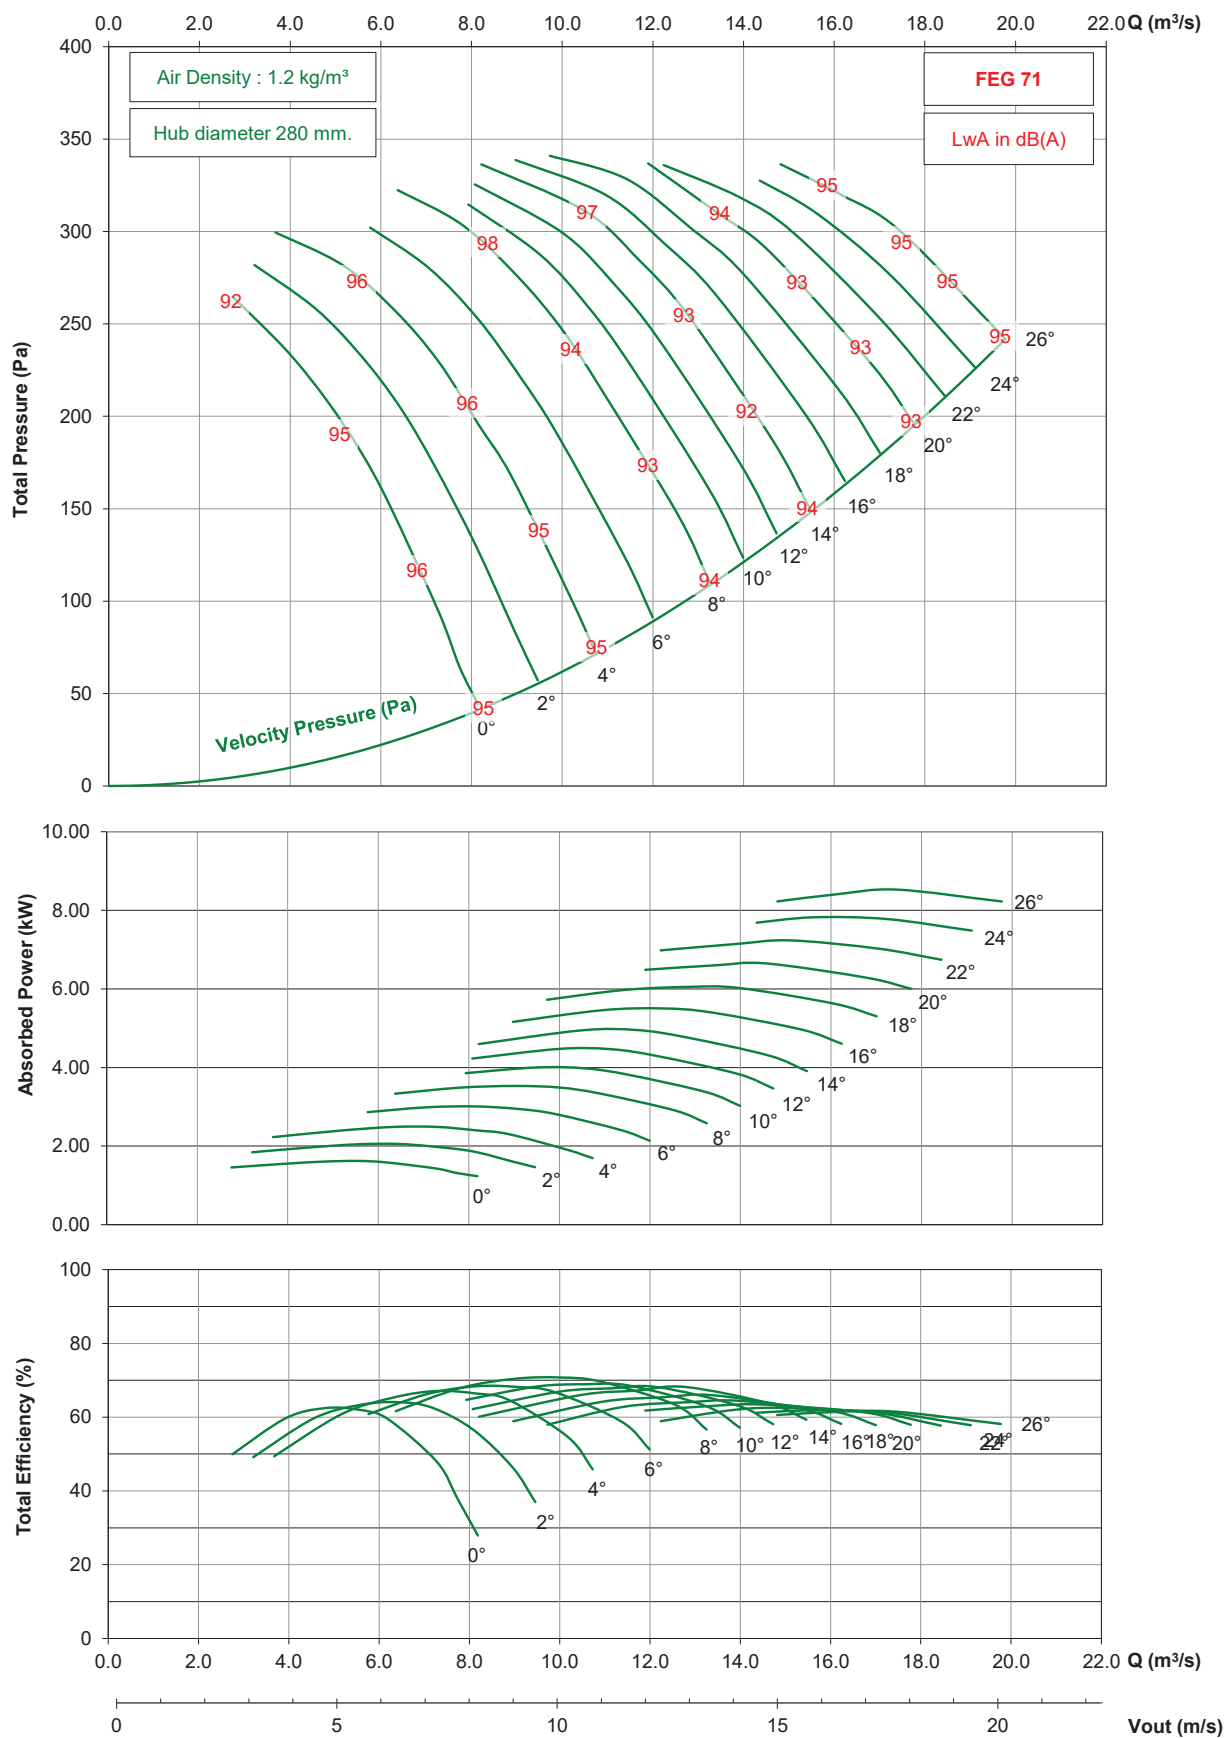


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA1120/ 14AA / 9-12 (280)

725 rpm - 50 Hz

KRUGER

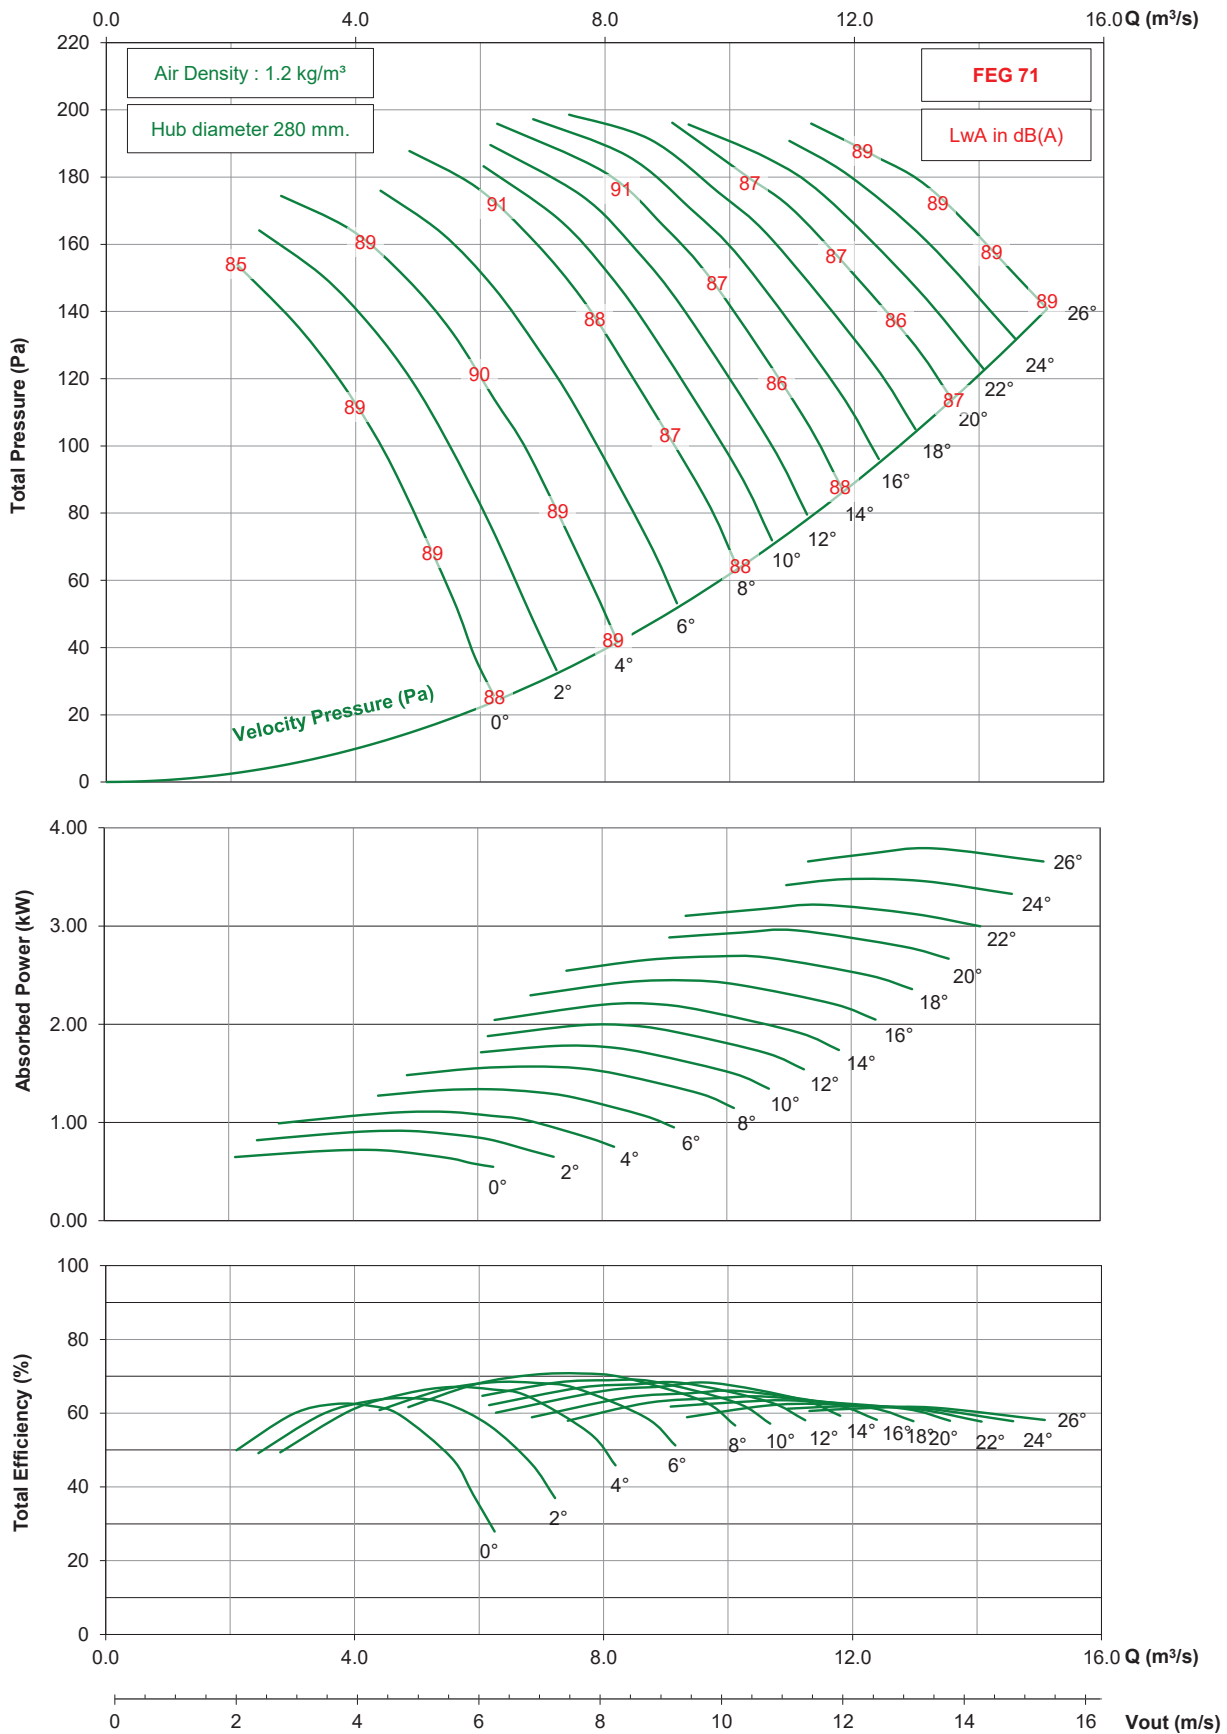


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA1120/ 14AA / 9-12 (280)

1750 rpm - 60 Hz

KRUGER

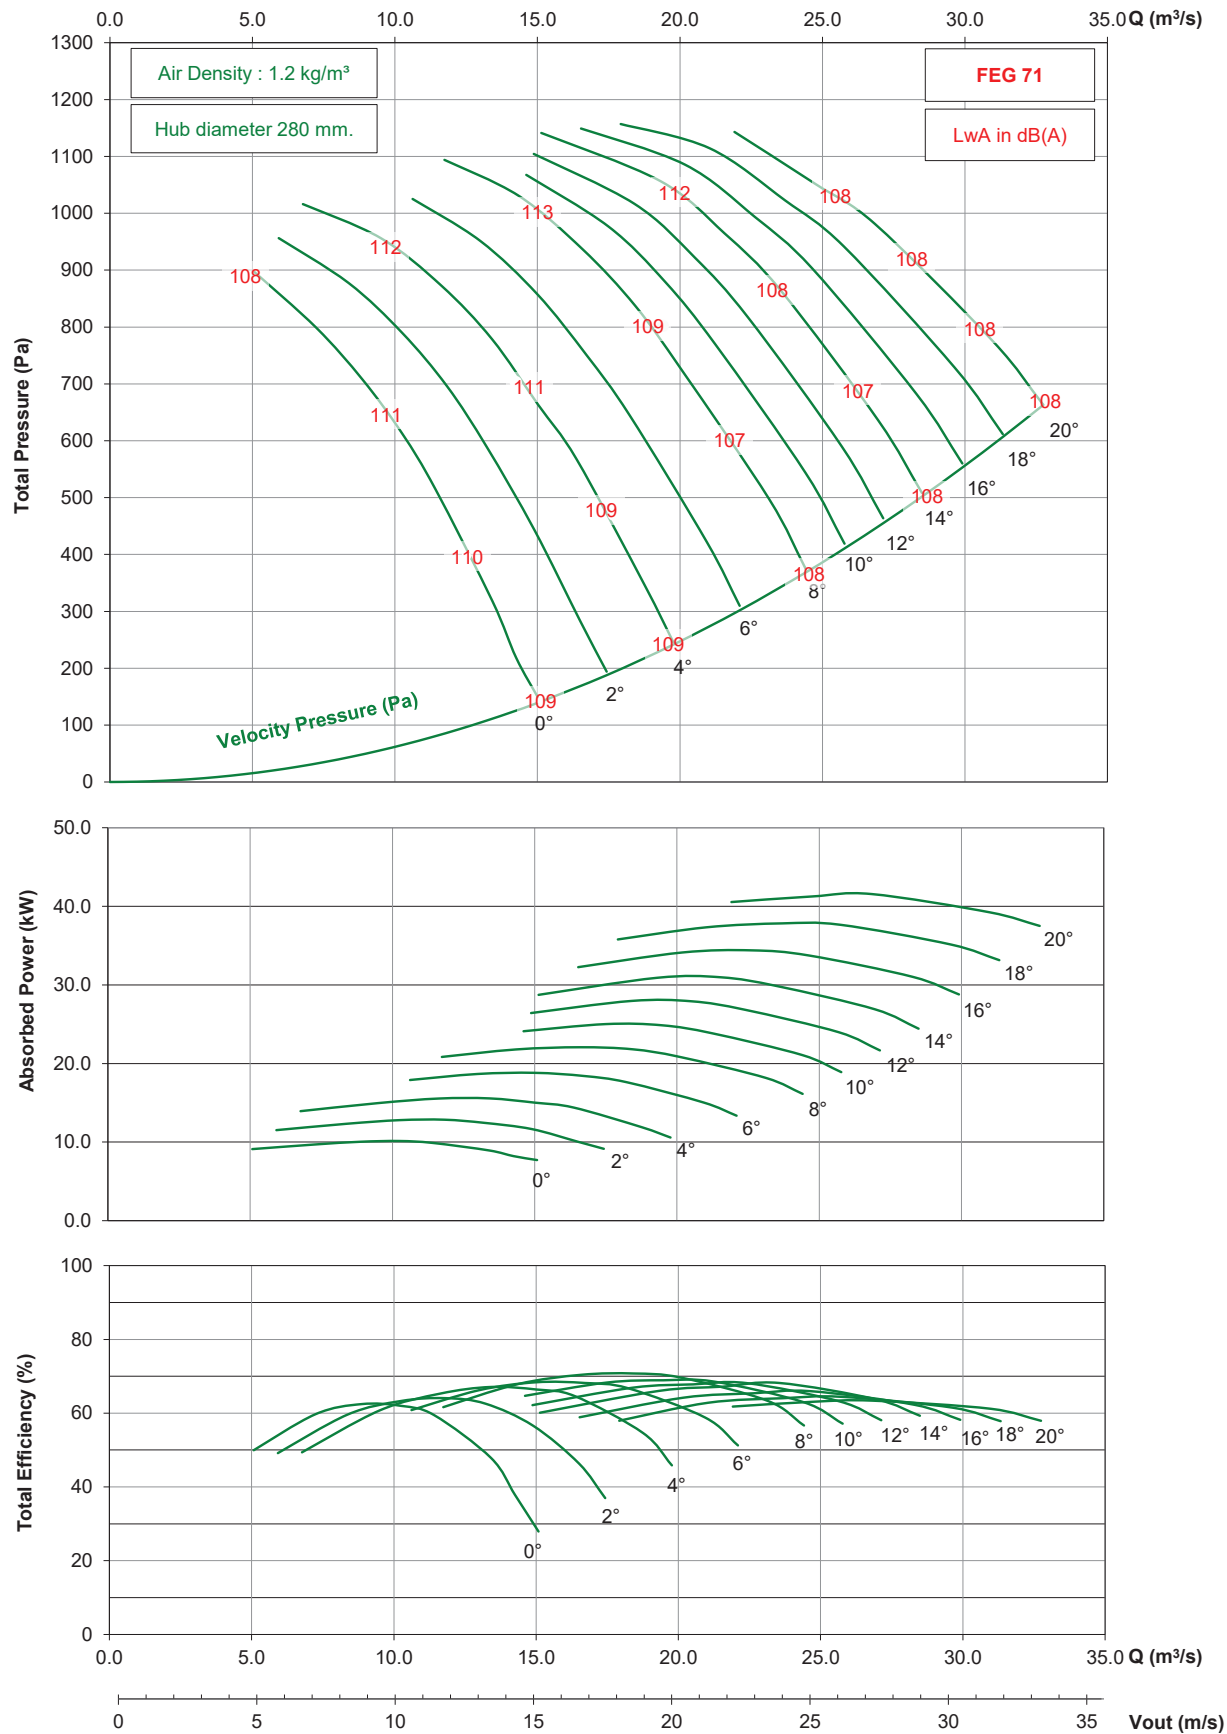


- Performance certified for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).
 - The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lwi(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA1120/ 14AA / 9-12 (280)

1150 rpm - 60 Hz

KRUGER

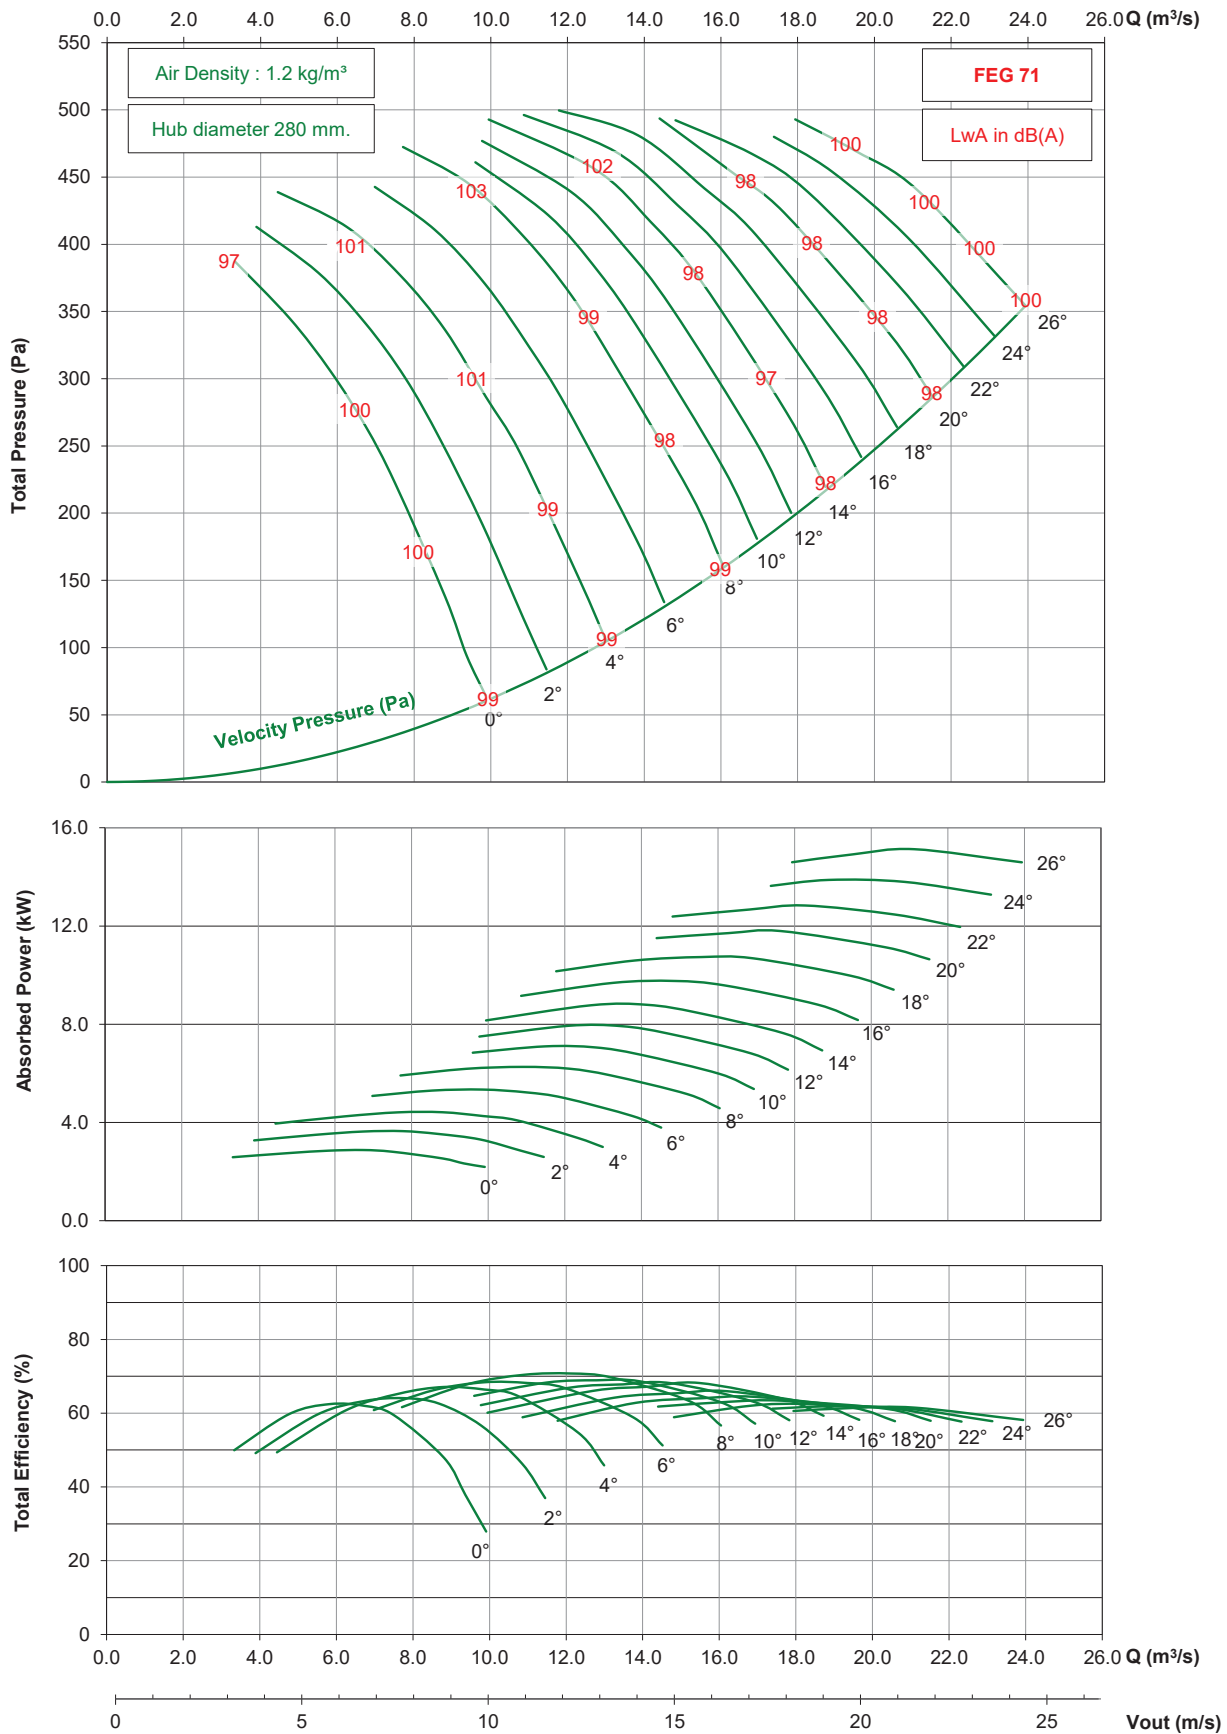


- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

TDA1120 / 14AA / 9-12 (280)

875 rpm - 60 Hz

KRUGER

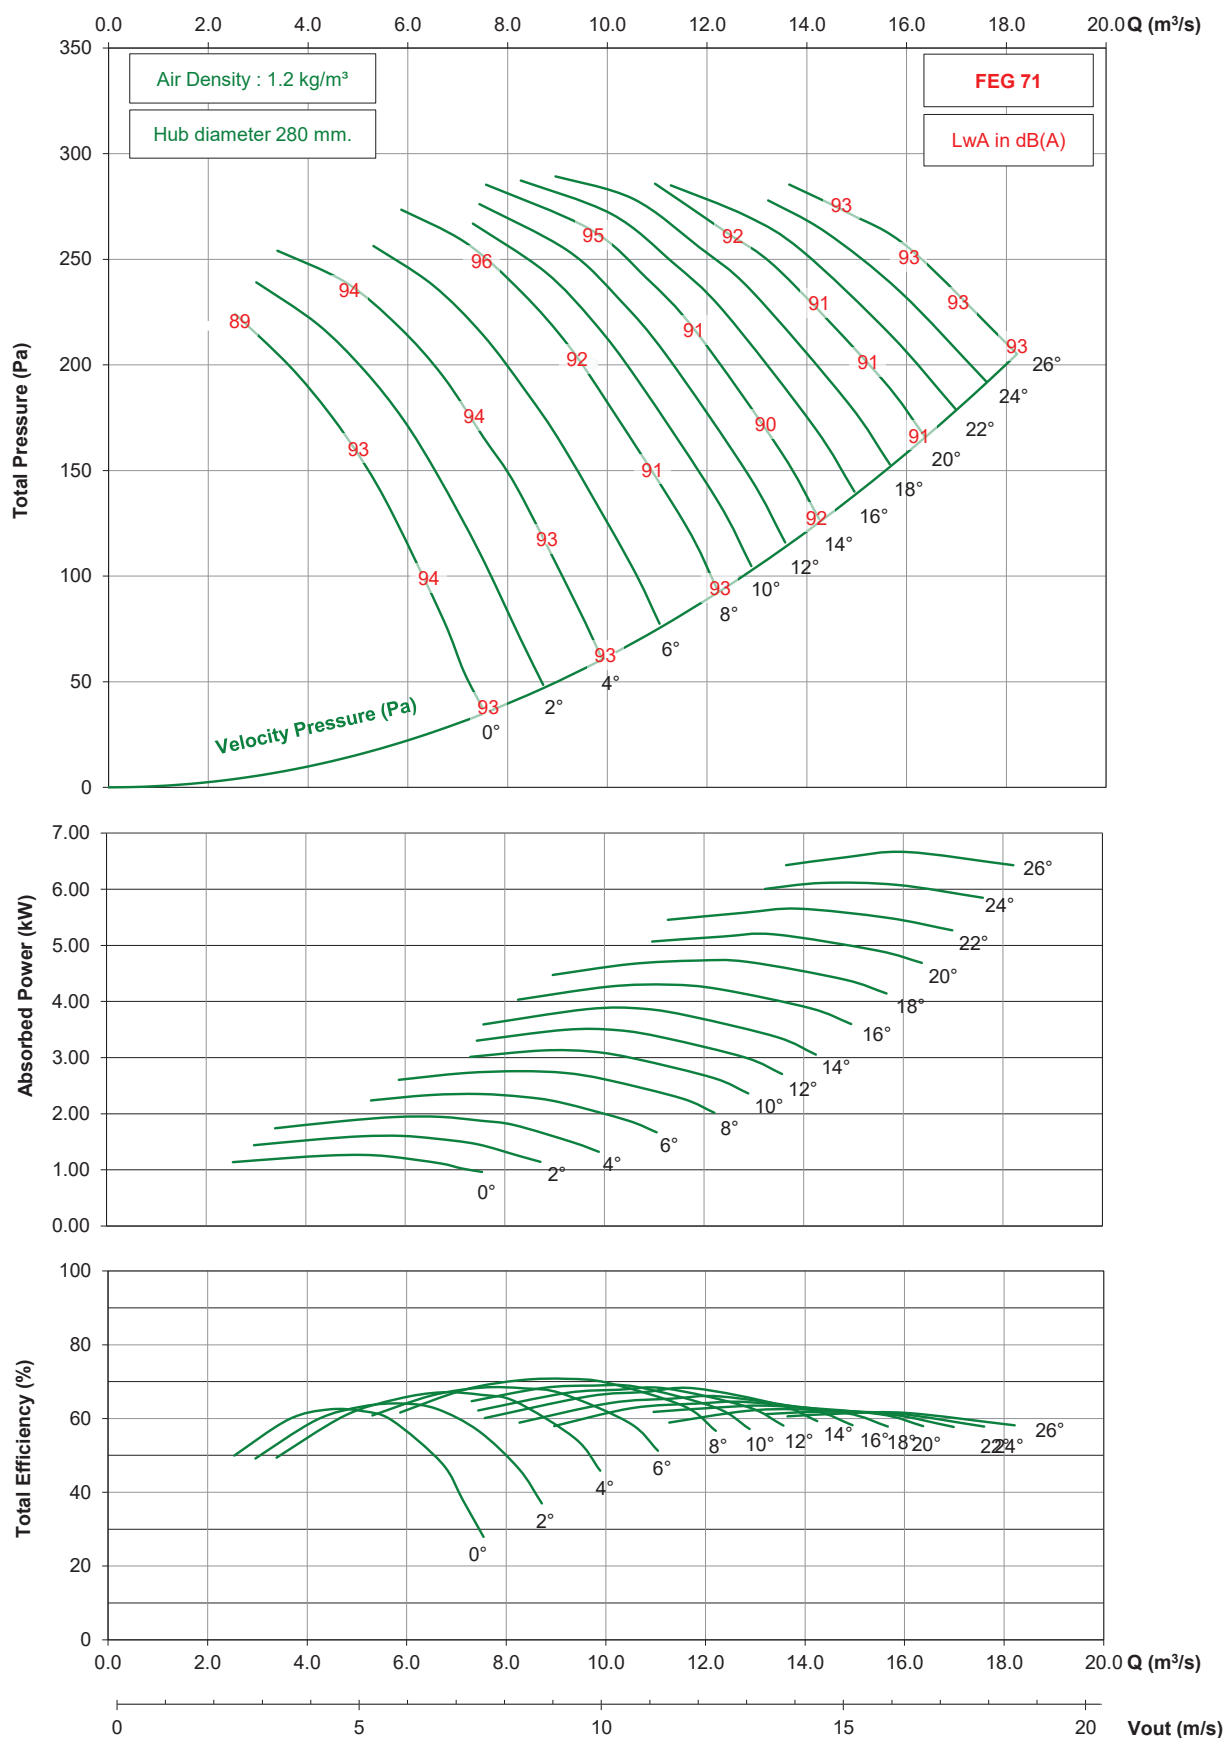

- Performance certified is for installation type D - ducted inlet, ducted outlet. Performance ratings do not include the effects of appurtenances (accessories).

- The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Values shown are for inlet Lw(A) sound power levels for installation type D - ducted inlet, ducted outlet. Ratings include the effects of duct end correction.

KRUGER VENTILATION GROUP

THAILAND (Regional Headquarters)

KRUGER VENTILATION INDUSTRIES ASIA CO., LTD.

30/159 Moo 1, Sinsakorn Industrial Estate, Chetsadawithi Road,
Khok Kham, Mueng, Samuthsakorn 74000, Thailand
Tel: +662 1054298 Fax: +662 0248256-9
Email: mktg@krugerventasia.co.th
Website: www.krugerfan.com

INDIA (Haryana)

KRUGER VENTILATION INDUSTRIES (INDIA) PVT. LTD.

Plant-1 :Khasra No. 150/20/2/1, 151/16/2/2,
Village-Rohad, Bahadurgarh, Jajhjar, Haryana - 124507,
India Plant-2 : Khasra No.: 2-0, 14/3, 4-10, 15/1, 6-2, 20
Area: 4 Kanal 4 Marla, Khewat No.: 1007/868,
Khata No.: 1068, Killa No.: 146/6 (7-12, 7/1)
Village Rohad, Bahadurgarh-Rohtak Road,
Bahadurgarh, District Jhajjar - 124507, Haryana, India
Tel: +91 995 8991 652, +91 995 8991 660, +91 858 6966 303
Email: sales.kni@krugerindia.com

INDIA (Mumbai)

KRUGER VENTILATION INDUSTRIES (INDIA) PVT. LTD.

Village-Kalamgaon, Mumbai-Nashik Highway,
Tal-Shahapur, Dist. Thane- 421 601. Maharashtra, India
Tel. : +91 996 0558 899 / 997 5577 211
Fax : +91 2527 240075
E-mail : sales@krugerindia.com

INDIA (Chennai)

KRUGER VENTILATION INDUSTRIES (INDIA) PVT. LTD.

Plot No: E-23/1, Survey No – 279, SIPCOT Industrial Park,
Irungattukottai, Sriperumbudur Taluk, Kancheepuram District,
Tamil Nadu, Pin – 602117, India.
Tel. : +91 978 9982 290
E-mail : giriprabu@krugerindia.com

MIDDLE EAST

CONTACT : KRUGER VENTILATION INDUSTRIES (INDIA) PVT. LTD.

Tel. : +91 9766323730 / +91 9975577211
Email : rahul@krugerindia.com

MALAYSIA

KRUVENT INDUSTRIES (M) SDN. BHD.

Lot 850, Jalan Subang 7, Taman Perindustrian Subang,
47500, Subang Jaya, Selangor D.E., Malaysia
Tel: +603 80743399 Fax: +603 80743388
Email: mktg@kruger.com.my

INDONESIA

PT. KRUGER VENTILATION INDONESIA

Jl. Teuku Umar No. 20, Karawaci,
Tangerang 15115, Indonesia
Tel: +62 21-5512288
Fax: +62 21-5513502
Email: mktg@krugerindo.co.id

AUSTRALIA

S&P-KRUGER AUSTRALIA PTY. LTD.

2 Cunningham St, Moorebank N.S.W. 2170
Tel: +612-98227747
Fax: +612-98227757
Email: info@sandpkruger.com.au

VIETNAM

KRUGER VENTILATION INDUSTRIES (VIETNAM) CO., LTD.

Lot A7, 2-4, C2 Road, Thanh Thanh Cong IZ,
Trang Bang District, Tay Ninh Province, Vietnam
Tel: +84-276 3585200/01/02 Fax: +84-276 3585199
Email: mktg@krugervn.com

CHINA (Shanghai)

SHANGHAI KRUGER VENTILATION CO., LTD.

No. 500 Yuanguo Road, Anting, Jiading District,
Shanghai 201814, P.R. China
Tel: +86 21-69573266 Fax: +86 21-69573296
Email: ksh@krugerfan.com.cn
Website: www.krugerfan.com.cn

CHINA (Tianjin)

TIANJIN KRUGER VENTILATION CO., LTD.

Jingjin Science and Technology Park,
Wuqing District, Tianjin 301700, P.R. China
Tel: +86 22-22143480 Fax: +86 22-22143482
Email: ktj@krugerfan.com.cn

CHINA (Guangzhou)

GUANGZHOU KRUGER VENTILATION CO., LTD.

No. 9 Huahui Road, Huashan Town,
Huadu District Guangzhou 510880, P.R. China
Tel: +86 20-66356635 Fax: +86 20-86786001/86786500
Email: kgv@krugerfan.com.cn

CHINA (Wuhan)

WUHAN KRUGER VENTILATION CO., LTD.

No. 805 Huian Avenue, Dongxihu District Wuhan,
Hubei 430040, P.R. China
Tel: +86 27- 83248840
Fax: +86 27- 83261886
Email: kwv@krugerfan.com.cn

HONG KONG

KRUGER VENTILATION (HONG KONG) LIMITED.

Flat E, 8/F, Yeung Yiu Chung (No.8) Industrial Building,
20 Wang Hoi Road, Kowloon Bay, Kowloon, Hong Kong
Tel: +852 22469182 Fax: +852 22469187
Email: info@kruger.com.hk

TAIPEI

KRUGER VENTILATION (TAIWAN) CO., LTD.

No. 157, Ping-an Rd, Hengfeng Village,
Dayuan Shiang Taoyuan County 337, Taiwan
Tel: +886 3-3859119 Fax: +886 3-3859118
Email: sales@krugertwn.com.tw

KOREA

NEOMATE CO., LTD.

80, Seogeunnae-gil, Paltan-myeon, Hwaseong-si,
Gyeonggi-do 18575, Korea
Tel: +82-2-2679-2052 Fax: +82-2-2679-2174
Email: y7890@neomate.co.kr

PHILIPPINES

KRUGER M & E INDUSTRIES CORP.

B3 Welborne Industrial Park, Bancal, Carmona,
Cavite, Philippines 4116
Tel: +63-917-561-9088, +63-917-596-7288,
+63-917-712-8438, +63-917-306-8288 Fax: -
Email: mktg.ph@krugerfan.com

SINGAPORE

KRUGER ENGINEERING PTE. LTD.

2 Venture Drive #20-23, Vision Exchange,
Singapore 608526.
Tel: +65 68631191 Fax: +65 68631151
Email: mktg@krugerfan.com

A member of



Kruger Ventilation Industries (India) Pvt. Ltd.

Kruger Centre, MumbaiNasik Highway,
Kalamgaon, Shahapur, Thane 421601,
Maharashtra, India

Tel. +91 9960558899 / 9975577211

Website: www.krugerfan.com

CAT058.E0.KAG.ED1 July 2026

A member of

