

FANBOS

This economic, high volume low speed fan design is ideal for circulating air in Industrial and Commercial applications and can help save energy year round.

The FANBOS blankets a very large area by constantly moving air to create an expansive comfort zone. As a result, the big ceiling fan can create an evaporative cooling effect of three to four degrees throughout the facility. During the heating season, The FANBOS can destratify uneven temperatures that can be in excess of fifteen degrees from ceiling to floor. This results in significant energy savings since the heating system cycles less frequently.

CP96WH/CP120WH



CP96-LEDBK - Complete with light kit



CP96BK/CP120BK



LK-CPPG - Grey



LK-CPWH - White



LK-CPBK - Matte Black

Optional 1000 Lumens Light Kits

FEATURES

- Six aluminum airfoils contoured for maximum air movement.
- DC motor for quiet performance and low operating cost.
- 5 speed forward and reverse with remote control (wall mountable).
- Control multiple fans with one remote within 65 1/2'.
- 1/4" powder-coated steel chassis resists rusting and corrosion even in cold and damp environments.
- Standard with a 1" diameter 12" long downrod. 24" and 36" lengths available to purchase separately.
- Easy installation with standard ball hanger design.

- 48" lead wires.
- Wet rated.
- Available in grey, white and matte black finishes.
- CP96-LEDBK comes complete with light kit
- 5 year warranty.

PERFORMANCE SPECIFICATIONS

CP120							Diameter: - 10 ft (3 m) 120 V, 1PH, 60 Hz	
RPM	CFM	WATTS	AMPS	CFEI	STANDBY POWER (WATTS)	COVERAGE		
71	20637	63.1	0.9	2.62	0.31	2500 FT ²		
62	18107	40.6	0.6	3.59				
51	14922	20.8	0.3	5.75				
41	11975	10.4	0.2	9.85				
33	10032	6.1	0.1	15.25				
CP96							Diameter: - 8 ft (2.4 m) 120 V, 1PH, 60 Hz	
RPM	CFM	WATTS	AMPS	CFEI	STANDBY POWER (WATTS)	COVERAGE		
105	16118	63.7	0.9	2.93	0.31	2500 FT ²		
90	15074	41.0	0.6	4.17				
74	13099	20.9	0.3	6.95				
59	11397	10.5	0.2	11.98				
47	10249	6.0	0.1	18.59				

Fans tested in forward direction of operation



Canarm Ltd. Certifies that the FANBOS Series shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Program Seal applies to airflow rate and power rating free delivery only. Performance ratings do not include the effects of appurtenances.

DIMENSIONS

CP120 - 10' span x 8 1/4" height (plus downrod height)
CP96 - 8' span x 8 1/4" height (plus downrod height)

DOWNRODS

24" L24" x 1" dia.



DR24-CPPG Painted grey



DR24-CPBK Matte black



DR24-CPWH White

36" L36" x 1" dia.




DR36-CPPG Painted grey



DR36-CPBK Matte black



DR36-CPWH White

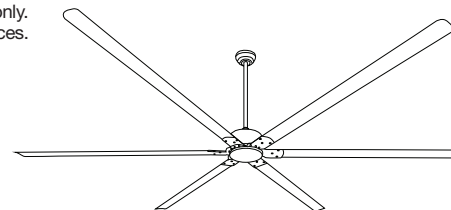

COMPLETE WITH
5 SPEED CONTROL