

RITEHITE[®]


ALWAYS LOOKING AHEAD

REVOLUTION[®]

CLASSIC

PERFORMANCE

CATALOG

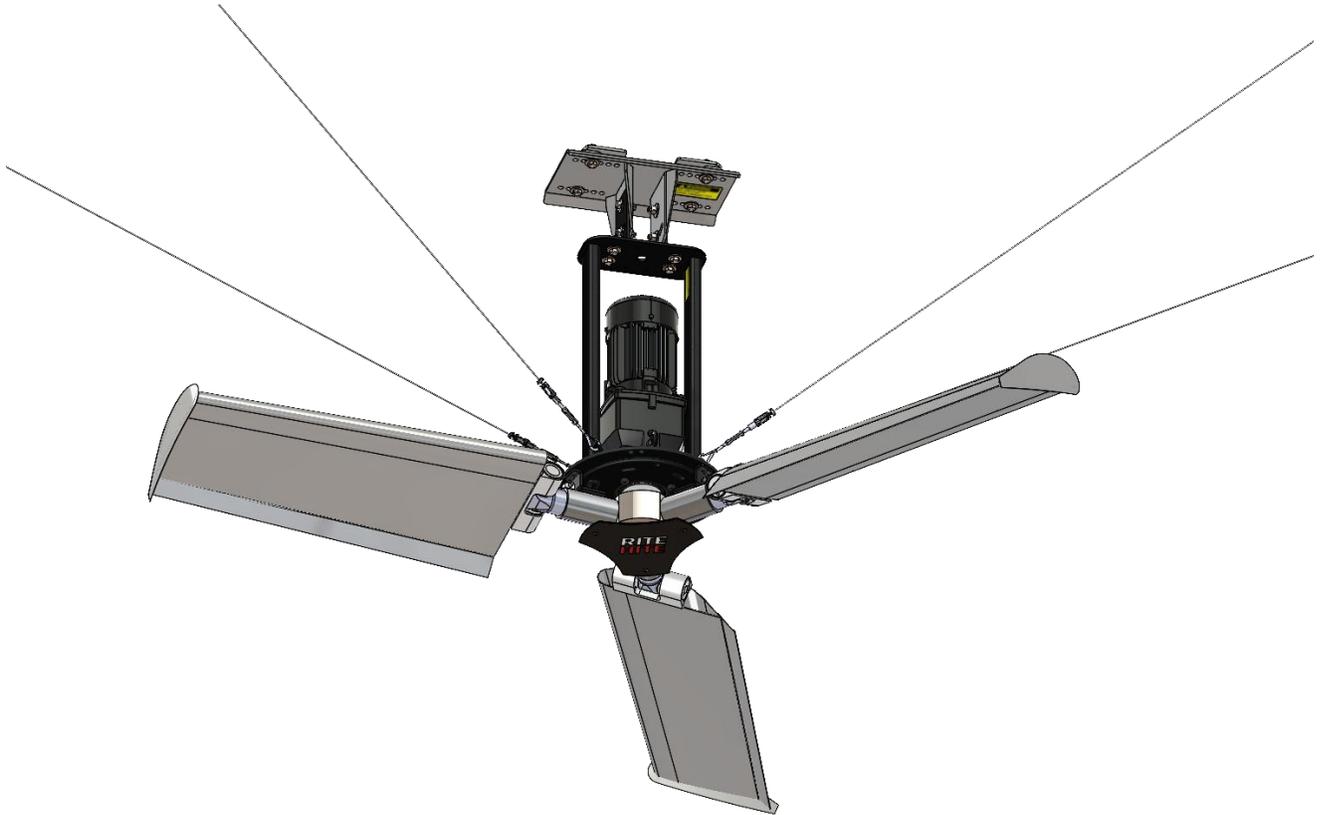

January 2026

Rite-Hite | 195 S. Rite-Hite Way | Milwaukee, WI 53204 | www.ritehite.com



Rite-Hite Engineered Solutions Group certifies that the fan models 8'-24' shown herein are licensed to bear the AMCA seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program.

The AMCA Certified Ratings Seal apply to air performance ratings only. The AMCA Certified Ratings Seal applies at free delivery only. Performance ratings do not include the effects of appurtenances (accessories).

No part of this document may be reproduced or translated into a different language without the prior written consent of Rite-Hite. The information contained in this document is subject to change without notice.

REVOLUTION[®]

CLASSIC

24 ft (7.3 m) Diameter

400-480V, 3Φ, 60 Hz					
Fan Speed (RPM)	Power (W)	Airflow (CFM)	CFM/W	* CFEI@100%	* CFEI@40%
40	697	181,472	261	1.35	1.79
32	412	142,143	345		
23.5	210	102,970	491		
15.5	104	66,022	637		
8	70	32,464	463		

Standby Power: 7 Watts

200-240V, 1Φ, 60 Hz					
Fan Speed (RPM)	Power (W)	Airflow (CFM)	CFM/W	* CFEI@100%	* CFEI@40%
40	656	182051	277	1.48	2.31
32	408	141586	347		
23.5	232	101504	438		
15.5	75	62714	839		
8	36	31932	890		

Standby Power: 5 Watts

20 ft (6.1 m) Diameter

400-480V, 3Φ, 60 Hz					
Fan Speed (RPM)	Power (W)	Airflow (CFM)	CFM/W	* CFEI@100%	* CFEI@40%
48	705	137886	196	1.26	1.61
38	411	108088	263		
28.5	212	78352	370		
18.5	106	49456	469		
9.5	72	24055	332		

Standby Power: 7 Watts

200-240V, 1Φ, 60 Hz					
Fan Speed (RPM)	Power (W)	Airflow (CFM)	CFM/W	* CFEI@100%	* CFEI@40%
48	646	137442	213	1.34	2.26
38	395	107407	272		
28.5	219	76447	350		
18	71	47388	663		
9.5	35	24024	679		

Standby Power: 5 Watts

January 2026

Rite-Hite | 195 S. Rite-Hite Way | Milwaukee, WI 53204 | www.ritehite.com

REVOLUTION[®] CLASSIC

16 ft (4.9 m) Diameter

400-480V, 3Φ, 60 Hz					
Fan Speed (RPM)	Power (W)	Airflow (CFM)	CFM/W	* CFEI@100%	* CFEI@40%
64.5	851	110708	130	1.23	1.56
51	470	89026	190		
38	232	63015	271		
25	113	39703	351		
12.5	75	19971	267		

Standby Power: 7 Watts

200-240V, 1Φ, 60 Hz					
Fan Speed (RPM)	Power (W)	Airflow (CFM)	CFM/W	* CFEI@100%	* CFEI@40%
64	793	110808	140	1.33	2.16
51.5	452	87426	193		
38	225	62989	280		
24	81	39389	488		
12.5	37	19585	531		

Standby Power: 5 Watts

12 ft (3.7 m) Diameter

400-480V, 3Φ, 60 Hz					
Fan Speed (RPM)	Power (W)	Airflow (CFM)	CFM/W	* CFEI@100%	* CFEI@40%
79.5	771	71273	92	1.21	1.53
63.5	430	56946	132		
47	216	41813	194		
30.5	111	26517	240		
16	74	13186	179		

Standby Power: 7 Watts

200-240V, 1Φ, 60 Hz					
Fan Speed (RPM)	Power (W)	Airflow (CFM)	CFM/W	* CFEI@100%	* CFEI@40%
79.5	691	70088	101	1.30	2.17
63.5	413	56900	138		
47	183	42179	230		
30.5	75	25600	341		
16	37	13047	357		

Standby Power: 5 Watts

January 2026

Rite-Hite | 195 S. Rite-Hite Way | Milwaukee, WI 53204 | www.ritehite.com

REVOLUTION[®] CLASSIC

8 ft (2.4 m) Diameter

400-480V, 3Φ, 60 Hz					
Fan Speed (RPM)	Power (W)	Airflow (CFM)	CFM/W	* CFEI@100%	*CFEI@40%
126.5	771	40623	53	1.35	1.61
101.5	427	31638	74		
75	218	24090	110		
49	114	15421	135		
25	76	7564	99		

Standby Power: 7 Watts

200-240V, 1Φ, 60 Hz					
Fan Speed (RPM)	Power (W)	Airflow (CFM)	CFM/W	* CFEI@100%	*CFEI@40%
126	701	39812	57	1.43	2.01
101.5	416	32574	78		
75	188	23063	123		
48	81	14567	179		
24.5	38	7608	198		

Standby Power: 5 Watts

*Ceiling Fan Energy Index CFEI based on Ansi/AMCA Standard 208 and 10 CFR 430

**Fans tested in forward direction of operation.

January 2026

Rite-Hite | 195 S. Rite-Hite Way | Milwaukee, WI 53204 | www.ritehite.com