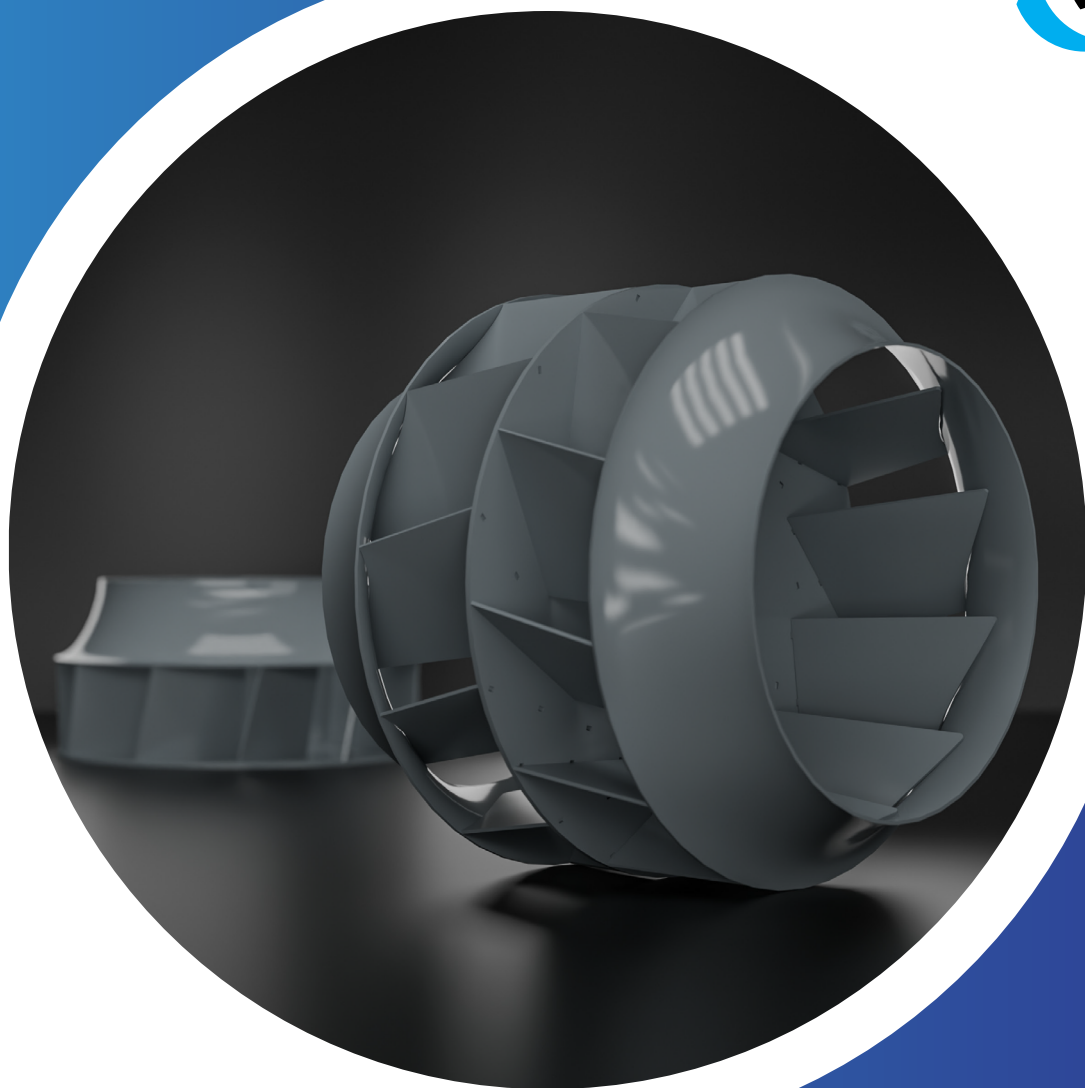


ME

SISW Belt Fans - Backward Series

2026 Products Catalogue




Table of Content

About ME	Page	4
Research & Development	Page	6
Centrifugal Single Inlet Fans - Belt		
Centrifugal Single Inlet Fans - Belt (Introduction)	Page	7
Centrifugal Single Inlet Fans - Belt (Designation Key)	Page	8
Centrifugal Single Inlet Fans - Belt (Geometry)	Page	9
Centrifugal Single Inlet Fans - Belt (Data Sheets)	Page	10



ME remains dedicated to quality at every stage of design and manufacturing. They are **ISO 9001** certified, and their products are approved by the **Egyptian Organization for Standardization and Quality (EOS)**.

ME supplies a variety of industrial and ventilation fans for different applications, including industrial plants, commercial establishments, smoke extraction systems, and general ventilation needs.



Mechatronics Engineering (ME). certifies that the high efficiency free wheels backward Inclined fans type CF-SIB-B sizes 315 to 1000 mm as shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA publication 211 and AMCA publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

Who We Are

Since its establishment, [Mechatronics Engineering Industries \(ME\)](#) has specialized in the design and manufacture of high-performance industrial fans and accessories. Our deep-rooted expertise, combined with cutting-edge engineering technology, has positioned us as a national leader in fan manufacturing.

What sets [\(ME\)](#) apart is our application expertise and commitment to customer-focused innovation. Our engineering team is renowned for delivering fast, effective solutions whether optimizing existing fan technology or designing and prototyping custom fan systems. This dedication to problem-solving has earned us the trust of our customers, who consistently rely on us for their air-moving needs. Simply put, we don't just build fans; we engineer solutions.

Our Vision

To be a global leader in fan engineering and FRP (Fiber Reinforced Plastic) technology by driving innovation, optimizing resource consumption, and delivering cutting-edge fan solutions. We strive to outperform the competition through technological advancements, industry-leading quality, and a commitment to sustainable development. Our goal is to serve the global community with innovative, high-efficiency fan products while upholding the highest industry

Our Mission

We are dedicated to delivering high-quality products, efficient services, and competitive pricing while maintaining technical superiority. Our mission is to contribute to the advancement of global industries by providing exceptional fan technology solutions that enhance efficiency, sustainability, and performance. We remain committed to creating value for our customers, employees, and stakeholders, ensuring long-term success for all.



Research & Development

The Research & Development division is dedicated to the continuous pursuit of optimized performance, exploring product evolutions, and industrializing new solutions.

Our ME team employs cutting-edge Finite Element Method (FEM) and Computational Fluid Dynamics (CFD) technologies.

FEM - Finite Element Model

Finite element methods (FEM) are widely used to analyze and optimize industrial fan blades, particularly axial fan blades, to enhance performance, durability, and efficiency under demanding conditions like high vibration, temperature, and corrosion. FEM involves discretizing the blade into smaller elements to simulate physical behavior, such as stress, deformation, vibration, and fatigue, enabling engineers to predict performance and refine designs without costly physical prototypes. Below is a concise overview of FEM applications for industrial fan blades based on recent research and engineering practices.

We conducted the following studies as per project based on customer need:

- Stress and Deformation Analysis.
- Optimization of Blade Geometry.
- Vibration and Resonance Analysis.
- Fatigue and Failure Analysis.
- Aerodynamic and Aeroacoustic Performance.
- Material and Manufacturing Considerations.


CFD - Computational Fluid Dynamics

Computational Fluid Dynamics (CFD) is a critical tool for analyzing and optimizing industrial fan performance, particularly for axial and centrifugal fans used in industries like HVAC, power generation. ME perform Aerodynamic Performance Analysis as per project based on adhoc projects and customer needs as following:


- Pressure and Flow Distribution.
- Tip Leakage and Vortices.
- Stall and Surge.
- Aeroacoustic Analysis based on blade profile.

Key benefits include:


- Reduced Physical Prototypes: Limits the number of prototypes needed for laboratory testing.
- Performance Evaluations: Assesses aerodynamic performance.
- Flow Studies: Analyzes flow in specific tunnel sections.
- Infrastructure Efficiency: Verifies the efficiency of designs.




Pressure Contours
(Axial fan impeller)



Stress Analysis
(Axial fan impeller)

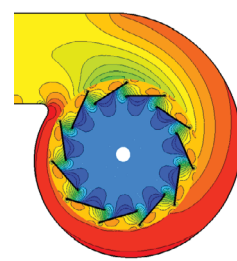

Pressure Contours
(Centrifugal fan)



Stress Analysis
(Centrifugal fan impeller)

Our designed fans are verified using computational fluid dynamics modeling and simulations. advanced software packages.

After completing our fans, our engineers will publish a beta version software [SelectME](#) which will be an extremely helpful tool to assist with the selection of products to meet your project requirements. The software will provide a detailed datasheets comprising efficiency, performance, sounds, wiring, dimensional data and specification. The software will also allow all obtained data to be exported to suit your needs.

Centrifugal Single Inlet Fans-Belt Type

Backward Series

Casing

features an all-metal construction with a heavy-gauge mild steel casing (electrostatically painted) and a galvanized steel volute, delivering exceptional durability for demanding applications. Its precision-rolled, flanged, and fully welded components ensure robust performance and extended service life, while the belt-driven design allows for flexible speed adjustment to match varying system requirements.

Impellers

impeller diameter 315 to 1000 mm, Backward-Inclined blades, Welded, Dust-repellent. impellers are factory set to meet specific customer requirements.

Motors


The centrifugal fans are equipped with IEC flanged (B3) standard motors, featuring IP55 protection. They are suitable for operation with frequency inverters and come with a standard industrial paint finish and Class [F] insulation. The motors are wired using a weatherproof cable for added durability, the belt-driven system provides flexible speed control while maintaining the same robust motor specifications as direct-drive models – ideal for applications requiring adjustable airflow without compromising durability.

Quality Management

Fans are designed and manufactured with procedures as defined in ISO 9001.

Variants

provides speed flexibility through pulley adjustments as a mechanical alternative to VSD control, while still supporting 4-pole and 6-pole motors for base speed selection. Performance data sheets include full aerodynamic and acoustic profiles for every impeller diameter and blade angle, allowing precise system matching without electronic speed controllers.

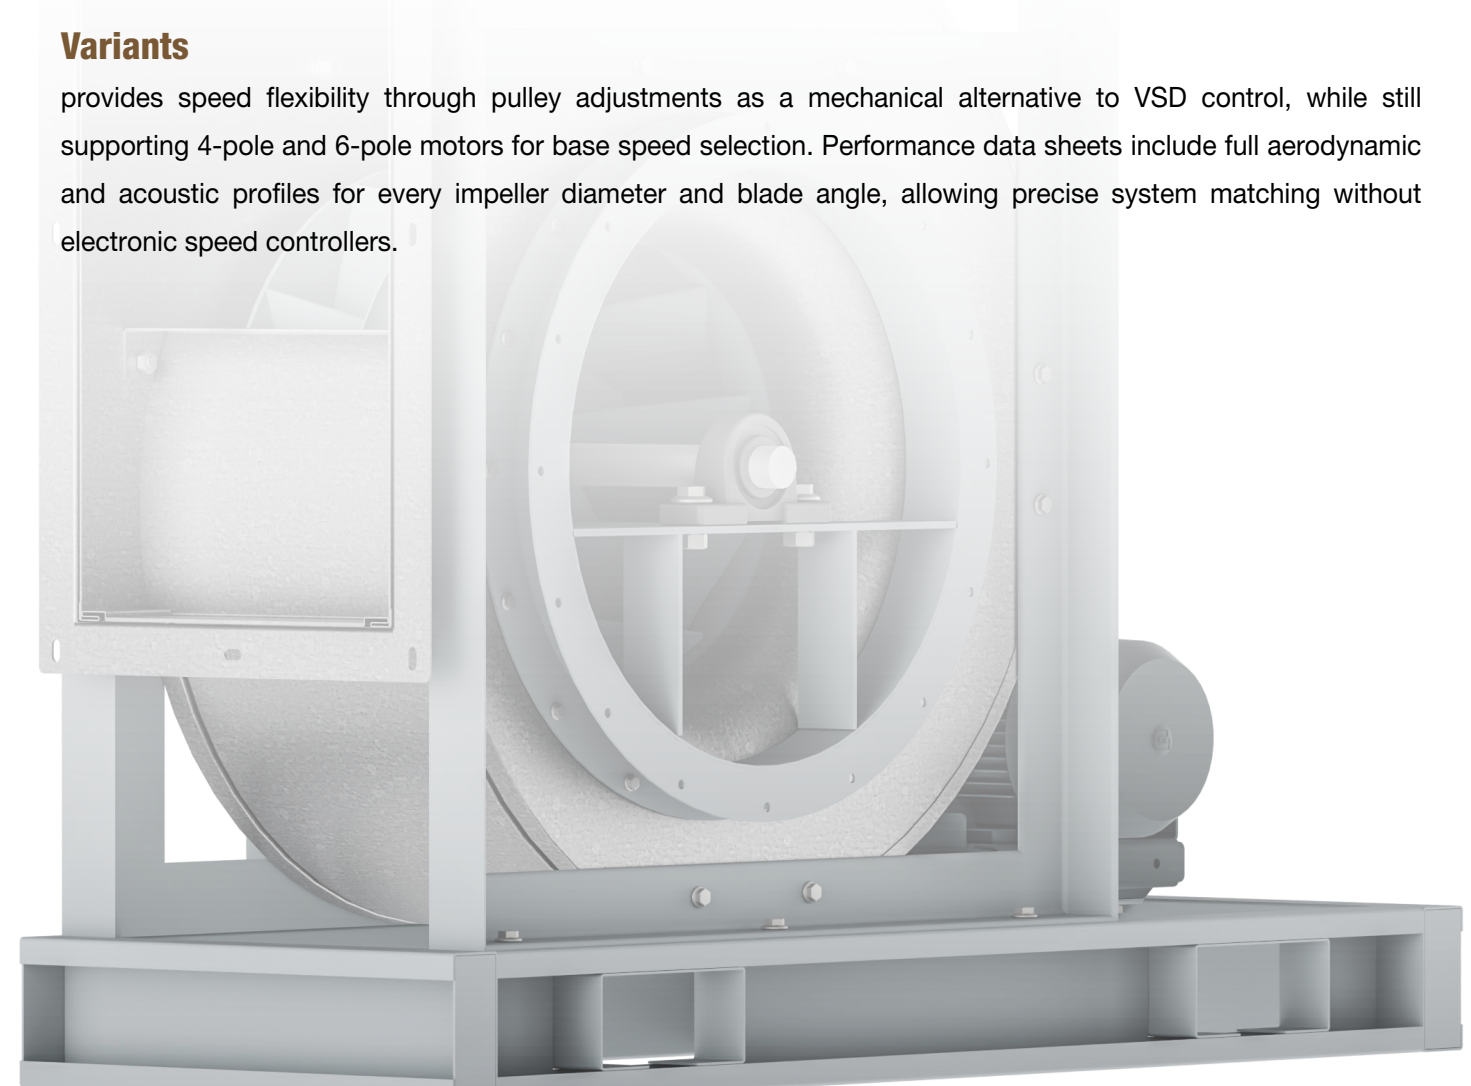

Centrifugal Single Inlet Fans-Belt Type

Backward Series

Fan Components and Material Properties:

The fan housing is made of high quality galvanized steel which resistant to corrosion. The Fan are suitable for supply Exhaust Applications.The motor and Fan Impeller are mounted on the shaft using double bearing, while the main structure is constructed with steel supports. The device is capable of exhaust air at maximum temperature 50 °C.

Fan Structure:

Single suction, backward high pressure centrifugal type fan. The fan impeller is manufactured from high strength resistant welded steel and streamlined to provide regular flow. Suitable aerodynamic wing structure, it works silently. The fan impeller is dynamically balanced based on ISO 14694 and AMCA 204 standards.

Benefits:

Produces high pressure with backward curved blade structure. They provide maximum performance with low energy. The fan body can rotate the fan rotor at high speeds.


Usage Areas:

In the extraction of clean air, industrial areas, domestic and industrial air conditioning system, mine and tunnel ventilation.

Designation Key:


CF-SIB-B-500-4T-7.5 (e.g.)

CF-S




SISW Centrifugal Fan

500




Diameter in mm

I




Blades Type

4




No. of Poles

B




Impeller Type

T



No. of Phases

B



Driver Type

7.5




Motor Power in HP

Centrifugal Single Inlet Fans-Belt Type

Backward Series

Geometric Characteristics

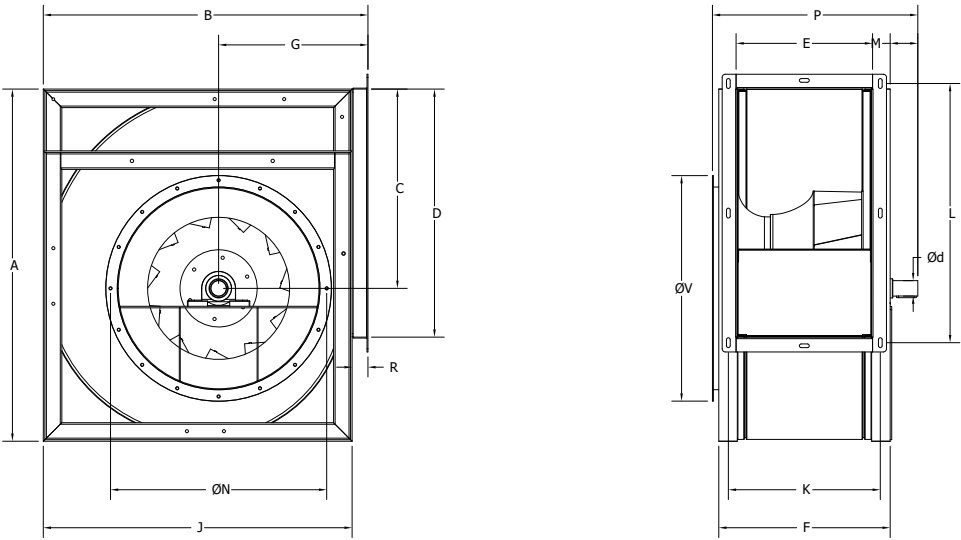


All Dimensions in mm

Model	A	B	C	D	E	F	G	J	K	L	M	N	P	R	V	d
CF-SIB-B-315	585	560	331	398	229	293	262	535	271	440	50	380	370	25	415	30
CF-SIB-B-355	650	610	368	449	249	323	283	582	290	489	55	410	397	28	442	30
CF-SIB-B-400	724	667	409	507	271	356	307	635	312	545	60	444	428	32	472	35
CF-SIB-B-450	812	763	461	574	301	402	360	718	340	610	68	502	474	45	529	35
CF-SIB-B-500	900	858	512	640	331	448	412	800	367	675	75	560	520	58	585	40
CF-SIB-B-560	1011	952	573	714	373	493	450	892	419	760	84	625	587	60	652	40
CF-SIB-B-630	1140	1062	645	800	421	545	495	1000	480	860	95	700	665	62	730	50
CF-SIB-B-710	1253	1160	707	949	498	622	536	1094	549	999	121	771	774	66	810	50
CF-SIB-B-800	1380	1271	776	1116	585	709	583	1200	627	1155	150	850	897	71	900	60
CF-SIB-B-900	1543	1417	881	1208	630	755	654	1340	682	1259	150	975	974	77	1025	65
CF-SIB-B-1000	1705	1562	985	1300	674	800	725	1480	736	1363	150	1100	1050	82	1150	65

Bill of Materials Characteristics

- 1. Belt Cover
- 2. V-Pully
- 3. V-Belt
- 4. Volute Plate
- 5. Backward Impeller
- 6. UCP Bearing
- 7. Electrical Motor
- 8. Fan Frame & Base
- 9. SISW Centrifugal Volute
- 10. Matching Flange

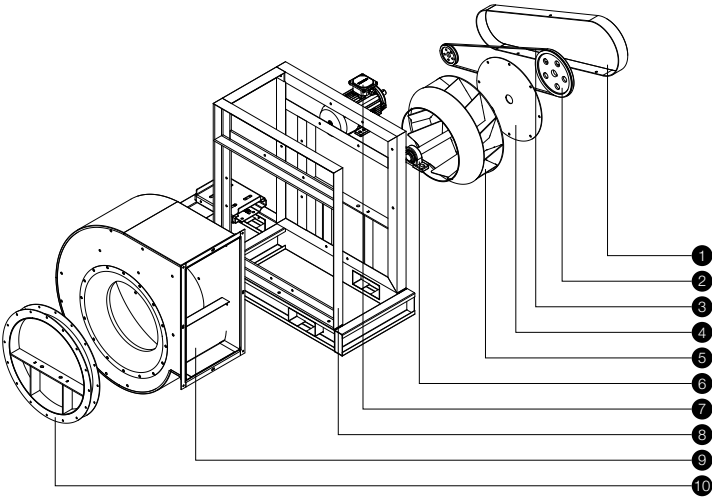


CF-SIB-B-315

CF-S Series

 **Nominal Diameter**
315 mm

 **Impeller Type**
SISW Backward

 **Driver Type**
Belt

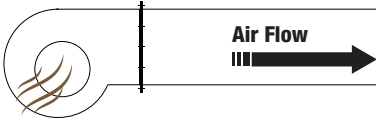



Technical Specifications

Performance Shown in diagrams refer to air density 1.2 kg/m³.
Performance tested is for installation type B - free inlet, ducted outlet.
Power rating (kW) does not include transmission losses.
Performance ratings do not include the effects of accessories.

BS ISO 5801 : 2017
AMCA 210 : 2025
Type B Installation



Curve Performance

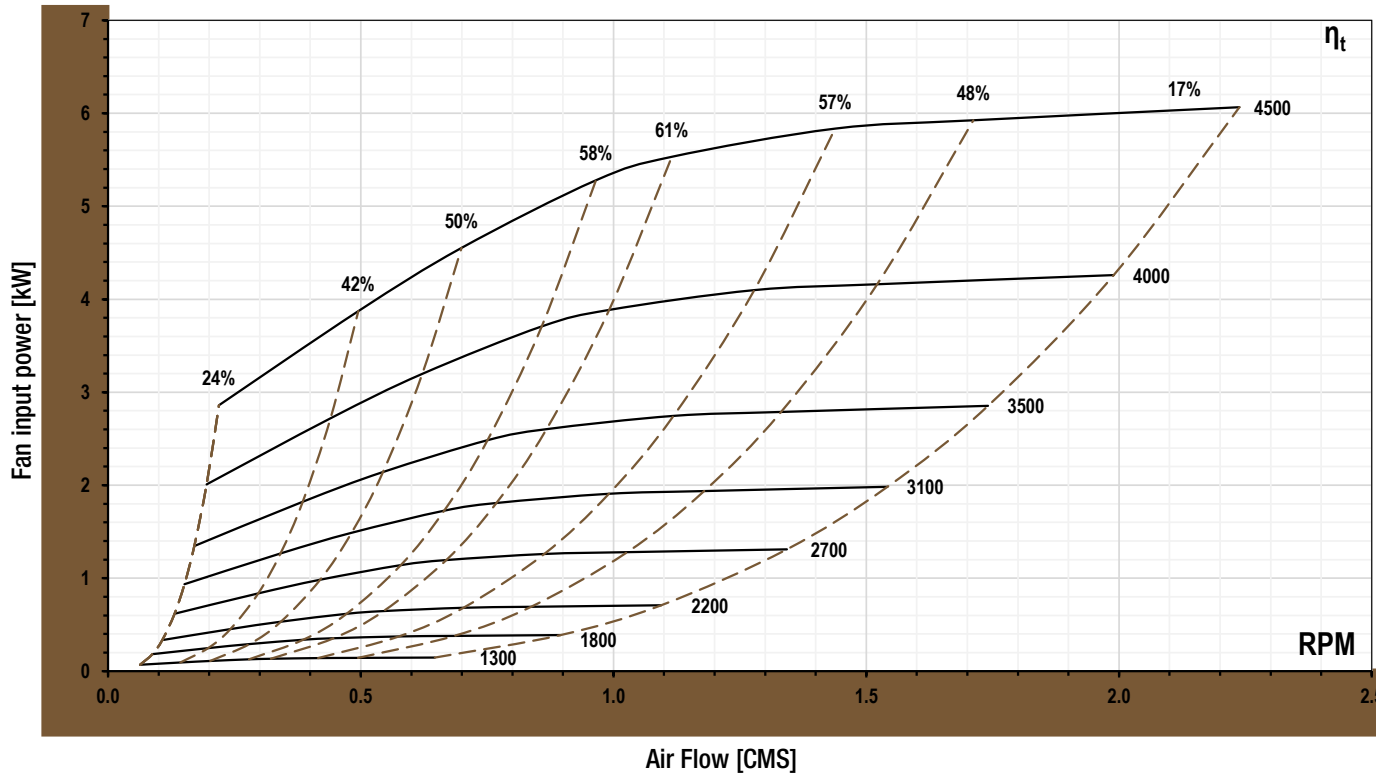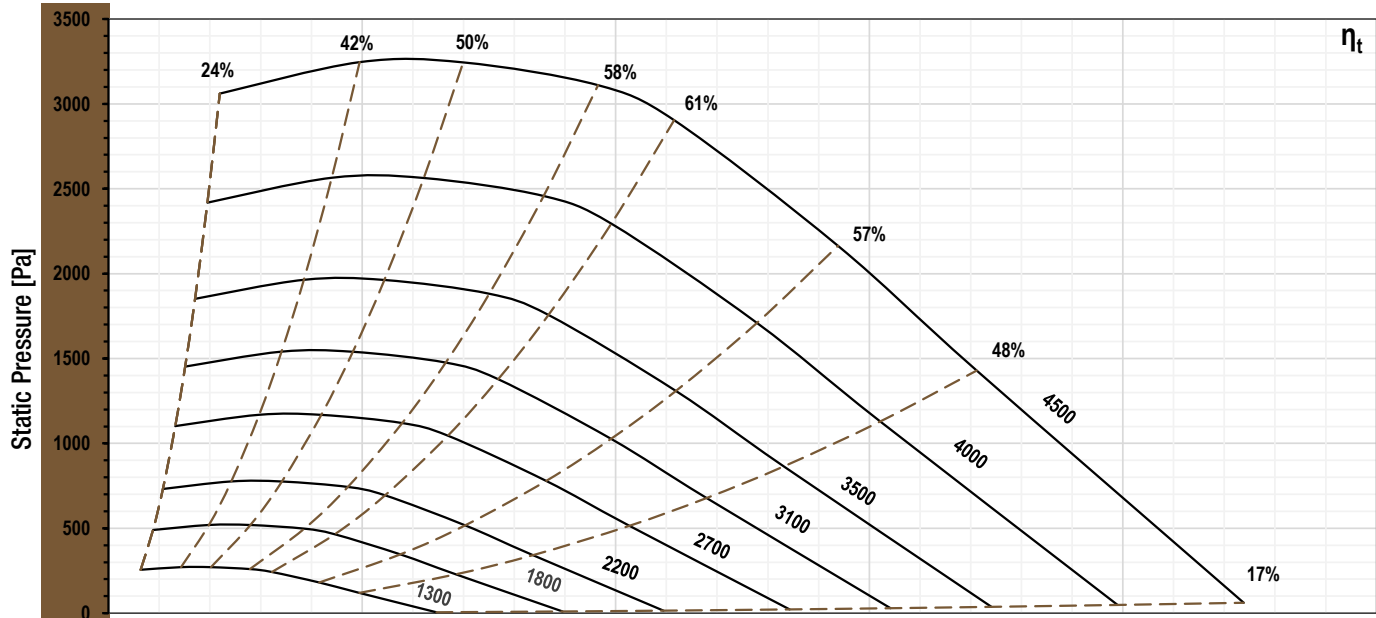

CF-SIB-B-315

Acoustic Performance

Inlet Sound Power Level												
Fan Speed	Air Flow (CMS)	Static Pressure (Pa)	63 (Hz)	125 (Hz)	250 (Hz)	500 (Hz)	1000 (Hz)	2000 (Hz)	4000 (Hz)	8000 (Hz)	Lwi (dB)	LwiA (dB)
1300 RPM	0.20	270.8	70.2	69.4	74.1	70.9	70	60.9	56.4	52.4	79.2	73.4
	0.32	242.4	70.1	69.3	74	70.8	69.9	60.8	56.3	52.3	79.1	73.3
	0.42	180.6	70.6	69.8	74.5	71.3	70.4	61.3	56.8	52.8	79.6	73.8
1800 RPM	0.28	519.1	74.4	73.6	78.3	75.1	74.2	65.1	60.6	56.6	83.4	77.6
	0.45	464.6	74.3	73.5	78.2	75	74.1	65	60.5	56.5	83.3	77.5
	0.58	346.2	74.8	74	78.7	75.5	74.6	65.5	61	57	83.8	78
2200 RPM	0.34	775.4	77	76.2	80.9	77.7	76.8	67.7	63.2	59.2	86	80.2
	0.55	694.1	76.9	76.1	80.8	77.6	76.7	67.6	63.1	59.1	85.9	80.1
	0.70	517.2	77.4	76.6	81.3	78.1	77.2	68.1	63.6	59.6	86.4	80.7
2700 RPM	0.42	1168	79.7	78.9	83.6	80.4	79.5	70.4	65.9	61.9	88.7	82.9
	0.67	1045.4	79.6	78.8	83.5	80.3	79.4	70.3	65.8	61.8	88.6	82.8
	0.86	778.9	80.1	79.3	84	80.8	79.9	70.8	66.3	62.3	89.1	83.3
3100 RPM	0.48	1539.7	81.5	80.7	85.4	82.2	81.3	72.2	67.7	63.7	90.5	84.7
	0.77	1378.1	81.4	80.6	85.3	82.1	81.2	72.1	67.6	63.6	90.4	84.6
	0.99	1026.8	81.9	81.1	85.8	82.6	81.7	72.6	68.1	64.1	90.9	85.1
3500 RPM	0.54	1962.6	83.1	82.3	87	83.8	82.9	73.8	69.3	65.3	92.1	86.3
	0.87	1756.7	83	82.2	86.9	83.7	82.8	73.7	69.2	65.2	92	86.2
	1.12	1308.9	83.5	82.7	87.4	84.2	83.3	74.2	69.7	65.7	92.5	86.7
4000 RPM	0.62	2563.4	84.8	84	88.7	85.5	84.6	75.5	71	67	93.8	88
	0.99	2294.4	84.7	83.9	88.6	85.4	84.5	75.4	70.9	66.9	93.7	87.9
	1.28	1709.6	85.2	84.4	89.1	85.9	85	75.9	71.4	67.4	94.2	88.4
4500 RPM	0.70	3244.3	86.4	85.6	90.3	87.1	86.2	77.1	72.6	68.6	95.4	89.6
	1.12	2903.9	86.2	85.4	90.1	86.9	86	76.9	72.4	68.4	95.2	89.4
	1.44	2163.7	86.8	86	90.7	87.5	86.6	77.5	73	69	95.8	90

Values shown are for (inlet Lwi and inlet LwiA) sound power levels for Installation Type B: Free inlet, duct outlet. The sound power level ratings shown are in decibels, referred to as 10-12 per AMCA International Standard 301. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Ratings do not include the effects of duct end correction.

CF-S Series

 **Nominal Diameter**
355 mm

 **Impeller Type**
SISW Backward

 **Driver Type**
Belt





Technical Specifications

Performance Shown in diagrams refer to air density 1.2 kg/m³.
Performance tested is for installation type B - free inlet, ducted outlet.
Power rating (kW) does not include transmission losses.
Performance ratings do not include the effects of accessories.

BS ISO 5801 : 2017
AMCA 210 : 2025
Type B Installation



Curve Performance

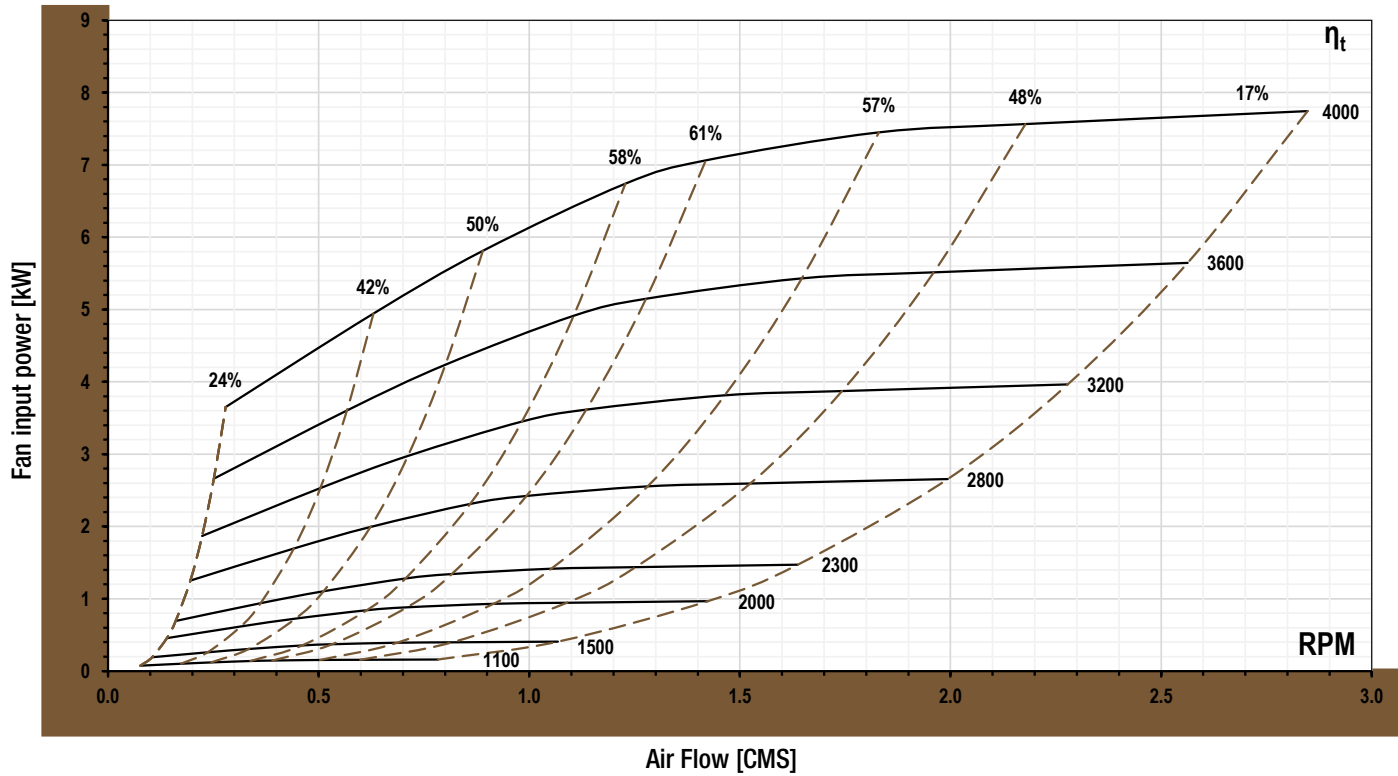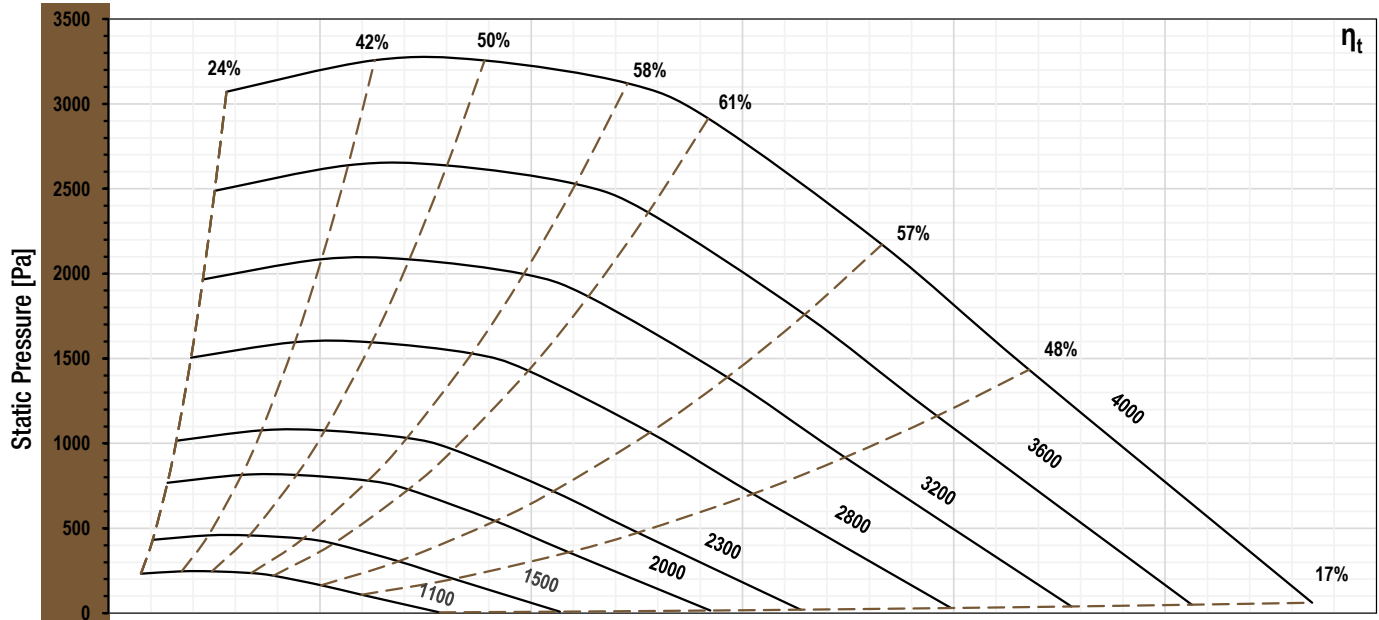

Acoustic Performance


Inlet Sound Power Level												
Fan Speed	Air Flow (CMS)	Static Pressure (Pa)	63 (Hz)	125 (Hz)	250 (Hz)	500 (Hz)	1000 (Hz)	2000 (Hz)	4000 (Hz)	8000 (Hz)	Lwi (dB)	LwiA (dB)
1100 RPM	0.24	246.2	70.6	69.8	74.5	71.3	70.4	61.3	56.8	52.8	79.6	73.8
	0.39	220.4	70.5	69.7	74.4	71.2	70.3	61.2	56.7	52.7	79.5	73.7
	0.50	164.2	71	70.2	74.9	71.7	70.8	61.7	57.2	53.2	80	74.2
1500 RPM	0.33	457.8	74.6	73.8	78.5	75.3	74.4	65.3	60.8	56.8	83.6	77.9
	0.53	409.8	74.5	73.7	78.4	75.2	74.3	65.2	60.7	56.7	83.5	77.7
	0.69	305.4	75	74.2	78.9	75.7	74.8	65.7	61.2	57.2	84	78.3
2000 RPM	0.44	813.9	78.4	77.6	82.3	79.1	78.2	69.1	64.6	60.6	87.4	81.6
	0.71	728.5	78.3	77.5	82.2	79	78.1	69	64.5	60.5	87.3	81.5
	0.92	542.8	78.8	78	82.7	79.5	78.6	69.5	65	61	87.8	82
2300 RPM	0.51	1076.4	80.2	79.4	84.1	80.9	80	70.9	66.4	62.4	89.2	83.4
	0.82	963.5	80.1	79.3	84	80.8	79.9	70.8	66.3	62.3	89.1	83.3
	1.05	717.9	80.6	79.8	84.5	81.3	80.4	71.3	66.8	62.8	89.6	83.8
2800 RPM	0.62	1595.3	82.8	82	86.7	83.5	82.6	73.5	69	65	91.8	86
	0.99	1427.9	82.6	81.8	86.5	83.3	82.4	73.3	68.8	64.8	91.6	85.9
	1.28	1064	83.2	82.4	87.1	83.9	83	73.9	69.4	65.4	92.2	86.4
3200 RPM	0.71	2083.7	84.5	83.7	88.4	85.2	84.3	75.2	70.7	66.7	93.5	87.7
	1.14	1865.1	84.4	83.6	88.3	85.1	84.2	75.1	70.6	66.6	93.4	87.6
	1.46	1389.7	84.9	84.1	88.8	85.6	84.7	75.6	71.1	67.1	93.9	88.1
3600 RPM	0.80	2637.2	86	85.2	89.9	86.7	85.8	76.7	72.2	68.2	95	89.3
	1.28	2360.5	85.9	85.1	89.8	86.6	85.7	76.6	72.1	68.1	94.9	89.1
	1.65	1758.8	86.4	85.6	90.3	87.1	86.2	77.1	72.6	68.6	95.4	89.7
4000 RPM	0.89	3255.8	87.4	86.6	91.3	88.1	87.2	78.1	73.6	69.6	96.4	90.6
	1.42	2914.2	87.3	86.5	91.2	88	87.1	78	73.5	69.5	96.3	90.5
	1.83	2171.4	87.8	87	91.7	88.5	87.6	78.5	74	70	96.8	91

Values shown are for (inlet Lwi and inlet LwiA) sound power levels for Installation Type B: Free inlet, duct outlet. The sound power level ratings shown are in decibels, referred to as 10-12 per AMCA International Standard 301. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Ratings do not include the effects of duct end correction.

CF-SIB-B-400

CF-S Series

-  Nominal Diameter
400 mm
-  Impeller Type
SISW Backward
-  Driver Type
Belt


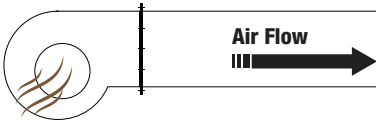


Technical Specifications

Performance Shown in diagrams refer to air density 1.2 kg/m³.
Performance tested is for installation type B - free inlet, ducted outlet.
Power rating (kW) does not include transmission losses.
Performance ratings do not include the effects of accessories.
BS ISO 5801 : 2017
AMCA 210 : 2025
Type B Installation



Curve Performance

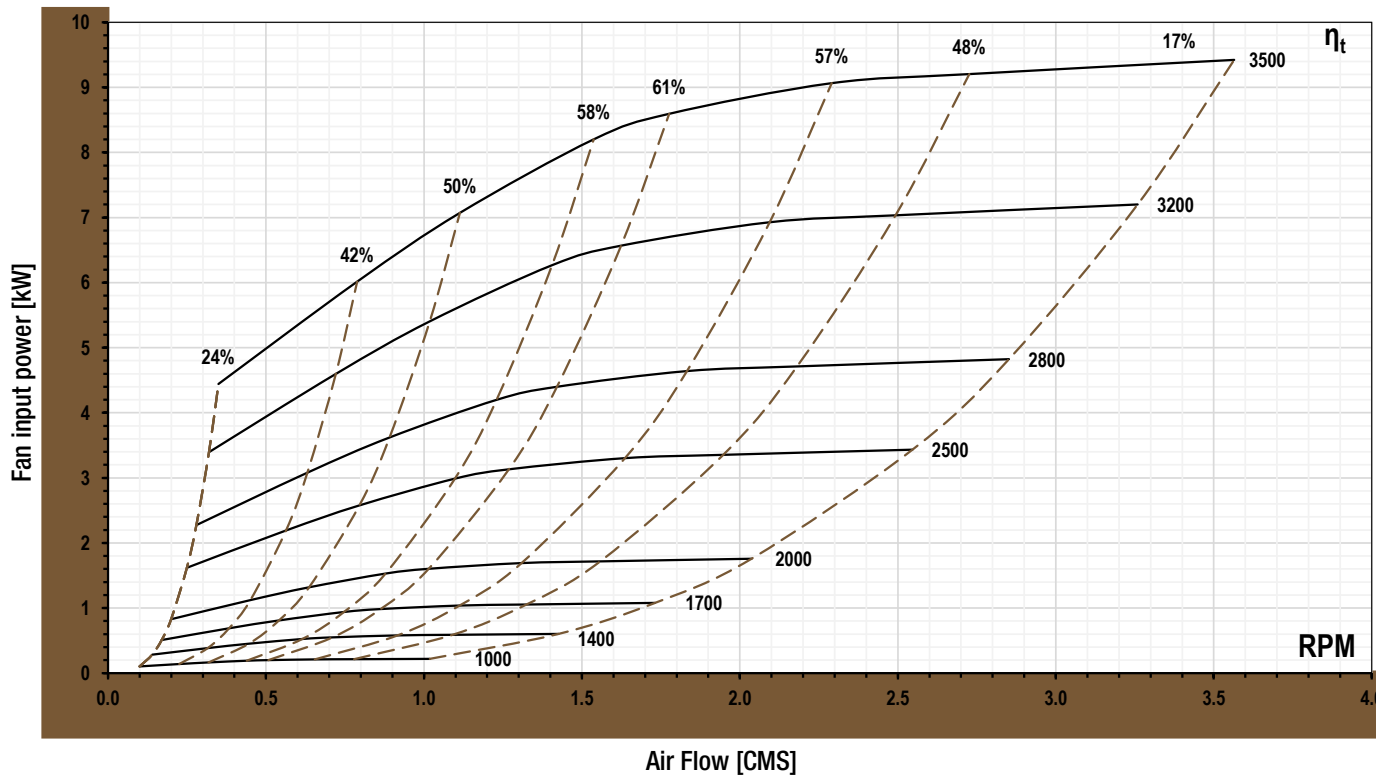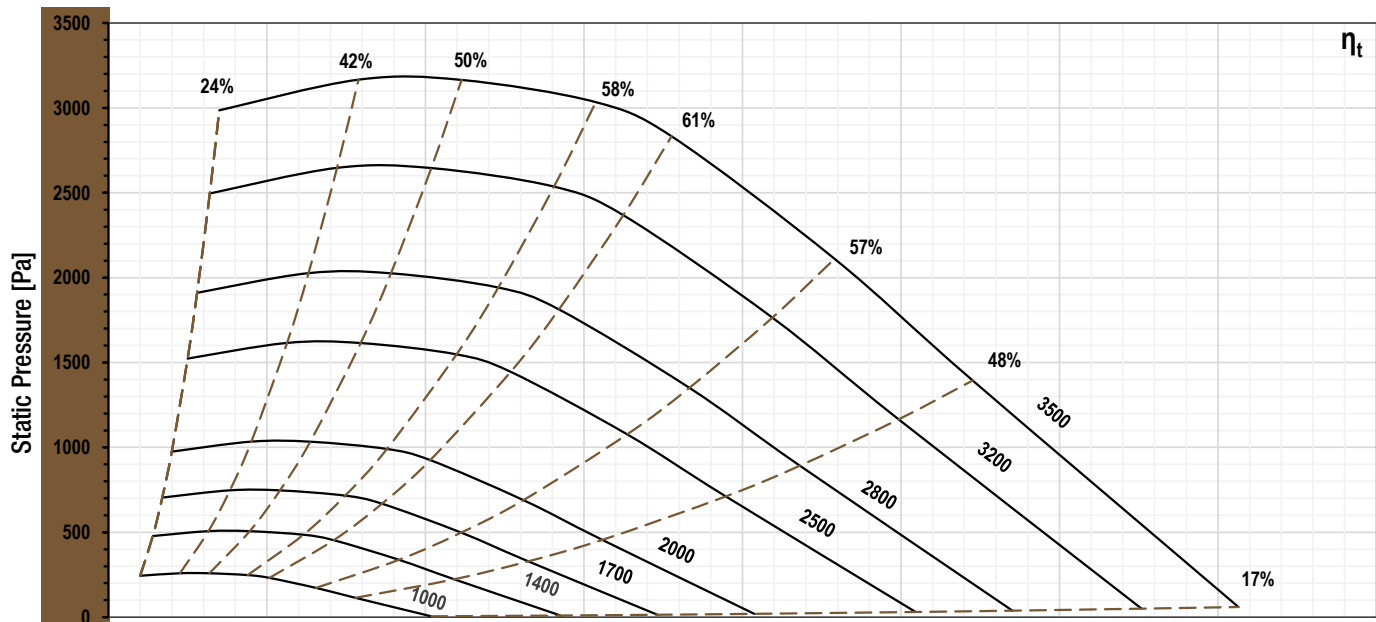

CF-SIB-B-400

Acoustic Performance

Inlet Sound Power Level												
Fan Speed	Air Flow (CMS)	Static Pressure (Pa)	63 (Hz)	125 (Hz)	250 (Hz)	500 (Hz)	1000 (Hz)	2000 (Hz)	4000 (Hz)	8000 (Hz)	Lwi (dB)	LwiA (dB)
1000 RPM	0.32	258.3	71.9	71.1	75.8	72.6	71.7	62.6	58.1	54.1	80.9	75.2
	0.51	231.2	71.8	71	75.7	72.5	71.6	62.5	58	54	80.8	75
	0.65	172.3	72.4	71.6	76.3	73.1	72.2	63.1	58.6	54.6	81.4	75.6
1400 RPM	0.45	506.4	76.3	75.5	80.2	77	76.1	67	62.5	58.5	85.3	79.5
	0.71	453.2	76.2	75.4	80.1	76.9	76	66.9	62.4	58.4	85.2	79.4
	0.92	337.7	76.7	75.9	80.6	77.4	76.5	67.4	62.9	58.9	85.7	80
1700 RPM	0.54	746.6	78.9	78.1	82.8	79.6	78.7	69.6	65.1	61.1	87.9	82.1
	0.86	668.3	78.7	77.9	82.6	79.4	78.5	69.4	64.9	60.9	87.7	82
	1.11	497.9	79.3	78.5	83.2	80	79.1	70	65.5	61.5	88.3	82.5
2000 RPM	0.64	1033.4	81	80.2	84.9	81.7	80.8	71.7	67.2	63.2	90	84.2
	1.01	924.9	80.9	80.1	84.8	81.6	80.7	71.6	67.1	63.1	89.9	84.1
	1.31	689.2	81.4	80.6	85.3	82.1	81.2	72.1	67.6	63.6	90.4	84.6
2500 RPM	0.80	1614.6	83.9	83.1	87.8	84.6	83.7	74.6	70.1	66.1	92.9	87.1
	1.27	1445.2	83.8	83	87.7	84.5	83.6	74.5	70	66	92.8	87
	1.64	1076.9	84.3	83.5	88.2	85	84.1	75	70.5	66.5	93.3	87.5
2800 RPM	0.89	2025.4	85.4	84.6	89.3	86.1	85.2	76.1	71.6	67.6	94.4	88.6
	1.42	1812.9	85.2	84.4	89.1	85.9	85	75.9	71.4	67.4	94.2	88.5
	1.83	1350.8	85.8	85	89.7	86.5	85.6	76.5	72	68	94.8	89
3200 RPM	1.02	2645.4	87.1	86.3	91	87.8	86.9	77.8	73.3	69.3	96.1	90.3
	1.62	2367.9	87	86.2	90.9	87.7	86.8	77.7	73.2	69.2	96	90.2
	2.09	1764.3	87.5	86.7	91.4	88.2	87.3	78.2	73.7	69.7	96.5	90.7
3500 RPM	1.11	3164.7	88.3	87.5	92.2	89	88.1	79	74.5	70.5	97.3	91.5
	1.78	2832.6	88.1	87.3	92	88.8	87.9	78.8	74.3	70.3	97.1	91.4
	2.29	2110.6	90.7	87.9	92.6	89.4	88.5	86.6	81.7	78.2	97.7	93.5

Values shown are for (inlet Lwi and inlet LwiA) sound power levels for Installation Type B: Free inlet, duct outlet. The sound power level ratings shown are in decibels, referred to as 10-12 per AMCA International Standard 301. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Ratings do not include the effects of duct end correction.

CF-SIB-B-450

CF-S Series

- Nominal Diameter 450 mm
- Impeller Type SISW Backward
- Driver Type Belt





Technical Specifications

Performance Shown in diagrams refer to air density 1.2 kg/m³. Performance tested is for installation type B - free inlet, ducted outlet. Power rating (kW) does not include transmission losses. Performance ratings do not include the effects of accessories.

BS ISO 5801 : 2017
AMCA 210 : 2025
Type B Installation



Curve Performance

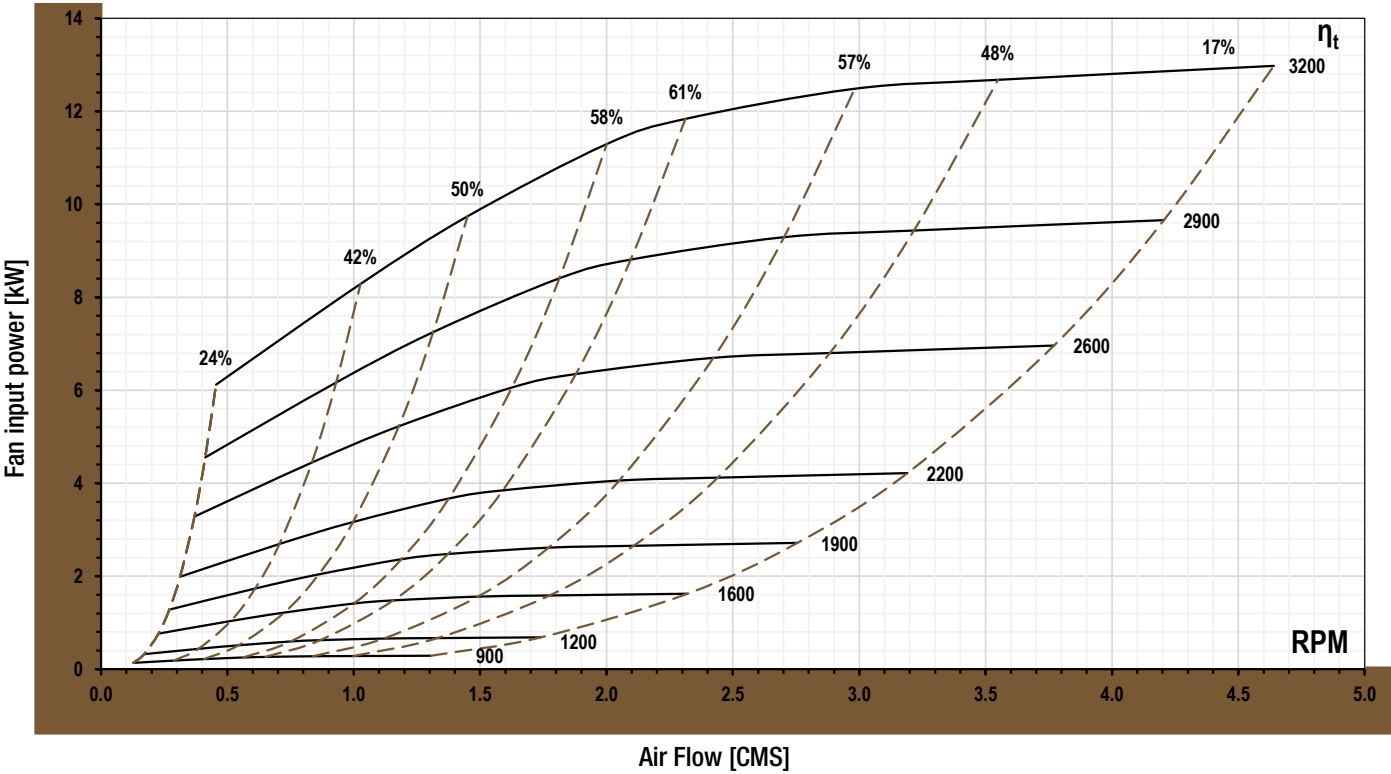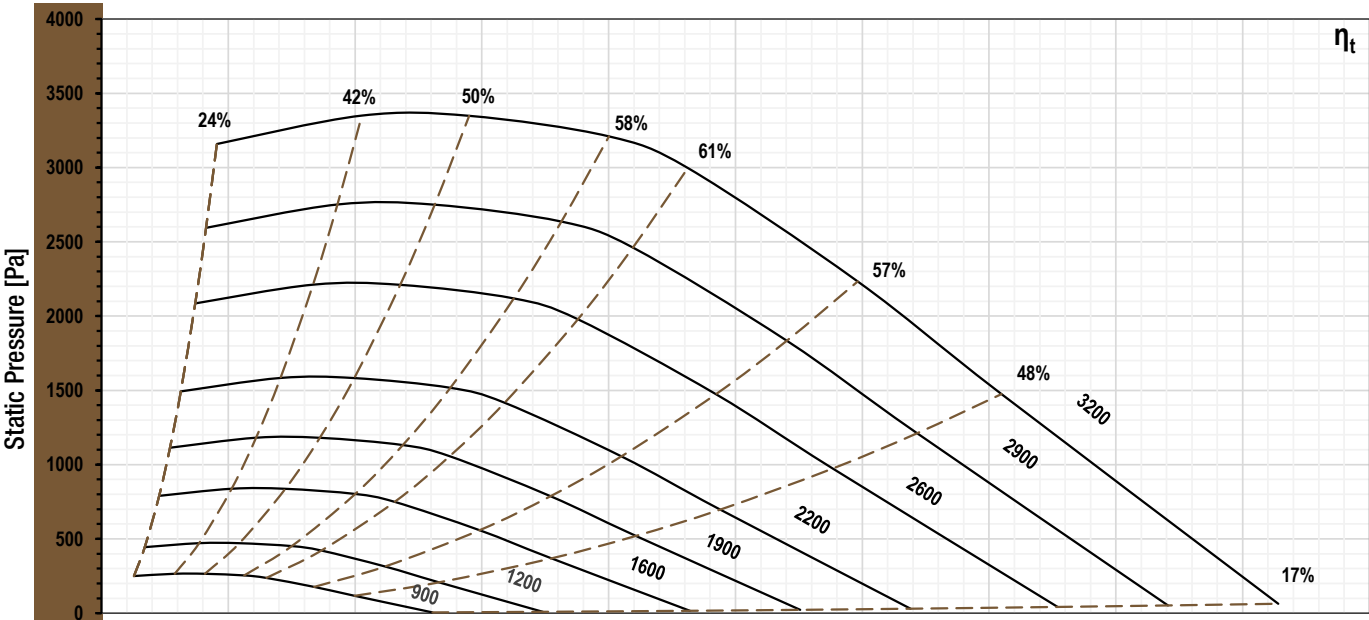

CF-SIB-B-450

Acoustic Performance


Inlet Sound Power Level												
Fan Speed	Air Flow (CMS)	Static Pressure (Pa)	63 (Hz)	125 (Hz)	250 (Hz)	500 (Hz)	1000 (Hz)	2000 (Hz)	4000 (Hz)	8000 (Hz)	Lwi (dB)	LwiA (dB)
900 RPM	0.41	264.8	73.1	72.3	77	73.8	72.9	63.8	59.3	55.3	82.1	76.3
	0.65	237.1	73	72.2	76.9	73.7	72.8	63.7	59.2	55.2	82	76.2
	0.84	176.6	73.5	72.7	77.4	74.2	73.3	64.2	59.7	55.7	82.5	76.8
1200 RPM	0.54	470.8	76.9	76.1	80.8	77.6	76.7	67.6	63.1	59.1	85.9	80.1
	0.87	421.4	76.8	76	80.7	77.5	76.6	67.5	63	59	85.8	80
	1.12	314	77.3	76.5	81.2	78	77.1	68	63.5	59.5	86.3	80.5
1600 RPM	0.72	837	80.6	79.8	84.5	81.3	80.4	71.3	66.8	62.8	89.6	83.8
	1.16	749.2	80.5	79.7	84.4	81.2	80.3	71.2	66.7	62.7	89.5	83.7
	1.49	558.2	81	80.2	84.9	81.7	80.8	71.7	67.2	63.2	90	84.3
1900 RPM	0.86	1180.3	82.9	82.1	86.8	83.6	82.7	73.6	69.1	65.1	91.9	86.1
	1.37	1056.5	82.7	81.9	86.6	83.4	82.5	73.4	68.9	64.9	91.7	86
	1.77	787.2	83.3	82.5	87.2	84	83.1	74	69.5	65.5	92.3	86.5
2200 RPM	1.00	1582.5	84.8	84	88.7	85.5	84.6	75.5	71	67	93.8	88
	1.59	1416.5	84.7	83.9	88.6	85.4	84.5	75.4	70.9	66.9	93.7	87.9
	2.05	1055.4	85.2	84.4	89.1	85.9	85	75.9	71.4	67.4	94.2	88.4
2600 RPM	1.18	2210.3	86.9	86.1	90.8	87.6	86.7	77.6	73.1	69.1	95.9	90.2
	1.88	1978.4	86.8	86	90.7	87.5	86.6	77.5	73	69	95.8	90
	2.42	1474.1	89.4	86.6	91.3	88.1	87.2	85.3	80.4	76.9	96.4	92.1
2900 RPM	1.31	2749.8	88.4	87.6	92.3	89.1	88.2	79.1	74.6	70.6	97.4	91.6
	2.10	2461.3	88.2	87.4	92.1	88.9	88	78.9	74.4	70.4	97.2	91.5
	2.70	1833.9	90.8	88	92.7	89.5	88.6	86.7	81.8	78.3	97.8	93.6
3200 RPM	1.45	3348.1	89.7	88.9	93.6	90.4	89.5	80.4	75.9	71.9	98.7	92.9
	2.31	2996.8	91.5	88.7	93.4	90.2	89.3	87.4	82.5	79	98.5	94.3
	2.98	2233	92.1	89.3	94	90.8	89.9	88	83.1	79.6	99.1	94.9

Values shown are for (inlet Lwi and inlet LwiA) sound power levels for Installation Type B: Free inlet, duct outlet. The sound power level ratings shown are in decibels, referred to as 10-12 per AMCA International Standard 301. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Ratings do not include the effects of duct end correction.

CF-SIB-B-500

CF-S Series

-  Nominal Diameter
500 mm
-  Impeller Type
SISW Backward
-  Driver Type
Belt


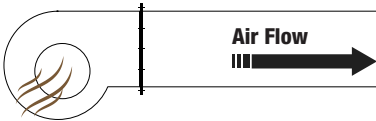


Technical Specifications

Performance Shown in diagrams refer to air density 1.2 kg/m³.
Performance tested is for installation type B - free inlet, ducted outlet.
Power rating (kW) does not include transmission losses.
Performance ratings do not include the effects of accessories.
BS ISO 5801 : 2017
AMCA 210 : 2025
Type B Installation



Curve Performance

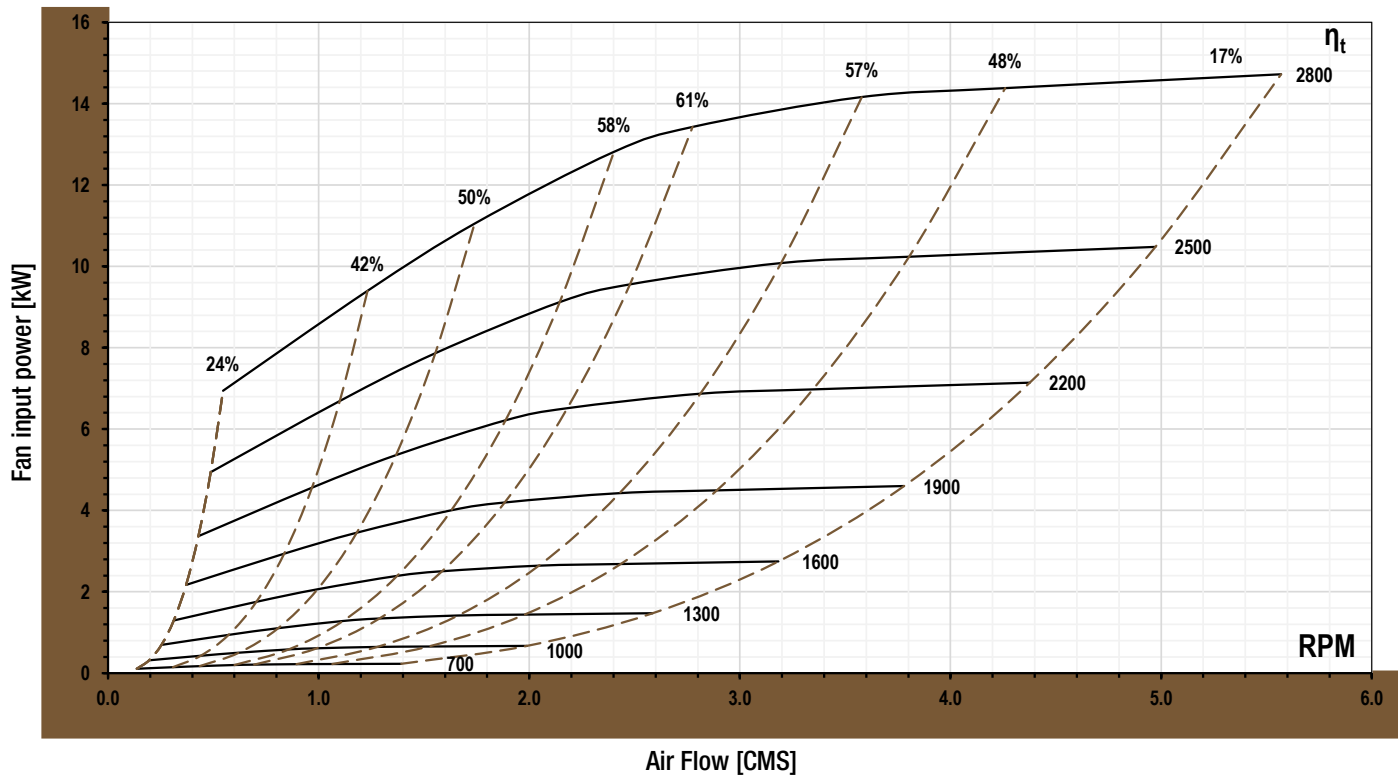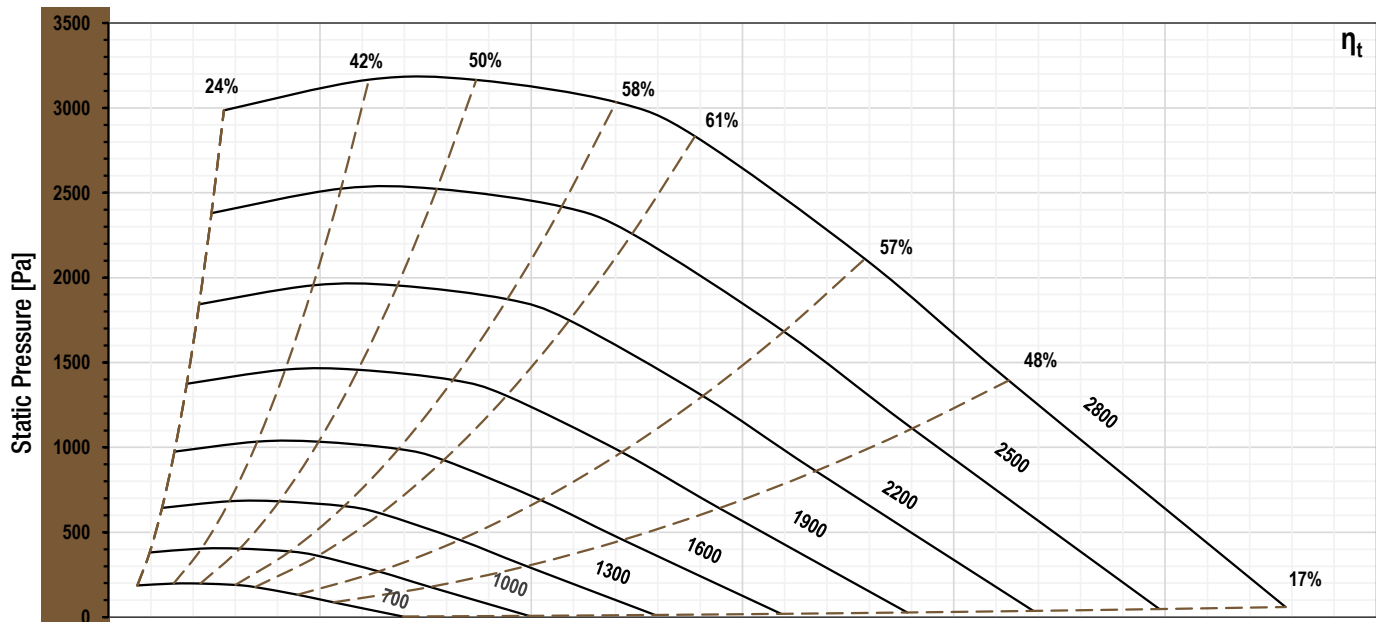

CF-SIB-B-500

Acoustic Performance

Inlet Sound Power Level												
Fan Speed	Air Flow (CMS)	Static Pressure (Pa)	63 (Hz)	125 (Hz)	250 (Hz)	500 (Hz)	1000 (Hz)	2000 (Hz)	4000 (Hz)	8000 (Hz)	Lwi (dB)	LwiA (dB)
700 RPM	0.44	197.8	72.1	71.3	76	72.8	71.9	62.8	58.3	54.3	81.1	75.4
	0.69	177	72	71.2	75.9	72.7	71.8	62.7	58.2	54.2	81	75.2
	0.89	131.9	72.6	71.8	76.5	73.3	72.4	63.3	58.8	54.8	81.6	75.8
1000 RPM	0.62	403.7	76.8	76	80.7	77.5	76.6	67.5	63	59	85.8	80
	0.99	361.3	76.7	75.9	80.6	77.4	76.5	67.4	62.9	58.9	85.7	79.9
	1.28	269.2	77.2	76.4	81.1	77.9	77	67.9	63.4	59.4	86.2	80.4
1300 RPM	0.81	682.2	80.2	79.4	84.1	80.9	80	70.9	66.4	62.4	89.2	83.4
	1.29	610.6	80.1	79.3	84	80.8	79.9	70.8	66.3	62.3	89.1	83.3
	1.66	455	80.6	79.8	84.5	81.3	80.4	71.3	66.8	62.8	89.6	83.8
1600 RPM	0.99	1033.4	82.9	82.1	86.8	83.6	82.7	73.6	69.1	65.1	91.9	86.1
	1.59	924.9	82.8	82	86.7	83.5	82.6	73.5	69	65	91.8	86
	2.05	689.2	83.3	82.5	87.2	84	83.1	74	69.5	65.5	92.3	86.5
1900 RPM	1.18	1457.2	85.2	84.4	89.1	85.9	85	75.9	71.4	67.4	94.2	88.4
	1.88	1304.3	85	84.2	88.9	85.7	84.8	75.7	71.2	67.2	94	88.2
	2.43	971.9	87.6	84.8	89.5	86.3	85.4	83.5	78.6	75.1	94.6	90.4
2200 RPM	1.37	1953.7	87.1	86.3	91	87.8	86.9	77.8	73.3	69.3	96.1	90.3
	2.18	1748.7	88.9	86.1	90.8	87.6	86.7	84.8	79.9	76.4	95.9	91.7
	2.81	1303	89.5	86.7	91.4	88.2	87.3	85.4	80.5	77	96.5	92.3
2500 RPM	1.55	2522.9	88.7	87.9	92.6	89.4	88.5	79.4	74.9	70.9	97.7	91.9
	2.48	2258.2	90.6	87.8	92.5	89.3	88.4	86.5	81.6	78.1	97.6	93.4
	3.20	1682.6	91.1	88.3	93	89.8	88.9	87	82.1	78.6	98.1	93.9
2800 RPM	1.74	3164.7	90.2	89.4	94.1	90.9	90	80.9	76.4	72.4	99.2	93.4
	2.78	2832.6	92.1	89.3	94	90.8	89.9	88	83.1	79.6	99.1	94.9
	3.58	2110.6	92.6	89.8	94.5	91.3	90.4	88.5	83.6	80.1	99.6	95.4

Values shown are for (inlet Lwi and inlet LwiA) sound power levels for Installation Type B: Free inlet, duct outlet. The sound power level ratings shown are in decibels, referred to as 10-12 per AMCA International Standard 301. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Ratings do not include the effects of duct end correction.


CF-SIB-B-560

CF-S Series

 **Nominal Diameter**
560 mm

 **Impeller Type**
SISW Backward

 **Driver Type**
Belt

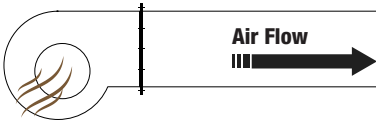



Technical Specifications

Performance Shown in diagrams refer to air density 1.2 kg/m³.
Performance tested is for installation type B - free inlet, ducted outlet.
Power rating (kW) does not include transmission losses.
Performance ratings do not include the effects of accessories.

BS ISO 5801 : 2017
AMCA 210 : 2025
Type B Installation



Curve Performance

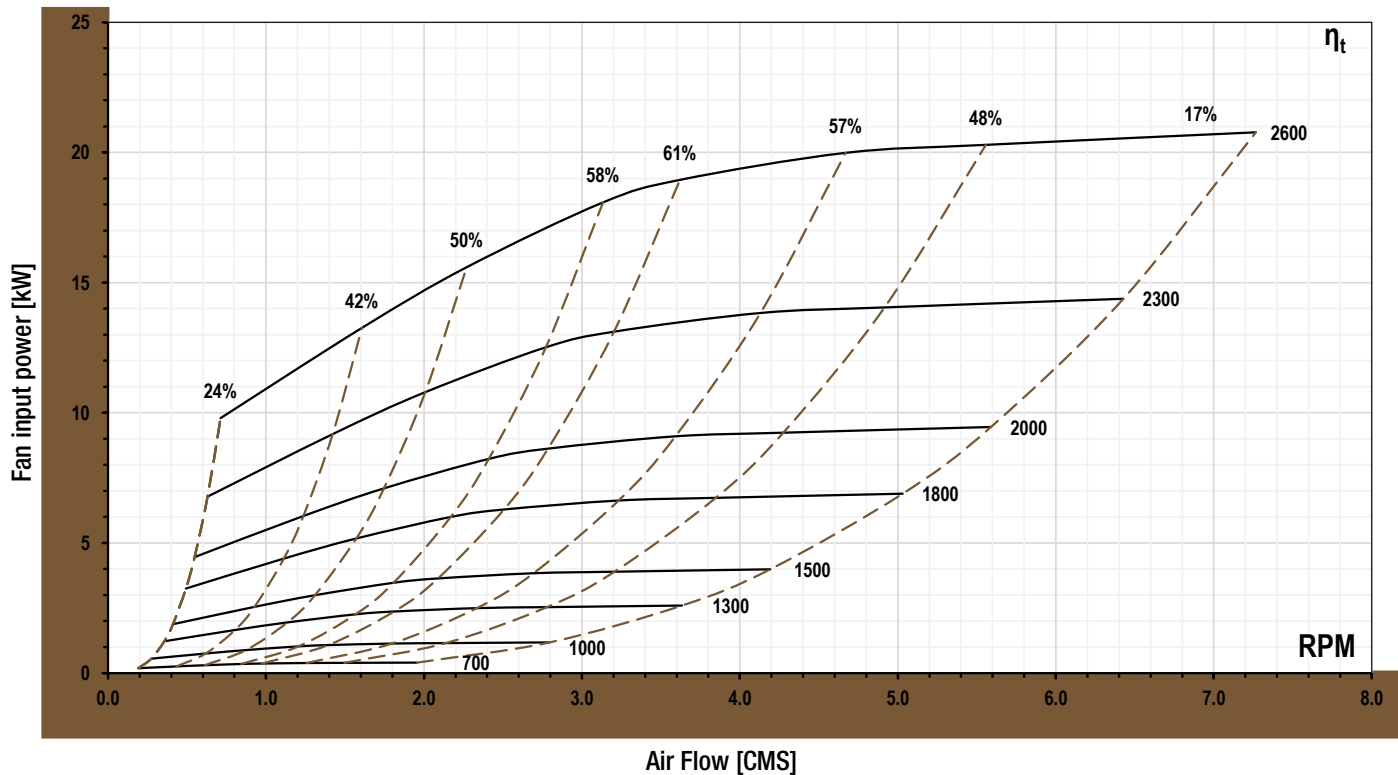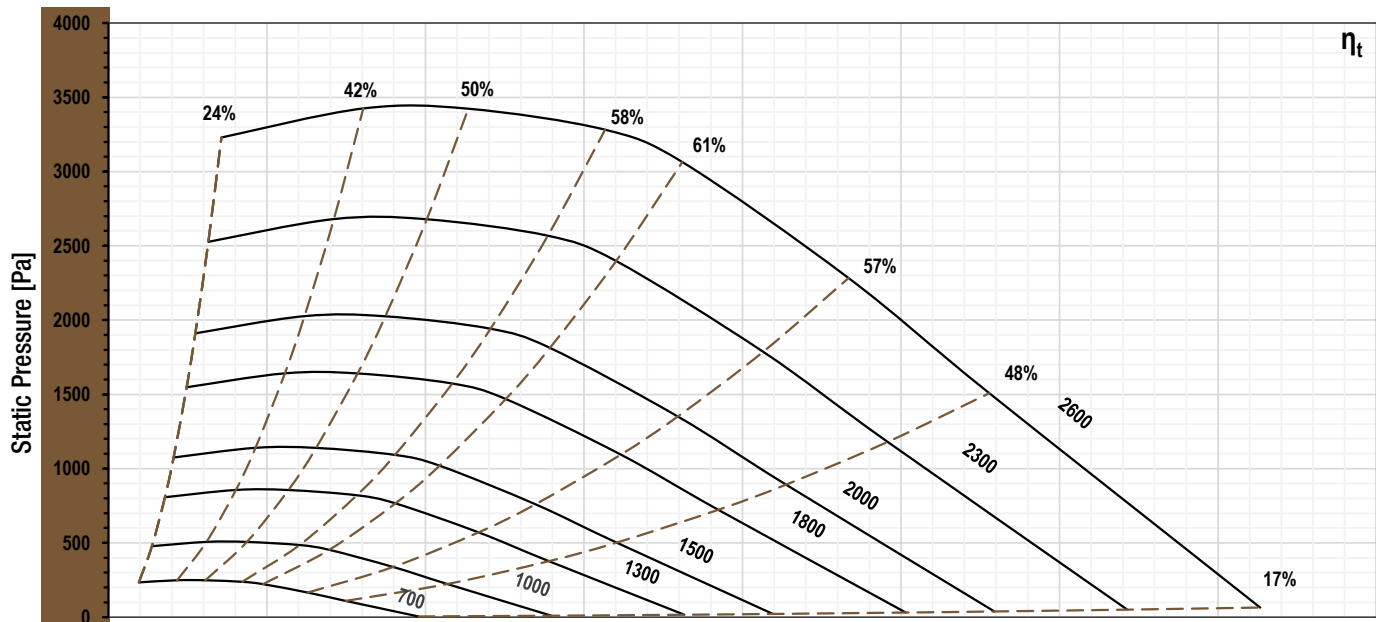

CF-SIB-B-560

Acoustic Performance

Inlet Sound Power Level												
Fan Speed	Air Flow (CMS)	Static Pressure (Pa)	63 (Hz)	125 (Hz)	250 (Hz)	500 (Hz)	1000 (Hz)	2000 (Hz)	4000 (Hz)	8000 (Hz)	Lwi (dB)	LwiA (dB)
700 RPM	0.61	248.1	74.6	73.8	78.5	75.3	74.4	65.3	60.8	56.8	83.6	77.8
	0.97	222.1	74.5	73.7	78.4	75.2	74.3	65.2	60.7	56.7	83.5	77.7
	1.26	165.5	75	74.2	78.9	75.7	74.8	65.7	61.2	57.2	84	78.2
1000 RPM	0.87	506.4	79.2	78.4	83.1	79.9	79	69.9	65.4	61.4	88.2	82.5
	1.39	453.2	79.1	78.3	83	79.8	78.9	69.8	65.3	61.3	88.1	82.3
	1.80	337.7	79.7	78.9	83.6	80.4	79.5	70.4	65.9	61.9	88.7	82.9
1300 RPM	1.14	855.7	82.7	81.9	86.6	83.4	82.5	73.4	68.9	64.9	91.7	85.9
	1.81	765.9	82.5	81.7	86.4	83.2	82.3	73.2	68.7	64.7	91.5	85.8
	2.33	570.7	85.1	82.3	87	83.8	82.9	81	76.1	72.6	92.1	87.9
1500 RPM	1.31	1139.3	84.5	83.7	88.4	85.2	84.3	75.2	70.7	66.7	93.5	87.8
	2.09	1019.8	84.4	83.6	88.3	85.1	84.2	75.1	70.6	66.6	93.4	87.6
	2.69	759.8	86.9	84.1	88.8	85.6	84.7	82.8	77.9	74.4	93.9	89.7
1800 RPM	1.57	1640.6	86.9	86.1	90.8	87.6	86.7	77.6	73.1	69.1	95.9	90.1
	2.51	1468.4	88.8	86	90.7	87.5	86.6	84.7	79.8	76.3	95.8	91.6
	3.23	1094.2	89.3	86.5	91.2	88	87.1	85.2	80.3	76.8	96.3	92.1
2000 RPM	1.75	2025.4	88.3	87.5	92.2	89	88.1	79	74.5	70.5	97.3	91.5
	2.79	1812.9	90.2	87.4	92.1	88.9	88	86.1	81.2	77.7	97.2	92.9
	3.59	1350.8	90.7	87.9	92.6	89.4	88.5	86.6	81.7	78.2	97.7	93.5
2300 RPM	2.01	2678.6	90.1	89.3	94	90.8	89.9	80.8	76.3	72.3	99.1	93.3
	3.20	2397.5	92	89.2	93.9	90.7	89.8	87.9	83	79.5	99	94.8
	4.13	1786.4	92.5	89.7	94.4	91.2	90.3	88.4	83.5	80	99.5	95.3
2600 RPM	2.27	3422.9	93.7	90.9	95.6	92.4	91.5	89.6	84.7	81.2	100.7	96.5
	3.62	3063.8	93.6	90.8	95.5	92.3	91.4	89.5	84.6	81.1	100.6	96.4
	4.67	2282.9	94.1	91.3	96	92.8	91.9	90	85.1	81.6	101.1	96.9

Values shown are for (inlet Lwi and inlet LwiA) sound power levels for Installation Type B: Free inlet, duct outlet. The sound power level ratings shown are in decibels, referred to as 10-12 per AMCA International Standard 301. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Ratings do not include the effects of duct end correction.

CF-SIB-B-630

CF-S Series

-  **Nominal Diameter**
630 mm
-  **Impeller Type**
SISW Backward
-  **Driver Type**
Belt





Technical Specifications

Performance Shown in diagrams refer to air density 1.2 kg/m³.
Performance tested is for installation type B - free inlet, ducted outlet.
Power rating (kW) does not include transmission losses.
Performance ratings do not include the effects of accessories.
BS ISO 5801 : 2017
AMCA 210 : 2025
Type B Installation



Curve Performance

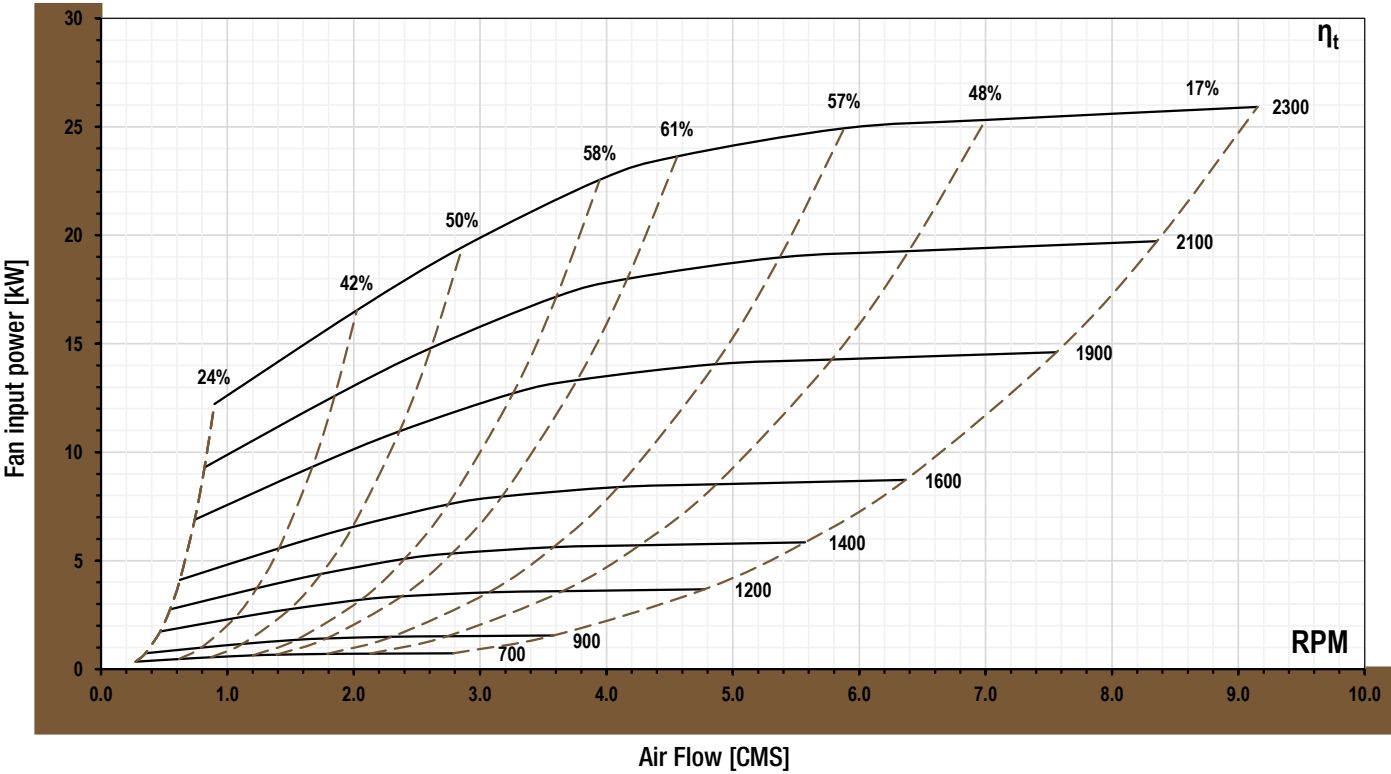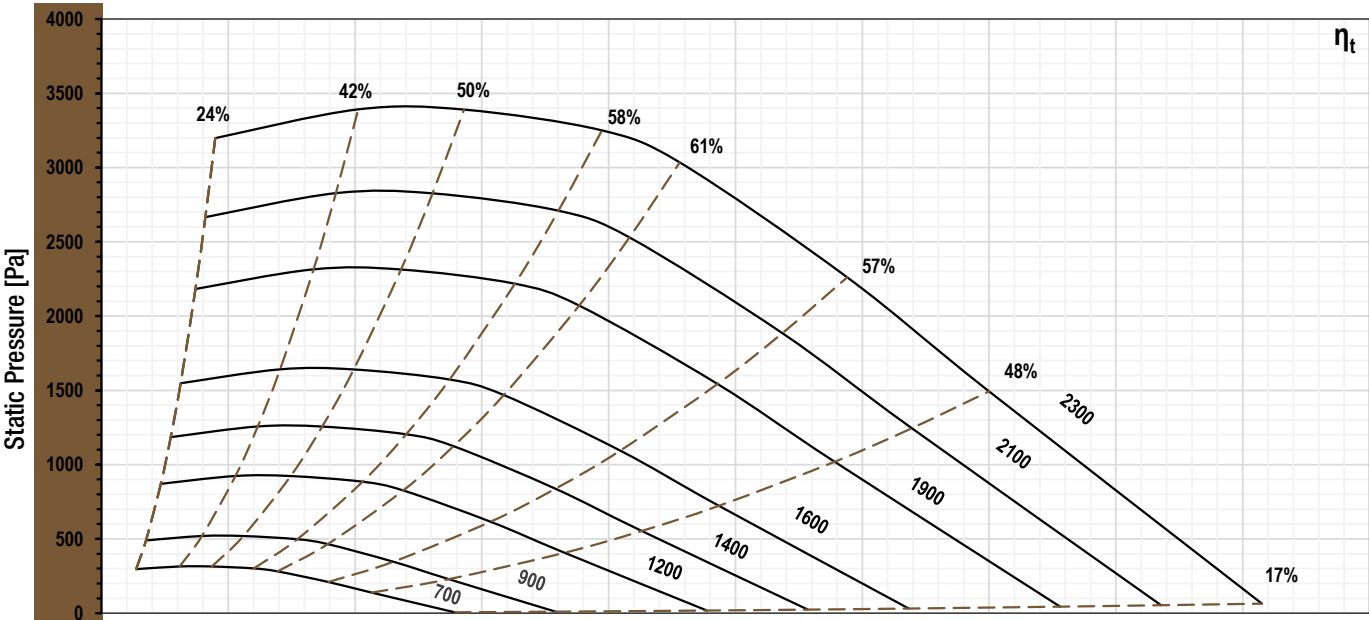

CF-SIB-B-630

Acoustic Performance

Inlet Sound Power Level												
Fan Speed	Air Flow (CMS)	Static Pressure (Pa)	63 (Hz)	125 (Hz)	250 (Hz)	500 (Hz)	1000 (Hz)	2000 (Hz)	4000 (Hz)	8000 (Hz)	Lwi (dB)	LwiA (dB)
700 RPM	0.87	314	77.2	76.4	81.1	77.9	77	67.9	63.4	59.4	86.2	80.4
	1.39	281.1	77	76.2	80.9	77.7	76.8	67.7	63.2	59.2	86	80.3
	1.79	209.4	77.6	76.8	81.5	78.3	77.4	68.3	63.8	59.8	86.6	80.8
900 RPM	1.12	519.1	80.4	79.6	84.3	81.1	80.2	71.1	66.6	62.6	89.4	83.7
	1.78	464.6	80.3	79.5	84.2	81	80.1	71	66.5	62.5	89.3	83.5
	2.30	346.2	82.8	80	84.7	81.5	80.6	78.7	73.8	70.3	89.8	85.6
1200 RPM	1.49	922.8	84.2	83.4	88.1	84.9	84	74.9	70.4	66.4	93.2	87.4
	2.38	826	86.1	83.3	88	84.8	83.9	82	77.1	73.6	93.1	88.9
	3.07	615.5	86.6	83.8	88.5	85.3	84.4	82.5	77.6	74.1	93.6	89.4
1400 RPM	1.74	1256.1	86.2	85.4	90.1	86.9	86	76.9	72.4	68.4	95.2	89.4
	2.78	1124.3	88.1	85.3	90	86.8	85.9	84	79.1	75.6	95.1	90.9
	3.58	837.7	88.6	85.8	90.5	87.3	86.4	84.5	79.6	76.1	95.6	91.4
1600 RPM	1.99	1640.6	87.9	87.1	91.8	88.6	87.7	78.6	74.1	70.1	96.9	91.2
	3.17	1468.4	89.8	87	91.7	88.5	87.6	85.7	80.8	77.3	96.8	92.6
	4.09	1094.2	90.3	87.5	92.2	89	88.1	86.2	81.3	77.8	97.3	93.1
1900 RPM	2.36	2313.5	92.2	89.4	94.1	90.9	90	88.1	83.2	79.7	99.2	95
	3.77	2070.7	92	89.2	93.9	90.7	89.8	87.9	83	79.5	99	94.8
	4.86	1542.9	92.6	89.8	94.5	91.3	90.4	88.5	83.6	80.1	99.6	95.4
2100 RPM	2.61	2826.2	93.5	90.7	95.4	92.2	91.3	89.4	84.5	81	100.5	96.3
	4.16	2529.6	93.4	90.6	95.3	92.1	91.2	89.3	84.4	80.9	100.4	96.1
	5.37	1884.9	93.9	91.1	95.8	92.6	91.7	89.8	84.9	81.4	100.9	96.7
2300 RPM	2.86	3390.1	94.7	91.9	96.6	93.4	92.5	90.6	85.7	82.2	101.7	97.4
	4.56	3034.4	94.5	91.7	96.4	93.2	92.3	90.4	85.5	82	101.5	97.3
	5.88	2261	95.1	92.3	97	93.8	92.9	91	86.1	82.6	102.1	97.9

Values shown are for (inlet Lwi and inlet LwiA) sound power levels for Installation Type B: Free inlet, duct outlet. The sound power level ratings shown are in decibels, referred to as 10-12 per AMCA International Standard 301. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Ratings do not include the effects of duct end correction.

CF-SIB-B-710

CF-S Series

- Nominal Diameter
710 mm
- Impeller Type
SISW Backward
- Driver Type
Belt





Technical Specifications

Performance Shown in diagrams refer to air density 1.2 kg/m³.
Performance tested is for installation type B - free inlet, ducted outlet.
Power rating (kW) does not include transmission losses.
Performance ratings do not include the effects of accessories.
BS ISO 5801 : 2017
AMCA 210 : 2025
Type B Installation



Curve Performance

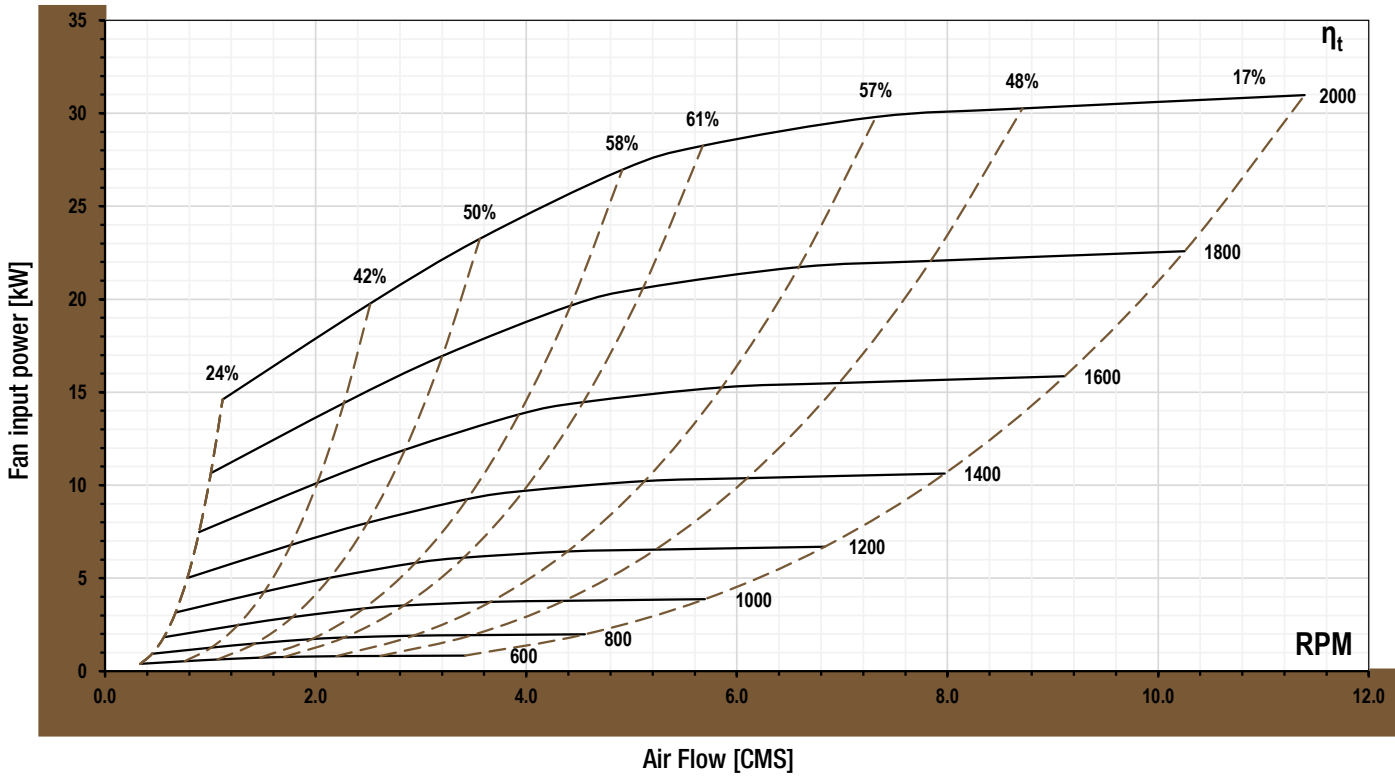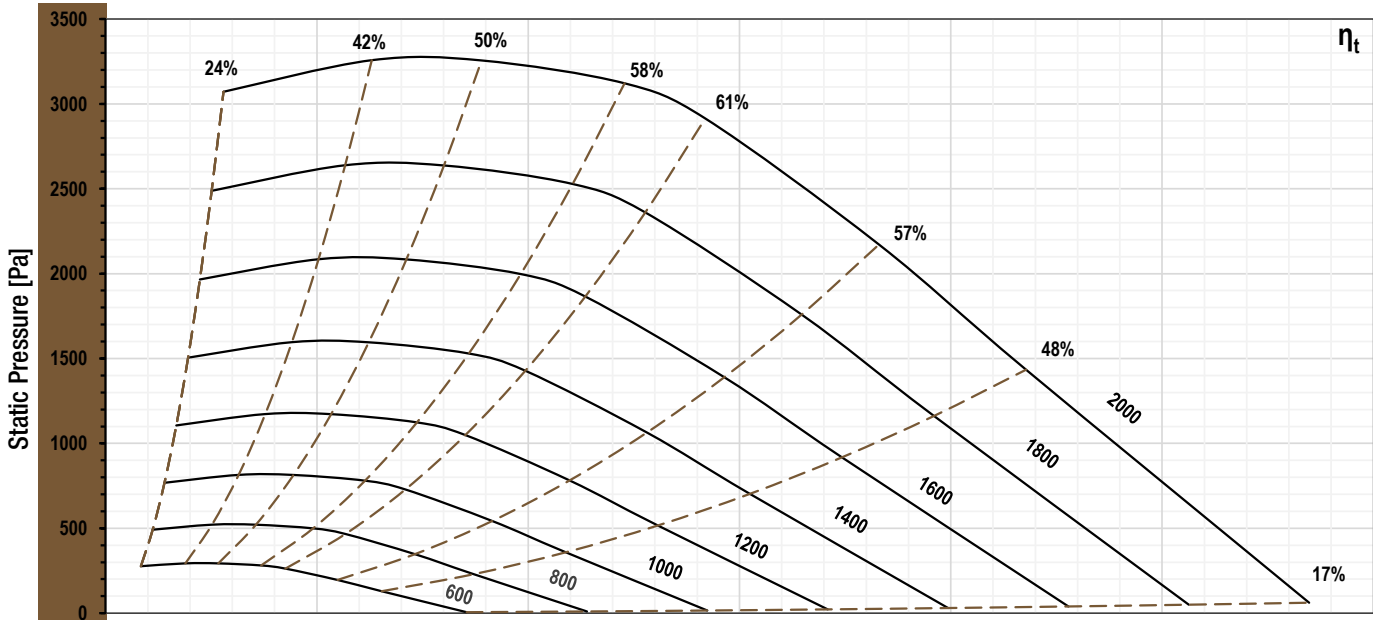

CF-SIB-B-710

Acoustic Performance

Inlet Sound Power Level												
Fan Speed	Air Flow (CMS)	Static Pressure (Pa)	63 (Hz)	125 (Hz)	250 (Hz)	500 (Hz)	1000 (Hz)	2000 (Hz)	4000 (Hz)	8000 (Hz)	Lwi (dB)	LwiA (dB)
600 RPM	1.07	293	77.7	76.9	81.6	78.4	77.5	68.4	63.9	59.9	86.7	81
	1.70	262.3	77.6	76.8	81.5	78.3	77.4	68.3	63.8	59.8	86.6	80.8
	2.20	195.4	80.2	77.4	82.1	78.9	78	76.1	71.2	67.7	87.2	82.9
800 RPM	1.42	520.9	81.5	80.7	85.4	82.2	81.3	72.2	67.7	63.7	90.5	84.7
	2.27	466.3	83.4	80.6	85.3	82.1	81.2	79.3	74.4	70.9	90.4	86.2
	2.93	347.4	83.9	81.1	85.8	82.6	81.7	79.8	74.9	71.4	90.9	86.7
1000 RPM	1.78	813.9	84.4	83.6	88.3	85.1	84.2	75.1	70.6	66.6	93.4	87.6
	2.84	728.5	86.3	83.5	88.2	85	84.1	82.2	77.3	73.8	93.3	89.1
	3.66	542.8	86.8	84	88.7	85.5	84.6	82.7	77.8	74.3	93.8	89.6
1200 RPM	2.14	1172.1	86.8	86	90.7	87.5	86.6	77.5	73	69	95.8	90
	3.41	1049.1	88.7	85.9	90.6	87.4	86.5	84.6	79.7	76.2	95.7	91.4
	4.39	781.7	89.2	86.4	91.1	87.9	87	85.1	80.2	76.7	96.2	92
1400 RPM	2.49	1595.3	90.8	88	92.7	89.5	88.6	86.7	81.8	78.3	97.8	93.6
	3.97	1427.9	90.7	87.9	92.6	89.4	88.5	86.6	81.7	78.2	97.7	93.5
	5.12	1064	91.2	88.4	93.1	89.9	89	87.1	82.2	78.7	98.2	94
1600 RPM	2.85	2083.7	92.5	89.7	94.4	91.2	90.3	88.4	83.5	80	99.5	95.3
	4.54	1865.1	92.4	89.6	94.3	91.1	90.2	88.3	83.4	79.9	99.4	95.2
	5.86	1389.7	92.9	90.1	94.8	91.6	90.7	88.8	83.9	80.4	99.9	95.7
1800 RPM	3.20	2637.2	94.1	91.3	96	92.8	91.9	90	85.1	81.6	101.1	96.9
	5.11	2360.5	93.9	91.1	95.8	92.6	91.7	89.8	84.9	81.4	100.9	96.7
	6.59	1758.8	94.5	91.7	96.4	93.2	92.3	90.4	85.5	82	101.5	97.3
2000 RPM	3.56	3255.8	95.4	92.6	97.3	94.1	93.2	91.3	86.4	82.9	102.4	98.2
	5.68	2914.2	95.3	92.5	97.2	94	93.1	91.2	86.3	82.8	102.3	98.1
	7.32	2171.4	95.8	93	97.7	94.5	93.6	91.7	86.8	83.3	102.8	98.6

Values shown are for (inlet Lwi and inlet LwiA) sound power levels for Installation Type B: Free inlet, duct outlet. The sound power level ratings shown are in decibels, referred to as 10-12 per AMCA International Standard 301. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Ratings do not include the effects of duct end correction.

CF-SIB-B-800

CF-S Series

 **Nominal Diameter**
800 mm

 **Impeller Type**
SISW Backward

 **Driver Type**
Belt





Technical Specifications

Performance Shown in diagrams refer to air density 1.2 kg/m³.
Performance tested is for installation type B - free inlet, ducted outlet.
Power rating (kW) does not include transmission losses.
Performance ratings do not include the effects of accessories.

BS ISO 5801 : 2017
AMCA 210 : 2025
Type B Installation



Curve Performance

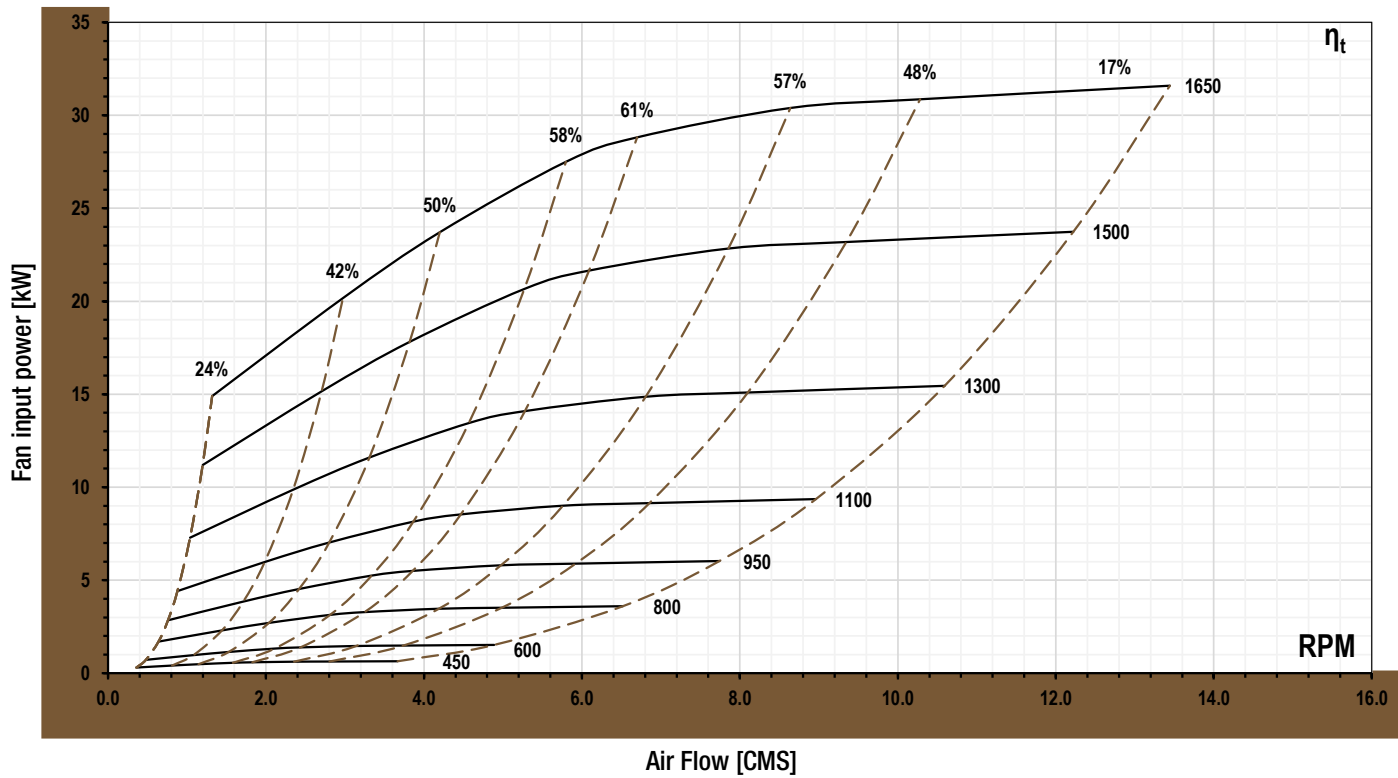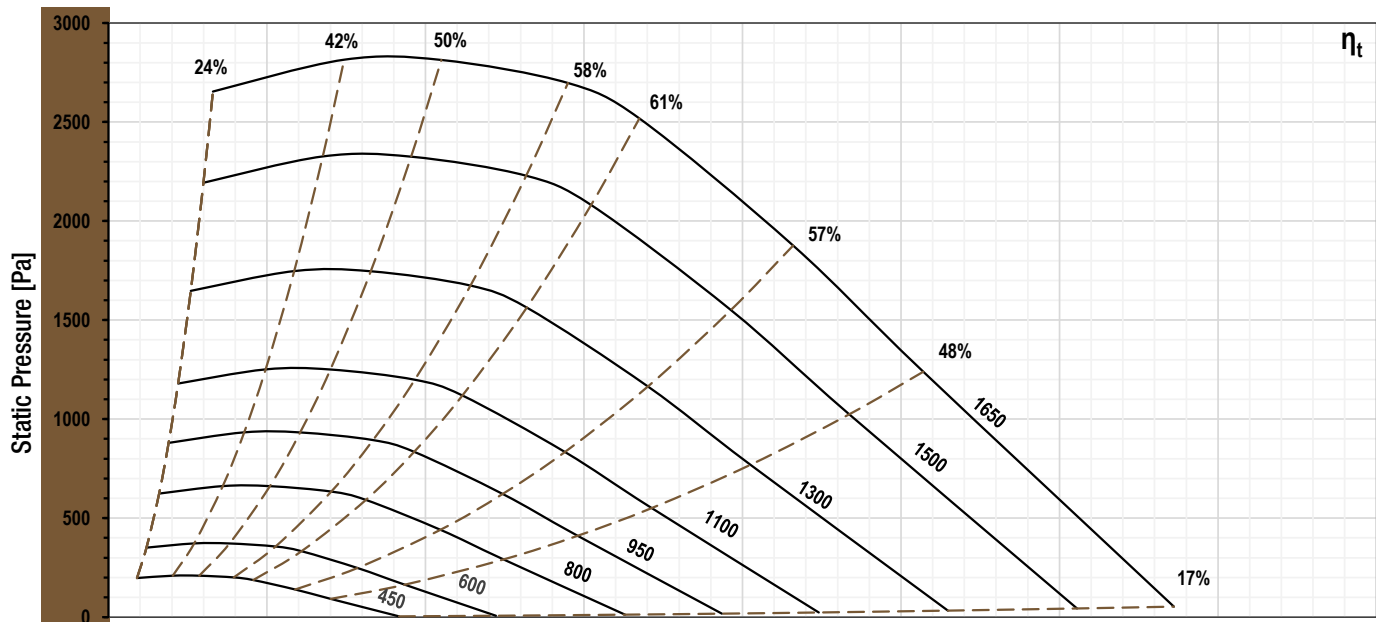

CF-SIB-B-800

Acoustic Performance

Inlet Sound Power Level												
Fan Speed	Air Flow (CMS)	Static Pressure (Pa)	63 (Hz)	125 (Hz)	250 (Hz)	500 (Hz)	1000 (Hz)	2000 (Hz)	4000 (Hz)	8000 (Hz)	Lwi (dB)	LwiA (dB)
450 RPM	1.15	209.3	76.6	75.8	80.5	77.3	76.4	67.3	62.8	58.8	85.6	79.8
	1.83	187.3	76.5	75.7	80.4	77.2	76.3	67.2	62.7	58.7	85.5	79.7
	2.36	139.6	79	76.2	80.9	77.7	76.8	74.9	70	66.5	86	81.8
600 RPM	1.53	372	80.3	79.5	84.2	81	80.1	71	66.5	62.5	89.3	83.6
	2.44	333	82.2	79.4	84.1	80.9	80	78.1	73.2	69.7	89.2	85
	3.14	248.1	82.7	79.9	84.6	81.4	80.5	78.6	73.7	70.2	89.7	85.5
800 RPM	2.04	661.4	84.1	83.3	88	84.8	83.9	74.8	70.3	66.3	93.1	87.3
	3.25	592	86	83.2	87.9	84.7	83.8	81.9	77	73.5	93	88.8
	4.19	441.1	86.5	83.7	88.4	85.2	84.3	82.4	77.5	74	93.5	89.3
950 RPM	2.42	932.6	88.3	85.5	90.2	87	86.1	84.2	79.3	75.8	95.3	91.1
	3.86	834.8	88.2	85.4	90.1	86.9	86	84.1	79.2	75.7	95.2	91
	4.97	622	88.7	85.9	90.6	87.4	86.5	84.6	79.7	76.2	95.7	91.5
1100 RPM	2.80	1250.4	90.2	87.4	92.1	88.9	88	86.1	81.2	77.7	97.2	93
	4.47	1119.2	90.1	87.3	92	88.8	87.9	86	81.1	77.6	97.1	92.9
	5.76	833.9	90.6	87.8	92.5	89.3	88.4	86.5	81.6	78.1	97.6	93.4
1300 RPM	3.31	1746.4	92.4	89.6	94.3	91.1	90.2	88.3	83.4	79.9	99.4	95.2
	5.28	1563.2	92.3	89.5	94.2	91	90.1	88.2	83.3	79.8	99.3	95.1
	6.81	1164.7	92.8	90	94.7	91.5	90.6	88.7	83.8	80.3	99.8	95.6
1500 RPM	3.82	2325.1	94.3	91.5	96.2	93	92.1	90.2	85.3	81.8	101.3	97.1
	6.09	2081.1	94.2	91.4	96.1	92.9	92	90.1	85.2	81.7	101.2	96.9
	7.85	1550.7	94.7	91.9	96.6	93.4	92.5	90.6	85.7	82.2	101.7	97.5
1650 RPM	4.20	2813.4	95.5	92.7	97.4	94.2	93.3	91.4	86.5	83	102.5	98.3
	6.70	2518.2	95.4	92.6	97.3	94.1	93.2	91.3	86.4	82.9	102.4	98.2
	8.64	1876.3	95.9	93.1	97.8	94.6	93.7	91.8	86.9	83.4	102.9	98.7

Values shown are for (inlet Lwi and inlet LwiA) sound power levels for Installation Type B: Free inlet, duct outlet. The sound power level ratings shown are in decibels, referred to as 10-12 per AMCA International Standard 301. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Ratings do not include the effects of duct end correction.

CF-SIB-B-900

CF-S Series

- Nominal Diameter 900 mm
- Impeller Type SISW Backward
- Driver Type Belt





Technical Specifications

Performance Shown in diagrams refer to air density 1.2 kg/m³. Performance tested is for installation type B - free inlet, ducted outlet. Power rating (kW) does not include transmission losses. Performance ratings do not include the effects of accessories. BS ISO 5801 : 2017 AMCA 210 : 2025 Type B Installation



Curve Performance

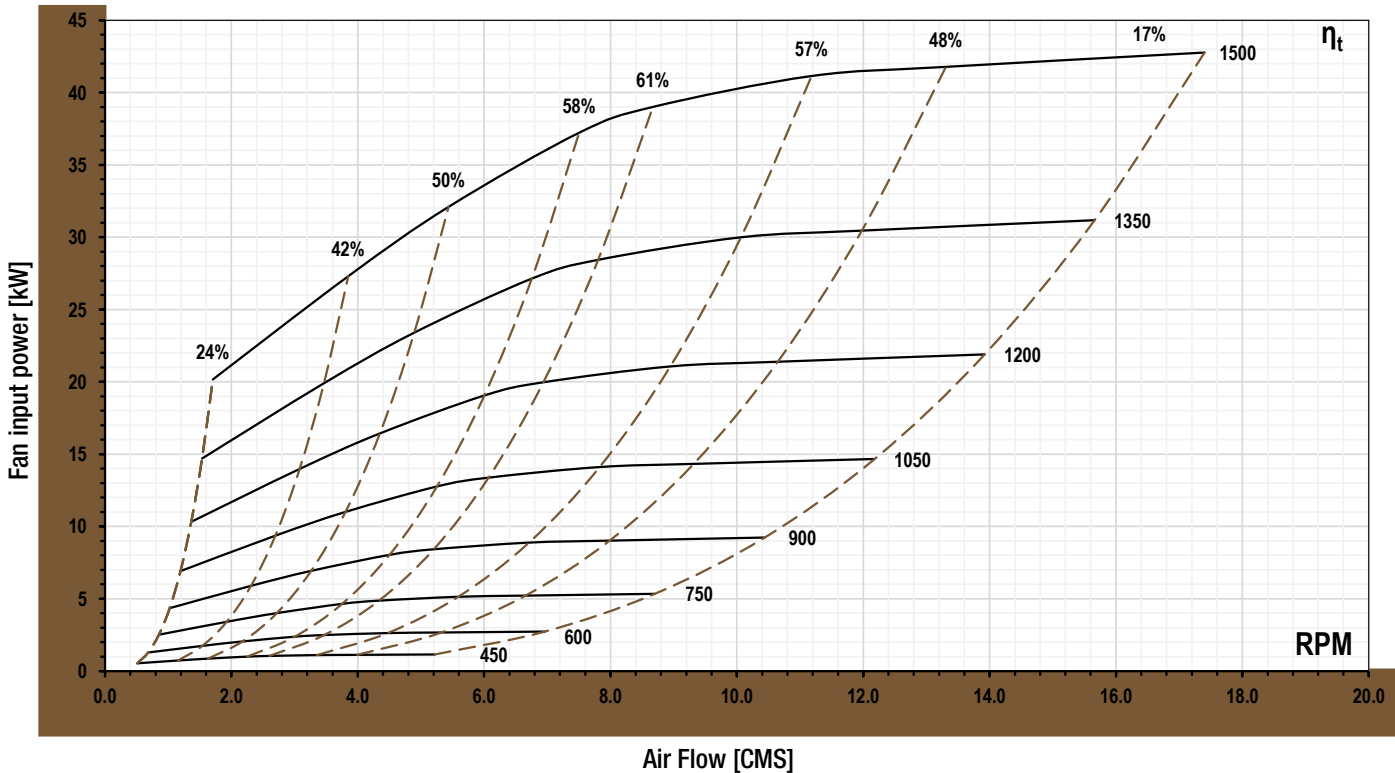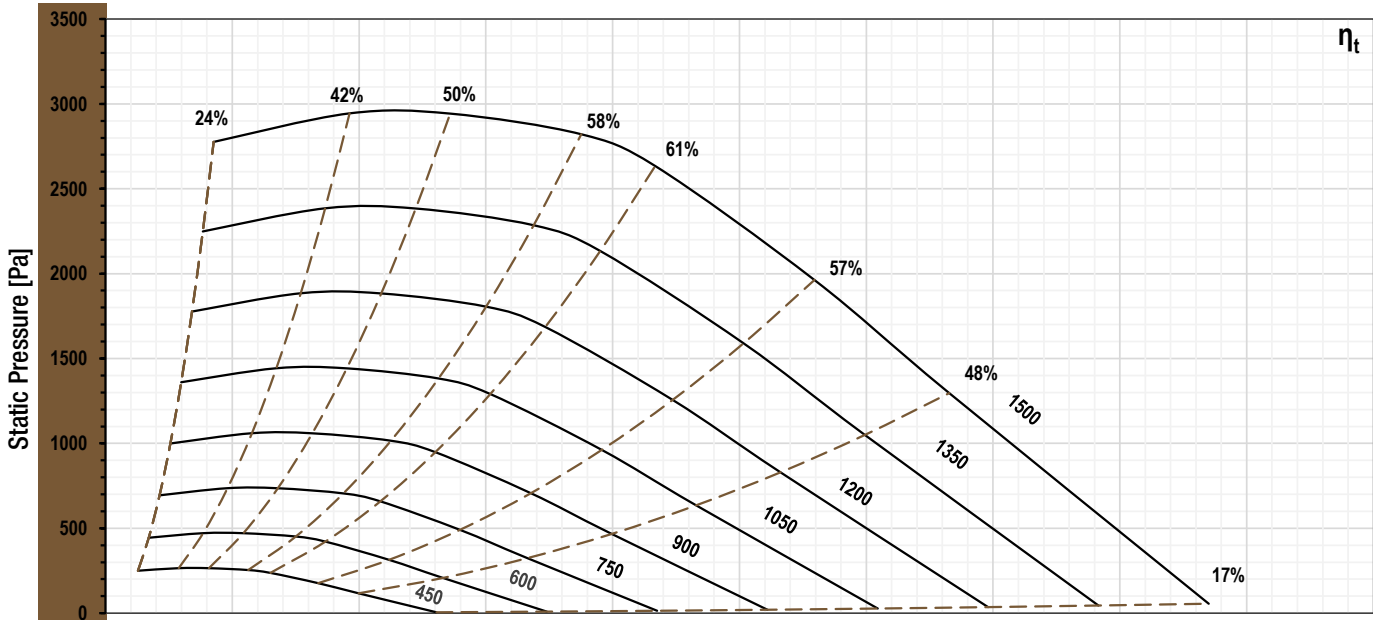

CF-SIB-B-900

Acoustic Performance

Inlet Sound Power Level												
Fan Speed	Air Flow (CMS)	Static Pressure (Pa)	63 (Hz)	125 (Hz)	250 (Hz)	500 (Hz)	1000 (Hz)	2000 (Hz)	4000 (Hz)	8000 (Hz)	Lwi (dB)	LwiA (dB)
450 RPM	1.63	264.8	79.1	78.3	83	79.8	78.9	69.8	65.3	61.3	88.1	82.4
	2.60	237.1	81	78.2	82.9	79.7	78.8	76.9	72	68.5	88	83.8
	3.35	176.6	81.6	78.8	83.5	80.3	79.4	77.5	72.6	69.1	88.6	84.3
600 RPM	2.17	470.8	84.9	82.1	86.8	83.6	82.7	80.8	75.9	72.4	91.9	87.7
	3.47	421.4	84.8	82	86.7	83.5	82.6	80.7	75.8	72.3	91.8	87.6
	4.47	314	85.3	82.5	87.2	84	83.1	81.2	76.3	72.8	92.3	88.1
750 RPM	2.72	735.7	87.8	85	89.7	86.5	85.6	83.7	78.8	75.3	94.8	90.6
	4.34	658.5	87.7	84.9	89.6	86.4	85.5	83.6	78.7	75.2	94.7	90.5
	5.59	490.6	88.2	85.4	90.1	86.9	86	84.1	79.2	75.7	95.2	91
900 RPM	3.26	1059.4	90.2	87.4	92.1	88.9	88	86.1	81.2	77.7	97.2	93
	5.20	948.2	90.1	87.3	92	88.8	87.9	86	81.1	77.6	97.1	92.8
	6.71	706.5	90.6	87.8	92.5	89.3	88.4	86.5	81.6	78.1	97.6	93.4
1050 RPM	3.81	1441.9	92.2	89.4	94.1	90.9	90	88.1	83.2	79.7	99.2	95
	6.07	1290.6	92.1	89.3	94	90.8	89.9	88	83.1	79.6	99.1	94.9
	7.83	961.7	92.6	89.8	94.5	91.3	90.4	88.5	83.6	80.1	99.6	95.4
1200 RPM	4.35	1883.3	93.9	91.1	95.8	92.6	91.7	89.8	84.9	81.4	100.9	96.7
	6.94	1685.7	93.8	91	95.7	92.5	91.6	89.7	84.8	81.3	100.8	96.6
	8.95	1256	94.3	91.5	96.2	93	92.1	90.2	85.3	81.8	101.3	97.1
1350 RPM	4.89	2383.6	95.5	92.7	97.4	94.2	93.3	91.4	86.5	83	102.5	98.3
	7.80	2133.5	95.3	92.5	97.2	94	93.1	91.2	86.3	82.8	102.3	98.1
	10.06	1589.7	95.9	93.1	97.8	94.6	93.7	91.8	86.9	83.4	102.9	98.7
1500 RPM	5.44	2942.7	96.8	94	98.7	95.5	94.6	92.7	87.8	84.3	103.8	99.6
	8.67	2633.9	96.7	93.9	98.6	95.4	94.5	92.6	87.7	84.2	103.7	99.5
	11.18	1962.6	97.2	94.4	99.1	95.9	95	93.1	88.2	84.7	104.2	100

Values shown are for (inlet Lwi and inlet LwiA) sound power levels for Installation Type B: Free inlet, duct outlet. The sound power level ratings shown are in decibels, referred to as 10-12 per AMCA International Standard 301. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Ratings do not include the effects of duct end correction.

CF-SIB-B-1000

CF-S Series

 **Nominal Diameter**
1000 mm

 **Impeller Type**
SISW Backward

 **Driver Type**
Belt





Technical Specifications

Performance Shown in diagrams refer to air density 1.2 kg/m³.
Performance tested is for installation type B - free inlet, ducted outlet.
Power rating (kW) does not include transmission losses.
Performance ratings do not include the effects of accessories.

BS ISO 5801 : 2017
AMCA 210 : 2025
Type B Installation



Curve Performance

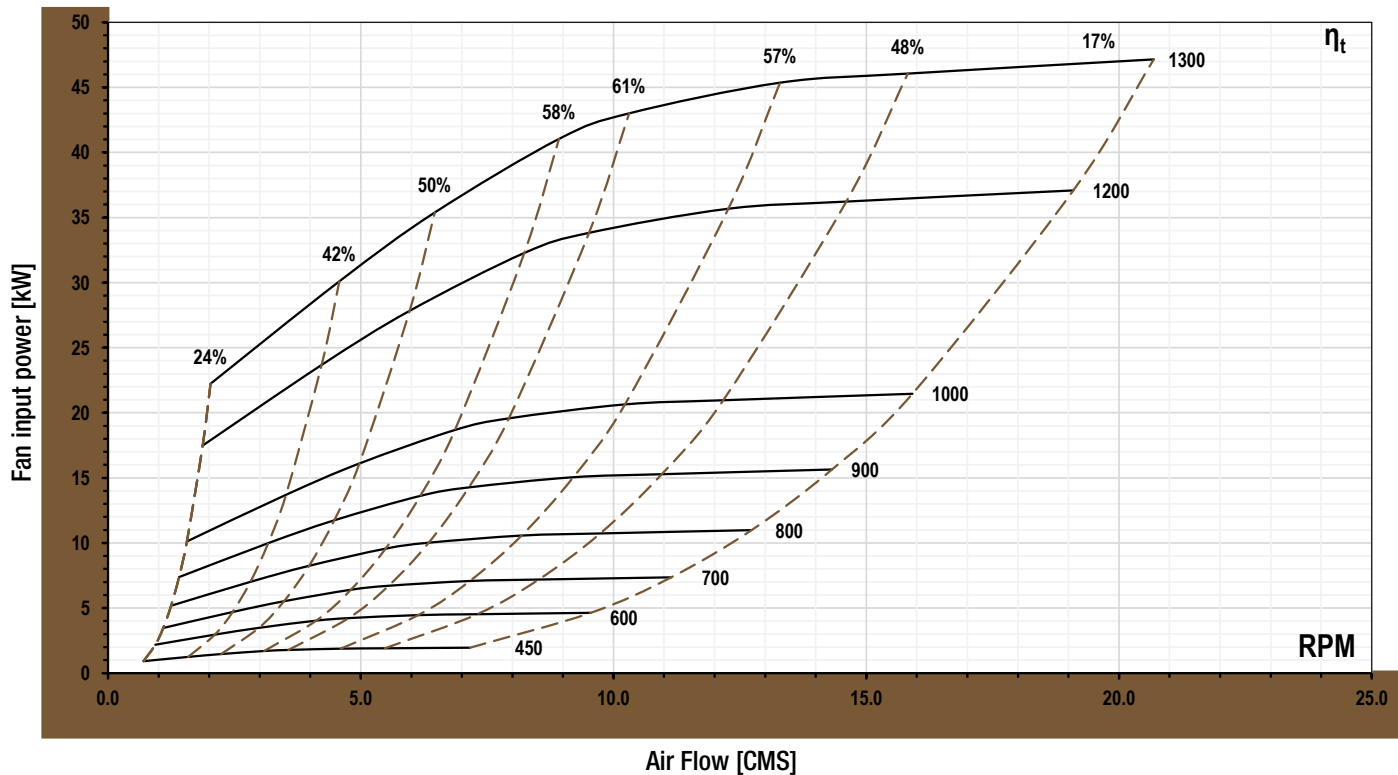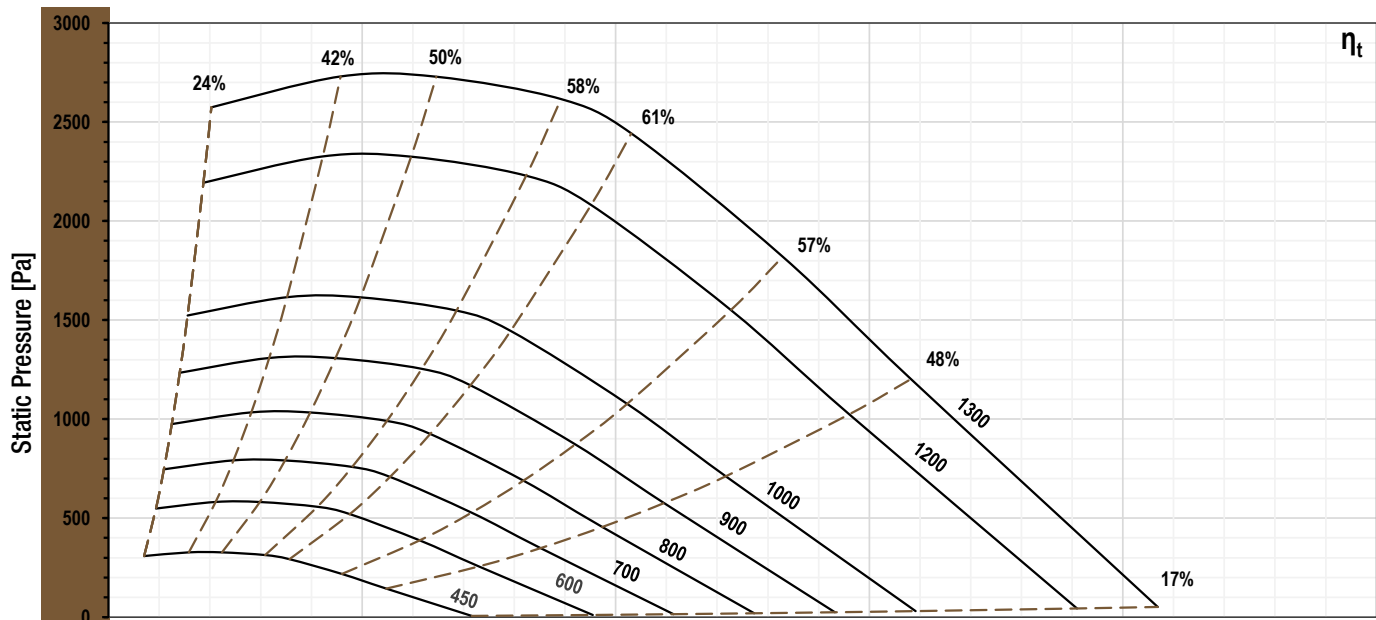

CF-SIB-B-1000

Acoustic Performance

Inlet Sound Power Level												
Fan Speed	Air Flow (CMS)	Static Pressure (Pa)	63 (Hz)	125 (Hz)	250 (Hz)	500 (Hz)	1000 (Hz)	2000 (Hz)	4000 (Hz)	8000 (Hz)	Lwi (dB)	LwiA (dB)
450 RPM	2.24	327	83.4	80.6	85.3	82.1	81.2	79.3	74.4	70.9	90.4	86.2
	3.57	292.7	83.3	80.5	85.2	82	81.1	79.2	74.3	70.8	90.3	86.1
	4.60	218.1	83.8	81	85.7	82.5	81.6	79.7	74.8	71.3	90.8	86.6
600 RPM	2.98	581.3	87.2	84.4	89.1	85.9	85	83.1	78.2	74.7	94.2	90
	4.76	520.3	87.1	84.3	89	85.8	84.9	83	78.1	74.6	94.1	89.9
	6.14	387.7	87.6	84.8	89.5	86.3	85.4	83.5	78.6	75.1	94.6	90.4
700 RPM	3.48	791.2	89.2	86.4	91.1	87.9	87	85.1	80.2	76.7	96.2	92
	5.55	708.2	89.1	86.3	91	87.8	86.9	85	80.1	76.6	96.1	91.9
	7.16	527.7	89.6	86.8	91.5	88.3	87.4	85.5	80.6	77.1	96.6	92.4
800 RPM	3.98	1033.4	90.9	88.1	92.8	89.6	88.7	86.8	81.9	78.4	97.9	93.7
	6.34	924.9	90.8	88	92.7	89.5	88.6	86.7	81.8	78.3	97.8	93.6
	8.18	689.2	91.3	88.5	93.2	90	89.1	87.2	82.3	78.8	98.3	94.1
900 RPM	4.48	1307.9	92.5	89.7	94.4	91.2	90.3	88.4	83.5	80	99.5	95.3
	7.14	1170.6	92.3	89.5	94.2	91	90.1	88.2	83.3	79.8	99.3	95.1
	9.20	872.3	92.9	90.1	94.8	91.6	90.7	88.8	83.9	80.4	99.9	95.7
1000 RPM	4.97	1614.6	93.8	91	95.7	92.5	91.6	89.7	84.8	81.3	100.8	96.6
	7.93	1445.2	93.7	90.9	95.6	92.4	91.5	89.6	84.7	81.2	100.7	96.5
	10.23	1076.9	94.2	91.4	96.1	92.9	92	90.1	85.2	81.7	101.2	97
1200 RPM	5.97	2325.1	96.2	93.4	98.1	94.9	94	92.1	87.2	83.7	103.2	99
	9.52	2081.1	96.1	93.3	98	94.8	93.9	92	87.1	83.6	103.1	98.9
	12.27	1550.7	96.6	93.8	98.5	95.3	94.4	92.5	87.6	84.1	103.6	99.4
1300 RPM	6.46	2728.8	97.3	94.5	99.2	96	95.1	93.2	88.3	84.8	104.3	100
	10.31	2442.4	97.1	94.3	99	95.8	94.9	93	88.1	84.6	104.1	99.9
	13.29	1819.9	97.7	94.9	99.6	96.4	95.5	93.6	88.7	85.2	104.7	100.5

Values shown are for (inlet Lwi and inlet LwiA) sound power levels for Installation Type B: Free inlet, duct outlet. The sound power level ratings shown are in decibels, referred to as 10-12 per AMCA International Standard 301. The A-weighted sound ratings shown have been calculated per AMCA International Standard 301. Ratings do not include the effects of duct end correction.



+20 110 310 8851



+22 507 26 89

+20 110 390 1212



info@mechatronics-eng.com



Plot 9413, South S, Karim Banouna St.
off St. 9, Mokattam , Cairo - Egypt.



Website

www.mechatronics-eng.com

March 2026