



Canarm Ltd. certifies that the SIS Series Fresh Air Unit shown hereon is licensed to bear the AMCA seal. The ratings are based on tests and procedures performed in accordance with AMCA Publication 211 and Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

SIS SERIES PERFORMANCE DATA

Model SIS-9											SOUND POWER re 10 -12 WATTS																	
1-1/2 HP MAXIMUM 3/4" SHAFT											OCTAVE BANDS										LwoA							
TIP SPEED = 2.65 x RPM WHEEL DIA. = 10.13"											RPM	SP	1	2	3	4	5	6	7	8								
CFM	OUTLET VELOCITY FPM	1/8" SP		1/4" SP		1/2" SP		3/4" SP		1" SP		1-1/2" SP		2" SP		2-1/2" SP												
		RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP											
400	475	404	0.02	554	0.04	786	0.08	947	0.12	-	-	-	-	-	-	-	-	600	0.25	83	76	66	62	58	55	51	48	63
600	713	449	0.04	577	0.06	785	0.11	964	0.16	1115	0.23	1346	0.36	-	-	-	-	800	0.25	91	88	77	72	70	67	67	63	78
800	951	511	0.07	622	0.10	809	0.15	968	0.21	1108	0.28	1367	0.45	1573	0.62	1743	0.79		0.50	93	84	72	65	62	59	56	51	73
1000	1189	584	0.12	681	0.15	847	0.22	994	0.29	1127	0.36	1357	0.52	1572	0.72	1766	0.94	1000	0.25	96	95	86	79	77	74	73	69	84
1200	1427	666	0.19	746	0.23	899	0.30	1032	0.38	1155	0.47	1377	0.65	1570	0.84	1752	1.06		0.50	95	94	85	77	75	71	70	65	82
1400	1665	752	0.29	820	0.33	958	0.42	1082	0.51	1195	0.60	1403	0.80	1592	1.01	1761	1.23		0.75	97	92	82	73	70	66	63	57	80
1600	1902	840	0.42	901	0.46	1022	0.56	1139	0.66	1245	0.77	1439	0.98	1618	1.21	1784	1.46	1200	0.25	100	100	93	85	83	80	78	76	89
1800	2140	930	0.58	985	0.63	1092	0.73	1200	0.85	1302	0.97	1483	1.20	1652	1.45	-	-		0.50	99	99	92	84	81	78	76	73	89
2000	2378	1022	0.78	1072	0.84	1168	0.95	1265	1.08	1362	1.21	1536	1.47	-	-	-	-		0.75	99	99	92	83	79	76	74	70	88
2200	2616	1114	1.03	1161	1.09	1248	1.21	1336	1.34	1425	1.48	-	-	-	-	-	-		1.00	99	98	91	82	77	73	70	66	86
2400	2854	1206	1.32	1250	1.39	-	-	-	-	-	-	-	-	-	-	-	-	1400	1.50	103	103	94	84	78	74	71	68	91

Model SIS-10														1-1/2 HP MAXIMUM 3/4" SHAFT										TIP SPEED = 2.99 X RPM WHEEL DIA. = 11.44"										SOUND POWER re 10 ⁻¹² WATTS													
																														OCTAVE BANDS										LwoA							
CFM		OUTLET VELOCITY FPM	1/8" SP		1/4" SP		1/2" SP		3/4" SP		1" SP		1-1/2" SP		2" SP		2-1/2" SP		RPM	SP	1	2	3	4	5	6	7	8																			
800	771		414	0.06	525	0.08	704	0.14	874	0.20	1013	0.27	1229	0.41	1404	0.56	1555	0.72	600	0.25	86	83	70	67	64	61	58	51	72																		
1000	964		461	0.09	559	0.12	722	0.19	862	0.26	1003	0.34	1241	0.50	1426	0.67	1583	0.85	800	0.25	92	96	80	74	73	70	69	64	83																		
1200	1157		514	0.14	600	0.18	754	0.26	881	0.34	997	0.42	1231	0.60	1433	0.80	1600	1.00		0.50	90	94	79	72	71	67	66	59	81																		
1400	1350		568	0.20	649	0.25	788	0.34	912	0.44	1020	0.53	1219	0.72	1420	0.94	1600	1.17	1000	0.50	95	99	90	80	78	75	73	69	88																		
1600	1543		625	0.28	701	0.33	828	0.45	945	0.55	1051	0.66	1234	0.87	1408	1.10	1584	1.34		0.75	94	98	89	79	77	73	71	67	86																		
1800	1736		685	0.39	755	0.44	873	0.57	981	0.69	1083	0.81	1262	1.05	1419	1.29	--	--		1.00	93	97	88	78	76	71	69	64	85																		
2000	1929		747	0.52	810	0.58	923	0.71	1023	0.85	1118	0.99	1293	1.25	--	--	--	--	1200	1.00	98	101	98	85	81	79	76	73	92																		
2200	2121		810	0.67	866	0.74	975	0.88	1069	1.04	1158	1.19	1326	1.49	--	--	--	--	1300	1.50	98	101	101	87	82	80	76	74	94																		
2400	2314		874	0.86	925	0.93	1029	1.09	1118	1.25	1201	1.42	--	--	--	--	--	--	1600	2.50	101	104	108	94	86	84	80	79	101																		
2600	2507		939	1.08	986	1.16	1082	1.32	1170	1.50	--	--	--	--	--	--	--	--																													

Model SIS-12											2 HP MAXIMUM 3/4 SHAFT		TIP SPEED = 3.27 x RPM WHEEL DIA. = 12.50"				SOUND POWER re 10 ⁻¹² WATTS											
													OCTAVE BANDS															
	OUTLET VELOCITY	1/8" SP		1/4" SP		1/2" SP		3/4" SP		1" SP		1-1/2" SP		2" SP		2-1/2" SP		RPM	SP	1	2	3	4	5	6	7	8	LwoA
CFM	FPM	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP											
1200	823	360	0.08	452	0.12	626	0.21	762	0.31	874	0.41	1061	0.64	1217	0.88	1354	1.13	500	0.25	81	71	68	66	65	64	59	57	71
1400	960	387	0.12	472	0.16	626	0.25	766	0.36	880	0.48	1068	0.73	1225	0.99	1363	1.27	600	0.25	86	80	74	73	72	70	67	65	75
1600	1097	418	0.16	497	0.21	633	0.31	767	0.42	884	0.55	1075	0.82	1233	1.11	1371	1.41	700	0.25	91	86	79	78	77	75	73	70	82
1800	1234	452	0.21	523	0.27	649	0.37	769	0.49	885	0.63	1080	0.93	1240	1.24	1379	1.56		0.50	87	85	75	74	73	72	69	66	79
2000	1371	488	0.28	551	0.34	671	0.45	778	0.58	886	0.72	1083	1.04	1245	1.37	1386	1.72	800	0.25	95	92	82	82	80	79	77	75	85
2200	1508	523	0.36	581	0.42	695	0.55	795	0.68	892	0.83	1084	1.16	1249	1.52	1392	1.89		0.50	92	91	80	79	78	77	75	72	83
2400	1646	559	0.45	614	0.52	721	0.66	816	0.80	905	0.95	1085	1.29	1252	1.67	-	-	-	900	0.75	88	90	77	76	75	73	71	81
2600	1783	596	0.56	649	0.64	747	0.79	839	0.94	924	1.10	1089	1.44	1252	1.84	-	-	-		0.25	98	95	86	85	83	82	81	77
2800	1920	633	0.68	685	0.77	775	0.93	865	1.10	945	1.26	1099	1.61	-	-	-	-		0.50	96	95	85	83	82	81	79	75	88
3000	2057	670	0.83	721	0.92	805	1.10	891	1.27	969	1.45	1114	1.81	-	-	-	-		0.75	92	94	83	81	80	78	77	72	86
3200	2194	709	0.99	756	1.09	836	1.28	918	1.47	994	1.65	-	-	-	-	-	-	1000	1.00	93	96	86	83	81	80	79	74	88
3400	2331	747	1.18	792	1.28	870	1.48	945	1.68	1020	1.88	-	-	-	-	-	-											
3600	2469	786	1.38	792	1.49	904	1.71	975	1.92	-	-	-	-	-	-	-	-											
3800	2606	826	1.62	792	1.73	940	1.96	-	-	-	-	-	-	-	-	-	-											
4000	2743	865	1.87	903	1.99	-	-	-	-	-	-	-	-	-	-	-	-											

The sound power level ratings shown are in decibels, referred to 10⁻¹² watts calculated per AMCA Standard 301. The A-weighted sound ratings have been calculated per AMCA Standard 301. Values shown are for outlet LwoA sound power levels for Installation Type B: free inlet, ducted outlet. Ratings include the effects of duct end correction. Power rating (BHP) does not include transmission losses. Performance shown is for installation type B-Free Inlet, Ducted Outlet. Performance ratings include the effects of filters in the air stream.

SI CONVERSION

SP x .249 = kPa
CFM x .472 = L/s



Canarm Ltd. certifies that the SIS Series Fresh Air Unit shown hereon is licensed to bear the AMCA seal. The ratings are based on tests and procedures performed in accordance with AMCA Publication 211 and Publication 311 and comply with the requirements of the AMCA Certified Ratings Program.

SIS SERIES PERFORMANCE DATA

Model SIS-15 3 HP MAXIMUM 1" SHAFT TIP SPEED = 3.99 x RPM WHEEL DIA. = 15.25"																	SOUND POWER re 10-12 WATTS											
CFM	OUTLET VELOCITY FPM	1/8" SP		1/4" SP		1/2" SP		3/4" SP		1" SP		1-1/2" SP		2" SP		2-1/2" SP		OCTAVE BANDS										LwoA
		RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	SP	1	2	3	4	5	6	7	8	
1000	487	280	0.05	375	0.09	525	0.17	636	0.26	729	0.35	882	0.54	1009	0.76	1121	1	400	0.25	76	71	68	67	66	65	59	57	71
1500	730	320	0.1	401	0.15	534	0.25	647	0.38	745	0.52	903	0.78	1034	1.05	1149	1.32	450	0.25	80	75	72	71	71	69	65	63	73
2000	974	372	0.19	441	0.24	560	0.38	660	0.52	751	0.67	915	1.03	1051	1.38	1168	1.73	500	0.25	84	80	75	74	74	73	70	67	76
2500	1217	431	0.32	490	0.39	596	0.54	689	0.72	772	0.89	921	1.26	1058	1.69	1180	2.15	550	0.25	87	83	78	77	77	76	73	70	82
3000	1461	494	0.51	546	0.61	640	0.78	725	0.96	803	1.17	943	1.6	1068	2.03	1186	2.53	600	0.50	84	80	75	73	73	71	68	65	74
3500	1704	559	0.78	606	0.89	690	1.09	768	1.29	841	1.5	972	1.99	1091	2.49	1199	3	600	0.25	89	85	80	79	79	78	75	72	84
4000	1948	626	1.12	668	1.25	745	1.49	815	1.71	883	1.95	1007	2.45	--	--	--	--	650	0.50	87	84	78	77	77	75	72	69	81
4500	2191	694	1.57	733	1.7	803	1.98	868	2.24	930	2.49	--	--	--	--	--	--	650	0.25	91	88	82	81	81	80	78	74	86
5000	2435	762	2.11	798	2.26	863	2.57	924	2.87	--	--	--	--	--	--	--	--	700	0.50	90	87	81	79	79	78	76	73	83
5500	2678	831	2.78	864	2.94	--	--	--	--	--	--	--	--	--	--	--	--	700	0.75	86	84	77	76	75	73	71	67	78
6000	2922	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	700	0.25	94	90	84	82	82	82	80	76	88
6500	3165	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	700	0.50	92	90	83	82	82	81	79	76	85
7000	3409	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	750	0.75	90	88	82	80	79	78	76	73	85
7500	3652	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	750	0.25	93	91	84	82	82	81	79	74	86
8000	3896	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	750	1.00	90	88	81	79	78	76	75	68	82
																		800	1.00	93	91	86	83	82	81	80	74	88
																		900	1.50	92	92	86	82	81	79	78	72	86

Model SIS-18											5 HP MAXIMUM		1" SHAFT		TIP SPEED = 4.76 x RPM				WHEEL DIA. = 18.19"				SOUND POWER re 10-12 WATTS										
CFM	OUTLET VELOCITY FPM	1/8" SP		1/4" SP		1/2" SP		3/4" SP		1" SP		1-1/2" SP		2" SP		2-1/2" SP		RPM	SP	OCTAVE BANDS								LwoA					
		RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP			1	2	3	4	5	6	7	8						
3000	1046	275	0.26	334	0.37	435	0.59	551	0.97	634	1.26	762	1.77	866	2.32	958	2.92	400	0.25	82	78	76	75	74	71	66	61	77					
3250	1133	288	0.32	345	0.42	438	0.66	545	1.02	637	1.39	768	1.96	874	2.53	966	3.14	450	0.25	87	82	79	79	78	76	71	67	83					
3500	1220	301	0.38	355	0.49	445	0.74	536	1.05	636	1.50	774	2.17	881	2.76	973	3.39		0.50	81	77	74	72	70	69	63	57	74					
3750	1307	315	0.45	366	0.56	454	0.84	533	1.11	629	1.57	778	2.37	887	3.02	980	3.66	500	0.25	91	85	82	82	81	80	75	70	85					
4000	1395	329	0.54	378	0.65	464	0.93	537	1.22	620	1.60	780	2.57	893	3.29	987	3.97		0.50	87	83	80	78	77	76	71	65	77					
4250	1482	344	0.63	390	0.74	473	1.04	544	1.35	615	1.67	779	2.74	897	3.56	993	4.29	550	0.25	94	89	85	84	84	83	79	73	88					
4500	1569	359	0.73	402	0.85	484	1.15	553	1.49	617	1.80	774	2.85	900	3.83	999	4.63		0.50	90	86	83	81	81	80	75	70	85					
4750	1656	374	0.84	415	0.97	494	1.27	562	1.63	624	1.96	765	2.91	901	4.08	1003	4.98		0.75	86	82	80	76	75	75	69	62	79					
5000	1743	389	0.97	428	1.11	505	1.40	572	1.78	632	2.14	757	2.97	899	4.28	-	-	600	0.25	97	92	88	86	86	85	81	76	90					
5250	1830	405	1.11	442	1.25	516	1.55	582	1.93	641	2.33	754	3.10	892	4.41	-	-		0.50	93	90	86	84	84	83	79	74	87					
5500	1918	421	1.26	456	1.41	527	1.72	592	2.10	650	2.52	756	3.29	883	4.48	-	-		0.75	90	87	84	81	80	80	75	69	81					
5750	2005	437	1.42	471	1.58	539	1.90	602	2.28	660	2.72	762	3.53	874	4.57	-	-		0.50	96	93	89	87	86	86	82	77	92					
6000	2092	453	1.60	485	1.77	551	2.10	613	2.47	669	2.92	770	3.79	870	4.72	-	-		0.75	93	91	87	85	84	83	80	74	89					
6250	2179	469	1.79	500	1.97	563	2.31	624	2.69	679	3.14	778	4.07	872	4.96	-	-		1.00	90	88	84	81	80	79	75	69	83					
6500	2266	485	2.00	515	2.18	576	2.54	635	2.92	690	3.37	787	4.36	-	-	-	-		0.75	95	94	90	87	87	86	83	78	91					
6750	2354	502	2.23	531	2.42	589	2.79	646	3.17	700	3.62	797	4.65	-	-	-	-		1.00	93	92	88	86	84	84	80	74	85					
7000	2441	518	2.47	546	2.67	602	3.05	658	3.44	711	3.89	806	4.94	-	-	-	-		800	1.50	93	93	89	87	85	84	82	75	89				
7250	2528	535	2.73	562	2.93	616	3.33	670	3.74	722	4.18	-	-	-	-	-	-		900	2.00	95	96	92	89	87	85	84	78	92				
7500	2615	551	3.00	578	3.22	630	3.63	682	4.05	733	4.49	-	-	-	-	-	-		1000	2.50	96	99	95	92	89	88	87	81	94				
7750	2702	568	3.30	593	3.52	644	3.95	694	4.38	744	4.82	-	-	-	-	-	-																
8000	2790	585	3.61	609	3.84	658	4.28	707	4.72	-	-	-	-	-	-	-	-																
8250	2877	601	3.95	625	4.18	673	4.64	-	-	-	-	-	-	-	-	-	-																
8500	2964	618	4.30	642	4.55	-	-	-	-	-	-	-	-	-	-	-	-																

Model SIS-20											10 HP MAXIMUM		1-3/16" SHAFT		TIP SPEED = 5.35 x RPM		WHEEL DIA. = 20.44"		SOUND POWER re 10-12 WATTS												
CFM	OUTLET VELOCITY FPM	1/8" SP		1/4" SP		1/2" SP		3/4" SP		1" SP		1-1/2" SP		2" SP		2-1/2" SP		OCTAVE BANDS											LwoA		
		RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	BHP	RPM	SP	1	2	3	4	5	6	7	8				
5000	1175	331	0.69	374	0.85	443	1.17	513	1.53	581	1.92	701	2.80	797	3.66	879	4.50	400	0.25	84	78	75	75	73	69	63	57	77			
5500	1292	354	0.88	396	1.06	461	1.41	524	1.78	587	2.19	706	3.12	806	4.08	890	5.02	500	0.25	92	85	81	81	80	78	71	65	83			
6000	1410	379	1.11	419	1.31	482	1.69	539	2.08	597	2.50	710	3.45	812	4.50	899	5.55	600	0.50	91	84	79	79	77	74	68	62	81			
6500	1528	404	1.38	441	1.58	503	2.00	556	2.42	610	2.85	716	3.82	816	4.92	905	6.07	600	0.25	96	91	87	85	85	83	78	72	88			
7000	1645	430	1.69	464	1.90	526	2.36	576	2.80	625	3.26	724	4.25	821	5.38	910	6.60	700	0.50	95	90	86	84	83	81	76	70	88			
7500	1763	456	2.05	488	2.27	548	2.76	597	3.24	642	3.72	735	4.74	827	5.88	915	7.14	750	0.75	94	89	84	82	81	79	73	67	85			
8000	1880	483	2.45	512	2.69	571	3.21	618	3.72	662	4.23	748	5.29	835	6.45	920	7.72	800	1.00	93	87	81	80	79	76	70	64	83			
8500	1998	510	2.91	537	3.15	593	3.71	641	4.26	682	4.79	763	5.90	845	7.08	926	8.37	850	0.25	98	96	91	89	89	87	83	77	91			
9000	2115	537	3.43	562	3.68	616	4.26	663	4.85	704	5.41	780	6.57	857	7.79	934	9.10	900	0.50	98	96	90	88	88	86	82	76	91			
9500	2233	564	4.00	588	4.27	638	4.86	686	5.49	726	6.09	799	7.30	871	8.56	944	9.89	950	0.75	98	95	90	87	87	85	80	74	91			
10000	2350	591	4.64	614	4.91	662	5.53	708	6.19	748	6.84	818	8.10	887	9.40	-	-	1000	1.00	97	94	88	85	85	83	78	72	89			
10500	2468	619	5.34	640	5.63	685	6.26	731	6.95	771	7.64	839	8.96	-	-	-	-	800	0.75	100	99	94	91	91	89	85	79	95			
11000	2585	646	6.11	667	6.41	709	7.06	753	7.78	793	8.51	861	9.90	-	-	-	-	1100	1.00	100	99	93	90	90	88	84	78	95			
11500	2703	674	6.95	693	7.27	733	7.93	776	8.67	816	9.44	-	-	-	-	-	-	1150	0.99	99	98	91	87	87	85	81	75	90			
12000	2820	701	7.87	720	8.20	758	8.88	799	9.64	-	-	-	-	-	-	-	-	1200	1.50	100	101	94	90	90	88	84	78	94			
12500	2938	729	8.86	747	9.21	784	9.91	-	-	-	-	-	-	-	-	-	-	1250	2.00	99	99	91	87	87	85	81	75	92			

Model SIS-9


Max Wheel RPM 2800

Shaft Diameter, In. 3/4"

Max HP 1-1/2



Canarm Ltd. certifies that the SIS Series Fresh Air Supply Units shown herein are licenced to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and Publication 311, and comply with the requirements of the AMCA Certified Ratings Programme. Performance certified is for installation type B: Free inlet, Ducted outlet. Power rating bhp does not include transmission losses. Performance ratings include the effects of filters, but do not include the effects of other appurtenances (accessories). For certified sound ratings refer to Delhi Catalogue #SS-32.

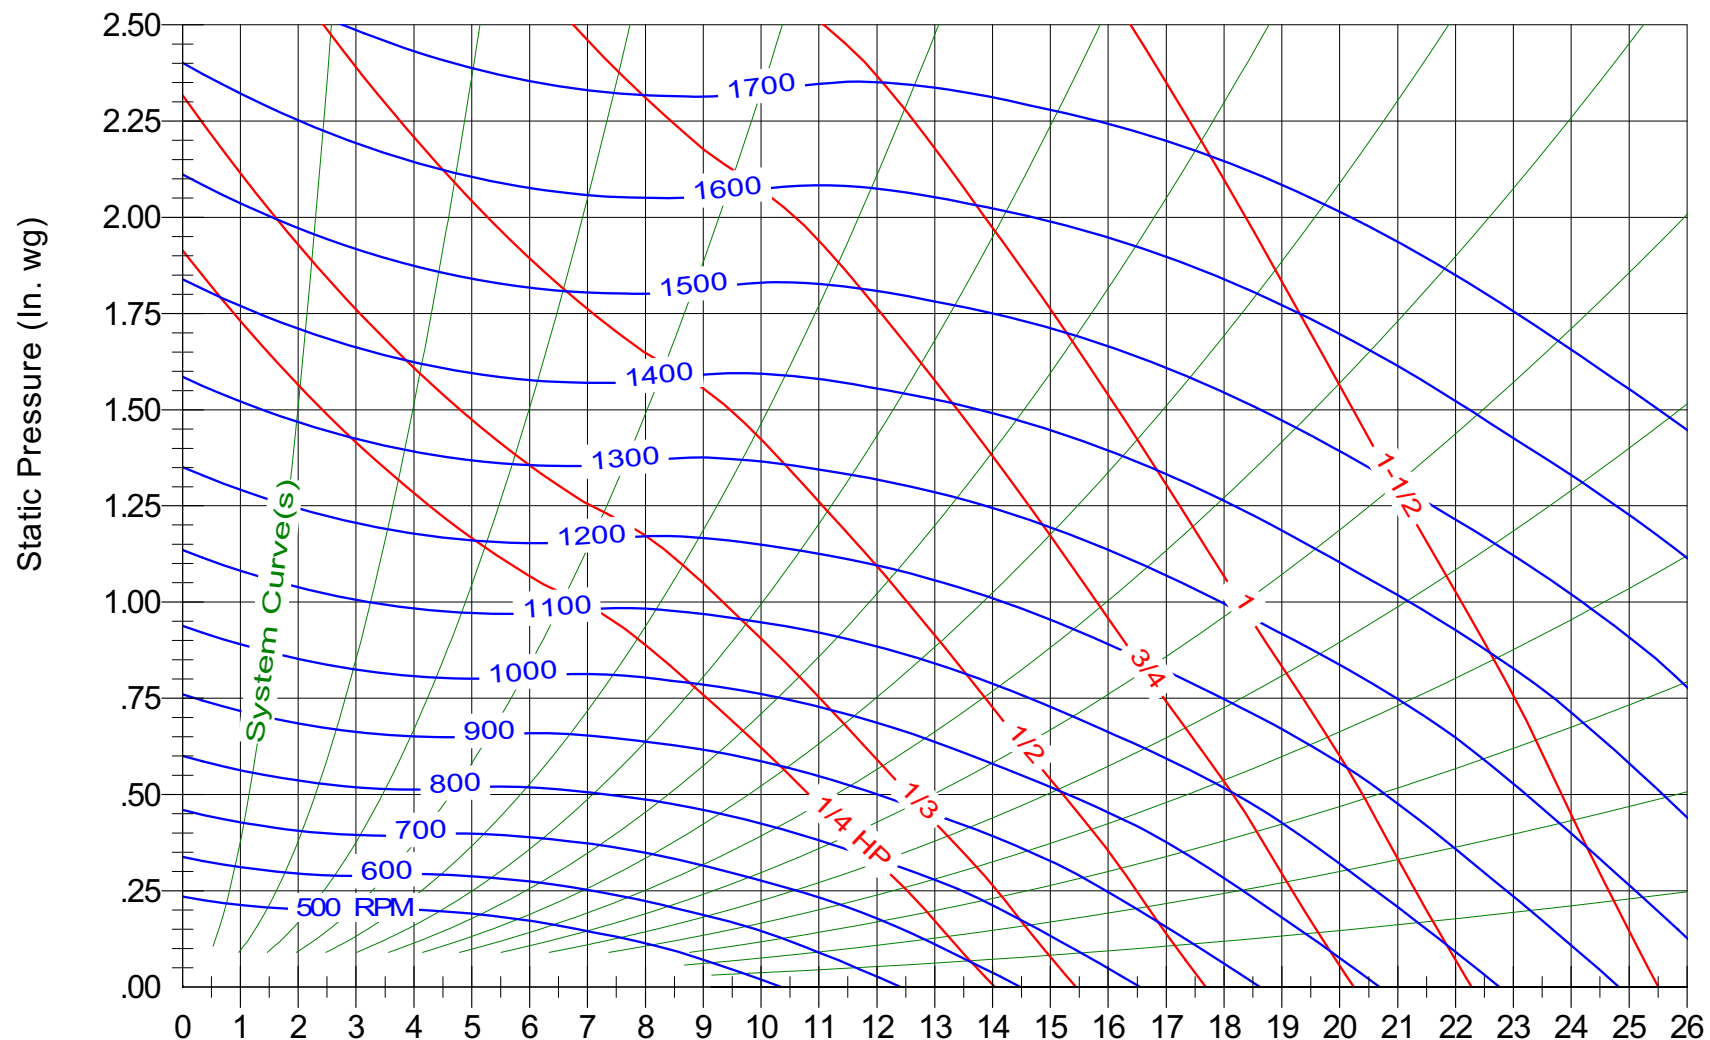

The sound power level ratings shown are in decibels, referred to 10^{-12} watts calculated per AMCA Standard 301. The A-weighted sound ratings have been calculated per AMCA Standard 301. Values shown are for outlet LwA sound power levels for Installation Type B: free inlet, ducted outlet. Ratings include the effects of duct end correction. Power rating (BHP) does not include transmission losses. Performance shown is for installation type B-Free Inlet, Ducted Outlet. Performance ratings include the effects of filters in the air stream.

Model SIS-10


Max Wheel RPM 2500

Shaft Diameter, In. 3/4"

Max HP 1-1/2



Canarm Ltd. certifies that the SIS Series Fresh Air Supply Units shown herein are licenced to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and Publication 311, and comply with the requirements of the AMCA Certified Ratings Programme. Performance certified is for installation type B: Free inlet, Ducted outlet. Power rating bhp does not include transmission losses. Performance ratings include the effects of filters, but do not include the effects of other appurtenances (accessories). For certified sound ratings refer to Delhi Catalogue #SS-32.

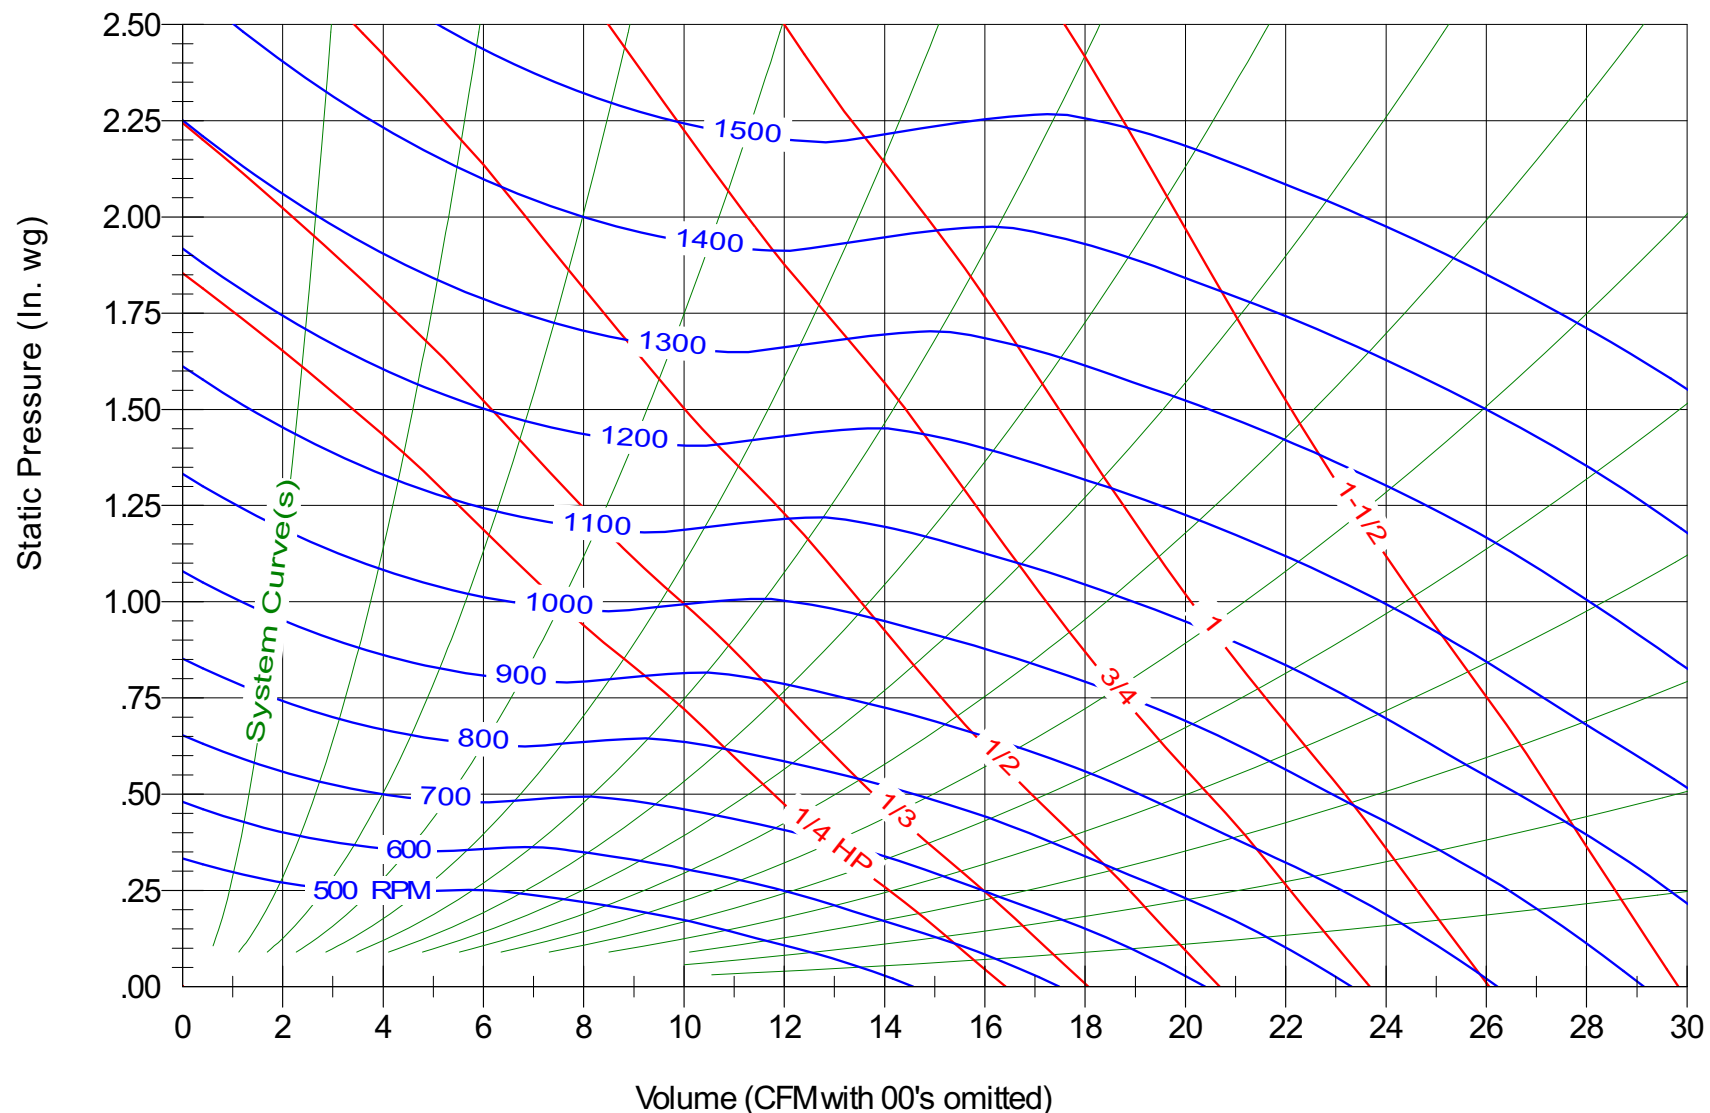

Model SIS-12


Max Wheel RPM 2140

Shaft Diameter, In. 3/4"

Max HP 2



Canarm Ltd. certifies that the SIS Series Fresh Air Supply Units shown herein are licenced to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and Publication 311, and comply with the requirements of the AMCA Certified Ratings Programme. Performance certified is for installation type B: Free inlet, Ducted outlet. Power rating bhp does not include transmission losses. Performance ratings include the effects of filters, but do not include the effects of other appurtenances (accessories). For certified sound ratings refer to Delhi Catalogue #SS-32.

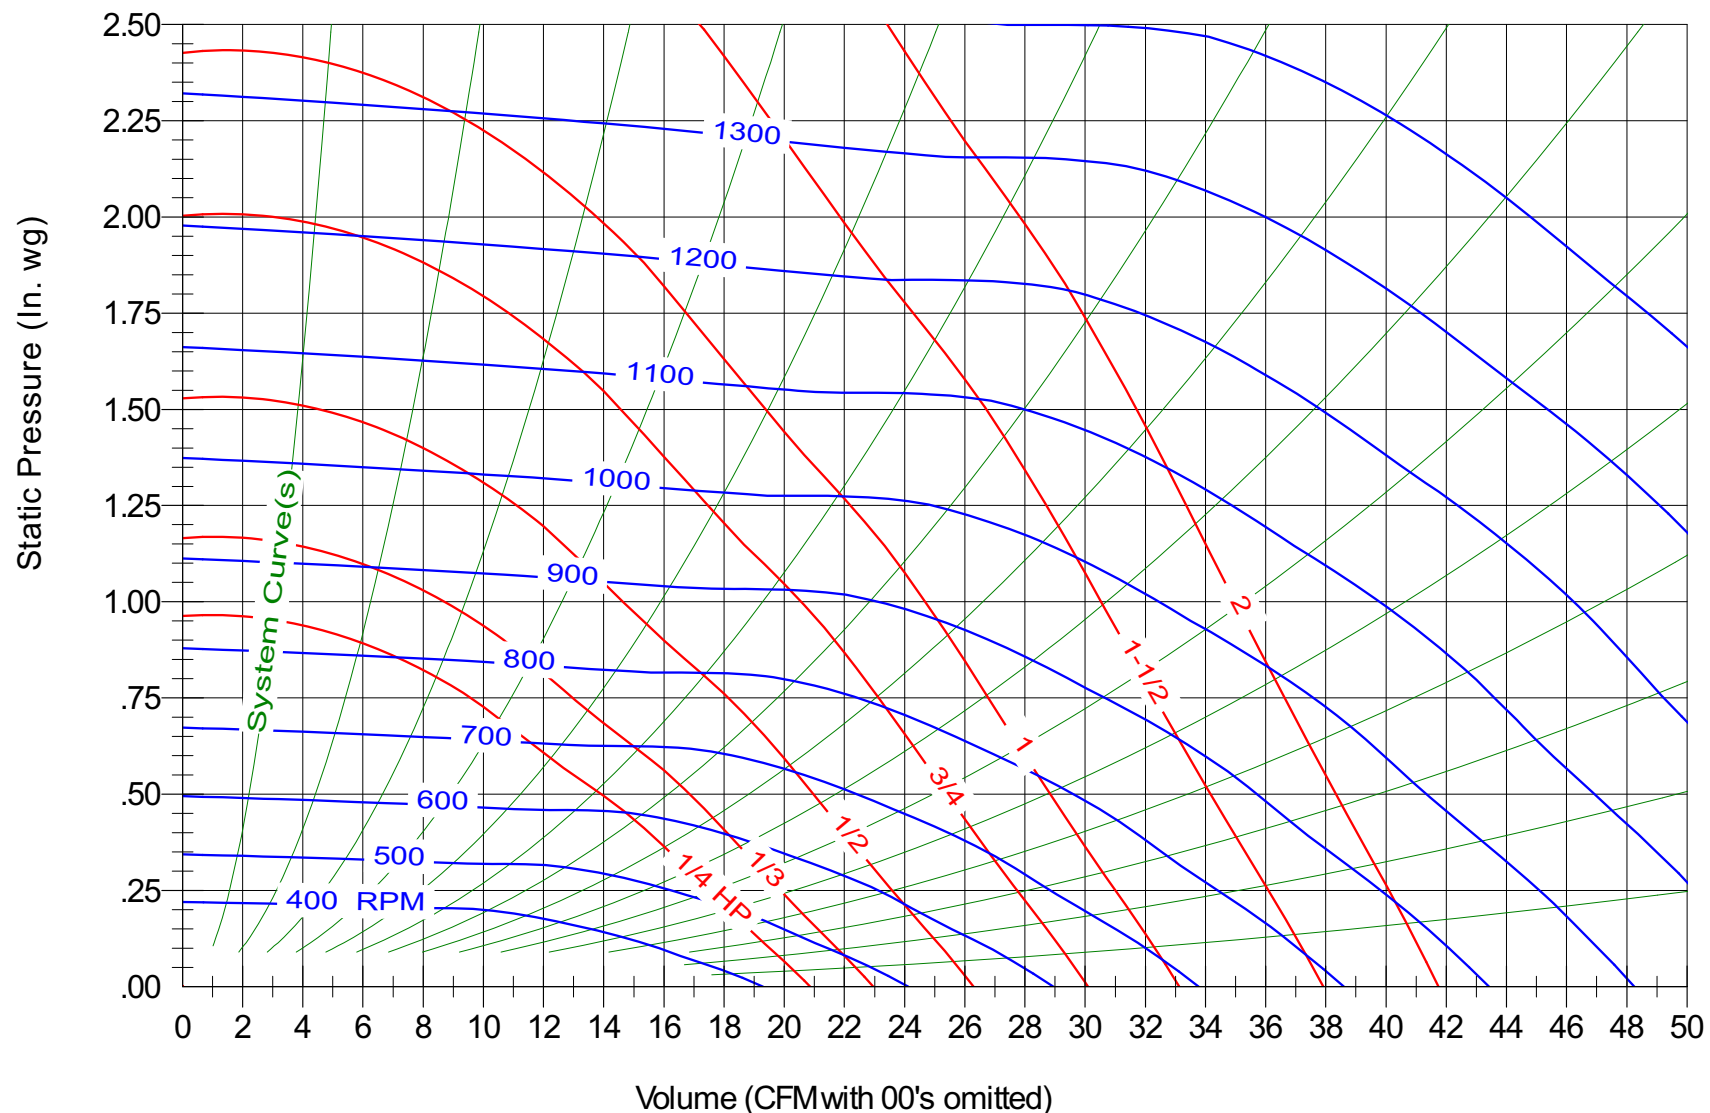

Model SIS-15


Max Wheel RPM 1800

Shaft Diameter, In. 1"

Max HP 3



Canarm Ltd. certifies that the SIS Series Fresh Air Supply Units shown herein are licenced to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and Publication 311, and comply with the requirements of the AMCA Certified Ratings Programme. Performance certified is for installation type B: Free inlet, Ducted outlet. Power rating bhp does not include transmission losses. Performance ratings include the effects of filters, but do not include the effects of other appurtenances (accessories). For certified sound ratings refer to Delhi Catalogue #SS-32.

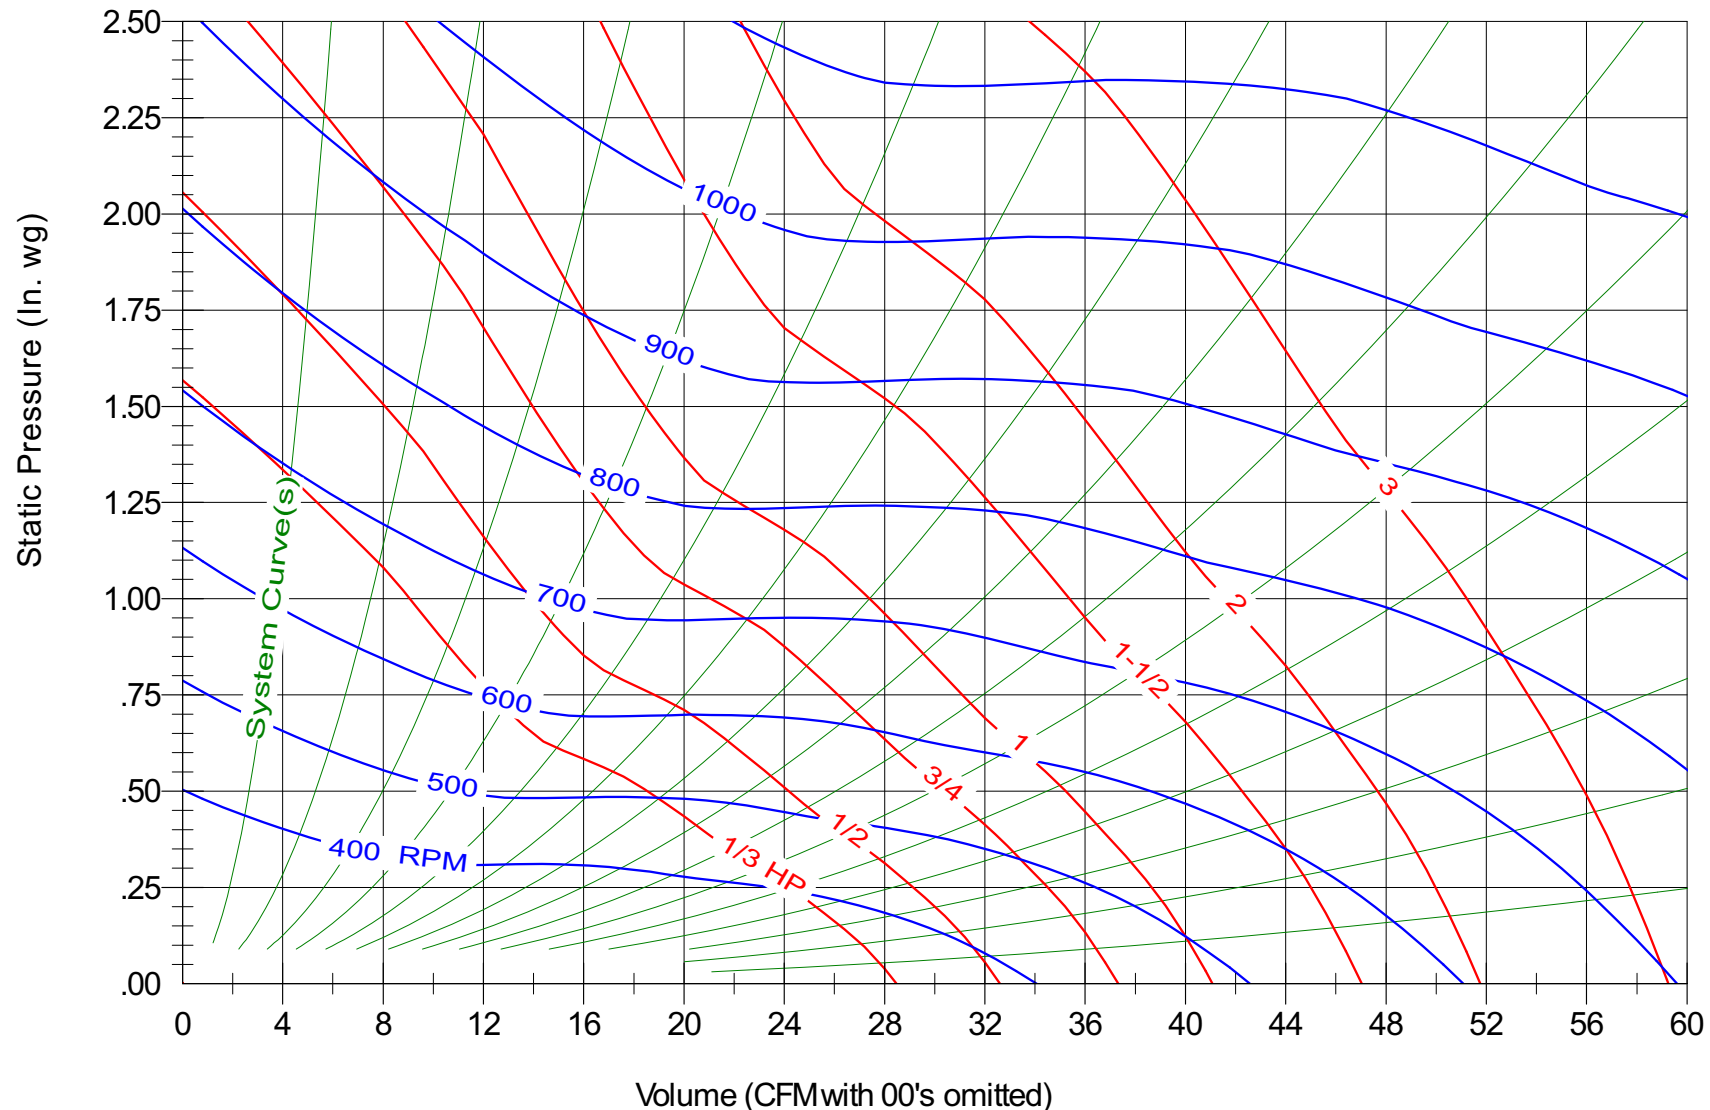

Model SIS-18


Max Wheel RPM 1450

Shaft Diameter, In. 1"

Max HP 5



Canarm Ltd. certifies that the SIS Series Fresh Air Supply Units shown herein are licenced to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and Publication 311, and comply with the requirements of the AMCA Certified Ratings Programme. Performance certified is for installation type B: Free inlet, Ducted outlet. Power rating bhp does not include transmission losses. Performance ratings include the effects of filters, but do not include the effects of other appurtenances (accessories). For certified sound ratings refer to Delhi Catalogue #SS-32.

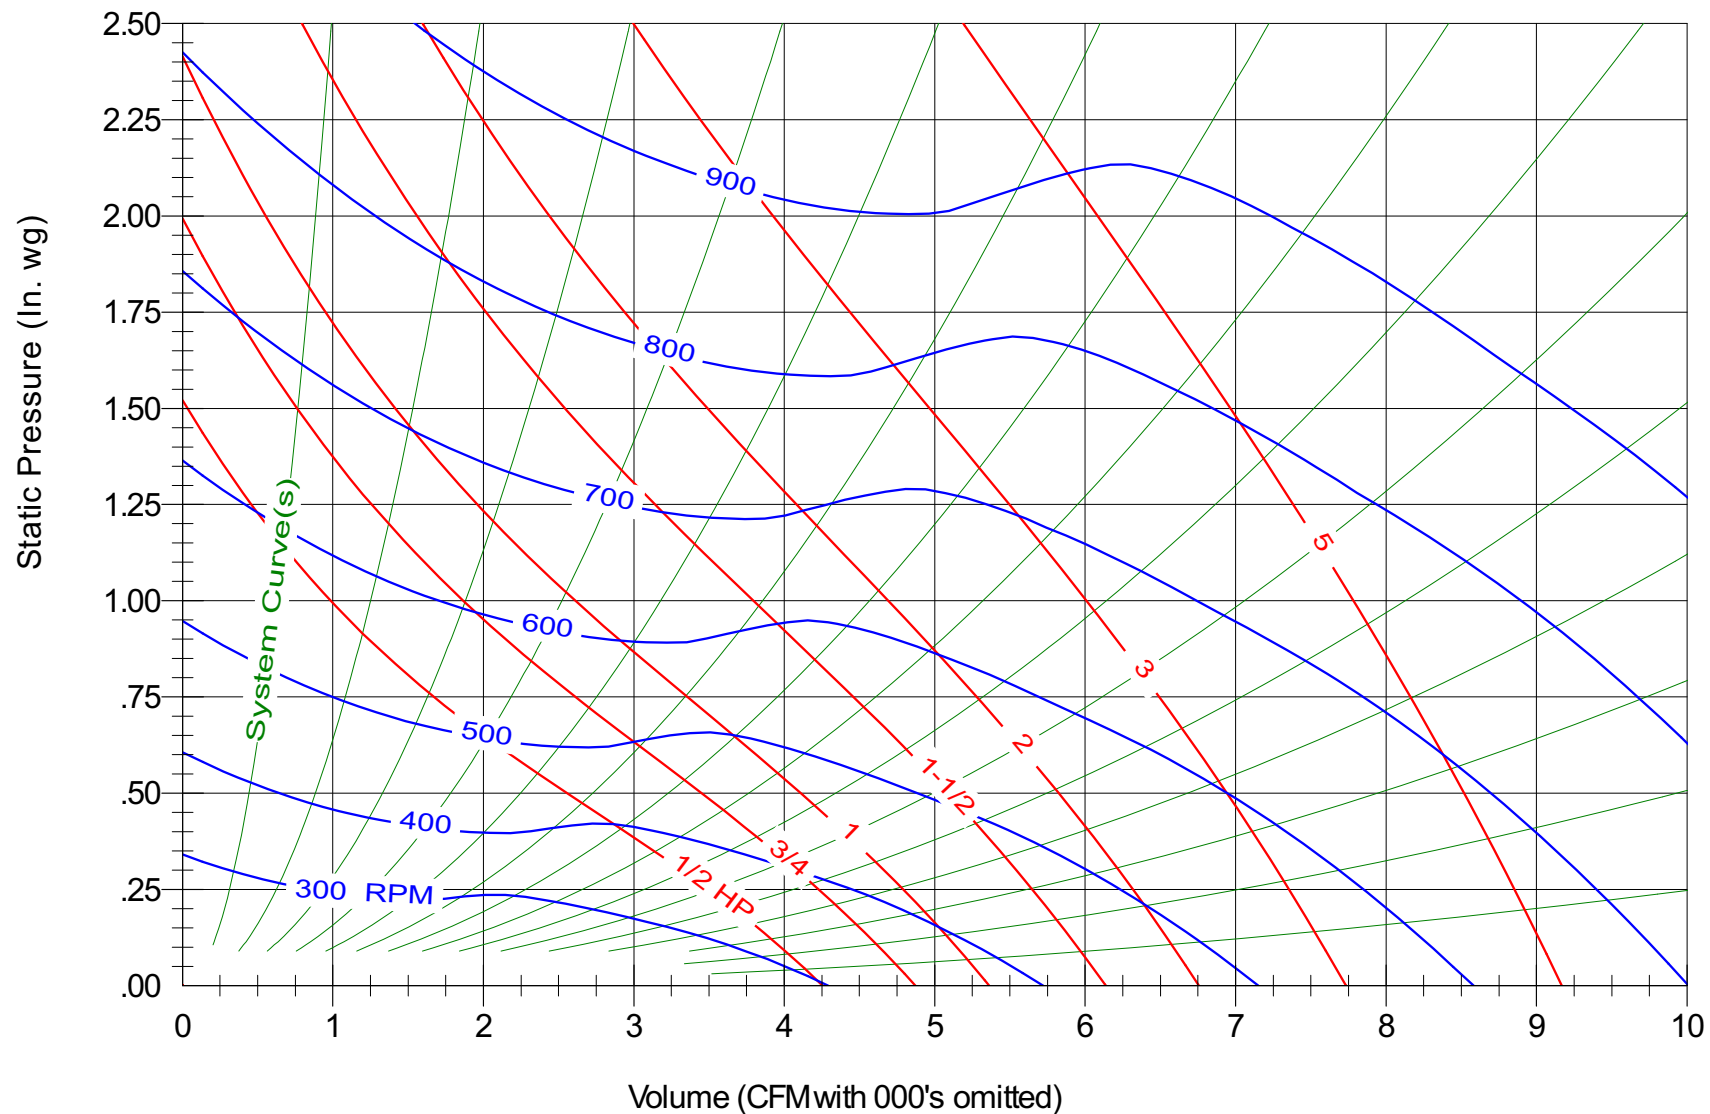

Model SIS-20

Max Wheel RPM 1325

Shaft Diameter, In. 1-3/16"

Max HP 10



Canarm Ltd. certifies that the SIS Series Fresh Air Supply Units shown herein are licenced to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and Publication 311, and comply with the requirements of the AMCA Certified Ratings Programme. Performance certified is for installation type B: Free inlet, Ducted outlet. Power rating bhp does not include transmission losses. Performance ratings include the effects of filters, but do not include the effects of other appurtenances (accessories). For certified sound ratings refer to Delhi Catalogue #SS-32.

