


## Standard Construction

<b>Frame</b>	Galvanized steel, 6 in. (152 mm) x 16 gauge wall thickness
<b>Blades</b>	J style, 20 gauge galvanized steel wall thickness, positioned 45° on approximately 5.5 in. (140 mm) centers
<b>Louver Depth</b>	6 in. (152 mm)
<b>Construction</b>	Mechanically fastened
<b>Finish</b>	Mill
<b>Minimum Size</b>	12 in. W x 16 in. H (305 mm W x 406 mm H)
<b>Maximum Single Section Size</b>	60 in. W x 96 in. H (1524 mm W x 2438 mm H)
<b>Wind Load</b>	25 PSF (1.2 kPa)



## Performance Ratings

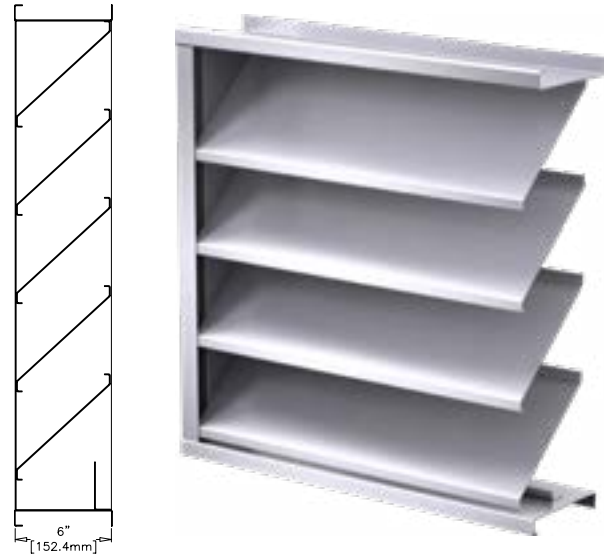

Greenheck Fan Corporation certifies that the FSJ-602 louvers shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to Water Penetration and Air Performance ratings.

### Performance of 48 in. x 48 in. (1219 mm x 1219 mm) Louver

<b>Free Area</b>	
Area	7.57 sq. ft. (0.703 sq. m)
Percent	47.3%
<b>Performance at Beginning Point of Water Penetration</b>	
Free Area Velocity	896 fpm (4.552 m/s)
Max Intake Volume	6783 cfm (3.201 m <sup>3</sup> /s)
<b>Performance at 6,000 CFM (2.832 m<sup>3</sup>/s) Intake</b>	
Pressure Drop	0.098 in. wg (0.024 kPa)

## Document Links

[Louver Finishes & Colors](#)

[Louver Product Selection Guide](#)

[Louver Products Catalog](#)

[Louver Warranty Statement](#)

## Options and Accessories

- [Bird Screen](#)
- [Blank Off Panels](#)
- [Extended Sill](#)
- [Filter Rack/Filter](#)
- [Flange Frame](#)
- [Hinged Frame](#)
- [Insect Screen](#)
- [Mounting Angles](#)
- [Security Bars](#)
- [Variety of Architectural Finishes](#)
- Welded Construction
- 16, 18, or 20 ga. Nominal Blade Thickness

## Standard Details

### [FSJ-602 Standard Details](#)

Structural reinforcing members may be required to adequately support and install multiple louver sections within a large opening. Structural reinforcing members along with any associated installation hardware is not provided by Greenheck unless indicated otherwise by Greenheck. Options and accessories including, but not limited to, screens, filter racks, louver doors, and blank off panels are not subject to structural analysis unless indicated otherwise by Greenheck.

## Free Area Chart

Free Area Chart shows free area in square feet and square meters.


Louver Height Inches (Meters)	Louver Width in Inches (Meters)								
	12	18	24	30	36	42	48	54	60
0.30	0.46	0.61	0.76	0.91	1.07	1.22	1.37	1.52	
<b>16</b>	<b>0.32</b>	<b>0.53</b>	<b>0.74</b>	<b>0.95</b>	<b>1.15</b>	<b>1.36</b>	<b>1.57</b>	<b>1.78</b>	<b>1.99</b>
0.41	0.03	0.05	0.07	0.09	0.11	0.13	0.15	0.17	0.18
<b>18</b>	<b>0.40</b>	<b>0.66</b>	<b>0.92</b>	<b>1.19</b>	<b>1.45</b>	<b>1.71</b>	<b>1.97</b>	<b>2.23</b>	<b>2.49</b>
0.46	0.04	0.06	0.09	0.11	0.13	0.16	0.18	0.21	0.23
<b>24</b>	<b>0.62</b>	<b>1.02</b>	<b>1.42</b>	<b>1.82</b>	<b>2.22</b>	<b>2.62</b>	<b>3.02</b>	<b>3.42</b>	<b>3.82</b>
0.61	0.06	0.09	0.13	0.17	0.21	0.24	0.28	0.32	0.35
<b>30</b>	<b>0.83</b>	<b>1.37</b>	<b>1.91</b>	<b>2.45</b>	<b>2.99</b>	<b>3.53</b>	<b>4.07</b>	<b>4.61</b>	<b>5.16</b>
0.76	0.08	0.13	0.18	0.23	0.28	0.33	0.38	0.43	0.48
<b>36</b>	<b>1.05</b>	<b>1.73</b>	<b>2.41</b>	<b>3.09</b>	<b>3.77</b>	<b>4.45</b>	<b>5.13</b>	<b>5.81</b>	<b>6.49</b>
0.91	0.10	0.16	0.22	0.29	0.35	0.41	0.48	0.54	0.60
<b>42</b>	<b>1.26</b>	<b>2.08</b>	<b>2.90</b>	<b>3.72</b>	<b>4.54</b>	<b>5.36</b>	<b>6.18</b>	<b>7.00</b>	<b>7.82</b>
1.07	0.12	0.19	0.27	0.35	0.42	0.50	0.57	0.65	0.73
<b>48</b>	<b>1.55</b>	<b>2.55</b>	<b>3.55</b>	<b>4.56</b>	<b>5.56</b>	<b>6.57</b>	<b>7.57</b>	<b>8.57</b>	<b>9.58</b>
1.22	0.14	0.24	0.33	0.42	0.52	0.61	0.70	0.80	0.89
<b>54</b>	<b>1.80</b>	<b>2.96</b>	<b>4.12</b>	<b>5.29</b>	<b>6.45</b>	<b>7.62</b>	<b>8.78</b>	<b>9.95</b>	<b>11.11</b>
1.37	0.17	0.27	0.38	0.49	0.60	0.71	0.82	0.92	1.03
<b>60</b>	<b>2.04</b>	<b>3.37</b>	<b>4.69</b>	<b>6.02</b>	<b>7.34</b>	<b>8.67</b>	<b>9.99</b>	<b>11.32</b>	<b>12.64</b>
1.52	0.19	0.31	0.44	0.56	0.68	0.81	0.93	1.05	1.17
<b>66</b>	<b>2.29</b>	<b>3.78</b>	<b>5.26</b>	<b>6.75</b>	<b>8.23</b>	<b>9.72</b>	<b>11.21</b>	<b>12.69</b>	<b>14.18</b>
1.68	0.21	0.35	0.49	0.63	0.76	0.90	1.04	1.18	1.32
<b>72</b>	<b>2.54</b>	<b>4.18</b>	<b>5.83</b>	<b>7.48</b>	<b>9.12</b>	<b>10.77</b>	<b>12.42</b>	<b>14.06</b>	<b>15.71</b>
1.83	0.24	0.39	0.54	0.69	0.85	1.00	1.15	1.31	1.46
<b>78</b>	<b>2.77</b>	<b>4.57</b>	<b>6.36</b>	<b>8.16</b>	<b>9.96</b>	<b>11.76</b>	<b>13.55</b>	<b>15.35</b>	<b>17.15</b>
1.98	0.26	0.42	0.59	0.76	0.93	1.09	1.26	1.43	1.59
<b>84</b>	<b>2.99</b>	<b>4.92</b>	<b>6.86</b>	<b>8.80</b>	<b>10.73</b>	<b>12.67</b>	<b>14.61</b>	<b>16.54</b>	<b>18.48</b>
2.13	0.28	0.46	0.64	0.82	1.00	1.18	1.36	1.54	1.72
<b>90</b>	<b>3.20</b>	<b>5.28</b>	<b>7.35</b>	<b>9.43</b>	<b>11.51</b>	<b>13.58</b>	<b>15.66</b>	<b>17.73</b>	<b>19.81</b>
2.29	0.30	0.49	0.68	0.88	1.07	1.26	1.45	1.65	1.84
<b>96</b>	<b>3.42</b>	<b>5.63</b>	<b>7.85</b>	<b>10.06</b>	<b>12.28</b>	<b>14.50</b>	<b>16.71</b>	<b>18.93</b>	<b>21.14</b>
2.44	0.32	0.52	0.73	0.93	1.14	1.35	1.55	1.76	1.96



## Airflow Resistance

Standard Air - 0.075 lb/ft<sup>3</sup> (1.2 kg/m<sup>3</sup>)

Test size 48 in. x 48 in. (1219 mm x 1219 mm)

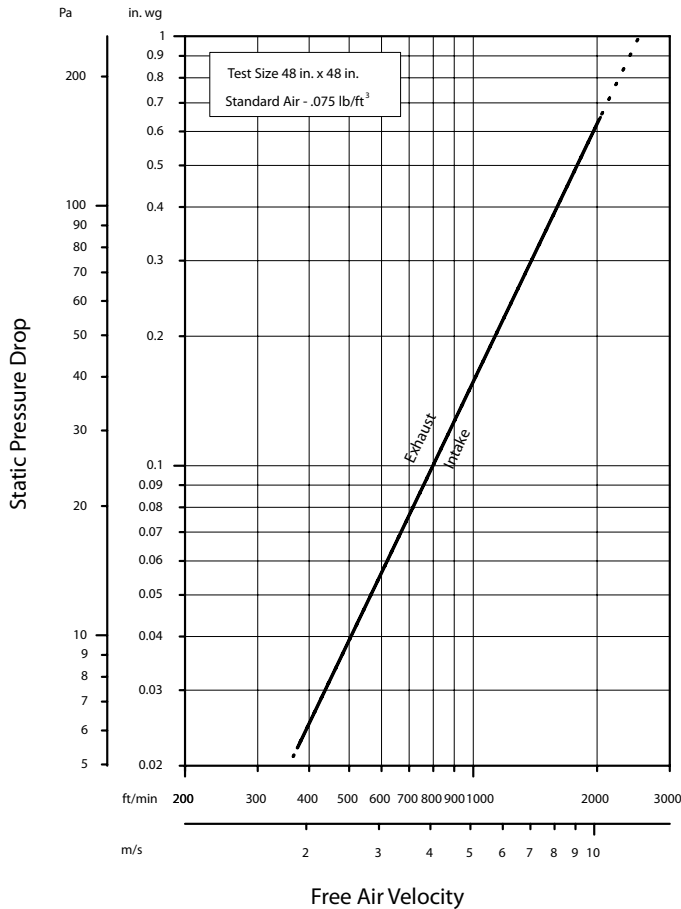


Model FSJ-602 resistance to airflow (pressure drop) varies depending on louver application (air intake or air exhaust). Free area velocities (shown) are higher than average velocity through the overall louver size. See louver selection information. (Test Figure 5.5-6.5)

## Water Penetration

Standard Air - 0.075 lb/ft<sup>3</sup> (1.2 kg/m<sup>3</sup>)

Test size 48 in. x 48 in. (1219 mm x 1219 mm) Test duration of 15 min.

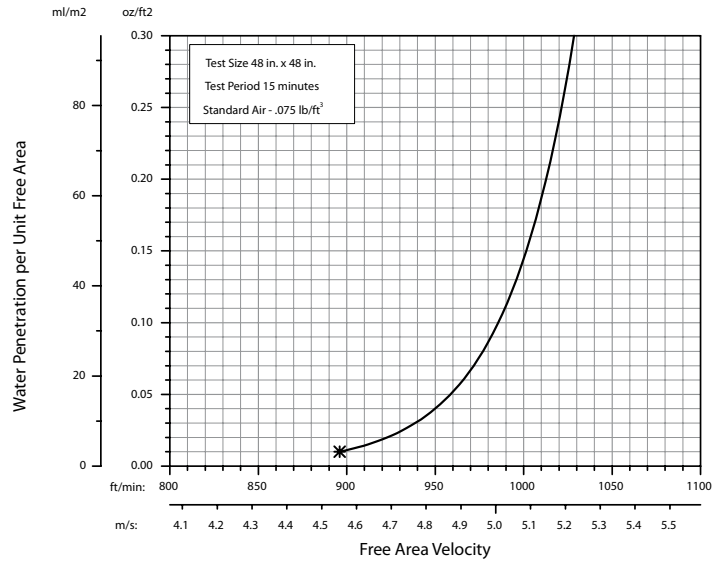

The AMCA Water Penetration Test provides a method for comparing various louver models and designs as to their efficiency in resisting the penetration of rainfall under specific laboratory test conditions. The beginning point of water penetration is defined as that velocity where the water penetration curve projects through 0.01 oz. (3 g) of water (penetration) per sq. ft. (m<sup>2</sup>) of louver free area. **\*The beginning point of water penetration for Model FSJ-602 is above 896 fpm (4.552 m/s) free area velocity.** These performance ratings do not guarantee a louver to be weatherproof or stormproof and should be used in combination with other factors including good engineering judgement in selecting louvers.