



Model DC-4174
4" (101.6 mm) Dade County Hurricane Louver

NOA: 20-1222.14
Florida Product Approval: FL-21658
Maximum Design Windload 170 PSF

Material:

Material:	6063-T6 Alloy
Nominal Thickness:	Heads: 0.060" (1.52 mm) Sills: 0.080" (2.03 mm) Jambs & Mullions: 0.125" (3.18 mm)
Nominal Blade Thickness:	0.070" (1.78 mm)
Furnished With:	Birdscreen: ½" intercrimp aluminum mesh, 0.063" diameter wire removeable alumi- num bird screen in an aluminum frame
Additional Options (at additional cost):	Insect screen (in lieu of bird screen), Continuous clip angles for attachment Sheet blank off, Insulated blank off Sill pans, Flange frames Integrated glazing frames

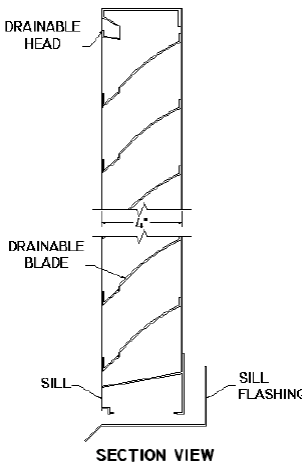

Test Summary:

For a 4 Foot by 4 Foot Unit.

Tested with mill finish and no screen

- Free area = 8.80 ft² (0.82 m²)
- Percent free area = 55%
- Free area velocity at the point of beginning water penetration (@ 0.01 oz. / ft² of free area based on a 15 minute interval test) = 1087 FPM (5.52 m/s)
- Intake pressure drop at 0.01 oz. / ft² free area velocity = 0.18 in. H₂O (44.7 Pa)

Discharge Coefficient

Intake Cd = 0.39 (Class 2)

AMCA certifies the coefficient class only

Construction Specialties Inc. certifies that the louver model DC-4174 shown herein is licensed to bear the AMCA Seal.

The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified ratings Program. The AMCA Certified Ratings Seal applies to air performance ratings and water penetration ratings.



Dade County Protocols:

- TAS-201: Large and small missile impact
- TAS-202: Criteria for testing impact and not impact resistant building envelope components using static uniform air pressure
- TAS-203: Criteria for testing products subject to cyclic wind pressure


Application and Design

DC-4174 is tested in accordance with AMCA 540 Test Method for Louvers Impacted by Wind Borne Debris (Basic Protection, Missile Level D). The DC-4174 is tested in accordance with AMCA 500-L Air Performance and Water Penetration.



Model DC-4174**4" (101.6 mm) Dade County Hurricane Louver****Water Penetration Statement**

AMCA defines the point of beginning water penetration as the free area velocity at which the AMCA water test has yielded 0.01 or less ounces of water per square foot of louver free area during a 15-minute test period.

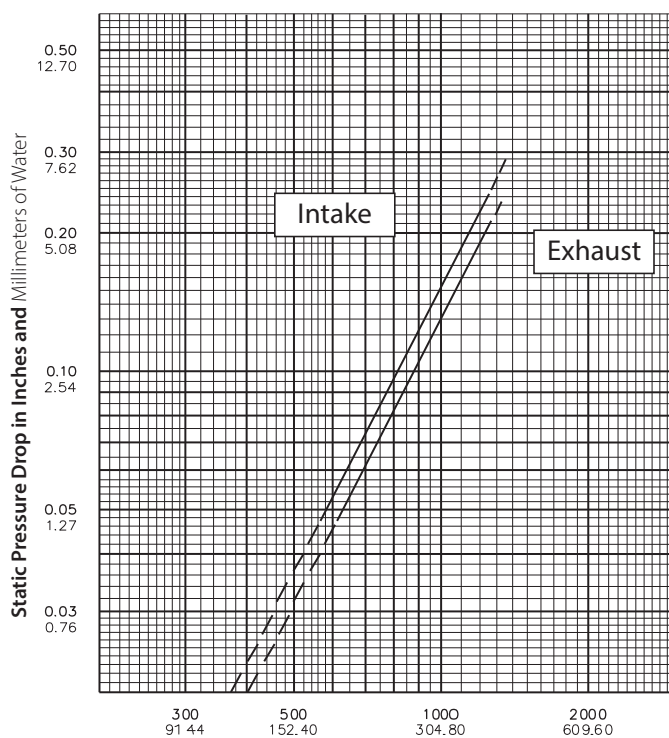**Air Velocity in Feet and Meters per Minute Through Free Area**

Data corrected to standard air density.
48" x 48" louver tested to figure 5.5.

Free Area Table (Free area in **sq. feet** and sq. meters)

For additional sizes, please visit:

<https://www.c-sgroup.com/architectural-louvers/louvers-airflow-tool>

Width in Inches and Meters									
	18	24	30	36	42	48	54	60	
	0.46	0.61	0.76	0.91	1.07	1.22	1.37	1.52	
18	0.91	1.25	1.60	1.95	2.29	2.51	2.86	3.20	
0.46	0.08	0.12	0.15	0.18	0.21	0.23	0.27	0.30	
24	1.30	1.80	2.29	2.79	3.28	3.59	4.09	4.59	
0.61	0.12	0.17	0.21	0.26	0.31	0.33	0.38	0.43	
30	1.79	2.47	3.15	3.83	4.52	4.94	5.62	6.30	
0.76	0.17	0.23	0.29	0.36	0.42	0.46	0.52	0.59	
36	2.28	3.14	4.01	4.88	5.75	6.29	7.16	8.02	
0.91	0.21	0.29	0.37	0.45	0.53	0.58	0.66	0.75	
42	2.76	3.81	4.86	5.91	6.97	7.62	8.67	9.73	
1.07	0.26	0.35	0.45	0.55	0.65	0.71	0.81	0.90	
48	3.19	4.40	5.61	6.83	8.04	8.80	10.01	11.22	
1.22	0.30	0.41	0.52	0.63	0.75	0.82	0.93	1.04	
54	3.62	5.00	6.37	7.75	9.13	9.99	11.37	12.75	
1.37	0.34	0.46	0.59	0.72	0.85	0.93	1.06	1.18	
60	4.05	5.59	7.14	8.68	10.22	11.19	12.73	14.28	
1.52	0.38	0.52	0.66	0.81	0.95	1.04	1.18	1.33	
66	4.47	6.17	7.88	9.58	11.28	12.35	14.05	15.76	
1.68	0.42	0.57	0.73	0.89	1.05	1.15	1.31	1.46	
72	4.96	6.85	8.74	10.63	12.52	13.70	15.59	17.47	
1.83	0.46	0.64	0.81	0.99	1.16	1.27	1.45	1.62	
78	5.45	7.53	9.60	11.68	13.75	15.05	17.13	19.20	
1.98	0.51	0.70	0.89	1.08	1.28	1.40	1.59	1.78	
84	5.90	8.15	10.40	12.65	14.90	16.30	18.55	20.80	
2.13	0.55	0.76	0.97	1.18	1.38	1.51	1.72	1.93	
90	6.33	8.74	11.15	13.56	15.97	17.48	19.89	22.30	
2.29	0.59	0.81	1.04	1.26	1.48	1.62	1.85	2.07	
96	6.76	9.34	11.91	14.49	17.06	18.67	21.25	23.82	
2.44	0.63	0.87	1.11	1.35	1.59	1.73	1.97	2.21	
102	7.15	9.88	12.60	15.33	18.05	19.76	22.48	25.21	
2.59	0.66	0.92	1.17	1.42	1.68	1.84	2.09	2.34	
108	7.64	10.55	13.46	16.37	19.29	21.10	24.02	26.93	
2.74	0.71	0.98	1.25	1.52	1.79	1.96	2.23	2.50	
114	8.13	11.23	14.32	17.42	20.52	22.45	25.55	28.65	
2.90	0.76	1.04	1.33	1.62	1.91	2.09	2.37	2.66	
120	8.61	11.89	15.17	18.46	21.74	23.79	27.07	30.35	
3.05	0.80	1.10	1.41	1.71	2.02	2.21	2.51	2.82	
126	9.04	12.48	15.92	19.37	22.81	24.96	28.40	31.85	
3.20	0.84	1.16	1.48	1.80	2.12	2.32	2.64	2.96	
132	9.47	13.08	16.69	20.29	23.90	26.16	29.76	33.37	
3.35	0.88	1.22	1.55	1.89	2.22	2.43	2.77	3.10	
138	9.90	13.68	17.45	21.22	25.00	27.35	31.13	34.90	
3.51	0.92	1.27	1.62	1.97	2.32	2.54	2.89	3.24	
144	10.32	14.26	18.19	22.12	26.06	28.51	32.45	36.38	
3.66	0.96	1.32	1.69	2.06	2.42	2.65	3.01	3.38	
150	10.81	14.93	19.05	23.17	27.29	29.86	33.98	38.10	
3.81	1.00	1.39	1.77	2.15	2.53	2.77	3.16	3.54	
156	11.30	15.61	19.91	24.22	28.53	31.22	35.52	39.83	
3.96	1.05	1.45	1.85	2.25	2.65	2.90	3.30	3.70	
162	11.76	16.23	20.71	25.19	29.67	32.47	36.94	41.42	
4.11	1.09	1.51	1.92	2.34	2.76	3.02	3.43	3.85	
168	12.18	16.82	21.46	26.10	30.74	33.64	38.28	42.92	
4.27	1.13	1.56	1.99	2.42	2.86	3.13	3.56	3.99	
174	12.61	17.42	22.22	27.03	31.83	34.84	39.64	44.45	
4.42	1.17	1.62	2.06	2.51	2.96	3.24	3.68	4.13	
180	13.01	17.96	22.92	27.87	32.83	35.92	40.88	45.83	
4.57	1.21	1.67	2.13	2.59	3.05	3.34	3.80	4.26	
186	13.49	18.63	23.77	28.92	34.06	37.27	42.41	47.55	
4.72	1.25	1.73	2.21	2.69	3.16	3.46	3.94	4.42	
192	13.98	19.31	24.63	29.96	35.29	38.62	43.94	49.27	
4.88	1.30	1.79	2.29	2.78	3.28	3.59	4.08	4.58	
198	14.46	19.98	25.49	31.00	36.51	39.95	45.46	50.97	
5.03	1.34	1.86	2.37	2.88	3.39	3.71	4.22	4.74	

Upper Numerals English Units/Lower Numerals Metric Units