

## Application

Model SEFSD-211 is a severe environment 316SS combination fire smoke damper with 3V style blades. This damper may be installed vertically (with blades running horizontal) or horizontally and is rated for airflow in either direction.

## Ratings

### UL 555 Fire Resistance Rating

Fire Rating: 1½ hours

Dynamic Closure Rating: Actual ratings are size dependent

Velocity: Up to 2000 fpm (10.2 m/s)

Pressure: Up to 6 in. wg (1.5 kPa)

### UL 555S Leakage Rating


Leakage Class: I

Operational Rating: Actual ratings are size dependent

Velocity: Up to 2000 fpm (10.2 m/s)

Pressure: Up to 6 in. wg (1.5 kPa)

Temperature: Up to 350°F (177°C) - depending upon the actuator

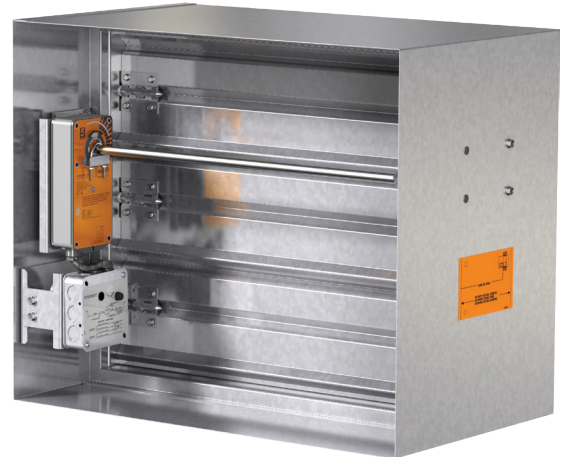

W & H dimensions furnished approximately ¼ in. (6 mm) undersize. Add sleeve thickness for overall sleeved damper dimension.

Internal right hand is shown.



See complete marking on product.

UL 555 and UL 555S Classification R13317

CAN/ULC S112 Classified Fire Damper

CAN/ULC S112.1 Classified Smoke Damper

## Size Limitations

W x H	Minimum Size	Maximum Size	
		Single Section	Multiple Section Horizontal    Vertical
<b>4 in. wg (1 kPa) pressure</b>			
<b>Inches</b>	4 x 4	24 x 30 or 22 x 36	48 x 30    88 x 72
<b>mm</b>	102 x 102	610 x 762 or 559 x 914	1219 x 762    2235 x 1829
<b>6 in. wg (1.5 kPa) pressure</b>			
<b>Inches</b>	4 x 4	24 x 30	48 x 30    88 x 72
<b>mm</b>	102 x 102	610 x 762	1219 x 762    2235 x 1829

\*Overall damper size is 8 in. x 6 in. (203 mm x 152 mm).

Model SEFSD-211 meets the requirements for fire dampers, smoke dampers and combination fire smoke dampers established by:

### National Fire Protection Association

NFPA Standards 80, 90A, 92, 101 & 105

### IBC International Building Codes

### CSFM California State Fire Marshal


Fire Damper Listing (#3225-0981:0103)

Leakage (Smoke) Damper Listing (#3230-0981:0104)

## Construction

	Standard	Optional
<b>Frame Material</b>	316SS	-
<b>Frame Material Thickness</b>	16 ga. (1.5 mm)	-
<b>Frame Type</b>	5 in. x 1 in. (127 mm x 25 mm) hat channel	-
<b>Blade Action</b>	Opposed	-
<b>Blade Material</b>	316SS	-
<b>Blade Material Thickness</b>	16 ga. (1.5 mm)	-
<b>Blade Type</b>	3V	-
<b>Blade Orientation</b>	Horizontal	-
<b>Linkage</b>	316SS out of airstream, concealed in jamb	-
<b>Axle Bearings</b>	316SS	-
<b>Axle Material</b>	316SS	-
<b>Blade Seals</b>	Silicone	-
<b>Jamb Seals</b>	316SS	-
<b>Closure Device</b>	RRL	RRL/OCI, TOR, Fusible Link
<b>Closure Temperature</b>	165°F (74°C)	212°F (100°C), 250°F (121°C), 286°F (141°C)*, 350°F (177°C)
<b>Mounting</b>	Vertical	Horizontal

\* only available with fusible link

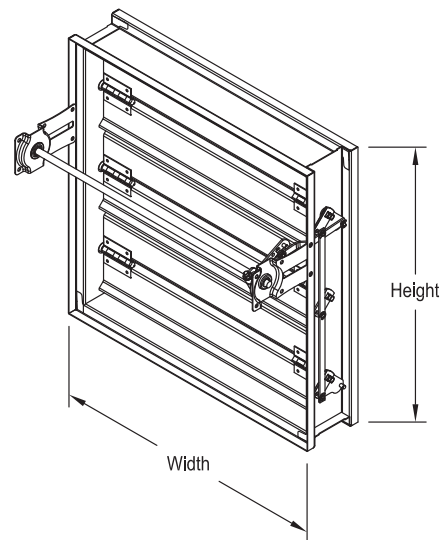

### Note:

The frames are constructed with reinforced corners. Low profile head and sill are used on sizes less than 17 in. (432 mm) high for lower pressure drop and improved damper performance.


## Options

Click on underline words for more information.

- [BACnet test module - 120V](#)
- [BACnet test module - 24V](#)
- [Momentary test switch](#)
- [OCI \(Open Closed Indicator switch\)](#)
- [Retaining angles](#)
- Sealed transitions and sleeves
- [Smoke detector - no flow](#)
- [Smoke detector - low flow](#)
- Transitions (C, O, R)

# Pressure Drop

AMCA Figure 5.2

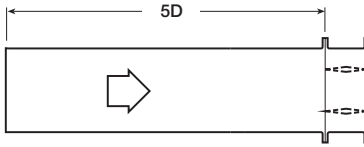

Velocity (fpm)	Pressure Drop (in. wg)
500	0.04
1000	0.14
1500	0.31
2000	0.55
2500	0.86
3000	1.24
3500	1.69
4000	2.20


Velocity (fpm)	Pressure Drop (in. wg)
500	0.02
1000	0.07
1500	0.16
2000	0.29
2500	0.45
3000	0.65
3500	0.89
4000	1.16

Velocity (fpm)	Pressure Drop (in. wg)
500	0.01
1000	0.04
1500	0.09
2000	0.16
2500	0.25
3000	0.36
3500	0.49
4000	0.64

Velocity (fpm)	Pressure Drop (in. wg)
500	0.01
1000	0.06
1500	0.13
2000	0.23
2500	0.36
3000	0.52
3500	0.70
4000	0.92

Velocity (fpm)	Pressure Drop (in. wg)
500	0.03
1000	0.10
1500	0.23
2000	0.41
2500	0.63
3000	0.91
3500	1.24
4000	1.62

AMCA Figure 5.3

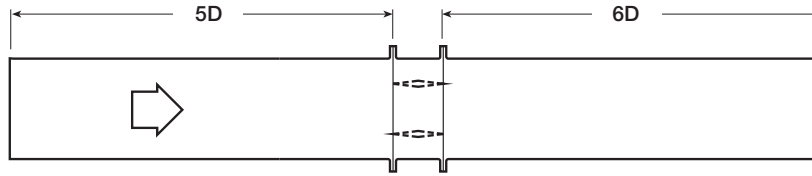

Velocity (fpm)	Pressure Drop (in. wg)
500	0.02
1000	0.09
1500	0.20
2000	0.36
2500	0.56
3000	0.81
3500	1.10
4000	1.44


Velocity (fpm)	Pressure Drop (in. wg)
500	0.01
1000	0.04
1500	0.09
2000	0.16
2500	0.25
3000	0.35
3500	0.48
4000	0.63

Velocity (fpm)	Pressure Drop (in. wg)
500	0.01
1000	0.03
1500	0.06
2000	0.11
2500	0.17
3000	0.24
3500	0.33
4000	0.42

Velocity (fpm)	Pressure Drop (in. wg)
500	0.01
1000	0.04
1500	0.10
2000	0.17
2500	0.27
3000	0.39
3500	0.53
4000	0.70

Velocity (fpm)	Pressure Drop (in. wg)
500	0.02
1000	0.07
1500	0.16
2000	0.29
2500	0.45
3000	0.64
3500	0.88
4000	1.14

AMCA Figure 5.5

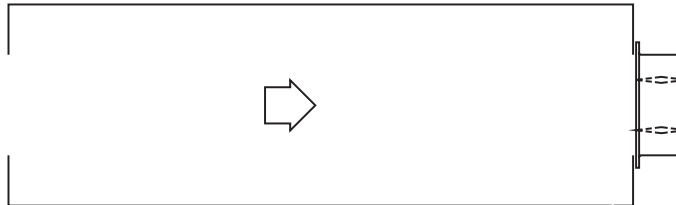

Velocity (fpm)	Pressure Drop (in. wg)
500	0.06
1000	0.22
1500	0.50
2000	0.89
2500	1.39
3000	2.00
3500	2.72
4000	3.55

Velocity (fpm)	Pressure Drop (in. wg)
500	0.03
1000	0.14
1500	0.31
2000	0.54
2500	0.85
3000	1.22
3500	1.66
4000	2.17

Velocity (fpm)	Pressure Drop (in. wg)
500	0.03
1000	0.12
1500	0.26
2000	0.46
2500	0.73
3000	1.05
3500	1.42
4000	1.86

Velocity (fpm)	Pressure Drop (in. wg)
500	0.03
1000	0.13
1500	0.30
2000	0.53
2500	0.83
3000	1.19
3500	1.62
4000	2.11

Velocity (fpm)	Pressure Drop (in. wg)
500	0.04
1000	0.17
1500	0.38
2000	0.67
2500	1.04
3000	1.50
3500	2.05
4000	2.67




Greenheck Fan Corporation certifies that the model SEFSD-211 shown herein is licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Programs. The AMCA Certified Ratings Seal applies to air performance ratings only.

## Space Envelopes

Externally mounted actuators always require space outside of the damper sleeve. The “S” dimension illustrates the clearance required for various available actuators.

Worst case space envelopes shown below. Exact dimensions may vary based on specific damper configuration. Consult factory for specific space envelope if necessary.

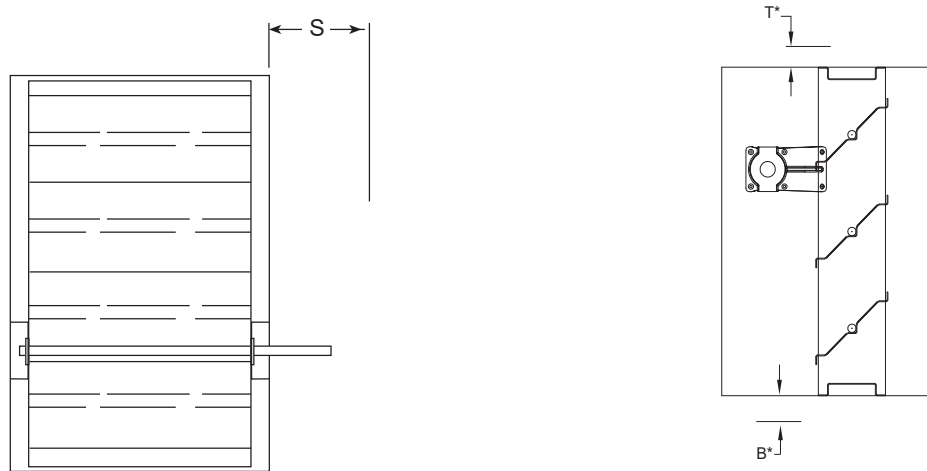


Actuator Type/Model	B*	T*	S	
	With RRL, RRL/OCI, or TOR	With RRL, RRL/OCI, or TOR	No	Yes
Belimo				
FSAFB24-SR (-S)	1½ in. (38 mm)	9¼ in. (235 mm)	6 in. (152 mm)	9 in. (229 mm)
FSLF series	8 in. (203 mm)	1½ in. (38 mm)	6½ in. (165 mm)	NA
FSNF series	1½ in. (38 mm)	9¼ in. (235 mm)	6 in. (152 mm)	9 in. (229 mm)
FSTF Series	8 in. (203 mm)	1½ in. (38 mm)	6½ in. (165 mm)	NA
Siemens				
GJD Series	7 in. (178 mm)	1½ in. (38 mm)	6½ in. (165 mm)	NA
GRD Series	1½ in. (38 mm)	7½ in. (191 mm)	6½ in. (165 mm)	NA
GXVD Series	1½ in. (38 mm)	9¼ in. (235 mm)	6 in. (152 mm)	9 in. (229 mm)
Honeywell				
MS4103, MS8103 Series	8¾ in. (222 mm)	1½ in. (38 mm)	6½ in. (165 mm)	NA
MS4104, MS4604, MS8104 Series	1½ in. (38 mm)	8½ in. (216 mm)	6½ in. (165 mm)	NA
MS4109, MS4609, MS8109 Series	1½ in. (38 mm)	8½ in. (216 mm)	6½ in. (165 mm)	NA
MS4120, MS4620, MS8120 Series	1½ in. (38 mm)	9½ in. (241 mm)	6 in. (152 mm)	9 in. (229 mm)

\* For dampers 18 in. (457 mm) or more in height these dimensions are 0 in.

## Contained Actuator Option


Dampers can be ordered with a “contained actuator option”. This option will result in the actuator being oriented such that it extends no more than 1½ inches (38 mm) above or below the sleeve. Note that some damper configurations that are 11 inches (279 mm) high or less will have the RRL, RRL/OCI, or TOR mounted on the side opposite the actuator when the contained actuator option is selected.

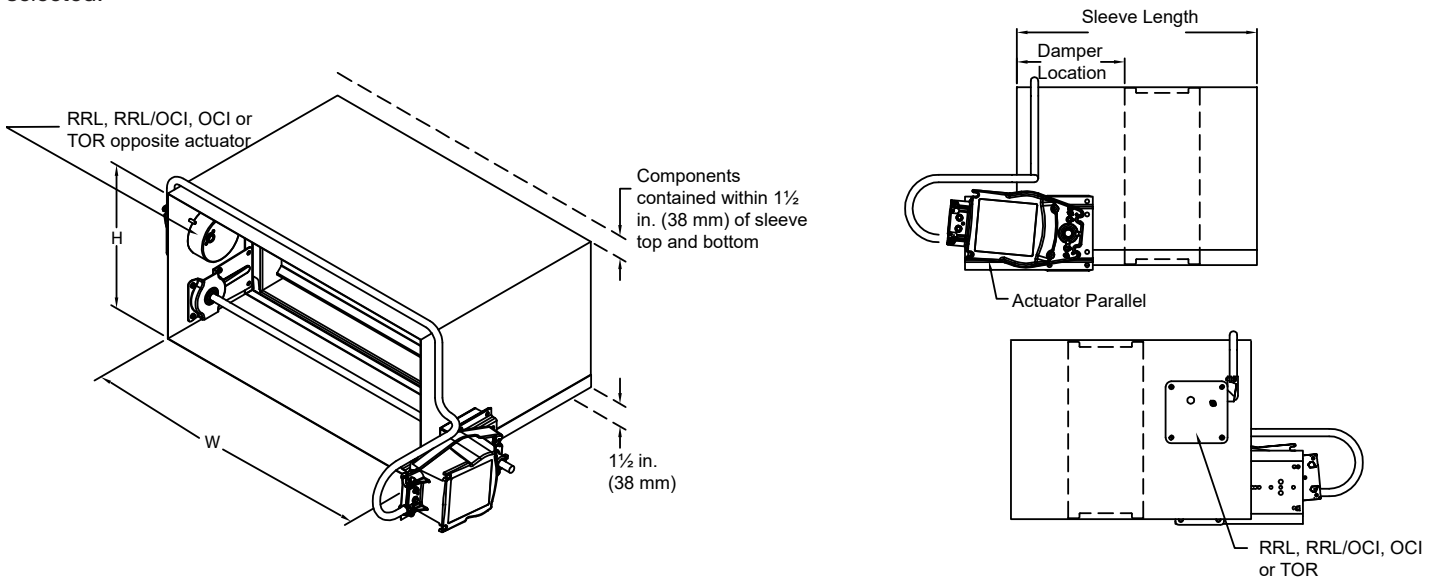


## Sleeve and Sideplate Dimensions

The drawings below and corresponding table show the position of the SEFSD-211 damper when mounted in a factory sleeve (“A” dimension). The standard mounting locations provide enough space for the mounting of actuators, controls and allow space for installation of retaining angles and duct connections. The following options may affect the range of available mounting locations: smoke detector, NEMA 7 enclosure, transitions, security bars, grille tabs.

The standard location of a damper mounted in a factory sleeve (“A” dimension) is shown below. The damper can be positioned at other locations within a range of 6 in. (152 mm) to 16 in. (406 mm) for the “A” dimension.

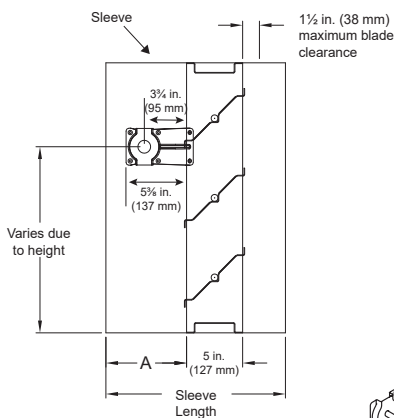

Sleeve

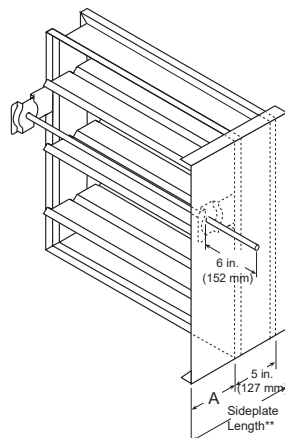


Sideplate

in. (mm)	With Sleeve		Sideplate Damper Location “A”
	Minimum Damper Location “A”	Maximum Damper Location “A”	
Height < 12 in. (305) RRL, RRL/OCI, or TOR	12 (305)	16 (406)	12 (305)
Height ≥ 12 in. (305) RRL, RRL/OCI, or TOR	7 3/16 in. (183)	16 (406)	12 (305)

**NOTE:** Entire damper frame is not required to be installed within the wall. The damper blades, when closed should be contained within the wall.

# Transitions


When a combination fire smoke damper is being used in conjunction with round and oval ductwork, the SEFSD-211 can be supplied in a factory sleeve with round or oval transitions on both ends of the sleeve. Dampers should be ordered to the duct dimensions.

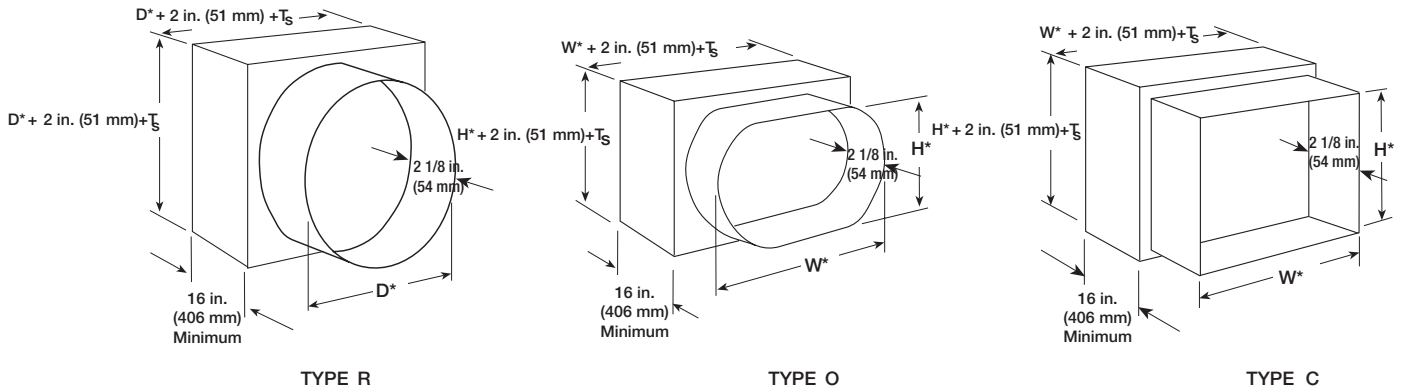


\* These dimensions are furnished approximately 1/4 in. (6 mm) undersize, except round and oval dimensions which are approximately 1/8 in. (3 mm) undersize.

# Multiple Section Dampers

Dampers larger than maximum single section size are supplied as a factory assembly of two or more sections of equal size. The following figures show maximum damper section size and assembly configurations for multi-section dampers.

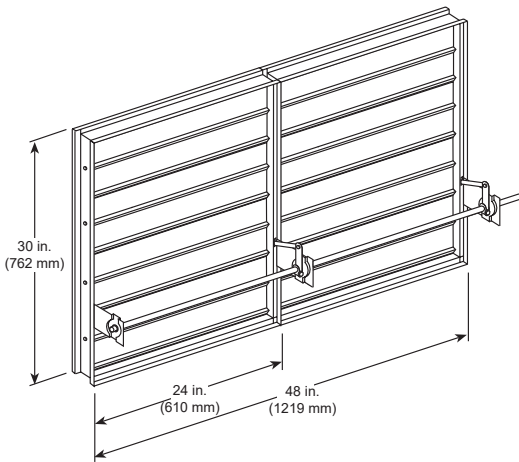

**Two Section**

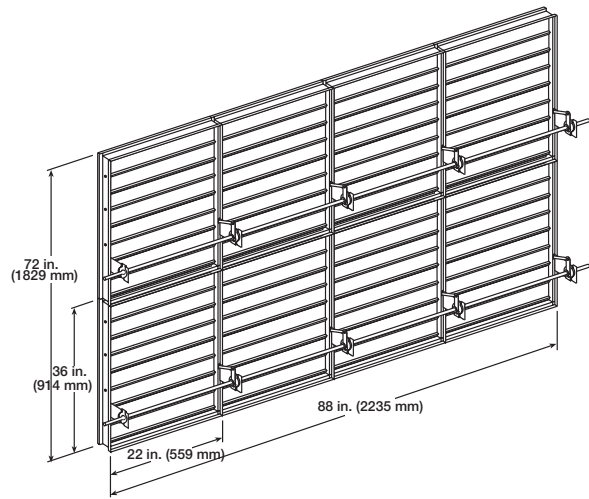

**4 Sections wide  
2 sections high**



[INSTALLATION](#)



[CATALOG](#)



[SELECTION GUIDE](#)



[ALTERNATE  
INSTALLATIONS](#)



[SPECIFICATIONS](#)



[WARRANTY](#)