


## Standard Construction

<b>Mounting</b>	Continuous aluminum angle along the head and sill
<b>Frame</b>	Heavy gauge extruded 6063-T5 aluminum, 6 in. (152 mm) x 0.095 in. (2 mm) nominal wall thickness
<b>Blades</b>	Vertical rain resistant style design, heavy gauge extruded 6063-T5 aluminum, 0.062 in. (2 mm) nominal wall thickness, positioned on approximately 0.75 in. (19 mm) centers
<b>Louver Depth</b>	6 in. (152 mm)
<b>Construction</b>	Mechanically fastened
<b>Finish</b>	Mill
<b>Minimum Rough Opening Size</b>	12 in. W x 12 in. H (305 mm W x 305 mm H)
<b>Maximum Rough Opening Size</b>	Unlimited W x 120.5 in. H (unlimited W x 3061 mm H)
<b>Maximum Rough Opening Single Section Size</b>	48.5 in. W x 120.5 in. H (1231 mm W x 3061 mm H) 60.5 in. W x 96.5 in. H (1537 mm W x 2451 mm H) 96.5 in. W x 60.5 in. H (2451 mm W x 1537 mm H)
<b>Wind Load</b>	+/- 150 PSF (7.2 kPa)

Florida Product Approval No.: FL16785  
Miami-Dade, FL NOA No.: 22-0707.08, EXP. 10/4/2027

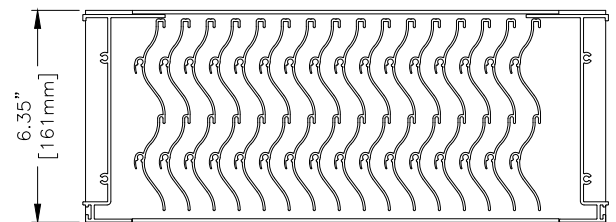

## Performance Ratings



Greenheck Fan Corporation certifies that the EVH-660D louvers shown herein are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 511 and comply with the requirements of the AMCA Certified Ratings Program. The AMCA Certified Ratings Seal applies to Water Penetration, Air Performance, and Wind-Driven Rain ratings.

Louvers were tested in accordance with AMCA Standard 500-L.



**HIGH VELOCITY RAIN RESISTANT WITH BLADES FULLY OPEN AND IMPACT RESISTANT LOUVER**  
Enhanced Protection Level E  
See www.amca.org for all certified or listed products

This label does not signify AMCA airflow performance certification.

Greenheck Fan Corporation certifies that the EVH-660D louver shown herein is approved to bear the AMCA Listing Label. The ratings shown are based on tests and procedures performed in

accordance with AMCA Publications and comply with the requirements of the AMCA Listing Label Program. The AMCA Listing Label applies to Wind Borne Debris Impact Resistant louvers rated for Enhanced Protection with a minimum blade span of less than 12 in. (305 mm) and a maximum unsupported blade span of 69.44 in. (1764 mm) and to High Velocity Wind-Driven Rain Resistant Louvers tested in the fully open position that permits airflow through the louver.

### Performance of 48 in. x 48 in. (1219 mm x 1219 mm) Louver

<b>Free Area</b>	Area 7.28 sq. ft. (0.676 sq. m)
	Percent 45.5%
<b>Performance at Beginning Point of Water Penetration</b>	
Free Area Velocity	above 1250 fpm (6.350 m/s)
Max Intake Volume	9100 cfm (4.295 m <sup>3</sup> /s)
<b>Performance at 6,000 CFM (2.832 m<sup>3</sup>/s) Intake</b>	
Pressure Drop	0.107 in. wg (0.027 kPa)

## Options and Accessories

- [Bird Screen](#)
- [Blank-Off Panels](#)
- [Extended Sill](#)
- [Filter Rack/Filter](#)
- [Flange Frame](#)
- [Insect Screen](#)
- [Security Bars](#)
- [Variety of Architectural Finishes](#)

## Product Details

[EVH-660D Standard Details](#)

[Miami-Dade County, FL Notice of Acceptance](#)

Structural reinforcing members may be required to adequately support and install multiple louver sections within a large opening. Structural reinforcing members along with any associated installation hardware is not provided by Greenheck unless indicated otherwise by Greenheck. Options and accessories including, but not limited to, screens, filter racks, louver doors, and blank off panels are not subject to structural analysis unless indicated otherwise by Greenheck.

## Free Area Chart

Free Area Chart shows free area in square feet and square meters.

Louver Height Inches (Meters)	Louver Width in Inches (Meters)														
	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96
0.30	0.30	0.46	0.61	0.76	0.91	1.07	1.22	1.37	1.52	1.68	1.83	1.98	2.13	2.29	2.44
<b>12</b>	<b>0.17</b>	<b>0.32</b>	<b>0.46</b>	<b>0.60</b>	<b>0.74</b>	<b>0.89</b>	<b>1.02</b>	<b>1.16</b>	<b>1.31</b>	<b>1.45</b>	<b>1.59</b>	<b>1.73</b>	<b>1.88</b>	<b>2.02</b>	<b>2.16</b>
0.30	0.02	0.03	0.04	0.06	0.07	0.08	0.09	0.11	0.12	0.13	0.15	0.16	0.17	0.19	0.20
<b>18</b>	<b>0.35</b>	<b>0.64</b>	<b>0.93</b>	<b>1.22</b>	<b>1.50</b>	<b>1.79</b>	<b>2.06</b>	<b>2.35</b>	<b>2.64</b>	<b>2.93</b>	<b>3.22</b>	<b>3.50</b>	<b>3.79</b>	<b>4.08</b>	<b>4.37</b>
0.46	0.03	0.06	0.09	0.11	0.14	0.17	0.19	0.22	0.25	0.27	0.30	0.33	0.35	0.38	0.41
<b>24</b>	<b>0.53</b>	<b>0.96</b>	<b>1.40</b>	<b>1.83</b>	<b>2.26</b>	<b>2.70</b>	<b>3.11</b>	<b>3.54</b>	<b>3.97</b>	<b>4.41</b>	<b>4.84</b>	<b>5.28</b>	<b>5.71</b>	<b>6.14</b>	<b>6.58</b>
0.61	0.05	0.09	0.13	0.17	0.21	0.25	0.29	0.33	0.37	0.41	0.45	0.49	0.53	0.57	0.61
<b>30</b>	<b>0.71</b>	<b>1.29</b>	<b>1.87</b>	<b>2.44</b>	<b>3.02</b>	<b>3.60</b>	<b>4.15</b>	<b>4.73</b>	<b>5.31</b>	<b>5.89</b>	<b>6.47</b>	<b>7.05</b>	<b>7.63</b>	<b>8.20</b>	<b>8.78</b>
0.76	0.07	0.12	0.17	0.23	0.28	0.33	0.39	0.44	0.49	0.55	0.60	0.65	0.71	0.76	0.82
<b>36</b>	<b>0.89</b>	<b>1.61</b>	<b>2.33</b>	<b>3.06</b>	<b>3.78</b>	<b>4.51</b>	<b>5.19</b>	<b>5.92</b>	<b>6.64</b>	<b>7.37</b>	<b>8.09</b>	<b>8.82</b>	<b>9.54</b>	<b>10.27</b>	<b>10.99</b>
0.91	0.08	0.15	0.22	0.28	0.35	0.42	0.48	0.55	0.62	0.68	0.75	0.82	0.89	0.95	1.02
<b>42</b>	<b>1.06</b>	<b>1.93</b>	<b>2.80</b>	<b>3.67</b>	<b>4.54</b>	<b>5.41</b>	<b>6.24</b>	<b>7.11</b>	<b>7.98</b>	<b>8.85</b>	<b>9.72</b>	<b>10.59</b>	<b>11.46</b>	<b>12.33</b>	<b>13.20</b>
1.07	0.10	0.18	0.26	0.34	0.42	0.50	0.58	0.66	0.74	0.82	0.90	0.98	1.06	1.15	1.23
<b>48</b>	<b>1.24</b>	<b>2.26</b>	<b>3.27</b>	<b>4.29</b>	<b>5.30</b>	<b>6.32</b>	<b>7.28</b>	<b>8.30</b>	<b>9.31</b>	<b>10.33</b>	<b>11.34</b>	<b>12.36</b>	<b>13.37</b>	<b>14.39</b>	<b>15.41</b>
1.22	0.12	0.21	0.30	0.40	0.49	0.59	0.68	0.77	0.86	0.96	1.05	1.15	1.24	1.34	1.43
<b>54</b>	<b>1.39</b>	<b>2.53</b>	<b>3.66</b>	<b>4.80</b>	<b>5.94</b>	<b>7.07</b>	<b>8.15</b>	<b>9.29</b>	<b>10.42</b>	<b>11.56</b>	<b>12.70</b>	<b>13.83</b>	<b>14.97</b>	<b>16.11</b>	<b>17.24</b>
1.37	0.13	0.24	0.34	0.45	0.55	0.66	0.76	0.86	0.97	1.07	1.18	1.28	1.39	1.50	1.60
<b>60</b>	<b>1.57</b>	<b>2.85</b>	<b>4.13</b>	<b>5.41</b>	<b>6.70</b>	<b>7.98</b>	<b>9.19</b>	<b>10.47</b>	<b>11.76</b>	<b>13.04</b>	<b>14.32</b>	<b>15.60</b>	<b>16.89</b>	<b>18.17</b>	<b>19.45</b>
1.52	0.15	0.26	0.38	0.50	0.62	0.74	0.85	0.97	1.09	1.21	1.33	1.45	1.57	1.69	1.81
<b>66</b>	<b>1.74</b>	<b>3.17</b>	<b>4.60</b>	<b>6.03</b>	<b>7.46</b>	<b>8.88</b>	<b>10.24</b>	<b>11.66</b>	<b>13.09</b>						
1.68	0.16	0.29	0.43	0.56	0.69	0.82	0.95	1.08	1.22						
<b>72</b>	<b>1.92</b>	<b>3.50</b>	<b>5.07</b>	<b>6.64</b>	<b>8.22</b>	<b>9.79</b>	<b>11.28</b>	<b>12.85</b>	<b>14.43</b>						
1.83	0.18	0.33	0.47	0.62	0.76	0.91	1.05	1.19	1.34						
<b>78</b>	<b>2.10</b>	<b>3.82</b>	<b>5.54</b>	<b>7.26</b>	<b>8.98</b>	<b>10.70</b>	<b>12.32</b>	<b>14.04</b>	<b>15.76</b>						
1.98	0.20	0.35	0.51	0.67	0.83	0.99	1.14	1.30	1.46						
<b>84</b>	<b>2.28</b>	<b>4.14</b>	<b>6.01</b>	<b>7.87</b>	<b>9.74</b>	<b>11.60</b>	<b>13.36</b>	<b>15.23</b>	<b>17.09</b>						
2.13	0.21	0.38	0.56	0.73	0.90	1.08	1.24	1.41	1.59						
<b>90</b>	<b>2.46</b>	<b>4.47</b>	<b>6.48</b>	<b>8.49</b>	<b>10.50</b>	<b>12.51</b>	<b>14.41</b>	<b>16.42</b>	<b>18.43</b>						
2.29	0.23	0.42	0.60	0.79	0.98	1.16	1.34	1.53	1.71						
<b>96</b>	<b>2.63</b>	<b>4.79</b>	<b>6.95</b>	<b>9.10</b>	<b>11.26</b>	<b>13.41</b>	<b>15.45</b>	<b>17.61</b>	<b>19.76</b>						
2.44	0.24	0.45	0.65	0.85	1.05	1.25	1.44	1.64	1.84						
<b>102</b>	<b>2.78</b>	<b>5.06</b>	<b>7.34</b>	<b>9.61</b>	<b>11.89</b>	<b>14.17</b>	<b>16.32</b>								
2.59	0.26	0.47	0.68	0.89	1.10	1.32	1.52								
<b>108</b>	<b>2.96</b>	<b>5.38</b>	<b>7.80</b>	<b>10.23</b>	<b>12.65</b>	<b>15.07</b>	<b>17.36</b>								
2.74	0.27	0.50	0.72	0.95	1.18	1.40	1.61								
<b>114</b>	<b>3.14</b>	<b>5.71</b>	<b>8.27</b>	<b>10.84</b>	<b>13.41</b>	<b>15.98</b>	<b>18.41</b>								
2.90	0.29	0.53	0.77	1.01	1.25	1.48	1.71								
<b>120</b>	<b>3.32</b>	<b>6.03</b>	<b>8.74</b>	<b>11.46</b>	<b>14.17</b>	<b>16.88</b>	<b>19.45</b>								
3.05	0.31	0.56	0.81	1.06	1.32	1.57	1.81								

## Document Links

[Louver Finishes & Colors](#)

[Louver Product Selection Guide](#)

[Louver Products Catalog](#)

[Louver Warranty Statement](#)

**Core Area Chart**


Core Area Chart shows core area in square feet and square meters.

Louver Height Inches (Meters)	Louver Width in Inches (Meters)														
	12	18	24	30	36	42	48	54	60	66	72	78	84	90	96
0.30	0.30	0.46	0.61	0.76	0.91	1.07	1.22	1.37	1.52	1.68	1.83	1.98	2.13	2.29	2.44
<b>12</b>	<b>0.46</b>	<b>0.77</b>	<b>1.08</b>	<b>1.39</b>	<b>1.69</b>	<b>2.00</b>	<b>2.31</b>	<b>2.62</b>	<b>2.92</b>	<b>3.23</b>	<b>3.54</b>	<b>3.84</b>	<b>4.15</b>	<b>4.46</b>	<b>4.77</b>
0.30	0.04	0.07	0.10	0.13	0.16	0.19	0.21	0.24	0.27	0.30	0.33	0.36	0.39	0.41	0.44
<b>18</b>	<b>0.84</b>	<b>1.40</b>	<b>1.96</b>	<b>2.51</b>	<b>3.07</b>	<b>3.63</b>	<b>4.19</b>	<b>4.74</b>	<b>5.30</b>	<b>5.86</b>	<b>6.42</b>	<b>6.97</b>	<b>7.53</b>	<b>8.09</b>	<b>8.64</b>
0.46	0.08	0.13	0.18	0.23	0.29	0.34	0.39	0.44	0.49	0.54	0.60	0.65	0.70	0.75	0.80
<b>24</b>	<b>1.22</b>	<b>2.03</b>	<b>2.83</b>	<b>3.64</b>	<b>4.45</b>	<b>5.26</b>	<b>6.06</b>	<b>6.87</b>	<b>7.68</b>	<b>8.49</b>	<b>9.29</b>	<b>10.10</b>	<b>10.91</b>	<b>11.72</b>	<b>12.52</b>
0.61	0.11	0.19	0.26	0.34	0.41	0.49	0.56	0.64	0.71	0.79	0.86	0.94	1.01	1.09	1.16
<b>30</b>	<b>1.60</b>	<b>2.66</b>	<b>3.71</b>	<b>4.77</b>	<b>5.83</b>	<b>6.88</b>	<b>7.94</b>	<b>9.00</b>	<b>10.06</b>	<b>11.11</b>	<b>12.17</b>	<b>13.23</b>	<b>14.29</b>	<b>15.34</b>	<b>16.40</b>
0.76	0.15	0.25	0.34	0.44	0.54	0.64	0.74	0.84	0.93	1.03	1.13	1.23	1.33	1.43	1.52
<b>36</b>	<b>1.98</b>	<b>3.28</b>	<b>4.59</b>	<b>5.90</b>	<b>7.21</b>	<b>8.51</b>	<b>9.82</b>	<b>11.13</b>	<b>12.43</b>	<b>13.74</b>	<b>15.05</b>	<b>16.36</b>	<b>17.66</b>	<b>18.97</b>	<b>20.28</b>
0.91	0.18	0.30	0.43	0.55	0.67	0.79	0.91	1.03	1.15	1.28	1.40	1.52	1.64	1.76	1.88
<b>42</b>	<b>2.35</b>	<b>3.91</b>	<b>5.47</b>	<b>7.03</b>	<b>8.58</b>	<b>10.14</b>	<b>11.70</b>	<b>13.26</b>	<b>14.81</b>	<b>16.37</b>	<b>17.93</b>	<b>19.48</b>	<b>21.04</b>	<b>22.60</b>	<b>24.16</b>
1.07	0.22	0.36	0.51	0.65	0.80	0.94	1.09	1.23	1.38	1.52	1.67	1.81	1.95	2.10	2.24
<b>48</b>	<b>2.73</b>	<b>4.54</b>	<b>6.35</b>	<b>8.15</b>	<b>9.96</b>	<b>11.77</b>	<b>13.58</b>	<b>15.38</b>	<b>17.19</b>	<b>19.00</b>	<b>20.80</b>	<b>22.61</b>	<b>24.42</b>	<b>26.23</b>	<b>28.03</b>
1.22	0.25	0.42	0.59	0.76	0.93	1.09	1.26	1.43	1.60	1.77	1.93	2.10	2.27	2.44	2.60
<b>54</b>	<b>3.11</b>	<b>5.17</b>	<b>7.22</b>	<b>9.28</b>	<b>11.34</b>	<b>13.40</b>	<b>15.45</b>	<b>17.51</b>	<b>19.57</b>	<b>21.63</b>	<b>23.68</b>	<b>25.74</b>	<b>27.80</b>	<b>29.85</b>	<b>31.91</b>
1.37	0.29	0.48	0.67	0.86	1.05	1.24	1.44	1.63	1.82	2.01	2.20	2.39	2.58	2.77	2.96
<b>60</b>	<b>3.49</b>	<b>5.80</b>	<b>8.10</b>	<b>10.41</b>	<b>12.72</b>	<b>15.02</b>	<b>17.33</b>	<b>19.64</b>	<b>21.95</b>	<b>24.25</b>	<b>26.56</b>	<b>28.87</b>	<b>31.18</b>	<b>33.48</b>	<b>35.79</b>
1.52	0.32	0.54	0.75	0.97	1.18	1.40	1.61	1.82	2.04	2.25	2.47	2.68	2.90	3.11	3.32
<b>66</b>	<b>3.87</b>	<b>6.42</b>	<b>8.98</b>	<b>11.54</b>	<b>14.09</b>	<b>16.65</b>	<b>19.21</b>	<b>21.77</b>	<b>24.32</b>						
1.68	0.36	0.60	0.83	1.07	1.31	1.55	1.78	2.02	2.26						
<b>72</b>	<b>4.24</b>	<b>7.05</b>	<b>9.86</b>	<b>12.67</b>	<b>15.47</b>	<b>18.28</b>	<b>21.09</b>	<b>23.89</b>	<b>26.70</b>						
1.83	0.39	0.65	0.92	1.18	1.44	1.70	1.96	2.22	2.48						
<b>78</b>	<b>4.62</b>	<b>7.68</b>	<b>10.74</b>	<b>13.79</b>	<b>16.85</b>	<b>19.91</b>	<b>22.97</b>	<b>26.02</b>	<b>29.08</b>						
1.98	0.43	0.71	1.00	1.28	1.57	1.85	2.13	2.42	2.70						
<b>84</b>	<b>5.00</b>	<b>8.31</b>	<b>11.61</b>	<b>14.92</b>	<b>18.23</b>	<b>21.54</b>	<b>24.84</b>	<b>28.15</b>	<b>31.46</b>						
2.13	0.46	0.77	1.08	1.39	1.69	2.00	2.31	2.62	2.92						
<b>90</b>	<b>5.38</b>	<b>8.93</b>	<b>12.49</b>	<b>16.05</b>	<b>19.61</b>	<b>23.16</b>	<b>26.72</b>	<b>30.28</b>	<b>33.84</b>						
2.29	0.50	0.83	1.16	1.49	1.82	2.15	2.48	2.81	3.14						
<b>96</b>	<b>5.76</b>	<b>9.56</b>	<b>13.37</b>	<b>17.18</b>	<b>20.98</b>	<b>24.79</b>	<b>28.60</b>	<b>32.41</b>	<b>36.21</b>						
2.44	0.54	0.89	1.24	1.60	1.95	2.30	2.66	3.01	3.36						
<b>102</b>	<b>6.13</b>	<b>10.19</b>	<b>14.25</b>	<b>18.31</b>	<b>22.36</b>	<b>26.42</b>	<b>30.48</b>								
2.59	0.57	0.95	1.32	1.70	2.08	2.45	2.83								
<b>108</b>	<b>6.51</b>	<b>10.82</b>	<b>15.13</b>	<b>19.43</b>	<b>23.74</b>	<b>28.05</b>	<b>32.35</b>								
2.74	0.60	1.01	1.41	1.81	2.21	2.61	3.01								
<b>114</b>	<b>6.89</b>	<b>11.45</b>	<b>16.00</b>	<b>20.56</b>	<b>25.12</b>	<b>29.68</b>	<b>34.23</b>								
2.90	0.64	1.06	1.49	1.91	2.33	2.76	3.18								
<b>120</b>	<b>7.27</b>	<b>12.07</b>	<b>16.88</b>	<b>21.69</b>	<b>26.50</b>	<b>31.30</b>	<b>36.11</b>								
3.05	0.68	1.12	1.57	2.02	2.46	2.91	3.35								

## Airflow Resistance

Standard Air - 0.075 lb/ft<sup>3</sup> (1.2 kg/m<sup>3</sup>)

Test size 48 in. x 48 in. (1219 mm x 1219 mm)

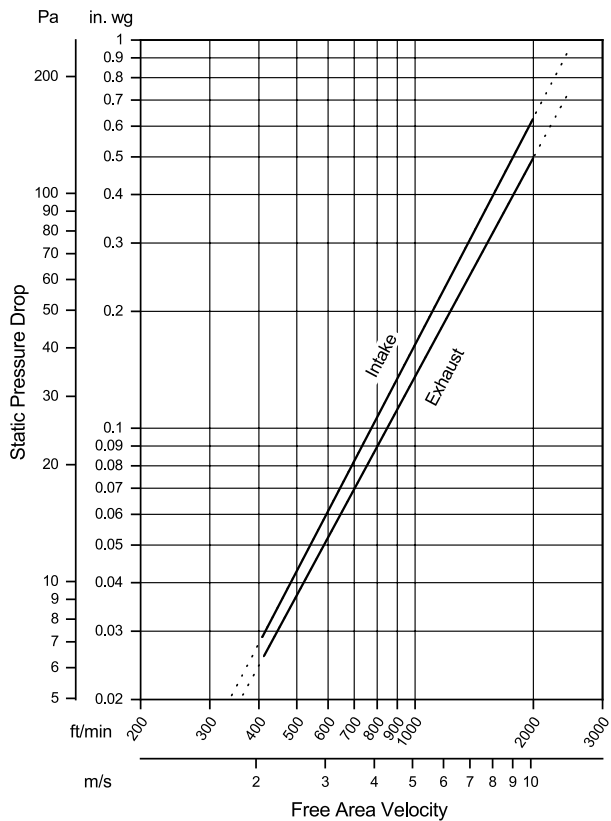


Model EVH-660D resistance to airflow (pressure drop) varies depending on louver application (air intake or air exhaust). Free area velocities (shown) are higher than average velocity through the overall louver size. See louver selection information. (Test Figure 5.5-6.5)

## Water Penetration

Standard Air - 0.075 lb/ft<sup>3</sup> (1.2 kg/m<sup>3</sup>)

Test size 48 in. x 48 in. (1219 mm x 1219 mm) Test duration of 15 min.

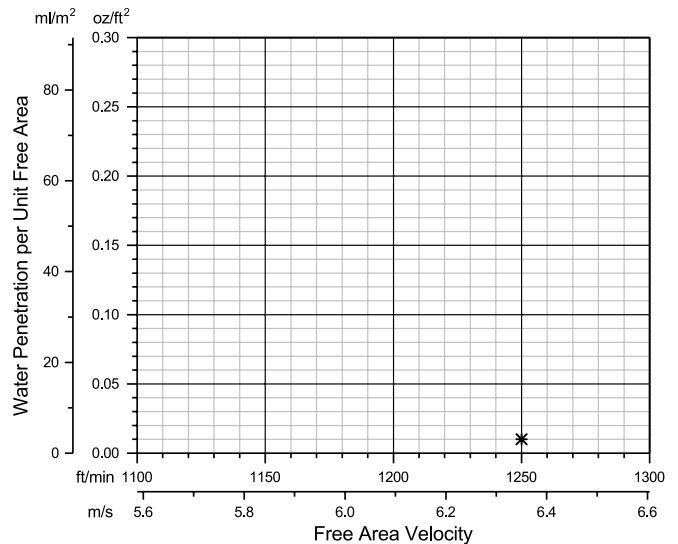

The AMCA Water Penetration Test provides a method for comparing various louver models and designs as to their efficiency in resisting the penetration of rainfall under specific laboratory test conditions. The beginning point of water penetration is defined as that velocity where the water penetration curve projects through 0.01 oz. (3 g) of water (penetration) per sq. ft. (m<sup>2</sup>) of louver free area. **\*The beginning point of water penetration for Model EVH-660D is above 1250 fpm (6.350 m/s) free area velocity.** These performance ratings do not guarantee a louver to be weatherproof or stormproof and should be used in combination with other factors including good engineering judgement in selecting louvers.

## Wind-Driven Rain Performance

3 in./hr. (75 mm/hr.) Rainfall Rate & 29 mph (13 m/s) Wind Velocity				8 in./hr. (203 mm/hr.) Rainfall Rate & 50 mph (22.4 m/s) Wind Velocity				Wind-Driven Rain Penetration Classes	
Ventilation Air Core Velocity fpm (m/s)	Ventilation Air Free Area Velocity fpm (m/s)	Water Penetration Effectiveness %	Water Penetration Classification	Ventilation Air Core Velocity fpm (m/s)	Ventilation Air Free Area Velocity fpm (m/s)	Water Penetration Effectiveness %	Water Penetration Classification	Class	Effectiveness
0 (0.0)	0 (0.0)	100	A	0 (0.0)	0 (0.0)	100	A	A	1 to 0.99
98 (0.5)	185 (0.9)	100	A	98 (0.5)	185 (0.9)	100	A	B	0.989 to 0.95
197 (1.0)	371 (1.9)	100	A	197 (1.0)	371 (1.9)	100	A	C	0.949 to 0.80
295 (1.5)	556 (2.8)	100	A	295 (1.5)	556 (2.8)	100	A	D	Below 0.80
394 (2.0)	742 (3.8)	100	A	394 (2.0)	742 (3.8)	100	A		
492 (2.5)	927 (4.7)	100	A	492 (2.5)	927 (4.7)	100	A		
591 (3.0)	1113 (5.7)	100	A	591 (3.0)	1113 (5.7)	100	A		
689 (3.5)	1298 (6.6)	100	A	689 (3.5)	1298 (6.6)	100	A		
787 (4.0)	1483 (7.5)	100	A	787 (4.0)	1483 (7.5)	100	A		
886 (4.5)	1669 (8.5)	100	A	886 (4.5)	1669 (8.5)	100	A		
983 (5.0)	1852 (9.4)	100	A	985 (5.0)	1856 (9.4)	100	A		

Water penetration classification ratings are based on the amount of simulated rain that penetrates the louver during a specific rainfall rate, wind velocity, and intake velocity. Ratings are based on a 39.4 in. x 39.4 in. (1 m x 1 m) core size.

