



ARCHITECTURAL CONTOUR 8

Ambient (Unheated) Air Curtain

Data Sheet

Recommended for Mounting Heights to 8' (environmental separation) and 7' (insect control)

STANDARD CONSTRUCTION

- 8 1/4" high x 20" deep
- 1/5 hp motor(s) - ten speeds
- Factory installed Intelliswitch™ digital controller
- Clear satin anodized aluminum exterior
- Wall or Top Mounting
- High efficiency, low noise, articulating, three vane, Pro-V Nozzle
- Filter (washable)

OPTIONS

- 1/5 hp EC motor(s) - ten speeds
- Custom Color or Stainless
- Rear cover for top mounting to conceal fasteners
- Berner AIR™ (smart controller & app, includes BACnet)

Energy Codes ASHRAE 90.1-2019, IECC 2018, and ASHRAE 189.1 vestibule exception validated by AMCA certification. Refer to Velocity Projection Chart below for information.



Berner International certifies that the air curtains shown here-in are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program. Rated data shown is for base (unheated) units. The AMCA Certified Ratings Seal applies to airflow rate, average outlet velocity, outlet velocity uniformity, velocity projection and power rating at free delivery only.

5 Year Limited Warranty




MODEL	Nozzle Width (in)	Max Vel. at Nozzle (fpm)	Avg. Outlet Vel. (fpm)	Air Volume (cfm)	Outlet Vel. Uniformity	Power Rating (kW)	Motor(s) @ hp	Net Wt. (lbs)
AC08-E-1036A	36.00	2,308	1,758	989	85%	0.21	1 @ 1/5	43
AC08-E-1042A	42.00	2,425	1,778	1,167	83%	0.24	1 @ 1/5	48
AC08-E-1048A	48.00	2,417	1,827	1,370	80%	0.26	1 @ 1/5	53
AC08-E-1060A	59.00	2,276	1,827	1,684	81%	0.33	1 @ 1/5	64
AC08-E-1072A	72.00	2,185	1,648	1,854	84%	0.35	1 @ 1/5	74
AC08-E-2084A	84.00	2,425	1,778	2,334	83%	0.47	2 @ 1/5	96
AC08-E-2096A	96.00	2,417	1,827	2,740	80%	0.53	2 @ 1/5	106
AC08-E-2108A	108.00	2,417	1,810	3,054	80%	0.60	2 @ 1/5	117
AC08-E-2120A	118.00	2,276	1,827	3,368	81%	0.67	2 @ 1/5	128

See sheets EP-260E-AC & EP-260E-EC for amp draws/total load requirements. 600/3/60 power supply includes transformer housing. See drawing AC08-E-AMB-600

NOTE: Operation of AC motor at 50Hz will generate a 17% reduction in performance; no reduction for EC motors.

MODEL NUMBER CONFIGURATION

AC08-E-1 036 A A-AC-WCA -SS

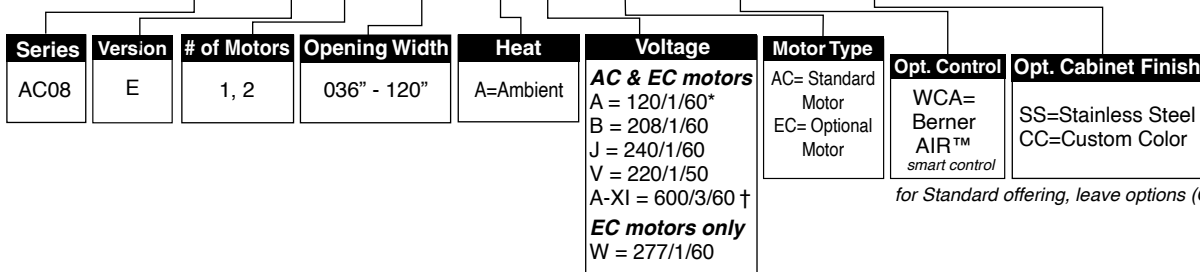

for Standard offering, leave options (Opt.) blank

*Suitable for 50 Hz
† Add 5" for transformer housing

VELOCITY PROJECTION: Model AC08-E-1036A			
Distance from Nozzle (in)	40	80	120
Core Velocity (fpm)	874	766	576
Uniformity (%)	90%	88%	87%

ASHRAE 90.1-2019 vestibule exception requires, "a jet velocity of not less than 6.6 feet per second (400 fpm; 2.0 m/s) at 6.0 in (15 cm) above the floor."

Sound level measured 10' (3m) from the unit in free field:

1 motor: Min./Max. Speed: 49/55 dBA

2 motors: Min./Max. Speed: 52/58 dBA

Sound data is not AMCA certified.

Berner reserves the right to alter specifications without prior notice.