


Vestibule Exception Compliance: up to 10 ft. AFF / Optimal Environmental Separation: up to 8 ft. AFF



Berner International certifies that the air curtains shown here-in are licensed to bear the AMCA Seal. The ratings shown are based on tests and procedures performed in accordance with AMCA Publication 211 and comply with the requirements of the AMCA Certified Ratings Program. Rated data shown is for base (electric heated) units. The AMCA Certified Ratings Seal applies to airflow rate, average outlet velocity, outlet velocity uniformity, velocity projection and power rating at free delivery only.

2 Year Limited Warranty

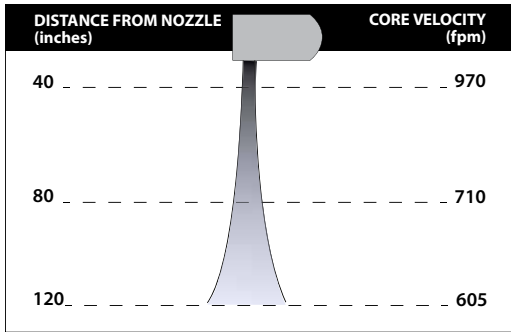

indoor use



MODEL	Nozzle Width (in)	Max Vel. at Nozzle (fpm)	Avg. Outlet Vel. (fpm)	Air Volume (cfm)	Outlet Vel. Uniformity	Power Rating (kW)	Motor(s) @ hp	Max Electric Capacity (kW)	Heater Output (MBH)	Air Temp. Rise (°F)	Net Wt. (lbs)
AI08-F-1036E	36.00	2,251	1,691	951	84%	0.20	1 @ 1/5	10.0	34.1	33°	53
AI08-F-1042E	42.00	2,317	1,728	1,134	83%	0.23	1 @ 1/5	10.0	34.1	28°	58
AI08-F-1048E	48.00	2,335	1,779	1,334	81%	0.26	1 @ 1/5	14.4	49.1	34°	63
AI08-F-1060E	59.00	2,189	1,808	1,667	81%	0.32	1 @ 1/5	14.4	49.1	27°	74
AI08-F-1072E	72.00	2,149	1,582	1,780	84%	0.32	1 @ 1/5	20.0	68.3	35°	89
AI08-F-2078E	78.00	2,317	1,711	2,085	83%	0.42	2 @ 1/5	20.0	68.3	30°	106
AI08-F-2084E	84.00	2,317	1,728	2,268	83%	0.45	2 @ 1/5	20.0	68.3	28°	116
AI08-F-2096E	96.00	2,335	1,779	2,668	81%	0.52	2 @ 1/5	28.8	98.3	34°	126
AI08-F-2108E	108.00	2,335	1,778	3,001	81%	0.58	2 @ 1/5	28.8	98.3	30°	137
AI08-F-2120E	118.00	2,189	1,808	3,334	81%	0.64	2 @ 1/5	28.8	98.3	27°	148

See sheets EP-282E-AC & EP-282E-EC for amp draws/total load requirements.
600/3/60 power supply includes transformer housing, See drawing AI08-F-ELE-600

NOTES:

1. Operation of standard motor (AC) at 50Hz will generate a 17% reduction in performance; no reduction for optional EC motors.
2. Single Point Power Connection – consult factory.

MODEL NUMBER CONFIGURATION

AI08-F-1 036 E B-100-AC-CB-D-R-SS

Series	Version	# of Motors	Opening Width	Heat	Voltage	Standard kW	Motor Type	Berner AIR	Opt. Data Link	Opt. Display	Opt. Cabinet Finish
AI08	F	1, 2	036" - 120"	E=Electric Heated	AC & EC motors B = 208/1/60* J = 240/1/60* V = 230/1/50* K = 120/480 L = 120/600 S = 208/480 M = 208/600 U = 240/480 N = 240/600 X = 208/3/60 Y = 240/3/60 O = 380/3/50** L-XI = 600/3/60 † W = 277/1/60 † WZ = 480/3/60**	10.0 - 28.8 (100 - 288) <i>See sheet EP-282 for alternate kW code</i>	AC (Std.) EC (Opt.)	CB=BASIC (Std.) CM=BMS (Opt.)	Opt. Physical Interconnect (daisy chain)	R=Remote Display TB=Tablet	SS=Stainless Steel CC=Custom Color

STANDARD CONSTRUCTION

- 8 1/4" high x 16" deep
- 1/5 hp AC motor(s) - ten speeds
- Touchscreen interface with Intelliswitch™ digital controller, includes Berner AIR® BASIC (smart control)
- Clear satin anodized aluminum exterior
- Wall or Top Mounting
- High efficiency, low noise, articulating, three vane, Pro-V Nozzle
- Single stage electric heater (open element)
- Filter (washable)

OPTIONS

- 1/5 hp EC motor(s) - ten speeds
- Alternate kW: see sheet EP-282E
- Berner AIR® BMS (smart control with BACnet and Modbus capabilities)
- Custom Color or Stainless
- Rear cover for top mounting to conceal fasteners

*B - Max 16.2 kW
*J and V - Max 16.2 kW or 20 kW based on # motors
*W - Max 20 kW
**Power Supply requires 4-wire system (w/ neutral)
† Add 5" to cabinet width for transformer
See sheet EP-282 for available lengths and voltages

for Standard offering, leave options (Opt.) blank

VELOCITY PROJECTION: Model AI08-F-1036E			
Distance from Nozzle (in)	40	80	120
Core Velocity (fpm)	970	710	605
Uniformity (%)	91%	89%	92%

ASHRAE 90.1-2019 vestibule exception requires, "a jet velocity of not less than 6.6 feet per second (400 fpm; 2.0 m/s) at 6.0 in (15 cm) above the floor."

Sound level measured 10' (3m) from the unit in free field:
1 motor: Min./Max. Speed: 50/55 dBA
2 motors: Min./Max. Speed: 53/58 dBA

Sound data is not AMCA certified.

Berner reserves the right to alter specifications without prior notice.